GenSwiss®

Making The Machinist's Job Easier

2022/23 Catalog



TOOLING FOR SWISS-TYPE CNC MACHINES

www.genswiss.com

GenSwiss®


Advancing Small Parts Manufacturing



Westfield, MA, USA

Genevieve Swiss Industries, Inc. brings to market unique high precision tools and accessories, advancing small parts manufacturing and enhancing Swiss-type machine processes. Our high quality product line of cutting tools, machine tool holders, and live spindles are imported from three of Switzerland's primarily world-class manufacturers: PCM Willen SA, UTILIS AG, and Louis Belet SA.

With more than 40-years of experience in the industry, GenSwiss aims to improve distribution efficiencies and increase manufacturing productivity. We strive to deliver products which meet or exceeds customer expectations, providing a reliable service with application solutions for YOUR critical small parts manufacturing.

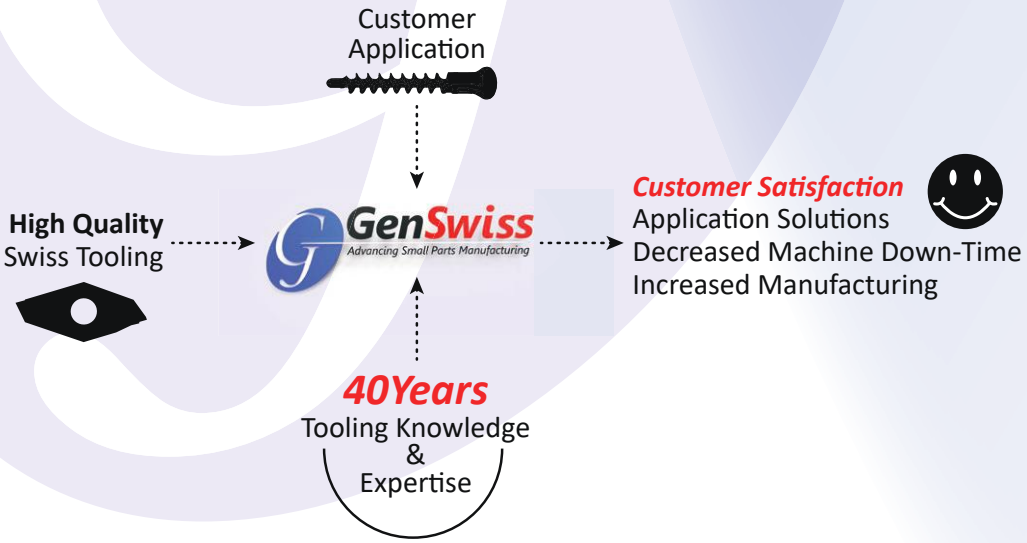


UTILIS® Tooling for High Technology PCM® be driven. REGO-FIX® LOUIS BELET® Swiss Cutting tools

Precision Tools

- High quality for extended tool life
- Quick setup times
- Low TIR's and tight tolerances
- Thousands of tools available
- Custom tooling available





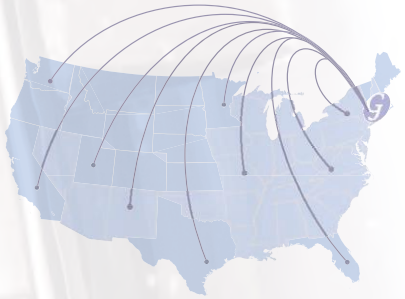


Customer Service & Sales Team

- Our skilled staff is dedicated to providing you with the tooling and assistance you require
- The GenSwiss team visits our distributor network to support our partners and learn how we can better provide or improve the GenSwiss experience
- Instant access to our vendors' inventory allows our team to provide immediate lead times and pricing

Tooling Application Assistance

- 40 years of industry experience
- Knowledge of the benefits and disadvantages for all available tooling systems
- GenSwiss will find the right combination of tools for your application to optimize the best tool life with cost savings





Live Tooling Repairs & Restoration

- Live swiss machine attachments restored to factory specification
- PCM and major OEM brands: CITIZEN, STAR, TSUGAMI, TORNOS
- $50.00 evaluation & inspection
- Save money by shipping to GenSwiss instead of overseas

GenSwiss E-Commerce


- See product inventory 24/7
- Get instant pricing 24/7
- Track orders
- Place custom tooling orders via online forms




ID TOOLING



Rotary Broaching
Pages 6-19



Micro-Boring
Pages 20-39
Micro-Bore Speeds & Feeds
Pages 40-41



Spot Drills
Pages 42-43



Micro-Reaming
Pages 44-47



Micro Drill Holders
Page 48



Coolant-Thru Drill Sleeves
Page 49



Micro Drills & End Mills
Pages 50-76



Louis Belet
Pages 77-96



Thread Mills
Pages 97-103



Tooling Expansion
(GenBore-mini)
Page 104



Collet Sleeves & Chucks
Pages 105-108v



Boring Adapters
Collet Adapters
GenQuick Tool Holding
Pages 109-112



EZR Swiss Clamp
Pages 113-114




TI-LOC®
Mill Extensions
Pages 115-116




Rego-Fix Collets & Nuts
Pages 117-122


TURNING




3000 Series
Inserts & Holders
Pages 123-157



1600 Series
Inserts & Holders
Pages 158-193
Multidec CUT Speeds & Feeds
Pages 194-136



ISO Series
Pages 197-264
ISO Speeds & Feeds
Pages 265-267



TOP Series
Pages 268-280
Multidec TOP Speeds & Feeds
Pages 281-301



multidec® Short
Insert Holders
Pages 302-304



Coolant Wedges &
Accessories
Pages 306-312



Back Tools
Pages 313-328



Thread Whirling
Pages 329-341

SPECIALIZED TOOLING & PRODUCTS



Knurling
Pages 342-347
Knurling Speeds & Feeds
Pages 348-349



Thread Rolling
Page 350



Gun Drills
Page 351



Ti-Loc ® Arbors
Pages 352-353



Saw Arbors & Saws
Pages 354-360



GenGrip
Pages 361-369



Escomatic Tool Holders
Pages 370



HSK & PSC Tool Holders
Pages 371-386



Cutting Oil
Pages 388-393



MicroCoolant Kit
Pages 394-395



Ejector Pins
Pages 396-399



Mi-Jet Parts Cleaner
Pages 400



Magnetic Finishing
Pages 401



Vice Blocks
Pages 402-403



Collets & Guide Bushings
Pages 404-409

LIVE TOOLING - SPINDLES & ATTACHMENTS

PCM
Table of Contents
Pages 414-415



Citizen
Pages 412-455



Tornos
Pages 456-460



Tsugami
Pages 461-465



Star
Pages 466-471

Signature Series
Table of Contents
Pages 476-477
NEW



Citizen
Pages 474-493



Star
Pages 494-527



Tsugami
Pages 528-543

ROTARY BROACHING
GUIDE




Rotary Broaching is a fast and easy method of producing polygonal drive features in turned parts. Genevieve Swiss offers Premium Rotary Broaching products from PCM, the European industry leader in rotary broaching tools.


PCM
be driven.

A Guide To Internal Rotary Broaching

During the rotary broach operation, the broach tool approaches the work piece at a small angle. The tool spins synchronously with the part, creating a wobble effect that causes the leading cutting edge to rotate in and out of the cut like a cam. This method shapes internal and external polygonal profiles at a single-point. Compared to punch forming, which shapes the entire profile at once, rotary broaching requires 80% less force, offers increased tool life, and lowers machine maintenence cost over time.


The advantages offered by rotary broaching result from proper preparation prior to the broaching operation. The most important part of this preparation includes drilling a hole which allows for broached material to accumulate, preventing damage to the broach tool and machine. Continue with the guide below for some important tips on rotary broaching.



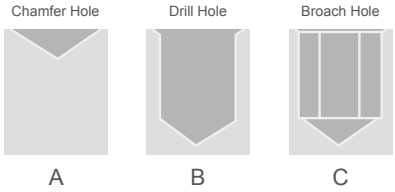

Preparing To Broach A Hole

First, prepare the hole with a 60° - 90° chamfer slightly bigger than the largest dimension of the broach tool. A chamfer provides a guide for the broach tool.

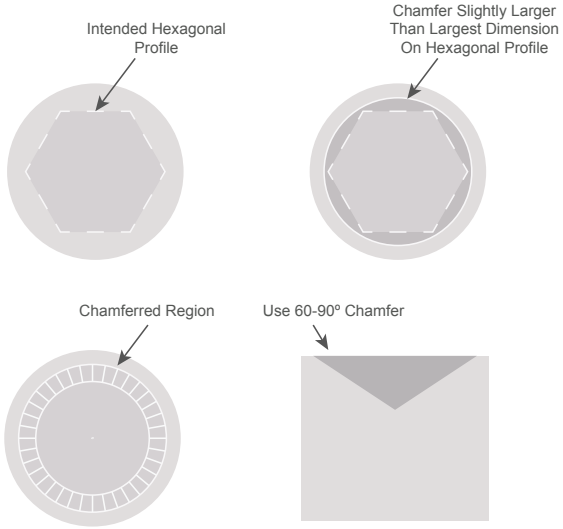


GenSwiss Spot Drills
Pgs. 42-43



Drilling The Hole


For internal broaching, the diameter of the hole should be 1 percent larger than the diameter across the flats of the broach's hex shape and drilled as deep as possible. A depth of 1.3 to 1.5 times the depth of the broached profile is recommended. Drilling to this depth is vital, leaving room for material accumulation during the broaching process. If material accumulates during the drilling process, re-drill the hole with a smaller drill.

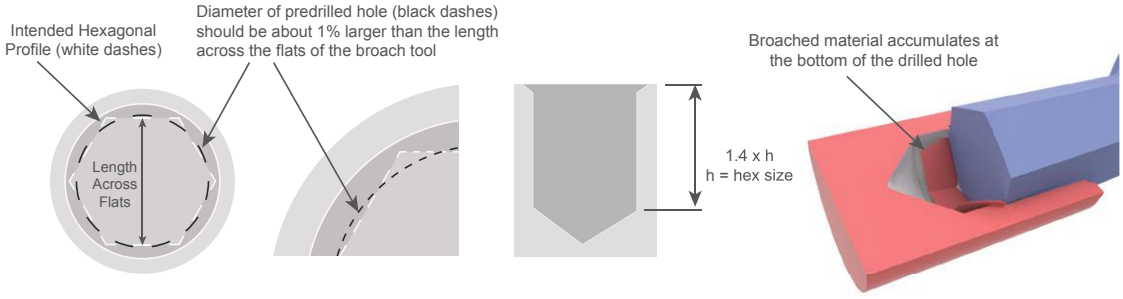

If A Drill Radius Is Not Allowed

Many medical and aerospace applications do not allow for a drill radius along the broached walls of the part. When exact concentricity is required, chamfer, drill, and then pre-bore the hole. Using a micro-bore allows for extra control and accuracy. The use of a drill might lead to inaccuracies due to deflection and other conditions.

NOTE: Broaching into a tight hole will not allow air or coolant to escape, resulting in a build up of pressure. This can cause the part or tool to push back, damaging the tool or machine. Use a GenSwiss broach that has a pressure relief vent.

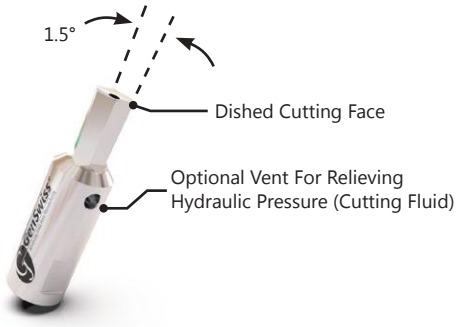




Micro-Bores
Pgs. 20 - 39

Broaching The Hole


Rotary broach holders hold the broach tool at a 1° angle relative to the centerline of the workpiece, allowing for high speed applications from 1,500 rpm up to 3,000 rpm. As the broach holder rotates, the broach tool is thrust into the pre-drilled hole.

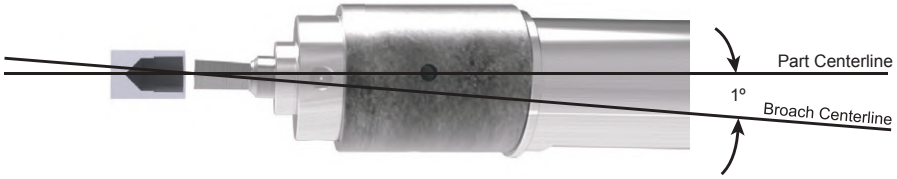

The cutting edges of the broach can dig into the part face as the tool comes into contact with the rotating material. At higher speeds, this dig mark is more pronounced and tool life suffers. For best results, start the broach operation at a slow rotation, and then increase the speed when it is in full contact. Reversing the spindle rotation halfway into the part can reduce spiraling.

The feed rate mainly depends on the material characteristics. In mild steel, 0.0012 to 0.0024 inches per revolution is recommended. If the machine thrust force is sufficient, the feed can be doubled as machinability increases. In most cases the maximum feed rate should not exceed 0.03 times the profile diameter. A slower feed rate will produce an improved finish with finer lines along the sidwalls of the broached hole. By increasing the feed rate, the cutting cycle will be faster, but the broaching lines will be more pronounced, leaving a coarse finish.

Give GenSwiss A Call For More Information On Rotary Broaching

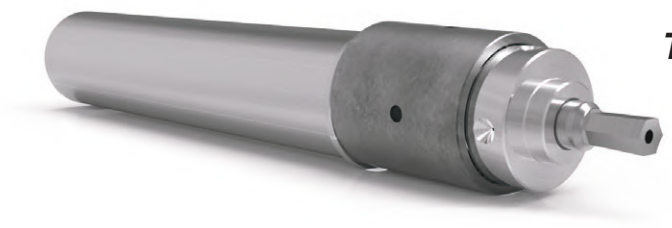

The Original

Swiss-Type Rotary Broach Holder

- Max thrust force: 2250lbs
- Uses 8x28mm broaches
- Recommended profile size .050" to .375"

ASSEMBLED IN USA


2160 Series Rotary Broach Holder

The ORIGINAL and best choice for Swiss machines and precision lathes! The 2160 series Swiss-type rotary broach holder is the premier choice for performing broaching applications in your Swiss-type CNC machine or gang-style lathe. It eliminates the need to indicate for center location. The recommended profile size range for this holder is .050" to .375"

Key Features


- No center indicating required
- Ideal for medical & aerospace fastener applications
- Low profile; fits machines with minimal interference
- Shank length is customizable, No need for bushings
- Short head length is ideal for sub-spindle applications
- Longer OAL broach tools can be used by adjusting X-axis

Item No.	Description	D	L
3010-000113	RBH-2160-158-038	.625in	1.50in
3010-000115	RBH-2160-190-100	.750in	4.00in
3010-000119	RBH-2160-254-120	1.00in	4.75in
3010-000112	RBH-2160-120-038	12mm	38mm
3010-000147	RBH-2160-140-038	14mm	38mm
3010-000114	RBH-2160-160-038	16mm	38mm
3010-000116	RBH-2160-200-100	20mm	100mm
3010-000117	RBH-2160-220-100	22mm	100mm
3010-000136	RBH-2160-230-100	23mm	100mm
3010-000118	RBH-2160-250-120	25mm	120mm

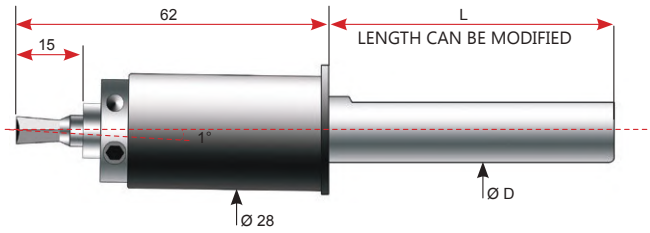

2160 Series - Flange Mount For STAR Machines


Item No.	Description	D	L	Machine Type
3010-000142	RBH-2160-160-038-MBG-T16	22mm	25mm	SR10, SR20, SR32, ECAS20

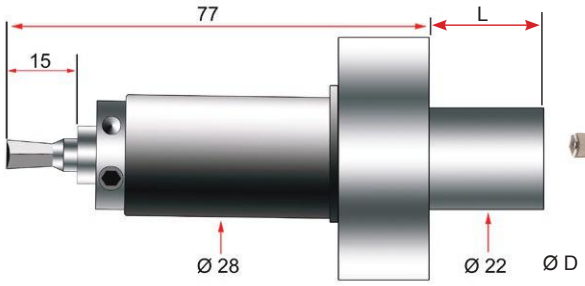




6180 / 6181 Series Holder

- Adjustable broaching holder designed for CNC Lathes & Turning centers
- Can be adapted with a special die to produce external broach forms such as splines
- Max thrust force: 2700lbs
- Uses 8mm shank broaches

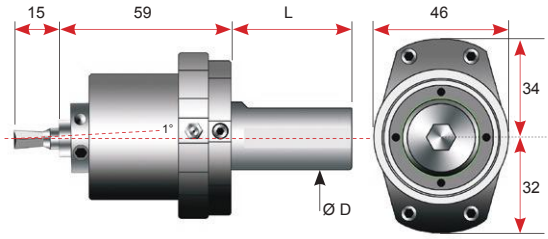

Hex cap screws enable easier locking of adjustment settings

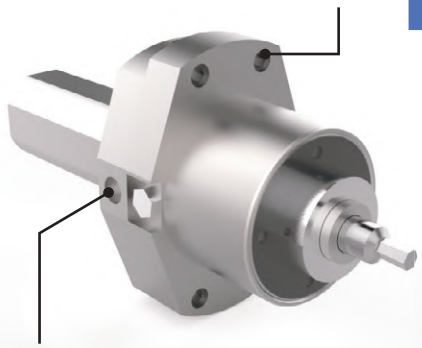



Four quadrant micro adjustability enables easiest center locating for better broach results

Shank Without Flats		Shank With Flats			
Item No.	Description	Item No.	Description	D	L
Call For Details	RBH-6180-158	3010-000123	RBH-6181-158-040	.625in	1.575in
Call For Details	RBH-6180-190	3010-000124	RBH-6181-190-040	.750in	1.575in
3010-000122	RBH-6180-254	3010-000125	RBH-6181-254-050	1.00in	1.970in
3010-000129	RBH-6180-317	3010-000135	RBH-6181-317	1.250in	2.365in
3010-000121	RBH-6180-160	Call For Details	RBH-6181-160	16mm	1.575in
Call For Details	RBH-6180-200	3010-000145	RBH-6181-200	20mm	1.575in
Call For Details	RBH-6180-250	Call For Details	RBH-6181-250	25mm	1.970in
Call For Details	RBH-6180-300	Call For Details	RBH-6181-300	30mm	2.365in
Call For Details	RBH-6180-320	3010-000139	RBH-6181-320-060	32mm	2.365in

6190 / 6191 Series Holder

- Adjustable broaching holder designed for the largest of turning centers and CNC lathes
- This broaching holder features a robust bearing configuration to withstand the high forces required to attain some of the largest of broach profiles
- Max thrust force: 9000lbs
- Uses 12mm shank broaches

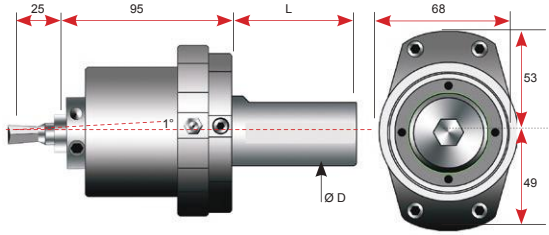

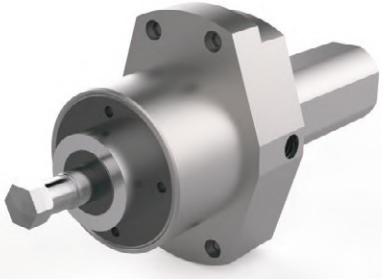


Shank Without Flats		Shank With Flats			
Item No.	Description	Item No.	Description	D	L
3010-000137	RBH-6190-254	3010-000126	RBH-6191-254-055	1.000in	2.165in
3010-000131	RBH-6190-317	Call For Details	RBH-6191-317	1.250in	2.165in
		3010-000141	RBH-6191-381	1.500in	2.165in
		Call For Details	RBH-6191-444	1.750in	2.675in
		3010-000127	RBH-6191-508	2.000in	2.675in
Call For Details	RBH-6190-200	Call For Details	RBH-6191-200	20mm	2.165in
		3010-000130	RBH-6191-220	22mm	2.165in
Call For Details	RBH-6190-250	Call For Details	RBH-6191-250	25mm	2.165in
Call For Details	RBH-6190-300	3010-000143	RBH-6191-300	30mm	2.165in
Call For Details	RBH-6190-320	Call For Details	RBH-6191-320	32mm	2.165in
		Call For Details	RBH-6191-350	35mm	2.165in
		Call For Details	RBH-6191-400	40mm	2.165in
		Call For Details	RBH-6191-450	45mm	2.675in
		3010-000140	RBH-6191-500	50mm	2.675in

Static Punch Holders

When special ID forms are required on your Swiss-style machining jobs, look to our static punch broach holders for ease of use, repeatability and rigidity. Our holders are able to position a broach form tool at a known location for timing or positioning of the broached profile.



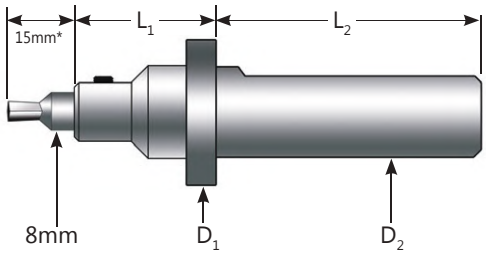



*Only applies when standard 2110 series or 0828 series broaches are used


Item No.	Description	D_1	D_2	L_1	L_2
3011-000100	SBH-158250-125-8M	1.00in	.625in	1.25in	2.5in
3011-000101	SBH-190250-125-8M	1.00in	.750in	1.25in	2.5in
3011-000102	SBH-200250-125-8M	1.00in	20mm	1.25in	2.5in
3011-000103	SBH-220250-125-8M	1.00in	22mm	1.25in	2.5in
3011-000104	SBH-254250-125-8M	1.10in	1.00in	1.25in	2.5in

Punch Broach Tools


Possible Punch Shapes for Index Broaching:



Diamond Punch



Rectangular Punch



Single Point Punch



Partial Hexalobe



Square Punch



"D" Form Punch


Double "D" Punch



Keyway Shaper







Finished Shape	S	L_1	L_2
Square | Hex | 6-Lobe | Key	See the diagrams for these dimensions		

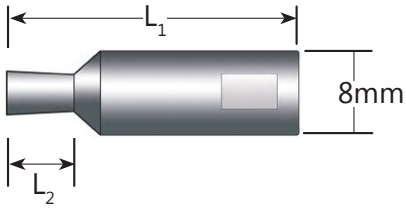

Partial forms are quoted on request. Contact us about your application! Tools made from standard 8x28mm blanks can be rapidly delivered!

SIGNATURE SERIES ROTARY BROACH TOOLS





GenSwiss' premium rotary broach tools deliver consistent high-performance cutting for industries requiring the highest degree of standards. Each tool is precision ground to ultra-high standards and features geometries designed specifically for the material type in which each broach will be used. These tools are engineered and manufactured to be utilized in the aerospace industry, medical industry, or any industry requiring the highest standards for inspection.

- Available sizes: 1.5mm-5mm & 1/16in-3/8in
- Available materials: Proprietary GSX
- Available shapes: Hexagon

Quality

Superior
Premium ■
Standard







Signature Series Hexagon Broaches - 1¼ inch OAL

Item No.	Description	S_{min}	S_{max}	Nominal	Material	Vented
3008-000130	RBT-0832-01.280	0.0503	0.0507		GSX	
3008-000178	RBT-0832-01.300	0.0513	0.0529	1.3mm	GSX	
3008-000131	RBT-0832-01.529	0.0600	0.0604	1.5mm	GSX	
3008-000132	RBT-0832-01.600	0.0630	0.0635	1/16	GSX	
3008-000133	RBT-0832-01.983T	0.0781	0.0791	5/64	GSX	•
3008-000134	RBT-0832-02.030T	0.0795	0.0799	2mm	GSX	•
3008-000135	RBT-0832-02.039T	0.0801	0.0805		GSX	•
3008-000136	RBT-0832-02.400T	0.0939	0.0951	3/32	GSX	•
3008-000137	RBT-0832-02.420T	0.0949	0.0953		GSX	•
3008-000138	RBT-0832-02.540T	0.0996	0.1000	2.5mm	GSX	•
3008-000139	RBT-0832-02.555T	0.1004	0.1008		GSX	•
3008-000140	RBT-0832-02.780T	0.1094	0.1111	7/64	GSX	•
3008-000141	RBT-0832-03.020T	0.1189	0.1193	3mm	GSX	•
3008-000142	RBT-0832-03.210T	0.1262	0.1266	1/8	GSX	•
3008-000143	RBT-0832-03.530T	0.1390	0.1394		GSX	•
3008-000144	RBT-0832-03.550T	0.1394	0.1398		GSX	•
3008-000145	RBT-0832-03.553T	0.1395	0.1399		GSX	•
3008-000146	RBT-0832-03.580T	0.1402	0.1409		GSX	•
3008-000147	RBT-0832-03.581T	0.1404	0.1410	9/64	GSX	•
3008-000148	RBT-0832-03.968T	0.1563	0.1586	5/32	GSX	•
3008-000149	RBT-0832-04.049T	0.1594	0.1600	4mm	GSX	•
3008-000179	RBT-0832-04.366T	0.1719	0.1743	11/64	GSX	•
3008-000150	RBT-0832-04.560T	0.1795	0.1799		GSX	•
3008-000151	RBT-0832-04.790T	0.1880	0.1892	3/16	GSX	•
3008-000152	RBT-0832-05.000T	0.1969	0.1976		GSX	•
3008-000153	RBT-0832-05.048T	0.1985	0.1990	5mm	GSX	•
3008-000154	RBT-0832-05.070T	0.1996	0.2000		GSX	•
3008-000180	RBT-0832-05.557T	0.2188	0.2218	7/32	GSX	•
3008-000181	RBT-0832-06.000T	0.2370	0.2399	6.0mm	GSX	•
3008-000155	RBT-0832-06.390T	0.2514	0.2518	1/4	GSX	•
3008-000156	RBT-0832-06.420T	0.2525	0.2530		GSX	•
3008-000157	RBT-0832-06.450T	0.2539	0.2545		GSX	•
3008-000158	RBT-0832-08.020T	0.3155	0.3160	5/16	GSX	•
3008-000159	RBT-0832-09.520T	0.3788	0.3794	3/8	GSX	•

Recommended Depth of Cut = 1.5xS

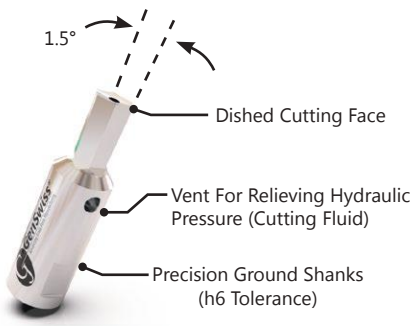


Special Sizes Expediated For FAST DELIVERY!



Quality


Superior
Premium
Standard



Signature Series Hexagon Broaches - 28mm OAL


Item No.	Description	S_{min}	S_{max}	Nominal	Material	Vented
3008-000100	RBT-0828-01.280	0.0503	0.0507		GSX	
3008-000174	RBT-0828-01.300	0.0513	0.0529	1.3mm	GSX	
3008-000101	RBT-0828-01.529	0.0600	0.0604	1.5mm	GSX	
3008-000102	RBT-0828-01.600	0.0630	0.0635	1/16	GSX	
3008-000103	RBT-0828-01.983T	0.0781	0.0791	5/64	GSX	•
3008-000104	RBT-0828-02.030T	0.0795	0.0799	2mm	GSX	•
3008-000105	RBT-0828-02.039T	0.0801	0.0805		GSX	•
3008-000106	RBT-0828-02.400T	0.0939	0.0951	3/32	GSX	•
3008-000107	RBT-0828-02.420T	0.0949	0.0953		GSX	•
3008-000108	RBT-0828-02.540T	0.0996	0.1000	2.5mm	GSX	•
3008-000109	RBT-0828-02.555T	0.1004	0.1008		GSX	•
3008-000110	RBT-0828-02.780T	0.1094	0.1111	7/64	GSX	•
3008-000111	RBT-0828-03.020T	0.1189	0.1193	3mm	GSX	•
3008-000112	RBT-0828-03.210T	0.1262	0.1266	1/8	GSX	•
3008-000113	RBT-0828-03.530T	0.1390	0.1394		GSX	•
3008-000114	RBT-0828-03.550T	0.1394	0.1398		GSX	•
3008-000115	RBT-0828-03.553T	0.1395	0.1399		GSX	•
3008-000116	RBT-0828-03.580T	0.1402	0.1409		GSX	•
3008-000117	RBT-0828-03.581T	0.1404	0.1410	9/64	GSX	•
3008-000118	RBT-0828-03.968T	0.1563	0.1586	5/32	GSX	•
3008-000119	RBT-0828-04.049T	0.1594	0.1600	4mm	GSX	•
3008-000175	RBT-0828-04.366T	0.1719	0.1743	11/64	GSX	•
3008-000120	RBT-0828-04.560T	0.1795	0.1799		GSX	•
3008-000121	RBT-0828-04.790T	0.1880	0.1892	3/16	GSX	•
3008-000122	RBT-0828-05.000T	0.1969	0.1976		GSX	•
3008-000123	RBT-0828-05.048T	0.1985	0.1990	5mm	GSX	•
3008-000124	RBT-0828-05.070T	0.1996	0.2000		GSX	•
3008-000176	RBT-0828-05.557T	0.2188	0.2218	7/32	GSX	•
3008-000177	RBT-0828-06.000T	0.2370	0.2399	6.0mm	GSX	•
3008-000125	RBT-0828-06.390T	0.2514	0.2518	1/4	GSX	•
3008-000126	RBT-0828-06.420T	0.2525	0.2530		GSX	•
3008-000127	RBT-0828-06.450T	0.2539	0.2545		GSX	•
3008-000128	RBT-0828-08.020T	0.3155	0.3160	5/16	GSX	•
3008-000129	RBT-0828-09.520T	0.3788	0.3794	3/8	GSX	•

Recommended Depth of Cut = 1.5xS

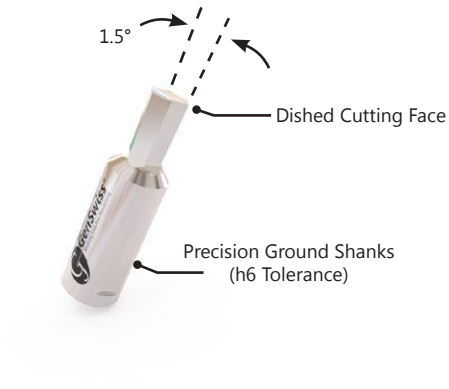


Special Sizes Expediated For FAST DELIVERY!

NEW



Quality

Superior
Premium
Standard



Signature Series Hexagon Broaches - 1.75in OAL


Item No.	Description	S_{min}	S_{max}	Material	Vented
3008-000242	RBT-127445-14.095	0.5524	0.5574	GSX	
3008-000359	RBT-127445-14.244	0.5606	0.561	GSX	
3008-000243	RBT-127445-14.357	0.5625	0.568	GSX	
3008-000360	RBT-127445-14.549	0.5726	0.573	GSX	
3008-000244	RBT-127445-15.133	0.5925	0.599	GSX	
3008-000361	RBT-127445-15.260	0.6006	0.601	GSX	
3008-000245	RBT-127445-15.951	0.625	0.631	GSX	
3008-000362	RBT-127445-16.124	0.6346	0.635	GSX	
3008-000246	RBT-127445-16.133	0.6318	0.6351	GSX	
3008-000363	RBT-127445-16.276	0.6406	0.641	GSX	
Recommended Depth of Cut = 1.5xS					

2110 Series Hexagon Broaches - HiCo8 Grade

Use With: 2100, 2160 & 6180 Series Rotary Broach Holders

Quality

Superior
Premium
Standard ■




Item No.	Description	S_{min}	S_{max}	Vented	For Titanium	Material
3005-000375	RBT-2110-01.21H	0.0474	0.0480			HiCo8
3005-000100	RBT-2110-01.21H-Ti	0.0474	0.0480		•	HiCo8
3005-000101	RBT-2110-01.27H-1-Ti	0.0498	0.0502		•	HiCo8
3005-000381	RBT-2110-01.28H-NF	0.0503	0.0507			HiCo8
3005-000102	RBT-2110-01.28H-Ti	0.0503	0.0507		•	HiCo8
3005-000388	RBT-2110-01.29H-NF	0.0506	0.0510			HiCo8
3005-000362	RBT-2110-01.35H	0.0512	0.0551			HiCo8
3005-000351	RBT-2110-01.503H	0.0590	0.0594			HiCo8
3005-000104	RBT-2110-01.506H-Ti	0.0590	0.0594		•	HiCo8
3005-000105	RBT-2110-01.524H-1-Ti	0.0598	0.0602		•	HiCo8
3005-000322	RBT-2110-01.529H	0.0600	0.0604			HiCo8
3005-000321	RBT-2110-01.529H-Ti	0.0600	0.0604		•	HiCo8
3005-000313	RBT-2110-01.534H	0.0602	0.0606			HiCo8
3005-000106	RBT-2110-01.539H-2-Ti	0.0604	0.0608		•	HiCo8
3005-000107	RBT-2110-01.60H-1	0.0630	0.0635			HiCo8
3005-000392	RBT-2110-01.616H-1-Ti	0.0635	0.0638			HiCo8
3005-000393	RBT-2110-01.616H-NF	0.0635	0.0638			HiCo8
3005-000383	RBT-2110-01.61H-NF	0.0630	0.0635			HiCo8
3005-000299	RBT-2110-01.72H	0.0675	0.0679			HiCo8
3005-000300	RBT-2110-01.72H-1-Ti	0.0675	0.0679		•	HiCo8
3005-000108	RBT-2110-01.80H-1	0.0688	0.0728			HiCo8
3005-000295	RBT-2110-01.828HT	0.0713	0.0720	•		HiCo8
3005-000395	RBT-2110-01.984HT-NF	0.0777	0.0785	•		HiCo8
3005-000363	RBT-2110-01.98H	0.0793	0.0797			HiCo8
3005-000364	RBT-2110-01.98HT	0.0793	0.0797	•		HiCo8
3005-000360	RBT-2110-01.98HT-1-Ti	0.0793	0.0797	•	•	HiCo8
3005-000109	RBT-2110-01.98H-Ti	0.0793	0.0797		•	HiCo8
3005-000385	RBT-2110-01.98HT-NF	0.0793	0.0797	•		HiCo8
3005-000234	RBT-2110-01.994H	0.0780	0.0790			HiCo8
3005-000328	RBT-2110-02.006HT	0.0786	0.0794	•		HiCo8
3005-000345	RBT-2110-02.034H	0.0799	0.0803			HiCo8
3005-000347	RBT-2110-02.034HT	0.0799	0.0803	•		HiCo8
3005-000346	RBT-2110-02.034H-Ti	0.0799	0.0803		•	HiCo8
3005-000289	RBT-2110-02.039H	0.0801	0.0805			HiCo8
3005-000293	RBT-2110-02.039H-1-Ti	0.0801	0.0805		•	HiCo8
3005-000361	RBT-2110-02.03H	0.0795	0.0799			HiCo8
3005-000110	RBT-2110-02.03HT	0.0795	0.0799	•		HiCo8
3005-000318	RBT-2110-02.042H-Ti	0.0802	0.0806		•	HiCo8
3005-000342	RBT-2110-02.232H	0.0881	0.0877			HiCo8

Recommended Depth of Cut = 1.5xS

Quality

Superior
Premium
Standard

■



Item No.	Description	S_{min}	S_{max}	Vented	For Titanium	Material
3005-000343	RBT-2110-02.232H-1-Ti	0.0877	0.0881		•	HiCo8
3005-000344	RBT-2110-02.232HT	0.0881	0.0877	•		HiCo8
3005-000334	RBT-2110-02.26H-1-Ti	0.0887	0.0893		•	HiCo8
3005-000340	RBT-2110-02.284H-1-Ti	0.0897	0.0901		•	HiCo8
3005-000330	RBT-2110-02.402HT-1	0.0944	0.0948	•		HiCo8
3005-000331	RBT-2110-02.402H-Ti	0.0944	0.0948		•	HiCo8
3005-000112	RBT-2110-02.40HT	0.0939	0.0951	•		HiCo8
3005-000304	RBT-2110-02.428H	0.0954	0.0958			HiCo8
3005-000113	RBT-2110-02.42H	0.0949	0.0953			HiCo8
3005-000329	RBT-2110-02.42HT	0.0949	0.0953	•		HiCo8
3005-000332	RBT-2110-02.43H-1	0.0952	0.0962			HiCo8
3005-000114	RBT-2110-02.43H-1-Ti	0.0952	0.0962		•	HiCo8
3005-000249	RBT-2110-02.45HT	0.0962	0.0966	•		HiCo8
3005-000352	RBT-2110-02.46H-Ti	0.0970	0.0974		•	HiCo8
3005-000115	RBT-2110-02.505H-1	0.0983	0.0990			HiCo8
3005-000116	RBT-2110-02.505HT-1-Ti	0.0983	0.0990	•	•	HiCo8
3005-000117	RBT-2110-02.53H-1	0.0992	0.0996			HiCo8
3005-000118	RBT-2110-02.53HT	0.0992	0.0996	•		HiCo8
3005-000229	RBT-2110-02.545HT-Ti	0.1000	0.1004	•	•	HiCo8
3005-000120	RBT-2110-02.54H-1-Ti	0.0996	0.1000		•	HiCo8
3005-000121	RBT-2110-02.54HT-1-Ti	0.0996	0.1000	•	•	HiCo8
3005-000122	RBT-2110-02.555H	0.1004	0.1008			HiCo8
3005-000123	RBT-2110-02.555HT	0.1004	0.1008	•		HiCo8
3005-000124	RBT-2110-02.57H	0.1009	0.1013			HiCo8
3005-000125	RBT-2110-02.57HT	0.1004	0.1012			HiCo8
3005-000333	RBT-2110-02.66H-1-Ti	0.1045	0.1051		•	HiCo8
3005-000242	RBT-2110-02.67HT	0.1053	0.1063	•		HiCo8
3005-000341	RBT-2110-02.685H-1-Ti	0.1055	0.1059		•	HiCo8
3005-000382	RBT-2110-02.79HT-NF	0.1090	0.1110	•		HiCo8
3005-000315	RBT-2110-02.813-NF	0.1105	0.1110			HiCo8
3005-000355	RBT-2110-02.81H	0.1104	0.1108			HiCo8
3005-000327	RBT-2110-02.81HT	0.1104	0.1108	•		HiCo8
3005-000126	RBT-2110-02.845GS	0.1070	0.1120			HiCo8
3005-000377	RBT-2110-02.852HT	0.1120	0.1126	•		HiCo8
3005-000127	RBT-2110-02.93H	0.1130	0.1177			HiCo8
3005-000128	RBT-2110-03.012HT-1-Ti	0.1184	0.1188	•	•	HiCo8
3005-000396	RBT-2110-03.012HT-NF	0.1184	0.1188	•		HiCo8
3005-000129	RBT-2110-03.02H-1	0.1185	0.1193			HiCo8

Recommended Depth of Cut = 1.5xS


2110 Series Hexagon Broaches - HiCo8 Grade

Use With: 2100, 2160 & 6180 Series Rotary Broach Holders

Quality

Superior
Premium
Standard

■




Item No.	Description	S_{min}	S_{max}	Vented	For Titanium	Material
3005-000335	RBT-2110-03.02HT	0.1185	0.1193			HiCo8
3005-000130	RBT-2110-03.02HT-8S	0.1220	0.1230	•		HiCo8
3005-000131	RBT-2110-03.037HT-1-Ti	0.1194	0.1198	•	•	HiCo8
3005-000240	RBT-2110-03.043HT	0.1196	0.1200	•		HiCo8
3005-000132	RBT-2110-03.045HT	0.1189	0.1209	•		HiCo8
3005-000255	RBT-2110-03.04H	0.1193	0.1200			HiCo8
3005-000231	RBT-2110-03.04HT	0.1189	0.1209	•		HiCo8
3005-000239	RBT-2110-03.063HT	0.1204	0.1208	•		HiCo8
3005-000133	RBT-2110-03.08H	0.1211	0.1216			HiCo8
3005-000134	RBT-2110-03.08HT	0.1211	0.1216	•		HiCo8
3005-000136	RBT-2110-03.17H	0.1280	0.1287			HiCo8
3005-000379	RBT-2110-03.17HT	0.1280	0.1287	•		HiCo8
3005-000370	RBT-2110-03.182HT	0.1250	0.1256	•		HiCo8
3005-000137	RBT-2110-03.212HT	0.1263	0.1265	•		HiCo8
3005-000138	RBT-2110-03.21H	0.1262	0.1266			HiCo8
3005-000139	RBT-2110-03.21HT	0.1262	0.1266	•		HiCo8
3005-000373	RBT-2110-03.22HT-NF	0.1265	0.1270	•		HiCo8
3005-000232	RBT-2110-03.245HT-Ti	0.1275	0.1280	•	•	HiCo8
3005-000391	RBT-2110-03.492HT-1-Ti	0.1370	0.1380	•	•	HiCo8
3005-000339	RBT-2110-03.492H-Ti	0.1370	0.1380		•	HiCo8
3005-000324	RBT-2110-03.536HT	0.1390	0.1394	•		HiCo8
3005-000323	RBT-2110-03.536HT-Ti	0.1390	0.1394	•	•	HiCo8
3005-000140	RBT-2110-03.53H-1	0.1385	0.1394			HiCo8
3005-000141	RBT-2110-03.53HT-1-Ti	0.1385	0.1394	•	•	HiCo8
3005-000384	RBT-2110-03.53HT-NF	0.1385	0.1394	•		HiCo8
3005-000368	RBT-2110-03.546HT-Ti	0.1391	0.1396	•	•	HiCo8
3005-000294	RBT-2110-03.548HT	0.1395	0.1399	•		HiCo8
3005-000301	RBT-2110-03.548HT-1-Ti	0.1395	0.1399	•	•	HiCo8
3005-000292	RBT-2110-03.54HT-1	0.1395	0.1399	•		HiCo8
3005-000350	RBT-2110-03.555HT-1-Ti	0.1398	0.1402	•	•	HiCo8
3005-000394	RBT-2110-03.556HT-NF	0.1390	0.1410	•		HiCo8
3005-000142	RBT-2110-03.55H-1-Ti	0.1394	0.1398		•	HiCo8
3005-000374	RBT-2110-03.55HT	0.1394	0.1398	•		HiCo8
3005-000143	RBT-2110-03.55HT-1-Ti	0.1394	0.1398	•	•	HiCo8
3005-000241	RBT-2110-03.56H	0.1400	0.1405			HiCo8
3005-000366	RBT-2110-03.56HT	0.1400	0.1405	•		HiCo8
3005-000367	RBT-2110-03.56HT-1-Ti	0.1400	0.1405	•	•	HiCo8
3005-000365	RBT-2110-03.56H-Ti	0.1400	0.1405		•	HiCo8
3005-000230	RBT-2110-03.57H	0.1404	0.1409			HiCo8

Recommended Depth of Cut = 1.5xS

Quality

Superior
Premium
Standard

■



Item No.	Description	S_{min}	S_{max}	Vented	For Titanium	Material
3005-000233	RBT-2110-03.57HT-R12	0.1404	0.1409	•		HiCo8
3005-000145	RBT-2110-03.57HT-Ti	0.1404	0.1409	•	•	HiCo8
3005-000144	RBT-2110-03.58H	0.1402	0.1409			HiCo8
3005-000325	RBT-2110-03.58HT	0.1402	0.1409	•		HiCo8
3005-000378	RBT-2110-03.598HT	0.1414	0.1419	•		HiCo8
3005-000356	RBT-2110-03.608HT	0.1416	0.1425	•		HiCo8
3005-000357	RBT-2110-03.608HT-1-Ti	0.1416	0.1425	•	•	HiCo8
3005-000369	RBT-2110-03.608HT-NF	0.1416	0.1425	•		HiCo8
3005-000297	RBT-2110-03.616HT-1	0.1421	0.1426	•		HiCo8
3005-000296	RBT-2110-03.616H-Ti	0.1421	0.1426		•	HiCo8
3005-000298	RBT-2110-03.616HT-Ti	0.1421	0.1426	•	•	HiCo8
3005-000146	RBT-2110-03.62H	0.1417	0.1425			HiCo8
3005-000302	RBT-2110-03.62HT-1-Ti	0.1417	0.1425	•	•	HiCo8
3005-000148	RBT-2110-03.63H	0.1425	0.1429			HiCo8
3005-000254	RBT-2110-03.63H-T	0.1425	0.1437	•		HiCo8
3005-000150	RBT-2110-03.64H	0.1430	0.1435			HiCo8
3005-000316	RBT-2110-03.739HT	0.1470	0.1474	•		HiCo8
3005-000320	RBT-2110-03.749HT	0.1472	0.1476	•		HiCo8
3005-000151	RBT-2110-03.80HT	0.1528	0.1534	•		HiCo8
3005-000152	RBT-2110-03.97H	0.1593	0.1600			HiCo8
3005-000153	RBT-2110-03.97HT	0.1594	0.1600	•		HiCo8
3005-000309	RBT-2110-03.99H	0.1567	0.1575			HiCo8
3005-000310	RBT-2110-03.99HT	0.1567	0.1575	•		HiCo8
3005-000154	RBT-2110-04.00H	0.1606	0.1612			HiCo8
3005-000397	RBT-2110-04.00HT-NF	0.1606	0.1612	•		HiCo8
3005-000286	RBT-2110-04.02HT-Ti	0.1580	0.1585	•	•	HiCo8
3005-000305	RBT-2110-04.089HT	0.1606	0.1614	•		HiCo8
3005-000155	RBT-2110-04.08HT-Ti	0.1604	0.1608	•	•	HiCo8
3005-000386	RBT-2110-04.15HT-NF	0.1615	0.1653	•		HiCo8
3005-000236	RBT-2110-04.42HT-Ti	0.1720	0.1760	•	•	HiCo8
3005-000248	RBT-2110-04.55HT-Ti	0.1792	0.1796	•	•	HiCo8
3005-000288	RBT-2110-04.56HT-Ti	0.1795	0.1799	•	•	HiCo8
3005-000156	RBT-2110-04.76H	0.1905	0.1911			HiCo8
3005-000157	RBT-2110-04.76HT	0.1905	0.1911	•		HiCo8
3005-000158	RBT-2110-04.79H	0.1880	0.1892			HiCo8
3005-000159	RBT-2110-04.79HT	0.1880	0.1892	•		HiCo8
3005-000387	RBT-2110-04.79HT-1-Ti	0.1880	0.1892	•	•	HiCo8
3005-000160	RBT-2110-04.820HT-1-Ti	0.1892	0.1898	•	•	HiCo8


Recommended Depth of Cut = 1.5xS

2110 Series Hexagon Broaches - HiCo8 Grade

Use With: 2100, 2160 & 6180 Series Rotary Broach Holders

Quality

Superior
Premium
Standard



Item No.	Description	S_{min}	S_{max}	Vented	For Titanium	Material
3005-000161	RBT-2110-04.826H	0.1895	0.1900			HiCo8
3005-000162	RBT-2110-04.826HT-Ti	0.1895	0.1900	•	•	HiCo8
3005-000319	RBT-2110-05.011HT-Ti	0.1969	0.1977	•	•	HiCo8
3005-000389	RBT-2110-05.028H-NF	0.1975	0.1985			HiCo8
3005-000163	RBT-2110-05.048HT	0.1975	0.1985	•		HiCo8
3005-000164	RBT-2110-05.07H-1	0.1996	0.2000			HiCo8
3005-000274	RBT-2110-05.07HT	0.1996	0.2000	•		HiCo8
3005-000372	RBT-2110-05.125HT-1-Ti	0.2013	0.2022	•	•	HiCo8
3005-000311	RBT-2110-05.56H	0.2218	0.2225			HiCo8
3005-000312	RBT-2110-05.56HT	0.2218	0.2225	•		HiCo8
3005-000165	RBT-2110-05.57H	0.2191	0.2195			HiCo8
3005-000390	RBT-2110-05.606H-NF	0.2205	0.2209			HiCo8
3005-000166	RBT-2110-05.635H	0.2217	0.2221			HiCo8
3005-000306	RBT-2110-05.645H	0.2220	0.2224			HiCo8
3005-000307	RBT-2110-05.645HT	0.2220	0.2224	•		HiCo8
3005-000337	RBT-2110-05.994H	0.2356	0.2364			HiCo8
3005-000338	RBT-2110-05.994H-1-Ti	0.2356	0.2364		•	HiCo8
3005-000380	RBT-2110-05.994H-NF	0.2356	0.2364			HiCo8
3005-000336	RBT-2110-05.994HT	0.2356	0.2364	•		HiCo8
3005-000167	RBT-2110-06.05H	0.2374	0.2382			HiCo8
3005-000168	RBT-2110-06.09H	0.2396	0.2400			HiCo8
3005-000169	RBT-2110-06.26H-1	0.2461	0.2468			HiCo8
3005-000170	RBT-2110-06.35H	0.2539	0.2545			HiCo8
3005-000353	RBT-2110-06.38H-Ti	0.2510	0.2514		•	HiCo8
3005-000171	RBT-2110-06.39H	0.2514	0.2518			HiCo8
3005-000354	RBT-2110-06.42H-1-NF	0.2525	0.2530			HiCo8
3005-000172	RBT-2110-06.42H-1-Ti	0.2525	0.2530		•	HiCo8
3005-000326	RBT-2110-06.553H	0.2560	0.2600			HiCo8
3005-000317	RBT-2110-07.086	0.2765	0.2814			HiCo8
3005-000173	RBT-2110-07.17H	0.2820	0.2825			HiCo8
3005-000174	RBT-2110-07.236H	0.2847	0.2851			HiCo8
3005-000348	RBT-2110-07.236H-1-Ti	0.2847	0.2851		•	HiCo8
3005-000349	RBT-2110-07.236HT	0.2847	0.2851	•		HiCo8
3005-000175	RBT-2110-07.24GS	0.2840	0.2850			HiCo8
3005-000176	RBT-2110-07.94H-1	0.3124	0.3128			HiCo8
3005-000308	RBT-2110-07.94H-Ti	0.3124	0.3128		•	HiCo8
3005-000314	RBT-2110-07.965H	0.3134	0.3138			HiCo8
3005-000285	RBT-2110-07.97HT-8S	0.3120	0.3160			HiCo8
3005-000371	RBT-2110-08.02H	0.3155	0.3160			HiCo8
3005-000177	RBT-2110-08.02H-Ti	0.3155	0.3160		•	HiCo8
3005-000358	RBT-2110-08.102H	0.3186	0.3194			HiCo8
3005-000359	RBT-2110-08.102H-1-Ti	0.3186	0.3194		•	HiCo8
3005-000376	RBT-2110-08.255H	0.3250	0.3270			HiCo8
3005-000284	RBT-2110-08.496H	0.3343	0.3347			HiCo8
3005-000178	RBT-2110-09.52H	0.3788	0.3794			HiCo8
3005-000179	RBT-2110-09.76H	0.3840	0.3844			HiCo8

Recommended Depth of Cut = 1.5xS

2122 Series Hexalobular Broach Tools

Use With: 2100, 2160 & 6180 Series Rotary Broach Hold-


Quality

Superior
Premium ■
Standard



Item No.	Description	Socket	A	B
3005-000192	RBT-2122-T06	T6	.0688″	.0500″
3005-000194	RBT-2122-T08	T8	.0944″	.0688″
3005-000195	RBT-2122-T10	T10	.1102″	.0807″
3005-000196	RBT-2122-T15	T15	.1318″	.0944″
3005-000197	RBT-2122-T20	T20	.1555″	.1122″
3005-000199	RBT-2122-T25	T25	.1771″	.1279″
3005-000200	RBT-2122-T30	T30	.2204″	.1594″
3005-000201	RBT-2122-T40	T40	.2657″	.1909″
3005-000202	RBT-2122-T45	T45	.3122″	.2220″

Recommended Depth of Cut = 1.5xB

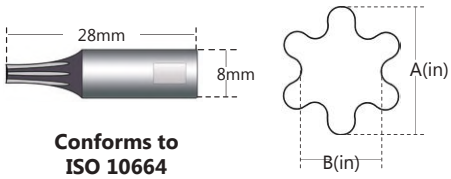

Conforms to ISO 10664

2151 Series Broach Tools

Use With: 2150 Series Micro Broach Holder


Quality

Superior
Premium ■
Standard



Item No.	Description	Hex Size	S
3005-000226	RBT-2151-100H	1.0mm	.040″
3005-000303	RBT-2151-150H	1.5mm	.060"
3005-000243	RBT-2151-200H	2.0mm	.078"
3005-000238	RBT-2151-251H	2.5mm	.098"
3005-000228	RBT-2151-300H	3.0mm	.121″

Custom Sizes and Tolerance Available






6150 Series Hexagon Broaches - HiCo8 Grade

Item No.	Description	S_{min}	S_{max}
3005-000256	RBT-6150-03H	.1205"	.1212"
3005-000258	RBT-6150-04H	.1605"	.1612"
3005-000260	RBT-6150-05H	.1998"	.2005"
3005-000247	RBT-6150-06H	.2390"	.2398"
Call For Details	RBT-6150-07H	.2792"	.2801"
3005-000259	RBT-6150-08H	.3186"	.3194"
Call For Details	RBT-6150-09H	.3579"	.3588"
3005-000287	RBT-6150-10H	.3972"	.3982"
3005-000282	RBT-6150-11H	.4376"	.4386"
3005-000266	RBT-6150-12H	.4770"	.4780"
Call For Details	RBT-6150-13H	.5163"	.5174"
Call For Details	RBT-6150-14H	.5557"	.5567"
Call For Details	RBT-6150-16H	.6379"	.6389"

Recommended Depth of Cut = 1.5xS

Item No.	Description	S_{min}	S_{max}
Call For Details	RBT-6150-17H	.6773"	.6783"
Call For Details	RBT-6150-18H	.7164"	.7177"
3005-000211	RBT-6150-19H	.7575"	.7588"
3005-000261	RBT-6150-317H	.1280"	.1287"
3005-000262	RBT-6150-397H	.1592"	.1599"
3005-000263	RBT-6150-476H	.1905"	.1912"
Call For Details	RBT-6150-556H	.2217"	.2224"
3005-000244	RBT-6150-635H	.2536"	.2545"
3005-000265	RBT-6150-794H	.3161"	.3170"
Call For Details	RBT-6150-952H	.3786"	.3795"
3005-000210	RBT-6150-127H	.5045"	.5055"
Call For Details	RBT-6150-142H	.5705"	.5715"
3005-000257	RBT-6150-158H	.6330"	.6340"

Recommended Depth of Cut = 1.5xS

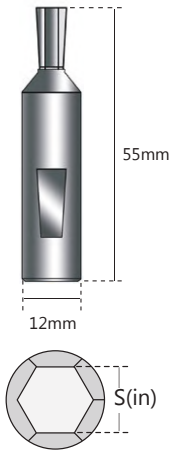

UTILIS

multidec®

swiss type tools


Micro-Bore






Now Available In UHM 20 TX+

Complete Micro-Boring System

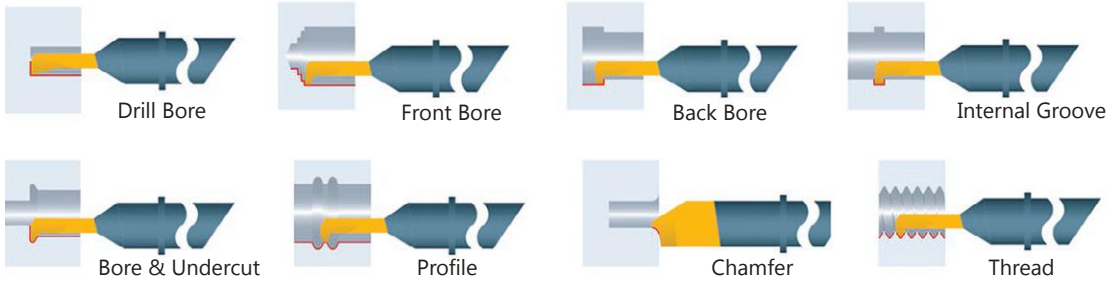

The multidec® micro-bore system is a complete I.D. working system that can perform boring, grooving, profiling, chamfering, threading and more.

Innovative Holding System

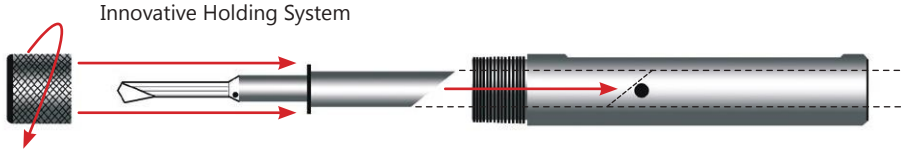


Nut is tightened by hand

Special nut applies holding force to snap ring on micro bore tools

Precision ground angle locates less than .0004" against carbide pin in micro bore holder

SDG - Drilling and Boring




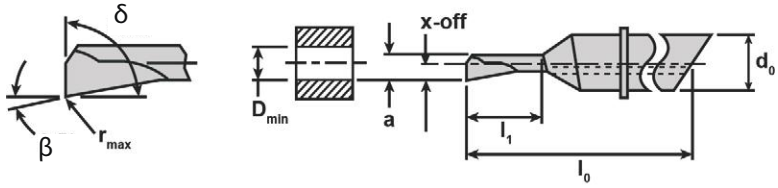


Item No.	Description	Min Hole Ø (D_{min})		Max Depth (l_1)		d_0	a	X-off	l_0	r_{max}	β	δ	Holder
7005-138045	SDG 435 042 R UHM20 HX	.42mm	0.017in	1.50mm	0.059in	4	0.38	0.21	35	.01	2.5°	89.5°	SDA 4...
Call For Details	SDG 435 052 R UHM20 HX	.52mm	0.020in	2.00mm	0.079in	4	0.47	0.26	35	.02	2.5°	89.5°	SDA 4...
Call For Details	SDG 435 072 R UHM20 HX	.72mm	0.028in	2.50mm	0.098in	4	0.65	0.36	35	.03	2.5°	89.5°	SDA 4...
7005-111484	SDG 435 092 R UHM20 HX	.92mm	0.036in	3.00mm	0.118in	4	0.83	0.46	35	.02	2.5°	89.5°	SDA 4...
7005-122208	SDG 440 092 R UHM20 HX	.92mm	0.036in	3.00mm	0.118in	4	0.83	0.46	40	.03	2.5°	89.5°	SDA 4...
7005-122250	SDG 448 092 R UHM20 HX	.92mm	0.036in	5.00mm	0.197in	4	0.83	0.46	48	.03	2.5°	89.5°	SDA 4...
7005-169964	SDG 435 122 R UHM20 HX	1.22mm	0.048in	4.00mm	0.157in	4	1.10	0.61	35	.03	2.5°	89.5°	SDA 4...
7005-111488	SDG 435 142 R UHM20 HX	1.42mm	0.056in	4.50mm	0.177in	4	1.28	0.71	35	.02	2.5°	89.5°	SDA 4...
7005-122214	SDG 440 142 R UHM20 HX	1.42mm	0.056in	4.50mm	0.177in	4	1.28	0.71	40	.04	2.5°	89.5°	SDA 4...
7005-122256	SDG 448 142 R UHM20 HX	1.42mm	0.056in	7.50mm	0.295in	4	1.28	0.71	48	.04	2.5°	89.5°	SDA 4...
7005-111492	SDG 435 192 R UHM20 HX	1.92mm	0.076in	6.00mm	0.236in	4	1.73	0.96	35	.03	2.5°	89.5°	SDA 4...
7005-122220	SDG 440 192 R UHM20 HX	1.92mm	0.076in	6.00mm	0.236in	4	1.73	0.96	40	.04	2.5°	89.5°	SDA 4...
7005-122262	SDG 448 192 R UHM20 HX	1.92mm	0.076in	10.00mm	0.394in	4	1.73	0.96	48	.04	2.5°	89.5°	SDA 4...
7005-111496	SDG 435 242 R UHM20 HX	2.42mm	0.095in	7.50mm	0.295in	4	2.18	1.21	35	.03	2.5°	89.5°	SDA 4...
7005-122226	SDG 440 242 R UHM20 HX	2.42mm	0.095in	7.50mm	0.295in	4	2.18	1.21	40	.05	2.5°	89.5°	SDA 4...
7005-122268	SDG 448 242 R UHM20 HX	2.42mm	0.095in	12.50mm	0.492in	4	2.18	1.21	48	.05	2.5°	89.5°	SDA 4...
7005-122232	SDG 440 292 R UHM20 HX	2.92mm	0.115in	9.00mm	0.354in	4	2.63	1.46	40	.05	2.5°	89.5°	SDA 4...
7005-122274	SDG 448 292 R UHM20 HX	2.92mm	0.115in	15.00mm	0.591in	4	2.63	1.46	48	.05	2.5°	89.5°	SDA 4...
7005-122238	SDG 440 342 R UHM20 HX	3.42mm	0.135in	10.50mm	0.413in	4	3.08	1.71	40	.06	2.5°	89.5°	SDA 4...
7005-122280	SDG 448 342 R UHM20 HX	3.42mm	0.135in	17.50mm	0.689in	4	3.08	1.71	48	.06	2.5°	89.5°	SDA 4...
7005-122244	SDG 440 392 R UHM20 HX	3.92mm	0.154in	12.00mm	0.472in	4	3.53	1.96	40	.06	2.5°	89.5°	SDA 4...
7005-122286	SDG 448 392 R UHM20 HX	3.92mm	0.154in	20.00mm	0.787in	4	3.53	1.96	48	.06	2.5°	89.5°	SDA 4...
7005-124099	SDG 644 442 R UHM20 HX	4.42mm	0.174in	9.00mm	0.354in	6	3.98	2.21	44	.07	2.5°	89.5°	SDA 6...
7005-124123	SDG 656 442 R UHM20 HX	4.42mm	0.174in	18.00mm	0.709in	6	3.98	2.21	56	.07	2.5°	89.5°	SDA 6...
7005-124147	SDG 668 442 R UHM20 HX	4.42mm	0.174in	27.00mm	1.063in	6	3.98	2.21	68	.07	2.5°	89.5°	SDA 6...
7005-124105	SDG 644 492 R UHM20 HX	4.92mm	0.194in	10.00mm	0.394in	6	4.43	2.46	44	.07	2.5°	89.5°	SDA 6...
7005-124129	SDG 656 492 R UHM20 HX	4.92mm	0.194in	20.00mm	0.787in	6	4.43	2.46	56	.07	2.5°	89.5°	SDA 6...
7005-124153	SDG 668 492 R UHM20 HX	4.92mm	0.194in	30.00mm	1.181in	6	4.43	2.46	68	.07	2.5°	89.5°	SDA 6...
7005-124111	SDG 644 542 R UHM20 HX	5.42mm	0.213in	11.00mm	0.433in	6	4.88	2.71	44	.08	2.5°	89.5°	SDA 6...
7005-124135	SDG 656 542 R UHM20 HX	5.42mm	0.213in	22.00mm	0.866in	6	4.88	2.71	56	.08	2.5°	89.5°	SDA 6...
7005-124159	SDG 668 542 R UHM20 HX	5.42mm	0.213in	33.00mm	1.299in	6	4.88	2.71	68	.08	2.5°	89.5°	SDA 6...
7005-124117	SDG 644 592 R UHM20 HX	5.92mm	0.233in	12.00mm	0.472in	6	5.33	2.96	44	.08	2.5°	89.5°	SDA 6...
7005-124141	SDG 656 592 R UHM20 HX	5.92mm	0.233in	24.00mm	0.945in	6	5.33	2.96	56	.08	2.5°	89.5°	SDA 6...
7005-124165	SDG 668 592 R UHM20 HX	5.92mm	0.233in	36.00mm	1.417in	6	5.33	2.96	68	.08	2.5°	89.5°	SDA 6...
7005-124171	SDG 850 692 R UHM20 HX	6.92mm	0.272in	14.00mm	0.551in	8	6.23	3.46	50	.09	2.5°	89.5°	SDA 8...
7005-124183	SDG 866 692 R UHM20 HX	6.92mm	0.272in	28.00mm	1.102in	8	6.23	3.46	66	.09	2.5°	89.5°	SDA 8...
7005-124195	SDG 882 692 R UHM20 HX	6.92mm	0.272in	42.00mm	1.654in	8	6.23	3.46	82	.09	2.5°	89.5°	SDA 8...
7005-124177	SDG 850 792 R UHM20 HX	7.92mm	0.312in	16.00mm	0.630in	8	7.13	3.96	50	.10	2.5°	89.5°	SDA 8...
7005-124189	SDG 866 792 R UHM20 HX	7.92mm	0.312in	32.00mm	1.260in	8	7.13	3.96	66	.10	2.5°	89.5°	SDA 8...
7005-124201	SDG 656 592 R UHM20 HX	7.92mm	0.312in	48.00mm	1.890in	8	7.13	3.96	82	.10	2.5°	89.5°	SDA 8...

Standard Grade Offering: UHM20 HX - Coated Carbide for Most Applications - Other Coatings on Request

Applications Example





Ideal Cutting Materials

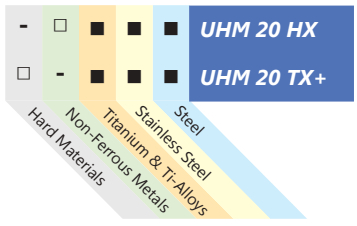


■ Preferred Application
□ Possible Application
- Application Not Recommended

SXG - Drilling and Boring






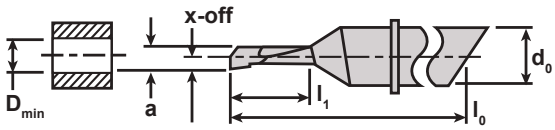


Item No.	Description	Min Hole Ø (D_{min})	Max Depth (l_1)	d_0	a	X-off	l_0	r_{max}	α	β	Holder
7005-111500	SXG 435 042 R UHM20 HX	.42mm 0.017in	1.5mm 0.059in	4	0.38	0.21	35	.02	0.5°	2.5°	SDA 4...
7005-169960	SXG 435 052 R UHM20 HX	.52mm 0.020in	2.0mm 0.079in	4	0.47	0.26	35	.02	0.5°	2.5°	SDA 4...
7005-169956	SXG 435 072 R UHM20 HX	.72mm 0.028in	2.5mm 0.098in	4	0.65	0.36	35	.03	0.5°	2.5°	SDA 4...
7005-111504	SXG 435 092 R UHM20 HX	.92mm 0.036in	3.0mm 0.118in	4	0.83	0.46	35	.02	0.5°	2.5°	SDA 4...
7005-169952	SXG 435 122 R UHM20 HX	1.22mm 0.048in	4.0mm 0.157in	4	1.10	0.61	35	0.03	0.5°	2.5°	SDA 4...
7005-111508	SXG 435 142 R UHM20 HX	1.42mm 0.056in	4.5mm 0.177in	4	1.28	0.71	35	.02	0.5°	2.5°	SDA 4...
7005-111512	SXG 435 192 R UHM20 HX	1.92mm 0.076in	6.0mm 0.236in	4	1.73	0.96	35	.02	0.5°	2.5°	SDA 4...
7005-111516	SXG 435 242 R UHM20 HX	2.42mm 0.095in	7.5mm 0.295in	4	2.18	1.21	35	.02	0.5°	2.5°	SDA 4...
7005-111520	SXG 440 092 R UHM20 HX	.92mm 0.036in	5.0mm 0.197in	4	0.83	1.46	40	.02	0.5°	2.5°	SDA 4...
7005-111524	SXG 440 142 R UHM20 HX	1.42mm 0.056in	7.5mm 0.295in	4	1.28	1.71	40	.02	0.5°	2.5°	SDA 4...
7005-111528	SXG 440 192 R UHM20 HX	1.92mm 0.076in	10.0mm 0.394in	4	1.73	1.98	40	.02	0.5°	2.5°	SDA 4...
7005-111532	SXG 440 242 R UHM20 HX	2.42mm 0.095in	12.5mm 0.492in	4	2.18	0.46	40	.02	0.5°	2.5°	SDA 4...
7005-111536	SXG 440 292 R UHM20 HX	2.92mm 0.115in	9.0mm 0.354in	4	2.63	0.71	40	.02	0.5°	2.5°	SDA 4...
7005-111540	SXG 440 342 R UHM20 HX	3.42mm 0.135in	10.5mm 0.413in	4	3.08	0.96	40	.02	0.5°	2.5°	SDA 4...
7005-111544	SXG 440 392 R UHM20 HX	3.92mm 0.154in	12.0mm 0.472in	4	3.53	1.21	40	.02	0.5°	2.5°	SDA 4...
7005-111548	SXG 448 292 R UHM20 HX	2.92mm 0.115in	15.0mm 0.591in	4	2.63	1.46	48	.02	0.5°	2.5°	SDA 4...
7005-111552	SXG 448 342 R UHM20 HX	3.42mm 0.135in	17.5mm 0.689in	4	3.08	1.71	48	.02	0.5°	2.5°	SDA 4...
7005-111556	SXG 448 392 R UHM20 HX	3.92mm 0.154in	20.0mm 0.787in	4	3.53	1.96	48	.02	0.5°	2.5°	SDA 4...
7005-111560	SXG 644 442 R UHM20 HX	4.42mm 0.174in	9.0mm 0.354in	6	3.98	2.21	44	.02	0.5°	2.5°	SDA 6...
7005-111564	SXG 644 492 R UHM20 HX	4.92mm 0.194in	10.0mm 0.394in	6	4.43	2.46	44	.02	0.5°	2.5°	SDA 6...
7005-111568	SXG 644 542 R UHM20 HX	5.42mm 0.213in	11.0mm 0.433in	6	4.88	2.71	44	.02	0.5°	2.5°	SDA 6...
7005-111572	SXG 644 592 R UHM20 HX	5.92mm 0.233in	12.0mm 0.472in	6	5.33	2.96	44	.02	0.5°	2.5°	SDA 6...
7005-111576	SXG 656 442 R UHM20 HX	4.42mm 0.174in	18.0mm 0.709in	6	3.98	2.21	56	.02	0.5°	2.5°	SDA 6...
7005-111580	SXG 656 492 R UHM20 HX	4.92mm 0.194in	20.0mm 0.787in	6	4.43	2.46	56	.02	0.5°	2.5°	SDA 6...
7005-111584	SXG 656 542 R UHM20 HX	5.42mm 0.213in	22.0mm 0.866in	6	4.88	2.71	56	.02	0.5°	2.5°	SDA 6...
7005-111588	SXG 656 592 R UHM20 HX	5.92mm 0.233in	24.0mm 0.945in	6	5.33	2.96	56	.02	0.5°	2.5°	SDA 6...
7005-111592	SXG 668 442 R UHM20 HX	4.42mm 0.174in	27.0mm 1.063in	6	3.98	2.21	68	.02	0.5°	2.5°	SDA 6...
7005-111596	SXG 668 492 R UHM20 HX	4.92mm 0.194in	30.0mm 1.181in	6	4.43	2.46	68	.02	0.5°	2.5°	SDA 6...
7005-111600	SXG 668 542 R UHM20 HX	5.42mm 0.213in	33.0mm 1.299in	6	4.88	2.71	68	.02	0.5°	2.5°	SDA 6...
7005-111604	SXG 668 592 R UHM20 HX	5.92mm 0.233in	36.0mm 1.417in	6	5.33	2.96	68	.02	0.5°	2.5°	SDA 6...
7005-111608	SXG 850 692 R UHM20 HX	6.92mm 0.272in	14.0mm 0.551in	8	6.23	3.46	50	.02	0.5°	2.5°	SDA 8...
7005-111612	SXG 850 792 R UHM20 HX	7.92mm 0.312in	16.0mm 0.630in	8	7.13	3.96	50	.02	0.5°	2.5°	SDA 8...
7005-111616	SXG 866 692 R UHM20 HX	6.92mm 0.272in	28.0mm 1.102in	8	6.23	3.46	66	.02	0.5°	2.5°	SDA 8...
7005-111620	SXG 866 792 R UHM20 HX	7.92mm 0.312in	32.0mm 1.260in	8	7.13	3.96	66	.02	0.5°	2.5°	SDA 8...
7005-111624	SXG 882 692 R UHM20 HX	6.92mm 0.272in	42.0mm 1.654in	8	6.23	3.46	82	.02	0.5°	2.5°	SDA 8...
7005-111628	SXG 882 792 R UHM20 HX	7.92mm 0.312in	48.0mm 1.890in	8	7.13	3.96	82	.02	0.5°	2.5°	SDA 8...

Standard Grade Offering: UHM20 HX - Coated Carbide for Most Applications - Other Coatings on Request

Applications Example





Ideal Cutting Materials

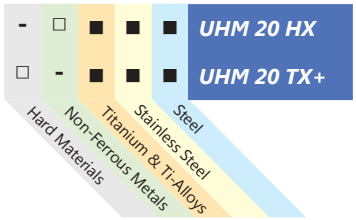


■ Preferred Application
□ Possible Application
- Application Not Recommended

SDI - Turning and Facing






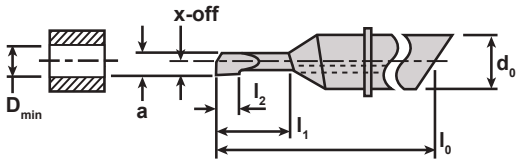


Item No.	Description	Min Hole Ø (D_{min})	Max Depth (l_1)	d_0	a	X-off	l_0	l_2	r_{max}	α	β	Holder
7005-111329	SDI 435 042 R UHM20 HX	.42mm 0.017in	1.5mm 0.059in	4	0.38	0.21	35	0.5	.01	0.5°	2.5°	SDA 4...
7005-169948	SDI 435 052 R UHM20 HX	.52mm 0.020in	2.0mm 0.079in	4	0.47	0.26	35	0.6	.02	0.5°	2.5°	SDA 4...
7005-169944	SDI 435 072 R UHM20 HX	.72mm 0.028in	2.5mm 0.098in	4	0.65	0.36	35	0.8	.02	0.5°	2.5°	SDA 4...
7005-111333	SDI 435 092 R UHM20 HX	.92mm 0.036in	3.0mm 0.118in	4	0.83	0.46	35	1	.02	0.5°	2.5°	SDA 4...
7005-122292	SDI 440 092 R UHM20 HX	.92mm 0.036in	3.0mm 0.118in	4	0.83	0.46	40	1	.02	0.5°	2.5°	SDA 4...
7005-122334	SDI 448 092 R UHM20 HX	.92mm 0.036in	5.0mm 0.197in	4	0.83	0.46	48	1	.02	0.5°	2.5°	SDA 4...
7005-169940	SDI 435 122 R UHM20 HX	1.22mm 0.048in	4.0mm 0.157in	4	1.10	0.61	35	1.3	.02	0.5°	2.5°	SDA 4...
7005-111337	SDI 435 142 R UHM20 HX	1.42mm 0.056in	4.5mm 0.177in	4	1.28	0.71	35	1.5	.02	0.5°	2.5°	SDA 4...
7005-122298	SDI 440 142 R UHM20 HX	1.42mm 0.056in	4.5mm 0.177in	4	1.28	0.71	40	1.5	.02	0.5°	2.5°	SDA 4...
7005-122340	SDI 448 142 R UHM20 HX	1.42mm 0.056in	7.5mm 0.295in	4	1.28	0.71	48	1.5	.02	0.5°	2.5°	SDA 4...
7005-111341	SDI 435 192 R UHM20 HX	1.92mm 0.076in	6.0mm 0.236in	4	1.73	0.96	35	2	.02	0.5°	2.5°	SDA 4...
7005-122304	SDI 440 192 R UHM20 HX	1.92mm 0.076in	6.0mm 0.236in	4	1.73	0.96	40	2	.02	0.5°	2.5°	SDA 4...
7005-122346	SDI 448 192 R UHM20 HX	1.92mm 0.076in	10.0mm 0.394in	4	1.73	0.96	48	2	.02	0.5°	2.5°	SDA 4...
7005-111345	SDI 435 242 R UHM20 HX	2.42mm 0.095in	7.5mm 0.295in	4	2.18	1.21	35	2.5	.02	0.5°	2.5°	SDA 4...
7005-122310	SDI 440 242 R UHM20 HX	2.42mm 0.095in	7.5mm 0.295in	4	2.18	1.21	40	2.5	.02	0.5°	2.5°	SDA 4...
7005-122352	SDI 448 242 R UHM20 HX	2.42mm 0.095in	12.5mm 0.492in	4	2.18	1.21	48	2.5	.02	0.5°	2.5°	SDA 4...
7005-122316	SDI 440 292 R UHM20 HX	2.92mm 0.115in	9.0mm 0.354in	4	2.63	1.46	40	3	.02	0.5°	2.5°	SDA 4...
7005-122358	SDI 448 292 R UHM20 HX	2.92mm 0.115in	15.0mm 0.591in	4	2.63	1.46	48	3	.02	0.5°	2.5°	SDA 4...
7005-122322	SDI 440 342 R UHM20 HX	3.42mm 0.135in	10.5mm 0.413in	4	3.08	1.71	40	3.5	.02	0.5°	2.5°	SDA 4...
7005-122364	SDI 448 342 R UHM20 HX	3.42mm 0.135in	17.5mm 0.689in	4	3.08	1.71	48	3.5	.02	0.5°	2.5°	SDA 4...
7005-122328	SDI 440 392 R UHM20 HX	3.92mm 0.154in	12.0mm 0.472in	4	3.53	1.96	40	4	.02	0.5°	2.5°	SDA 4...
7005-122370	SDI 448 392 R UHM20 HX	3.92mm 0.154in	20.0mm 0.787in	4	3.53	1.96	48	4	.02	0.5°	2.5°	SDA 4...
7005-124207	SDI 644 442 R UHM20 HX	4.42mm 0.174in	9.0mm 0.354in	6	3.98	2.21	44	4.5	.02	0.5°	2.5°	SDA 6...
7005-124262	SDI 656 442 R UHM20 HX	4.42mm 0.174in	18.0mm 0.709in	6	3.98	2.21	56	4.5	.02	0.5°	2.5°	SDA 6...
7005-124278	SDI 668 442 R UHM20 HX	4.42mm 0.174in	27.0mm 1.063in	6	3.98	2.21	68	4.5	.02	0.5°	2.5°	SDA 6...
7005-124213	SDI 644 492 R UHM20 HX	4.92mm 0.194in	10.0mm 0.394in	6	4.43	2.46	44	5	.02	0.5°	2.5°	SDA 6...
7005-124266	SDI 656 492 R UHM20 HX	4.92mm 0.194in	20.0mm 0.787in	6	4.43	2.46	56	5	.02	0.5°	2.5°	SDA 6...
7005-124286	SDI 668 492 R UHM20 HX	4.92mm 0.194in	30.0mm 1.181in	6	4.43	2.46	68	5	.02	0.5°	2.5°	SDA 6...
7005-124219	SDI 644 542 R UHM20 HX	5.42mm 0.213in	11.0mm 0.433in	6	4.88	2.71	44	5.5	.02	0.5°	2.5°	SDA 6...
7005-124270	SDI 656 542 R UHM20 HX	5.42mm 0.213in	22.0mm 0.866in	6	4.88	2.71	56	5.5	.02	0.5°	2.5°	SDA 6...
7005-124290	SDI 668 542 R UHM20 HX	5.42mm 0.213in	33.0mm 1.299in	6	4.88	2.71	68	5.5	.02	0.5°	2.5°	SDA 6...
7005-124225	SDI 644 592 R UHM20 HX	5.92mm 0.233in	12.0mm 0.472in	6	5.33	2.96	44	6	.02	0.5°	2.5°	SDA 6...
7005-124274	SDI 656 592 R UHM20 HX	5.92mm 0.233in	24.0mm 0.945in	6	5.33	2.96	56	6	.02	0.5°	2.5°	SDA 6...
7005-124294	SDI 668 592 R UHM20 HX	5.92mm 0.233in	36.0mm 1.417in	6	5.33	2.96	68	6	.02	0.5°	2.5°	SDA 6...
7005-124298	SDI 850 692 R UHM20 HX	6.92mm 0.272in	14.0mm 0.551in	8	6.23	3.46	50	7	.02	0.5°	2.5°	SDA 8...
7005-124306	SDI 866 692 R UHM20 HX	6.92mm 0.272in	28.0mm 1.102in	8	6.23	3.46	66	7	.02	0.5°	2.5°	SDA 8...
7005-124314	SDI 882 692 R UHM20 HX	6.92mm 0.272in	42.0mm 1.654in	8	6.23	3.46	82	7	.02	0.5°	2.5°	SDA 8...
7005-124302	SDI 850 792 R UHM20 HX	7.92mm 0.312in	16.0mm 0.630in	8	7.13	3.96	50	8	.02	0.5°	2.5°	SDA 8...
7005-124310	SDI 866 792 R UHM20 HX	7.92mm 0.312in	32.0mm 1.260in	8	7.13	3.96	66	8	.02	0.5°	2.5°	SDA 8...
7005-124318	SDI 882 792 R UHM20 HX	7.92mm 0.312in	48.0mm 1.890in	8	7.13	3.96	82	8	.02	0.5°	2.5°	SDA 8...

Standard Grade Offering: UHM20 HX - Coated Carbide for Most Applications - Other Coatings on Request

Applications Example




Ideal Cutting Materials

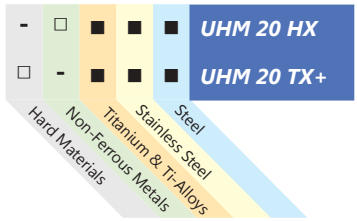


■ Preferred Application
□ Possible Application
- Application Not Recommended

SXI - Turning and Facing






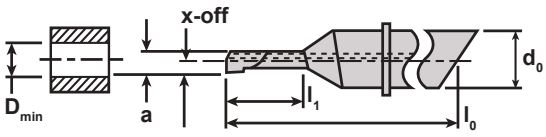


Item No.	Description	Min Hole Ø (D_{min})	Max Depth (l_1)	d_0	a	X-off	l_0	r_{max}	α	β	Holder
7005-111349	SXI 435 042 R UHM20 HX	.42mm 0.017in	1.5mm 0.059in	4	0.38	0.21	35	.02	0.5°	2.5°	SDA 4...
7005-169936	SXI 435 052 R UHM20 HX	.52mm 0.020in	2.0mm 0.079in	4	0.47	0.26	35	.02	0.5°	2.5°	SDA 4...
7005-169933	SXI 435 072 R UHM20 HX	.72mm 0.028in	2.5mm 0.098in	4	0.65	0.36	35	.02	0.5°	2.5°	SDA 4...
7005-111353	SXI 435 092 R UHM20 HX	.92mm 0.036in	3.0mm 0.118in	4	0.83	0.46	35	.02	0.5°	2.5°	SDA 4...
7005-169928	SXI 435 122 R UHM20 HX	1.22mm 0.048in	4.0mm 0.157in	4	1.10	0.61	35	.02	0.5°	2.5°	SDA 4...
7005-111357	SXI 435 142 R UHM20 HX	1.42mm 0.056in	4.5mm 0.177in	4	1.28	0.71	35	.02	0.5°	2.5°	SDA 4...
7005-111361	SXI 435 192 R UHM20 HX	1.92mm 0.076in	6.0mm 0.236in	4	1.73	0.96	35	.02	0.5°	2.5°	SDA 4...
7005-111365	SXI 435 242 R UHM20 HX	2.42mm 0.095in	7.5mm 0.295in	4	2.18	1.21	35	.02	0.5°	2.5°	SDA 4...
7005-111369	SXI 440 092 R UHM20 HX	.92mm 0.036in	5.0mm 0.197in	4	0.83	0.46	40	.02	0.5°	2.5°	SDA 4...
7005-111373	SXI 440 142 R UHM20 HX	1.42mm 0.056in	7.5mm 0.295in	4	1.28	0.71	40	.02	0.5°	2.5°	SDA 4...
7005-111377	SXI 440 192 R UHM20 HX	1.92mm 0.076in	10.0mm 0.394in	4	1.73	0.96	40	.02	0.5°	2.5°	SDA 4...
7005-111381	SXI 440 242 R UHM20 HX	2.42mm 0.095in	12.5mm 0.492in	4	2.18	1.21	40	.02	0.5°	2.5°	SDA 4...
7005-111385	SXI 440 292 R UHM20 HX	2.92mm 0.115in	9.0mm 0.354in	4	1.73	1.46	40	.02	0.5°	2.5°	SDA 4...
7005-111389	SXI 440 342 R UHM20 HX	3.42mm 0.135in	10.5mm 0.413in	4	2.63	1.71	40	.02	0.5°	2.5°	SDA 4...
7005-111393	SXI 440 392 R UHM20 HX	3.92mm 0.154in	12.0mm 0.472in	4	3.53	1.96	40	.02	0.5°	2.5°	SDA 4...
7005-111397	SXI 448 292 R UHM20 HX	2.92mm 0.115in	15.0mm 0.591in	4	2.63	1.46	48	.02	0.5°	2.5°	SDA 4...
7005-111401	SXI 448 342 R UHM20 HX	3.42mm 0.135in	17.5mm 0.689in	4	3.08	1.71	48	.02	0.5°	2.5°	SDA 4...
7005-111405	SXI 448 392 R UHM20 HX	3.92mm 0.154in	20.0mm 0.787in	4	3.53	1.96	48	.02	0.5°	2.5°	SDA 4...
7005-111409	SXI 644 442 R UHM20 HX	4.42mm 0.174in	9.0mm 0.354in	6	3.98	2.21	44	.02	0.5°	2.5°	SDA 6...
7005-111413	SXI 644 492 R UHM20 HX	4.92mm 0.194in	10.0mm 0.394in	6	4.43	2.46	44	.02	0.5°	2.5°	SDA 6...
7005-111417	SXI 644 542 R UHM20 HX	5.42mm 0.213in	11.0mm 0.433in	6	4.88	2.71	44	.02	0.5°	2.5°	SDA 6...
7005-111421	SXI 644 592 R UHM20 HX	5.92mm 0.233in	12.0mm 0.472in	6	5.33	2.96	44	.02	0.5°	2.5°	SDA 6...
7005-111425	SXI 656 442 R UHM20 HX	4.42mm 0.174in	18.0mm 0.709in	6	3.98	2.21	56	.02	0.5°	2.5°	SDA 6...
7005-111429	SXI 656 492 R UHM20 HX	4.92mm 0.194in	20.0mm 0.787in	6	4.43	2.46	56	.02	0.5°	2.5°	SDA 6...
7005-111433	SXI 656 542 R UHM20 HX	5.42mm 0.213in	22.0mm 0.866in	6	4.88	2.71	56	.02	0.5°	2.5°	SDA 6...
7005-111437	SXI 656 592 R UHM20 HX	5.92mm 0.233in	24.0mm 0.945in	6	5.33	2.96	56	.02	0.5°	2.5°	SDA 6...
7005-111441	SXI 668 442 R UHM20 HX	4.42mm 0.174in	27.0mm 1.063in	6	3.98	2.21	68	.02	0.5°	2.5°	SDA 6...
7005-111445	SXI 668 492 R UHM20 HX	4.92mm 0.194in	30.0mm 1.181in	6	4.43	2.46	68	.02	0.5°	2.5°	SDA 6...
7005-111449	SXI 668 542 R UHM20 HX	5.42mm 0.213in	33.0mm 1.299in	6	4.88	2.71	68	.02	0.5°	2.5°	SDA 6...
7005-111453	SXI 668 592 R UHM20 HX	5.92mm 0.233in	36.0mm 1.417in	6	5.33	2.96	68	.02	0.5°	2.5°	SDA 6...
7005-111457	SXI 850 692 R UHM20 HX	6.92mm 0.272in	14.0mm 0.551in	8	6.23	3.46	50	.02	0.5°	2.5°	SDA 8...
7005-111461	SXI 850 792 R UHM20 HX	7.92mm 0.312in	16.0mm 0.630in	8	7.13	3.96	50	.02	0.5°	2.5°	SDA 8...
7005-111465	SXI 866 692 R UHM20 HX	6.92mm 0.272in	28.0mm 1.102in	8	6.23	3.46	66	.02	0.5°	2.5°	SDA 8...
7005-111469	SXI 866 792 R UHM20 HX	7.92mm 0.312in	32.0mm 1.260in	8	7.13	3.96	66	.02	0.5°	2.5°	SDA 8...
7005-111473	SXI 882 692 R UHM20 HX	6.92mm 0.272in	42.0mm 1.654in	8	6.23	3.46	82	.02	0.5°	2.5°	SDA 8...
7005-111477	SXI 882 792 R UHM20 HX	7.92mm 0.312in	48.0mm 1.890in	8	7.13	3.96	82	.02	0.5°	2.5°	SDA 8...

Standard Grade Offering: UHM20 HX - Coated Carbide for Most Applications - Other Coatings on Request

Applications Example





Ideal Cutting Materials

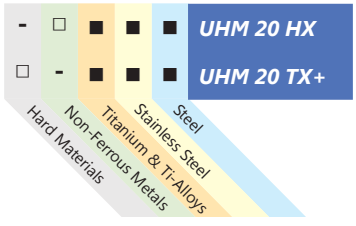

■ Preferred Application
□ Possible Application
- Application Not Recommended

SDF - Turning and Facing




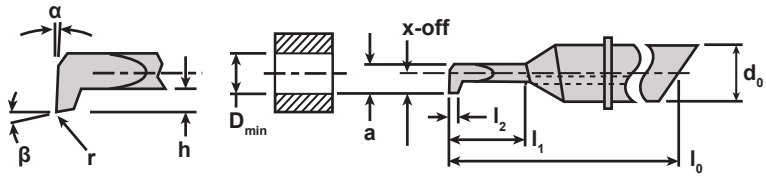


Item No.	Description	Min Hole Ø (D_{min})		Max Depth (l_1)		d_0	a	X-off	h	l_0	l_2	r_{max}	α	β	Holder
7005-150464	SDF 435 042 R UHM20 HX	0.42mm	0.017in	1.5mm	0.059in	4	0.38	0.21	0.21	35	0.5	0.06	0.5°	2.5°	SDA 4...
7005-150468	SDF 435 092 R UHM20 HX	0.92mm	0.036in	3.0mm	0.118in	4	0.83	0.46	0.23	35	1.0	0.06	0.5°	2.5°	SDA 4...
7005-150484	SDF 440 092 R UHM20 HX	0.92mm	0.036in	3.0mm	0.118in	4	0.83	0.46	0.23	40	1.0	0.06	0.5°	2.5°	SDA 4...
7005-150512	SDF 448 092 R UHM20 HX	0.92mm	0.036in	5.0mm	0.197in	4	0.83	0.46	0.23	48	1.0	0.06	0.5°	2.5°	SDA 4...
7005-150472	SDF 435 142 R UHM20 HX	1.42mm	0.056in	4.5mm	0.177in	4	1.28	0.71	0.36	35	1.5	0.06	0.5°	2.5°	SDA 4...
7005-150488	SDF 440 142 R UHM20 HX	1.42mm	0.056in	4.5mm	0.177in	4	1.28	0.71	0.36	40	1.5	0.06	0.5°	2.5°	SDA 4...
7005-150516	SDF 448 142 R UHM20 HX	1.42mm	0.056in	7.5mm	0.295in	4	1.28	0.71	0.36	48	1.5	0.06	0.5°	2.5°	SDA 4...
7005-150476	SDF 435 192 R UHM20 HX	1.92mm	0.076in	6.0mm	0.236in	4	1.73	0.96	0.48	35	2.0	0.06	0.5°	2.5°	SDA 4...
7005-150492	SDF 440 192 R UHM20 HX	1.92mm	0.076in	6.0mm	0.236in	4	1.73	0.96	0.48	40	2.0	0.06	0.5°	2.5°	SDA 4...
7005-150520	SDF 448 192 R UHM20 HX	1.92mm	0.076in	10.0mm	0.394in	4	1.73	0.96	0.48	48	2.0	0.06	0.5°	2.5°	SDA 4...
7005-150480	SDF 435 242 R UHM20 HX	2.42mm	0.095in	7.5mm	0.295in	4	2.18	1.21	0.61	35	2.5	0.06	0.5°	2.5°	SDA 4...
7005-150496	SDF 440 242 R UHM20 HX	2.42mm	0.095in	7.5mm	0.295in	4	2.18	1.21	0.61	40	2.5	0.06	0.5°	2.5°	SDA 4...
7005-150524	SDF 448 242 R UHM20 HX	2.42mm	0.095in	12.5mm	0.492in	4	2.18	1.21	0.61	48	2.5	0.06	0.5°	2.5°	SDA 4...
7005-150500	SDF 440 292 R UHM20 HX	2.92mm	0.115in	9.0mm	0.354in	4	2.63	1.46	0.73	40	3.0	0.06	0.5°	2.5°	SDA 4...
7005-150528	SDF 448 292 R UHM20 HX	2.92mm	0.115in	15.0mm	0.591in	4	2.63	1.46	0.73	48	3.0	0.06	0.5°	2.5°	SDA 4...
7005-150504	SDF 440 342 R UHM20 HX	3.42mm	0.135in	10.5mm	0.413in	4	3.08	1.71	0.86	40	3.5	0.06	0.5°	2.5°	SDA 4...
7005-150532	SDF 448 342 R UHM20 HX	3.42mm	0.135in	17.5mm	0.689in	4	3.08	1.71	0.86	48	3.5	0.06	0.5°	2.5°	SDA 4...
7005-150508	SDF 440 392 R UHM20 HX	3.92mm	0.154in	12.0mm	0.472in	4	3.53	1.96	0.98	40	4.0	0.06	0.5°	2.5°	SDA 4...
7005-150536	SDF 448 392 R UHM20 HX	3.92mm	0.154in	20.0mm	0.787in	4	3.53	1.96	0.98	48	4.0	0.06	0.5°	2.5°	SDA 4...
7005-150540	SDF 644 442 R UHM20 HX	4.42mm	0.174in	9.0mm	0.354in	6	3.98	2.21	1.11	44	4.5	0.08	0.5°	2.5°	SDA 6...
7005-150556	SDF 656 442 R UHM20 HX	4.42mm	0.174in	18.0mm	0.709in	6	3.98	2.21	1.11	56	4.5	0.08	0.5°	2.5°	SDA 6...
7005-150572	SDF 668 442 R UHM20 HX	4.42mm	0.174in	27.0mm	1.063in	6	3.98	2.21	1.11	68	4.5	0.08	0.5°	2.5°	SDA 6...
7005-150544	SDF 644 492 R UHM20 HX	4.92mm	0.194in	10.0mm	0.394in	6	4.43	2.46	1.23	44	5.0	0.08	0.5°	2.5°	SDA 6...
7005-150560	SDF 656 492 R UHM20 HX	4.92mm	0.194in	20.0mm	0.787in	6	4.43	2.46	1.23	56	5.0	0.08	0.5°	2.5°	SDA 6...
7005-150576	SDF 668 492 R UHM20 HX	4.92mm	0.194in	30.0mm	1.181in	6	4.43	2.46	1.23	68	5.0	0.08	0.5°	2.5°	SDA 6...
7005-150548	SDF 644 542 R UHM20 HX	5.42mm	0.213in	11.0mm	0.433in	6	4.88	2.71	1.36	44	5.5	0.08	0.5°	2.5°	SDA 6...
7005-150564	SDF 656 542 R UHM20 HX	5.42mm	0.213in	22.0mm	0.866in	6	4.88	2.71	1.36	56	5.5	0.08	0.5°	2.5°	SDA 6...
7005-150580	SDF 668 542 R UHM20 HX	5.42mm	0.213in	33.0mm	1.299in	6	4.88	2.71	1.36	68	5.5	0.08	0.5°	2.5°	SDA 6...
7005-150552	SDF 644 592 R UHM20 HX	5.92mm	0.233in	12.0mm	0.472in	6	5.33	2.96	1.48	44	6.0	0.08	0.5°	2.5°	SDA 6...
7005-150568	SDF 656 592 R UHM20 HX	5.92mm	0.233in	24.0mm	0.945in	6	5.33	2.96	1.48	56	6.0	0.08	0.5°	2.5°	SDA 6...
7005-150584	SDF 668 592 R UHM20 HX	5.92mm	0.233in	36.0mm	1.417in	6	5.33	2.96	1.48	68	6.0	0.08	0.5°	2.5°	SDA 6...
7005-150588	SDF 850 692 R UHM20 HX	6.92mm	0.272in	14.0mm	0.551in	8	6.23	3.46	1.73	50	7.0	0.08	0.5°	2.5°	SDA 8...
7005-150596	SDF 866 692 R UHM20 HX	6.92mm	0.272in	28.0mm	1.102in	8	6.23	3.46	1.73	66	7.0	0.08	0.5°	2.5°	SDA 8...
7005-150604	SDF 882 692 R UHM20 HX	6.92mm	0.272in	42.0mm	1.654in	8	6.23	3.46	1.73	82	7.0	0.08	0.5°	2.5°	SDA 8...
7005-150592	SDF 850 792 R UHM20 HX	7.92mm	0.312in	16.0mm	0.630in	8	3.96	3.96	1.98	50	8.0	0.08	0.5°	2.5°	SDA 8...
7005-150600	SDF 866 792 R UHM20 HX	7.92mm	0.312in	32.0mm	1.260in	8	3.96	3.96	1.98	66	8.0	0.08	0.5°	2.5°	SDA 8...
7005-150608	SDF 882 792 R UHM20 HX	7.92mm	0.312in	48.0mm	1.890in	8	3.96	3.96	1.98	82	8.0	0.08	0.5°	2.5°	SDA 8...

Standard Grade Offering: UHM20 HX - Coated Carbide for Most Applications - Other Coatings on Request

Applications Example





Ideal Cutting Materials

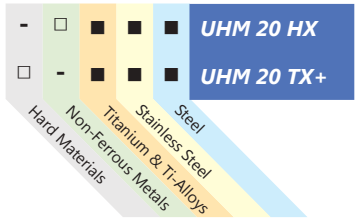

■ Preferred Application
□ Possible Application
- Application Not Recommended

SXF - Turning and Facing




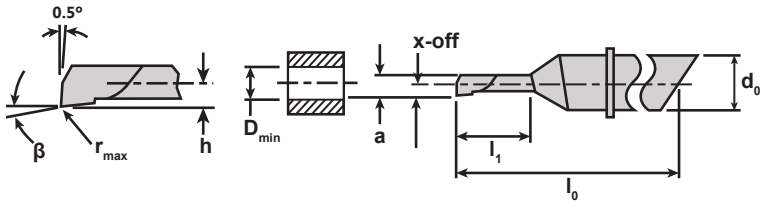


Item No.	Description	Min Hole Ø (D_{min})		Max Depth (l_1)		d_0	a	X-off	h	l_0	l_2	r_{max}	β	Holder
7005-150612	SXF 435 042 R UHM20 HX	0.42mm	0.017in	1.5mm	0.059in	4	0.38	0.21	0.05	35	0.5	0.06	2.5°	SDA 4...
7005-150616	SXF 435 092 R UHM20 HX	0.92mm	0.036in	3.0mm	0.118in	4	0.83	0.46	0.1	35	1.0	0.06	2.5°	SDA 4...
7005-150632	SXF 440 092 R UHM20 HX	0.92mm	0.036in	5.0mm	0.197in	4	0.83	0.46	0.1	40	1.0	0.06	2.5°	SDA 4...
7005-150620	SXF 435 142 R UHM20 HX	1.42mm	0.056in	4.5mm	0.177in	4	1.28	0.71	0.15	35	1.5	0.06	2.5°	SDA 4...
7005-150636	SXF 440 142 R UHM20 HX	1.42mm	0.056in	7.5mm	0.295in	4	1.28	0.71	0.15	40	1.5	0.06	2.5°	SDA 4...
7005-150624	SXF 435 192 R UHM20 HX	1.92mm	0.076in	6.0mm	0.236in	4	1.73	0.96	0.2	35	2.0	0.06	2.5°	SDA 4...
7005-150640	SXF 440 192 R UHM20 HX	1.92mm	0.076in	10.0mm	0.394in	4	1.73	0.96	0.2	40	2.0	0.06	2.5°	SDA 4...
7005-150628	SXF 435 242 R UHM20 HX	2.42mm	0.095in	7.5mm	0.295in	4	2.18	1.21	0.25	35	2.5	0.06	2.5°	SDA 4...
7005-150644	SXF 440 242 R UHM20 HX	2.42mm	0.095in	12.5mm	0.492in	4	2.18	1.21	0.25	40	2.5	0.06	2.5°	SDA 4...
7005-150648	SXF 440 292 R UHM20 HX	2.92mm	0.115in	9.0mm	0.354in	4	2.63	1.46	0.3	40	3.0	0.06	2.5°	SDA 4...
7005-150660	SXF 448 292 R UHM20 HX	2.92mm	0.115in	15.0mm	0.591in	4	2.63	1.46	0.3	48	3.0	0.06	2.5°	SDA 4...
7005-150652	SXF 440 342 R UHM20 HX	3.42mm	0.135in	10.5mm	0.413in	4	3.08	1.71	0.35	40	3.5	0.06	2.5°	SDA 4...
7005-150664	SXF 448 342 R UHM20 HX	3.42mm	0.135in	17.5mm	0.689in	4	3.08	1.71	0.35	48	3.5	0.06	2.5°	SDA 4...
7005-150656	SXF 440 392 R UHM20 HX	3.92mm	0.154in	12.0mm	0.472in	4	3.53	1.96	0.4	40	4.0	0.06	2.5°	SDA 4...
7005-150668	SXF 448 392 R UHM20 HX	3.92mm	0.154in	20.0mm	0.787in	4	3.53	1.96	0.4	48	4.0	0.06	2.5°	SDA 4...
7005-150672	SXF 644 442 R UHM20 HX	4.42mm	0.174in	9.0mm	0.354in	6	3.98	2.21	0.45	44	4.5	0.08	2.5°	SDA 6...
7005-150688	SXF 656 442 R UHM20 HX	4.42mm	0.174in	18.0mm	0.709in	6	3.98	2.21	0.45	56	4.5	0.08	2.5°	SDA 6...
7005-150704	SXF 668 442 R UHM20 HX	4.42mm	0.174in	27.0mm	1.063in	6	3.98	2.21	0.45	68	4.5	0.08	2.5°	SDA 6...
7005-150676	SXF 644 492 R UHM20 HX	4.92mm	0.194in	10.0mm	0.394in	6	4.43	2.46	0.5	44	5.0	0.08	2.5°	SDA 6...
7005-150692	SXF 656 492 R UHM20 HX	4.92mm	0.194in	20.0mm	0.787in	6	4.43	2.46	0.5	56	5.0	0.08	2.5°	SDA 6...
7005-150708	SXF 668 492 R UHM20 HX	4.92mm	0.194in	30.0mm	1.181in	6	4.43	2.46	0.5	68	5.0	0.08	2.5°	SDA 6...
7005-150680	SXF 644 542 R UHM20 HX	5.42mm	0.213in	11.0mm	0.433in	6	4.88	2.71	0.55	44	5.5	0.08	2.5°	SDA 6...
7005-150696	SXF 656 542 R UHM20 HX	5.42mm	0.213in	22.0mm	0.866in	6	4.88	2.71	0.55	56	5.5	0.08	2.5°	SDA 6...
7005-150712	SXF 668 542 R UHM20 HX	5.42mm	0.213in	33.0mm	1.299in	6	4.88	2.71	0.55	68	5.5	0.08	2.5°	SDA 6...
7005-150684	SXF 644 592 R UHM20 HX	5.92mm	0.233in	12.0mm	0.472in	6	5.33	2.96	0.6	44	6.0	0.08	2.5°	SDA 6...
7005-150700	SXF 656 592 R UHM20 HX	5.92mm	0.233in	24.0mm	0.945in	6	5.33	2.96	0.6	56	6.0	0.08	2.5°	SDA 6...
7005-150716	SXF 668 592 R UHM20 HX	5.92mm	0.233in	36.0mm	1.417in	6	5.33	2.96	0.6	68	6.0	0.08	2.5°	SDA 6...
7005-150720	SXF 850 692 R UHM20 HX	6.92mm	0.272in	14.0mm	0.551in	8	6.23	3.46	0.7	50	7.0	0.08	2.5°	SDA 8...
7005-150728	SXF 866 692 R UHM20 HX	6.92mm	0.272in	8.0mm	0.315in	8	6.23	3.46	0.7	66	7.0	0.08	2.5°	SDA 8...
7005-150736	SXF 882 692 R UHM20 HX	6.92mm	0.272in	42.0mm	1.654in	8	6.23	3.46	0.7	82	7.0	0.08	2.5°	SDA 8...
7005-150724	SXF 850 792 R UHM20 HX	7.92mm	0.312in	16.0mm	0.630in	8	3.96	3.96	0.8	50	8.0	0.08	2.5°	SDA 8...
7005-150732	SXF 866 792 R UHM20 HX	7.92mm	0.312in	32.0mm	1.260in	8	3.96	3.96	0.8	66	8.0	0.08	2.5°	SDA 8...
7005-150740	SXF 882 792 R UHM20 HX	7.92mm	0.312in	48.0mm	1.890in	8	3.96	3.96	0.8	82	8.0	0.08	2.5°	SDA 8...

Standard Grade Offering: UHM20 HX - Coated Carbide for Most Applications - Other Coatings on Request

Applications Example




Ideal Cutting Materials

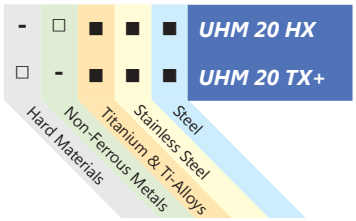

■ Preferred Application
□ Possible Application
- Application Not Recommended


SDH - Front-Turning

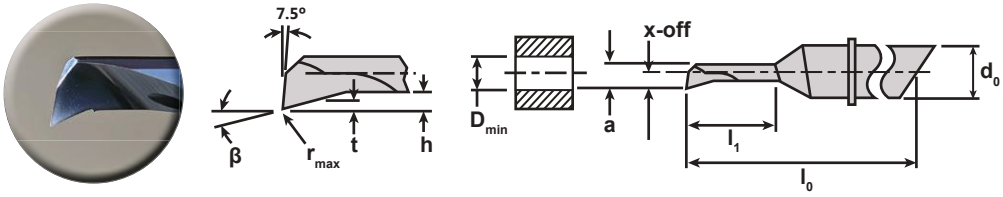


Item No.	Description	Min Hole Ø (D_{min})		Max Depth (l_1)		d_0	a	X-off	h	t	l_0	r_{max}	β	Holder
7005-138641	SDH 435 042 R UHM20 HX	.42mm	0.017in	1.5mm	0.059in	4	0.38	0.21	0.09	0.07	35	.05	22.5°	SDA 4...
7005-111651	SDH 435 092 R UHM20 HX	.92mm	0.036in	3.0mm	0.118in	4	0.83	0.46	0.19	0.15	35	.05	22.5°	SDA 4...
7005-126202	SDH 440 092 R UHM20 HX	.92mm	0.036in	3.0mm	0.118in	4	0.83	0.46	0.21	0.16	40	.05	22.5°	SDA 4...
7005-126247	SDH 448 092 R UHM20 HX	.92mm	0.036in	5.0mm	0.197in	4	0.83	0.46	0.21	0.16	48	.05	22.5°	SDA 4...
7005-111653	SDH 435 142 R UHM20 HX	1.42mm	0.056in	4.5mm	0.177in	4	1.28	0.71	0.30	0.23	35	.05	22.5°	SDA 4...
7005-126211	SDH 440 142 R UHM20 HX	1.42mm	0.056in	4.5mm	0.177in	4	1.28	0.71	0.31	0.23	40	.05	22.5°	SDA 4...
7005-126253	SDH 448 142 R UHM20 HX	1.42mm	0.056in	7.5mm	0.295in	4	1.28	0.71	0.31	0.23	48	.05	22.5°	SDA 4...
7005-111659	SDH 435 192 R UHM20 HX	1.92mm	0.076in	6.0mm	0.236in	4	1.73	0.96	0.40	0.31	35	.05	22.5°	SDA 4...
7005-126217	SDH 440 192 R UHM20 HX	1.92mm	0.076in	6.0mm	0.236in	4	1.73	0.96	0.41	0.31	40	.05	22.5°	SDA 4...
7005-126259	SDH 448 192 R UHM20 HX	1.92mm	0.076in	10.0mm	0.394in	4	1.73	0.96	0.41	0.31	48	.05	22.5°	SDA 4...
7005-111663	SDH 435 242 R UHM20 HX	2.42mm	0.095in	7.5mm	0.295in	4	2.18	1.21	0.51	0.39	35	.05	22.5°	SDA 4...
7005-126223	SDH 440 242 R UHM20 HX	2.42mm	0.095in	7.5mm	0.295in	4	2.18	1.21	0.52	0.39	40	.05	22.5°	SDA 4...
7005-126265	SDH 448 242 R UHM20 HX	2.42mm	0.095in	12.5mm	0.492in	4	2.18	1.21	0.52	0.39	48	.05	22.5°	SDA 4...
7005-126229	SDH 440 292 R UHM20 HX	2.92mm	0.115in	9.0mm	0.354in	4	2.63	1.46	0.62	0.47	40	.05	22.5°	SDA 4...
7005-126271	SDH 448 292 R UHM20 HX	2.92mm	0.115in	15.0mm	0.591in	4	2.63	1.46	0.62	0.47	48	.05	22.5°	SDA 4...
7005-126235	SDH 440 342 R UHM20 HX	3.42mm	0.135in	10.5mm	0.413in	4	3.08	1.71	0.72	0.54	40	.05	22.5°	SDA 4...
7005-126277	SDH 448 342 R UHM20 HX	3.42mm	0.135in	17.5mm	0.689in	4	3.08	1.71	0.72	0.54	48	.05	22.5°	SDA 4...
7005-126241	SDH 440 392 R UHM20 HX	3.92mm	0.154in	12.0mm	0.472in	4	3.53	1.96	0.83	0.62	40	.05	22.5°	SDA 4...
7005-126283	SDH 448 392 R UHM20 HX	3.92mm	0.154in	20.0mm	0.787in	4	3.53	1.96	0.83	0.62	48	.05	22.5°	SDA 4...
7005-126289	SDH 644 442 R UHM20 HX	4.42mm	0.174in	9.0mm	0.354in	6	3.98	2.21	0.93	0.7	44	.05	22.5°	SDA 6...
7005-126313	SDH 656 442 R UHM20 HX	4.42mm	0.174in	18.0mm	0.709in	6	3.98	2.21	0.93	0.7	56	.05	22.5°	SDA 6...
7005-126337	SDH 668 442 R UHM20 HX	4.42mm	0.174in	27.0mm	1.063in	6	3.98	2.21	0.93	0.7	68	.05	22.5°	SDA 6...
7005-126295	SDH 644 492 R UHM20 HX	4.92mm	0.194in	10.0mm	0.394in	6	4.43	2.46	1.04	0.78	44	.05	22.5°	SDA 6...
7005-126319	SDH 656 492 R UHM20 HX	4.92mm	0.194in	20.0mm	0.787in	6	4.43	2.46	1.04	0.78	56	.05	22.5°	SDA 6...
7005-126343	SDH 668 492 R UHM20 HX	4.92mm	0.194in	30.0mm	1.181in	6	4.43	2.46	1.04	0.78	68	.05	22.5°	SDA 6...
7005-126301	SDH 644 542 R UHM20 HX	5.42mm	0.213in	11.0mm	0.433in	6	4.88	2.71	1.14	0.85	44	.05	22.5°	SDA 6...
7005-126325	SDH 656 542 R UHM20 HX	5.42mm	0.213in	22.0mm	0.866in	6	4.88	2.71	1.14	0.85	56	.05	22.5°	SDA 6...
7005-126349	SDH 668 542 R UHM20 HX	5.42mm	0.213in	33.0mm	1.299in	6	4.88	2.71	1.14	0.85	68	.05	22.5°	SDA 6...
7005-126307	SDH 644 592 R UHM20 HX	5.92mm	0.233in	12.0mm	0.472in	6	5.33	2.96	1.24	0.93	44	.05	22.5°	SDA 6...
7005-126331	SDH 656 592 R UHM20 HX	5.92mm	0.233in	24.0mm	0.945in	6	5.33	2.96	1.24	0.93	56	.05	22.5°	SDA 6...
7005-126355	SDH 668 592 R UHM20 HX	5.92mm	0.233in	36.0mm	1.417in	6	5.33	2.96	1.24	0.93	68	.05	22.5°	SDA 6...
7005-126361	SDH 850 692 R UHM20 HX	6.92mm	0.272in	14.0mm	0.551in	8	6.23	3.46	1.45	1.09	50	.05	22.5°	SDA 8...
7005-126373	SDH 866 692 R UHM20 HX	6.92mm	0.272in	28.0mm	1.102in	8	6.23	3.46	1.45	1.09	66	.05	22.5°	SDA 8...
7005-126385	SDH 882 692 R UHM20 HX	6.92mm	0.272in	42.0mm	1.654in	8	6.23	3.46	1.45	1.09	82	.05	22.5°	SDA 8...
7005-126367	SDH 850 792 R UHM20 HX	7.92mm	0.312in	16.0mm	0.630in	8	7.13	3.96	1.66	1.24	50	.05	22.5°	SDA 8...
7005-126379	SDH 866 792 R UHM20 HX	7.92mm	0.312in	32.0mm	1.260in	8	7.13	3.96	1.66	1.24	66	.05	22.5°	SDA 8...
7005-126391	SDH 882 792 R UHM20 HX	7.92mm	0.312in	48.0mm	1.890in	8	7.13	3.96	1.66	1.24	82	.05	22.5°	SDA 8...

Standard Grade Offering: UHM20 HX - Coated Carbide for Most Applications - Other Coatings on Request

Applications Example





Ideal Cutting Materials

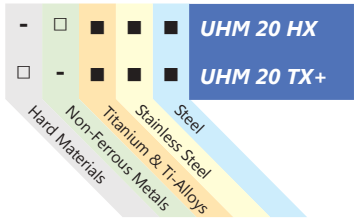

■ Preferred Application
□ Possible Application
- Application Not Recommended

SDK - Front-Turning




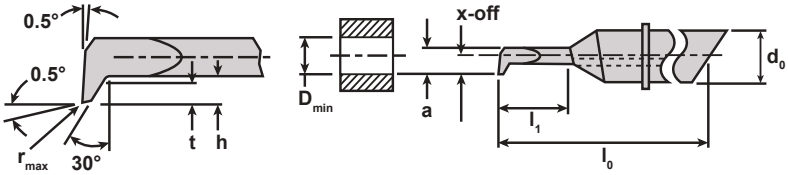


Item No.	Description	Min Hole Ø (D_{min})		Max Depth (l_1)		d_0	a	X-off	h	t	l_0	l_2	r_{max}	Holder
7005-111667	SDK 435 092 R UHM20 HX	.92mm	0.036in	1.5mm	0.059in	4	0.83	0.46	.23	.15	35	0.50	.02	SDA 4...
7005-122376	SDK 440 092 R UHM20 HX	.92mm	0.036in	3.0mm	0.118in	4	0.83	0.46	.23	.10	40	0.50	.02	SDA 4...
7005-122418	SDK 448 092 R UHM20 HX	.92mm	0.036in	5.0mm	0.197in	4	0.83	0.46	.23	.10	48	0.50	.02	SDA 4...
7005-111671	SDK 435 142 R UHM20 HX	1.42mm	0.056in	4.5mm	0.177in	4	1.28	0.71	.36	.23	35	0.75	.02	SDA 4...
7005-122382	SDK 440 142 R UHM20 HX	1.42mm	0.056in	4.5mm	0.177in	4	1.28	0.71	.36	.20	40	0.75	.02	SDA 4...
7005-122424	SDK 448 142 R UHM20 HX	1.42mm	0.056in	7.5mm	0.295in	4	1.28	0.71	.36	.20	48	0.75	.02	SDA 4...
7005-111675	SDK 435 192 R UHM20 HX	1.92mm	0.076in	6.0mm	0.236in	4	1.73	0.96	.48	.32	35	1.00	.03	SDA 4...
7005-122388	SDK 440 192 R UHM20 HX	1.92mm	0.076in	6.0mm	0.236in	4	1.73	0.96	.48	.30	40	1.00	.02	SDA 4...
7005-122430	SDK 448 192 R UHM20 HX	1.92mm	0.076in	10.0mm	0.394in	4	1.73	0.96	.48	.30	48	1.00	.02	SDA 4...
7005-111679	SDK 435 242 R UHM20 HX	2.42mm	0.095in	7.5mm	0.295in	4	2.18	1.21	.61	.40	35	1.25	.03	SDA 4...
7005-122394	SDK 440 242 R UHM20 HX	2.42mm	0.095in	7.5mm	0.295in	4	2.18	1.21	.61	.40	40	1.25	.02	SDA 4...
7005-122436	SDK 448 242 R UHM20 HX	2.42mm	0.095in	12.5mm	0.492in	4	2.18	1.21	.61	.40	48	1.25	.02	SDA 4...
7005-122400	SDK 440 292 R UHM20 HX	2.92mm	0.115in	9.0mm	0.354in	4	2.63	1.46	.73	.50	40	1.50	.02	SDA 4...
7005-122442	SDK 448 292 R UHM20 HX	2.92mm	0.115in	15.0mm	0.591in	4	2.63	1.46	.73	.50	48	1.50	.02	SDA 4...
7005-122406	SDK 440 342 R UHM20 HX	3.42mm	0.135in	10.5mm	0.413in	4	3.08	1.71	.86	.60	40	1.75	.02	SDA 4...
7005-122448	SDK 448 342 R UHM20 HX	3.42mm	0.135in	17.5mm	0.689in	4	3.08	1.71	.86	.60	48	1.75	.02	SDA 4...
7005-122412	SDK 440 392 R UHM20 HX	3.92mm	0.154in	12.0mm	0.472in	4	3.53	1.96	.98	.70	40	2.00	.02	SDA 4...
7005-122454	SDK 448 392 R UHM20 HX	3.92mm	0.154in	20.0mm	0.787in	4	3.53	1.96	.98	.70	48	2.00	.02	SDA 4...
7005-124540	SDK 644 442 R UHM20 HX	4.42mm	0.174in	9.0mm	0.354in	6	3.98	2.21	1.11	.70	44	2.25	.02	SDA 6...
7005-124564	SDK 656 442 R UHM20 HX	4.42mm	0.174in	18.0mm	0.709in	6	3.98	2.21	1.11	.70	56	2.25	.02	SDA 6...
7005-124588	SDK 668 442 R UHM20 HX	4.42mm	0.174in	27.0mm	1.063in	6	3.98	2.21	1.11	.70	68	2.25	.02	SDA 6...
7005-124546	SDK 644 492 R UHM20 HX	4.92mm	0.194in	10.0mm	0.394in	6	4.43	2.46	1.23	.80	44	2.50	.02	SDA 6...
7005-124570	SDK 656 492 R UHM20 HX	4.92mm	0.194in	20.0mm	0.787in	6	4.43	2.46	1.23	.80	56	2.50	.02	SDA 6...
7005-124594	SDK 668 492 R UHM20 HX	4.92mm	0.194in	30.0mm	1.181in	6	4.43	2.46	1.23	.80	68	2.50	.02	SDA 6...
7005-124552	SDK 644 542 R UHM20 HX	5.42mm	0.213in	11.0mm	0.433in	6	4.88	2.71	1.36	.90	44	2.75	.02	SDA 6...
7005-124576	SDK 656 542 R UHM20 HX	5.42mm	0.213in	22.0mm	0.866in	6	4.88	2.71	1.36	.90	56	2.75	.02	SDA 6...
7005-124600	SDK 668 542 R UHM20 HX	5.42mm	0.213in	33.0mm	1.299in	6	4.88	2.71	1.36	.90	68	2.75	.02	SDA 6...
7005-124555	SDK 644 592 R UHM20 HX	5.92mm	0.233in	12.0mm	0.472in	6	5.33	2.96	1.48	1.00	44	3.00	.02	SDA 6...
7005-124582	SDK 656 592 R UHM20 HX	5.92mm	0.233in	24.0mm	0.945in	6	5.33	2.96	1.48	1.00	56	3.00	.02	SDA 6...
7005-124606	SDK 668 592 R UHM20 HX	5.92mm	0.233in	36.0mm	1.417in	6	5.33	2.96	1.48	1.00	68	3.00	.02	SDA 6...
7005-124612	SDK 850 692 R UHM20 HX	6.92mm	0.272in	14.0mm	0.551in	8	6.23	3.46	1.73	1.20	50	3.50	.02	SDA 8...
7005-124624	SDK 866 692 R UHM20 HX	6.92mm	0.272in	28.0mm	1.102in	8	6.23	3.46	1.73	1.20	66	3.50	.02	SDA 8...
7005-124636	SDK 882 692 R UHM20 HX	6.92mm	0.272in	42.0mm	1.654in	8	6.23	3.46	1.73	1.20	82	3.50	.02	SDA 8...
7005-124618	SDK 850 792 R UHM20 HX	7.92mm	0.312in	16.0mm	0.630in	8	7.13	3.96	1.98	1.30	50	4.00	.02	SDA 8...
7005-124630	SDK 866 792 R UHM20 HX	7.92mm	0.312in	32.0mm	1.260in	8	7.13	3.96	1.98	1.30	66	4.00	.02	SDA 8...
7005-124642	SDK 882 792 R UHM20 HX	7.92mm	0.312in	48.0mm	1.890in	8	7.13	3.96	1.98	1.30	82	4.00	.02	SDA 8...

Standard Grade Offering: UHM20 HX - Coated Carbide for Most Applications - Other Coatings on Request

Applications Example





Ideal Cutting Materials

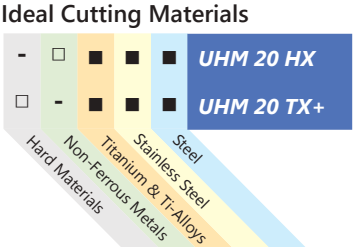

■ Preferred Application
□ Possible Application
- Application Not Recommended

SDM - ID Back-Turning




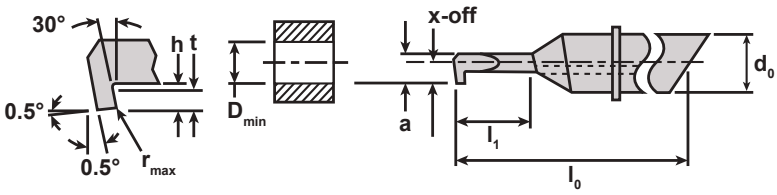


Item No.	Description	Min Hole Ø (D_{min})		Max Depth (l_1)		d_0	a	X-off	h	t	l_0	l_2	r_{max}	Holder
7005-111632	SDM 435 092 R UHM20 HX	.92mm	0.036in	1.5mm	0.059in	4	0.83	0.46	.23	.15	35	0.50	.02	SDA 4...
7005-122460	SDM 440 092 R UHM20 HX	.92mm	0.036in	3.0mm	0.118in	4	0.83	0.46	.23	.10	40	0.50	.02	SDA 4...
7005-122502	SDM 448 092 R UHM20 HX	.92mm	0.036in	5.0mm	0.197in	4	0.83	0.46	.23	.10	48	0.50	.02	SDA 4...
7005-111636	SDM 435 142 R UHM20 HX	1.42mm	0.056in	4.5mm	0.177in	4	1.28	0.71	.36	.23	35	0.75	.02	SDA 4...
7005-122466	SDM 440 142 R UHM20 HX	1.42mm	0.056in	4.5mm	0.177in	4	1.28	0.71	.36	.20	40	0.75	.02	SDA 4...
7005-122508	SDM 448 142 R UHM20 HX	1.42mm	0.056in	7.5mm	0.295in	4	1.28	0.71	.36	.20	48	0.75	.02	SDA 4...
7005-111640	SDM 435 192 R UHM20 HX	1.92mm	0.076in	6.0mm	0.236in	4	1.73	0.96	.48	.32	35	1.00	.03	SDA 4...
7005-122472	SDM 440 192 R UHM20 HX	1.92mm	0.076in	6.0mm	0.236in	4	1.73	0.96	.48	.30	40	1.00	.02	SDA 4...
7005-122514	SDM 448 192 R UHM20 HX	1.92mm	0.076in	10.0mm	0.394in	4	1.73	0.96	.48	.30	48	1.00	.02	SDA 4...
7005-111644	SDM 435 242 R UHM20 HX	2.42mm	0.095in	7.5mm	0.295in	4	2.18	1.21	.61	.40	35	1.25	.03	SDA 4...
7005-122478	SDM 440 242 R UHM20 HX	2.42mm	0.095in	7.5mm	0.295in	4	2.18	1.21	.61	.40	40	1.25	.02	SDA 4...
7005-122520	SDM 448 242 R UHM20 HX	2.42mm	0.095in	12.5mm	0.492in	4	2.18	1.21	.61	.40	48	1.25	.02	SDA 4...
7005-122484	SDM 440 292 R UHM20 HX	2.92mm	0.115in	9.0mm	0.354in	4	2.63	1.46	.73	.50	40	1.50	.02	SDA 4...
7005-122526	SDM 448 292 R UHM20 HX	2.92mm	0.115in	15.0mm	0.591in	4	2.63	1.46	.73	.50	48	1.50	.02	SDA 4...
7005-122490	SDM 440 342 R UHM20 HX	3.42mm	0.135in	10.5mm	0.413in	4	3.08	1.71	.86	.60	40	1.75	.02	SDA 4...
7005-122532	SDM 448 342 R UHM20 HX	3.42mm	0.135in	17.5mm	0.689in	4	3.08	1.71	.86	.60	48	1.75	.02	SDA 4...
7005-122496	SDM 440 392 R UHM20 HX	3.92mm	0.154in	12.0mm	0.472in	4	3.53	1.96	.98	.70	40	2.00	.02	SDA 4...
7005-122538	SDM 448 392 R UHM20 HX	3.92mm	0.154in	20.0mm	0.787in	4	3.53	1.96	.98	.70	48	2.00	.02	SDA 4...
7005-124432	SDM 644 442 R UHM20 HX	4.42mm	0.174in	9.0mm	0.354in	6	3.98	2.21	1.11	.70	44	2.25	.02	SDA 6...
7005-124456	SDM 656 442 R UHM20 HX	4.42mm	0.174in	18.0mm	0.709in	6	3.98	2.21	1.11	.70	56	2.25	.02	SDA 6...
7005-124480	SDM 668 442 R UHM20 HX	4.42mm	0.174in	27.0mm	1.063in	6	3.98	2.21	1.11	.70	68	2.25	.02	SDA 6...
7005-124438	SDM 644 492 R UHM20 HX	4.92mm	0.194in	10.0mm	0.394in	6	4.43	2.46	1.23	.80	44	2.50	.02	SDA 6...
7005-124462	SDM 656 492 R UHM20 HX	4.92mm	0.194in	20.0mm	0.787in	6	4.43	2.46	1.23	.80	56	2.50	.02	SDA 6...
7005-124486	SDM 668 492 R UHM20 HX	4.92mm	0.194in	30.0mm	1.181in	6	4.43	2.46	1.23	.80	68	2.50	.02	SDA 6...
7005-124444	SDM 644 542 R UHM20 HX	5.42mm	0.213in	11.0mm	0.433in	6	4.88	2.71	1.36	.90	44	2.75	.02	SDA 6...
7005-124468	SDM 656 542 R UHM20 HX	5.42mm	0.213in	22.0mm	0.866in	6	4.88	2.71	1.36	.90	56	2.75	.02	SDA 6...
7005-124492	SDM 668 542 R UHM20 HX	5.42mm	0.213in	33.0mm	1.299in	6	4.88	2.71	1.36	.90	68	2.75	.02	SDA 6...
7005-124450	SDM 644 592 R UHM20 HX	5.92mm	0.233in	12.0mm	0.472in	6	5.33	2.96	1.48	1.00	44	3.00	.02	SDA 6...
7005-124474	SDM 656 592 R UHM20 HX	5.92mm	0.233in	24.0mm	0.945in	6	5.33	2.96	1.48	1.00	56	3.00	.02	SDA 6...
7005-124498	SDM 668 592 R UHM20 HX	5.92mm	0.233in	36.0mm	1.417in	6	5.33	2.96	1.48	1.00	68	3.00	.02	SDA 6...
7005-124504	SDM 850 692 R UHM20 HX	6.92mm	0.272in	14.0mm	0.551in	8	6.23	3.46	1.73	1.20	50	3.50	.02	SDA 8...
7005-124516	SDM 866 692 R UHM20 HX	6.92mm	0.272in	28.0mm	1.102in	8	6.23	3.46	1.73	1.20	66	3.50	.02	SDA 8...
7005-124528	SDM 882 692 R UHM20 HX	6.92mm	0.272in	42.0mm	1.654in	8	6.23	3.46	1.73	1.20	82	3.50	.02	SDA 8...
7005-124510	SDM 850 792 R UHM20 HX	7.92mm	0.312in	16.0mm	0.630in	8	7.13	3.96	1.98	1.30	50	4.00	.02	SDA 8...
7005-124522	SDM 866 792 R UHM20 HX	7.92mm	0.312in	32.0mm	1.260in	8	7.13	3.96	1.98	1.30	66	4.00	.02	SDA 8...
7005-124534	SDM 882 792 R UHM20 HX	7.92mm	0.312in	48.0mm	1.890in	8	7.13	3.96	1.98	1.30	82	4.00	.02	SDA 8...

Standard Grade Offering: UHM20 HX - Coated Carbide for Most Applications - Other Coatings on Request

Applications Example





Ideal Cutting Materials

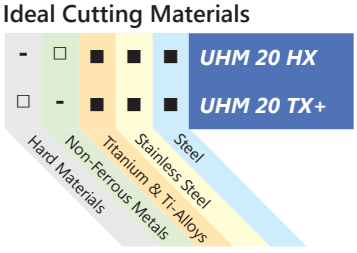

■ Preferred Application
□ Possible Application
- Application Not Recommended

SDO - Profiling




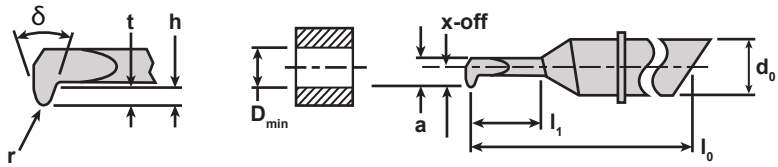


Item No.	Description	Min Hole Ø (D_{min})		Max Depth (l_1)		d_0	a	X-off	h	t	l_0	r	δ	Holder
7005-111786	SDO 435 092 R UHM20 HX	.92mm	0.036in	1.5mm	0.059in	4	0.83	0.46	.31	.23	35	0.05	59°	SDA 4...
7005-122544	SDO 440 092 R UHM20 HX	.92mm	0.036in	3.0mm	0.118in	4	0.83	0.46	.31	.20	40	0.05	59°	SDA 4...
7005-122586	SDO 448 092 R UHM20 HX	.92mm	0.036in	5.0mm	0.197in	4	0.83	0.46	.31	.20	48	0.05	59°	SDA 4...
7005-111790	SDO 435 142 R UHM20 HX	1.42mm	0.056in	4.5mm	0.177in	4	1.28	0.71	.47	.36	35	0.05	59°	SDA 4...
7005-122550	SDO 440 142 R UHM20 HX	1.42mm	0.056in	4.5mm	0.177in	4	1.28	0.71	.47	.40	40	.075	59°	SDA 4...
7005-122592	SDO 448 142 R UHM20 HX	1.42mm	0.056in	7.5mm	0.295in	4	1.28	0.71	.47	.40	48	.075	59°	SDA 4...
7005-111794	SDO 435 192 R UHM20 HX	1.92mm	0.076in	6.0mm	0.236in	4	1.73	0.96	.64	.48	35	0.05	59°	SDA 4...
7005-122556	SDO 440 192 R UHM20 HX	1.92mm	0.076in	6.0mm	0.236in	4	1.73	0.96	.64	.50	40	0.10	59°	SDA 4...
7005-122598	SDO 448 192 R UHM20 HX	1.92mm	0.076in	10.0mm	0.394in	4	1.73	0.96	.64	.50	48	0.10	59°	SDA 4...
7005-111798	SDO 435 242 R UHM20 HX	2.42mm	0.095in	7.5mm	0.295in	4	2.18	1.21	.81	.61	35	0.05	59°	SDA 4...
7005-122562	SDO 440 242 R UHM20 HX	2.42mm	0.095in	7.5mm	0.295in	4	2.18	1.21	.81	.60	40	.125	59°	SDA 4...
7005-122604	SDO 448 242 R UHM20 HX	2.42mm	0.095in	12.5mm	0.492in	4	2.18	1.21	.81	.60	48	.125	59°	SDA 4...
7005-122568	SDO 440 292 R UHM20 HX	2.92mm	0.115in	9.0mm	0.354in	4	2.63	1.46	.97	.70	40	0.15	59°	SDA 4...
7005-122610	SDO 448 292 R UHM20 HX	2.92mm	0.115in	15.0mm	0.591in	4	2.63	1.46	.97	.70	48	0.15	59°	SDA 4...
7005-122574	SDO 440 342 R UHM20 HX	3.42mm	0.135in	10.5mm	0.413in	4	3.08	1.71	1.14	.90	40	.175	59°	SDA 4...
7005-122616	SDO 448 342 R UHM20 HX	3.42mm	0.135in	17.5mm	0.689in	4	3.08	1.71	1.14	.90	48	.175	59°	SDA 4...
7005-122580	SDO 440 392 R UHM20 HX	3.92mm	0.154in	12.0mm	0.472in	4	3.53	1.96	1.31	1.0	40	0.20	59°	SDA 4...
7005-122622	SDO 448 392 R UHM20 HX	3.92mm	0.154in	20.0mm	0.787in	4	3.53	1.96	1.31	1.0	48	0.20	59°	SDA 4...
7005-124646	SDO 644 442 R UHM20 HX	4.42mm	0.174in	9.0mm	0.354in	6	3.98	2.21	1.47	1.1	44	.225	59°	SDA 6...
7005-124670	SDO 656 442 R UHM20 HX	4.42mm	0.174in	18.0mm	0.709in	6	3.98	2.21	1.47	1.1	56	.225	59°	SDA 6...
7005-124694	SDO 668 442 R UHM20 HX	4.42mm	0.174in	27.0mm	1.063in	6	3.98	2.21	1.47	1.1	68	.225	59°	SDA 6...
7005-124652	SDO 644 492 R UHM20 HX	4.92mm	0.194in	10.0mm	0.394in	6	4.43	2.46	1.64	1.2	44	0.25	59°	SDA 6...
7005-124676	SDO 656 492 R UHM20 HX	4.92mm	0.194in	20.0mm	0.787in	6	4.43	2.46	1.64	1.2	56	0.25	59°	SDA 6...
7005-124700	SDO 668 492 R UHM20 HX	4.92mm	0.194in	30.0mm	1.181in	6	4.43	2.46	1.64	1.2	68	0.25	59°	SDA 6...
7005-124658	SDO 644 542 R UHM20 HX	5.42mm	0.213in	11.0mm	0.433in	6	4.88	2.71	1.80	1.4	44	.275	59°	SDA 6...
7005-124682	SDO 656 542 R UHM20 HX	5.42mm	0.213in	22.0mm	0.866in	6	4.88	2.71	1.80	1.4	56	.275	59°	SDA 6...
7005-124706	SDO 668 542 R UHM20 HX	5.42mm	0.213in	33.0mm	1.299in	6	4.88	2.71	1.80	1.4	68	.275	59°	SDA 6...
7005-124664	SDO 644 592 R UHM20 HX	5.92mm	0.233in	12.0mm	0.472in	6	5.33	2.96	1.97	1.5	44	0.30	59°	SDA 6...
7005-124688	SDO 656 592 R UHM20 HX	5.92mm	0.233in	24.0mm	0.945in	6	5.33	2.96	1.97	1.5	56	0.30	59°	SDA 6...
7005-124712	SDO 668 592 R UHM20 HX	5.92mm	0.233in	36.0mm	1.417in	6	5.33	2.96	1.97	1.5	68	0.30	59°	SDA 6...
7005-124718	SDO 850 692 R UHM20 HX	6.92mm	0.272in	14.0mm	0.551in	8	6.23	3.46	2.30	1.7	50	0.35	59°	SDA 8...
7005-124730	SDO 866 692 R UHM20 HX	6.92mm	0.272in	28.0mm	1.102in	8	6.23	3.46	2.30	1.7	66	0.35	59°	SDA 8...
7005-124742	SDO 882 692 R UHM20 HX	6.92mm	0.272in	42.0mm	1.654in	8	6.23	3.46	2.30	1.7	82	0.35	59°	SDA 8...
7005-124724	SDO 850 792 R UHM20 HX	7.92mm	0.312in	16.0mm	0.630in	8	7.13	3.96	2.64	2.0	50	0.40	59°	SDA 8...
7005-124736	SDO 866 792 R UHM20 HX	7.92mm	0.312in	32.0mm	1.260in	8	7.13	3.96	2.64	2.0	66	0.40	59°	SDA 8...
7005-124748	SDO 882 792 R UHM20 HX	7.92mm	0.312in	48.0mm	1.890in	8	7.13	3.96	2.64	2.0	82	0.40	59°	SDA 8...

Standard Grade Offering: UHM20 HX - Coated Carbide for Most Applications - Other Coatings on Request

Applications Example





Ideal Cutting Materials

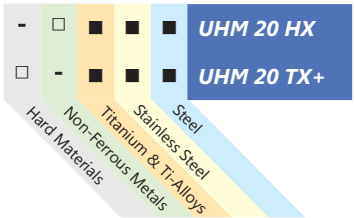


■ Preferred Application
□ Possible Application
- Application Not Recommended

SDQ - Internal Profiling






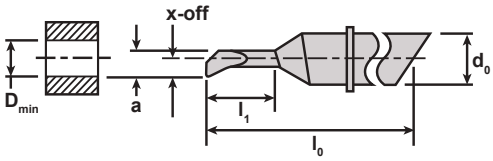


Item No.	Description	Min Hole Ø (D_{min})		Max Depth (l_1)		d_0	a	X-off	h	t	l_0	r_{max}	β	Holder
7005-111802	SDQ 435 092 R UHM20 HX	.92mm	0.036in	1.5mm	0.059in	4	0.83	0.46	.31	.23	35	0.05	30.5°	SDA 4...
7005-122628	SDQ 440 092 R UHM20 HX	.92mm	0.036in	3.0mm	0.118in	4	0.83	0.46	.31	.20	40	0.05	30.5°	SDA 4...
7005-122670	SDQ 448 092 R UHM20 HX	.92mm	0.036in	5.0mm	0.197in	4	0.83	0.46	.31	.20	48	0.05	30.5°	SDA 4...
7005-111806	SDQ 435 142 R UHM20 HX	1.42mm	0.056in	4.5mm	0.177in	4	1.28	0.71	.47	.36	35	0.05	30.5°	SDA 4...
7005-122634	SDQ 440 142 R UHM20 HX	1.42mm	0.056in	4.5mm	0.177in	4	1.28	0.71	.47	.40	40	.075	30.5°	SDA 4...
7005-122676	SDQ 448 142 R UHM20 HX	1.42mm	0.056in	7.5mm	0.295in	4	1.28	0.71	.47	.40	48	.075	30.5°	SDA 4...
7005-111810	SDQ 435 192 R UHM20 HX	1.92mm	0.076in	6.0mm	0.236in	4	1.73	0.96	.64	.48	35	0.05	30.5°	SDA 4...
7005-122640	SDQ 440 192 R UHM20 HX	1.92mm	0.076in	6.0mm	0.236in	4	1.73	0.96	.64	.50	40	0.10	30.5°	SDA 4...
7005-122682	SDQ 448 192 R UHM20 HX	1.92mm	0.076in	10.0mm	0.394in	4	1.73	0.96	.64	.50	48	0.10	30.5°	SDA 4...
7005-111814	SDQ 435 242 R UHM20 HX	2.42mm	0.095in	7.5mm	0.295in	4	2.18	1.21	.81	.61	35	0.05	30.5°	SDA 4...
7005-122646	SDQ 440 242 R UHM20 HX	2.42mm	0.095in	7.5mm	0.295in	4	2.18	1.21	.81	.60	40	.125	30.5°	SDA 4...
7005-122688	SDQ 448 242 R UHM20 HX	2.42mm	0.095in	12.5mm	0.492in	4	2.18	1.21	.81	.60	48	.125	30.5°	SDA 4...
7005-122652	SDQ 440 292 R UHM20 HX	2.92mm	0.115in	9.0mm	0.354in	4	2.63	1.46	.97	.70	40	0.15	30.5°	SDA 4...
7005-122694	SDQ 448 292 R UHM20 HX	2.92mm	0.115in	15.0mm	0.591in	4	2.63	1.46	.97	.70	48	0.15	30.5°	SDA 4...
7005-122658	SDQ 440 342 R UHM20 HX	3.42mm	0.135in	10.5mm	0.413in	4	3.08	1.71	1.14	.90	40	.175	30.5°	SDA 4...
7005-122700	SDQ 448 342 R UHM20 HX	3.42mm	0.135in	17.5mm	0.689in	4	3.08	1.71	1.14	.90	48	.175	30.5°	SDA 4...
7005-122664	SDQ 440 392 R UHM20 HX	3.92mm	0.154in	12.0mm	0.472in	4	3.53	1.96	1.31	1.0	40	0.20	30.5°	SDA 4...
7005-122706	SDQ 448 392 R UHM20 HX	3.92mm	0.154in	20.0mm	0.787in	4	3.53	1.96	1.31	1.0	48	0.20	30.5°	SDA 4...
7005-124754	SDQ 644 442 R UHM20 HX	4.42mm	0.174in	9.0mm	0.354in	6	3.98	2.21	1.47	1.1	44	.225	30.5°	SDA 6...
7005-124778	SDQ 656 442 R UHM20 HX	4.42mm	0.174in	18.0mm	0.709in	6	3.98	2.21	1.47	1.1	56	.225	30.5°	SDA 6...
7005-124802	SDQ 668 442 R UHM20 HX	4.42mm	0.174in	27.0mm	1.063in	6	3.98	2.21	1.47	1.1	68	.225	30.5°	SDA 6...
7005-124760	SDQ 644 492 R UHM20 HX	4.92mm	0.194in	10.0mm	0.394in	6	4.43	2.46	1.64	1.2	44	0.25	30.5°	SDA 6...
7005-124784	SDQ 656 492 R UHM20 HX	4.92mm	0.194in	20.0mm	0.787in	6	4.43	2.46	1.64	1.2	56	0.25	30.5°	SDA 6...
7005-124808	SDQ 668 492 R UHM20 HX	4.92mm	0.194in	30.0mm	1.181in	6	4.43	2.46	1.64	1.2	68	0.25	30.5°	SDA 6...
7005-124766	SDQ 644 542 R UHM20 HX	5.42mm	0.213in	11.0mm	0.433in	6	4.88	2.71	1.80	1.4	44	.275	30.5°	SDA 6...
7005-124790	SDQ 656 542 R UHM20 HX	5.42mm	0.213in	22.0mm	0.866in	6	4.88	2.71	1.80	1.4	56	.275	30.5°	SDA 6...
7005-124814	SDQ 668 542 R UHM20 HX	5.42mm	0.213in	33.0mm	1.299in	6	4.88	2.71	1.80	1.4	68	.275	30.5°	SDA 6...
7005-124772	SDQ 644 592 R UHM20 HX	5.92mm	0.233in	12.0mm	0.472in	6	5.33	2.96	1.97	1.5	44	0.30	30.5°	SDA 6...
7005-124796	SDQ 656 592 R UHM20 HX	5.92mm	0.233in	24.0mm	0.945in	6	5.33	2.96	1.97	1.5	56	0.30	30.5°	SDA 6...
7005-124820	SDQ 668 592 R UHM20 HX	5.92mm	0.233in	36.0mm	1.417in	6	5.33	2.96	1.97	1.5	68	0.30	30.5°	SDA 6...
7005-124826	SDQ 850 692 R UHM20 HX	6.92mm	0.272in	14.0mm	0.551in	8	6.23	3.46	2.30	1.7	50	0.35	30.5°	SDA 8...
7005-124838	SDQ 866 692 R UHM20 HX	6.92mm	0.272in	28.0mm	1.102in	8	6.23	3.46	2.30	1.7	66	0.35	30.5°	SDA 8...
7005-124850	SDQ 882 692 R UHM20 HX	6.92mm	0.272in	42.0mm	1.654in	8	6.23	3.46	2.30	1.7	82	0.35	30.5°	SDA 8...
7005-124832	SDQ 850 792 R UHM20 HX	7.92mm	0.312in	16.0mm	0.630in	8	7.13	3.96	2.64	2.0	50	0.40	30.5°	SDA 8...
7005-124844	SDQ 866 792 R UHM20 HX	7.92mm	0.312in	32.0mm	1.260in	8	7.13	3.96	2.64	2.0	66	0.40	30.5°	SDA 8...
7005-124856	SDQ 882 792 R UHM20 HX	7.92mm	0.312in	48.0mm	1.890in	8	7.13	3.96	2.64	2.0	82	0.40	30.5°	SDA 8...

Standard Grade Offering: UHM20 HX - Coated Carbide for Most Applications - Other Coatings on Request

Applications Example





Ideal Cutting Materials

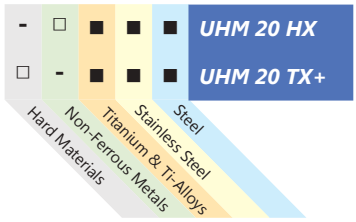

■ Preferred Application
□ Possible Application
- Application Not Recommended

SDR - Full Radius Grooving




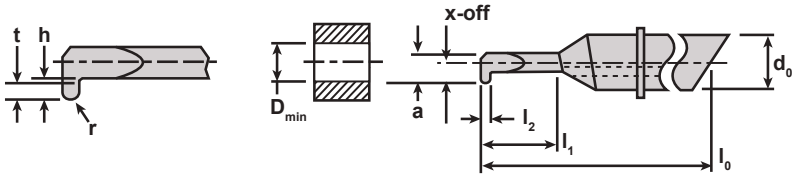


Item No.	Description	Min Hole Ø (D_{min})		Max Depth (l_1)		d_0	a	X-off	h	t	l_0	l_2	r_{max}	Holder
7005-111818	SDR 435 092 R UHM20 HX	.92mm	0.036in	3.0mm	3.0mm	4	0.83	0.46	0.30	0.20	35	0.20	0.10	SDA 4...
7005-111822	SDR 435 142 R UHM20 HX	1.42mm	0.056in	4.5mm	4.5mm	4	1.28	0.71	0.38	0.25	35	0.25	.125	SDA 4...
7005-111826	SDR 435 192 R UHM20 HX	1.92mm	0.076in	6.0mm	6.0mm	4	1.73	0.96	0.45	0.30	35	0.30	0.15	SDA 4...
7005-111830	SDR 435 242 R UHM20 HX	2.42mm	0.095in	7.5mm	7.5mm	4	2.18	1.21	0.53	0.35	35	0.35	.175	SDA 4...
7005-111834	SDR 440 092 R UHM20 HX	.92mm	0.036in	5.0mm	5.0mm	4	0.83	0.46	0.30	0.20	40	0.20	0.10	SDA 4...
7005-111838	SDR 440 142 R UHM20 HX	1.42mm	0.056in	7.5mm	7.5mm	4	1.28	0.71	0.38	0.25	40	0.25	.125	SDA 4...
7005-111842	SDR 440 192 R UHM20 HX	1.92mm	0.076in	10.0mm	10.0mm	4	1.73	0.96	0.45	0.30	40	0.30	0.15	SDA 4...
7005-111846	SDR 440 242 R UHM20 HX	2.42mm	0.095in	12.5mm	12.5mm	4	2.18	1.21	0.53	0.35	40	0.35	.175	SDA 4...
7005-111850	SDR 440 292 R UHM20 HX	2.92mm	0.115in	9.0mm	9.0mm	4	1.73	1.46	0.60	0.40	40	0.40	0.20	SDA 4...
7005-111854	SDR 440 342 R UHM20 HX	3.42mm	0.135in	10.5mm	10.5mm	4	2.63	1.71	0.68	0.45	40	0.45	.225	SDA 4...
7005-111858	SDR 440 392 R UHM20 HX	3.92mm	0.154in	12.0mm	12.0mm	4	3.53	1.96	0.75	0.50	40	0.50	0.25	SDA 4...
7005-111862	SDR 448 292 R UHM20 HX	2.92mm	0.115in	15.0mm	15.0mm	4	2.63	1.46	0.60	0.40	48	0.40	0.20	SDA 4...
7005-111866	SDR 448 342 R UHM20 HX	3.42mm	0.135in	17.5mm	17.5mm	4	3.08	1.71	0.68	0.45	48	0.45	.225	SDA 4...
7005-111870	SDR 448 392 R UHM20 HX	3.92mm	0.154in	20.0mm	20.0mm	4	3.53	1.96	0.75	0.50	48	0.50	0.25	SDA 4...
7005-111874	SDR 644 442 R UHM20 HX	4.42mm	0.174in	9.0mm	9.0mm	6	3.98	2.21	0.83	0.55	44	0.55	.275	SDA 6...
7005-111878	SDR 644 492 R UHM20 HX	4.92mm	0.194in	10.0mm	10.0mm	6	4.43	2.46	0.90	0.60	44	0.60	0.30	SDA 6...
7005-111882	SDR 644 542 R UHM20 HX	5.42mm	0.213in	11.0mm	11.0mm	6	4.88	2.71	0.98	0.65	44	0.65	.325	SDA 6...
7005-111886	SDR 644 592 R UHM20 HX	5.92mm	0.233in	12.0mm	12.0mm	6	5.33	2.96	1.05	0.70	44	0.70	0.35	SDA 6...
7005-111890	SDR 656 442 R UHM20 HX	4.42mm	0.174in	18.0mm	18.0mm	6	3.98	2.21	0.83	0.55	56	0.55	.275	SDA 6...
7005-111894	SDR 656 492 R UHM20 HX	4.92mm	0.194in	20.0mm	20.0mm	6	4.43	2.46	0.90	0.60	56	0.60	0.30	SDA 6...
7005-111898	SDR 656 542 R UHM20 HX	5.42mm	0.213in	22.0mm	22.0mm	6	4.88	2.71	0.98	0.65	56	0.65	.325	SDA 6...
7005-111902	SDR 656 592 R UHM20 HX	5.92mm	0.233in	24.0mm	24.0mm	6	5.33	2.96	1.05	0.70	56	0.70	0.35	SDA 6...
7005-111906	SDR 668 442 R UHM20 HX	4.42mm	0.174in	27.0mm	27.0mm	6	3.98	2.21	0.83	0.55	68	0.55	.275	SDA 6...
7005-111910	SDR 668 492 R UHM20 HX	4.92mm	0.194in	30.0mm	30.0mm	6	4.43	2.46	0.90	0.60	68	0.60	0.30	SDA 6...
7005-111914	SDR 668 542 R UHM20 HX	5.42mm	0.213in	33.0mm	33.0mm	6	4.88	2.71	0.98	0.65	68	0.65	.325	SDA 6...
7005-111918	SDR 668 592 R UHM20 HX	5.92mm	0.233in	36.0mm	36.0mm	6	5.33	2.96	1.05	0.70	68	0.70	0.35	SDA 6...

Standard Grade Offering: UHM20 HX - Coated Carbide for Most Applications - Other Coatings on Request

Applications Example





Ideal Cutting Materials

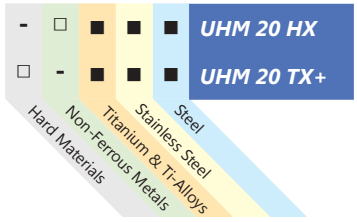

■ Preferred Application
□ Possible Application
- Application Not Recommended

SDS - Micro-Grooving




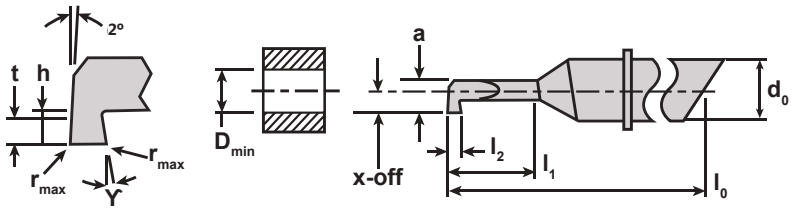


Item No.	Description	Min Hole Ø (D_{min})		Max Depth (l_1)		d_0	a	X-off	h	t	l_0	l_2	r_{max}	Y	Holder
7005-111683	SDS 435 092 R UHM20 HX	.92mm	0.036in	1.5mm	0.059in	4	0.83	0.46	.31	.23	35	0.20	.02	2°	SDA 4...
7005-122712	SDS 440 092 R UHM20 HX	.92mm	0.036in	3.0mm	0.118in	4	0.83	0.46	.31	.20	40	0.20	.02	2°	SDA 4...
7005-122754	SDS 448 092 R UHM20 HX	.92mm	0.036in	5.0mm	0.197in	4	0.83	0.46	.31	.20	48	0.20	.02	2°	SDA 4...
7005-111687	SDS 435 142 R UHM20 HX	1.42mm	0.056in	4.5mm	0.177in	4	1.28	0.71	.47	.36	35	0.25	.02	2°	SDA 4...
7005-122718	SDS 440 142 R UHM20 HX	1.42mm	0.056in	4.5mm	0.177in	4	1.28	0.71	.47	.40	40	0.25	.02	2°	SDA 4...
7005-122760	SDS 448 142 R UHM20 HX	1.42mm	0.056in	7.5mm	0.295in	4	1.28	0.71	.47	.40	48	0.25	.02	2°	SDA 4...
7005-111691	SDS 435 192 R UHM20 HX	1.92mm	0.076in	6.0mm	0.236in	4	1.73	0.96	.64	.48	35	0.30	.02	2°	SDA 4...
7005-122724	SDS 440 192 R UHM20 HX	1.92mm	0.076in	6.0mm	0.236in	4	1.73	0.96	.64	.50	40	0.30	.02	2°	SDA 4...
7005-122766	SDS 448 192 R UHM20 HX	1.92mm	0.076in	10.0mm	0.394in	4	1.73	0.96	.64	.50	48	0.30	.02	2°	SDA 4...
7005-111695	SDS 435 242 R UHM20 HX	2.42mm	0.095in	7.5mm	0.295in	4	2.18	1.21	.81	.61	35	0.35	.02	2°	SDA 4...
7005-122730	SDS 440 242 R UHM20 HX	2.42mm	0.095in	7.5mm	0.295in	4	2.18	1.21	.81	.60	40	0.35	.02	2°	SDA 4...
7005-122772	SDS 448 242 R UHM20 HX	2.42mm	0.095in	12.5mm	0.492in	4	2.18	1.21	.81	.60	48	0.35	.02	2°	SDA 4...
7005-122736	SDS 440 292 R UHM20 HX	2.92mm	0.115in	9.0mm	0.354in	4	2.63	1.46	.97	.70	40	0.40	.02	2°	SDA 4...
7005-122778	SDS 448 292 R UHM20 HX	2.92mm	0.115in	15.0mm	0.591in	4	2.63	1.46	.97	.70	48	0.40	.02	2°	SDA 4...
7005-122742	SDS 440 342 R UHM20 HX	3.42mm	0.135in	10.5mm	0.413in	4	3.08	1.71	1.14	.90	40	0.45	.02	2°	SDA 4...
7005-122784	SDS 448 342 R UHM20 HX	3.42mm	0.135in	17.5mm	0.689in	4	3.08	1.71	1.14	.90	48	0.45	.02	2°	SDA 4...
7005-122748	SDS 440 392 R UHM20 HX	3.92mm	0.154in	12.0mm	0.472in	4	3.53	1.96	1.31	1.0	40	0.50	.02	2°	SDA 4...
7005-122790	SDS 448 392 R UHM20 HX	3.92mm	0.154in	20.0mm	0.787in	4	3.53	1.96	1.31	1.0	48	0.50	.02	2°	SDA 4...
7005-125027	SDS 644 442 R UHM20 HX	4.42mm	0.174in	9.0mm	0.354in	6	3.98	2.21	1.47	1.1	44	1.00	.02	2°	SDA 6...
7005-125051	SDS 656 442 R UHM20 HX	4.42mm	0.174in	18.0mm	0.709in	6	3.98	2.21	1.47	1.1	56	1.00	.02	2°	SDA 6...
7005-125085	SDS 668 442 R UHM20 HX	4.42mm	0.174in	27.0mm	1.063in	6	3.98	2.21	1.47	1.1	68	1.50	.02	2°	SDA 6...
7005-125029	SDS 644 492 R UHM20 HX	4.92mm	0.194in	10.0mm	0.394in	6	4.43	2.46	1.64	1.2	44	1.50	.02	2°	SDA 6...
7005-125057	SDS 656 492 R UHM20 HX	4.92mm	0.194in	20.0mm	0.787in	6	4.43	2.46	1.64	1.2	56	1.50	.02	2°	SDA 6...
7005-125091	SDS 668 492 R UHM20 HX	4.92mm	0.194in	30.0mm	1.181in	6	4.43	2.46	1.64	1.2	68	1.00	.02	2°	SDA 6...
7005-125039	SDS 644 542 R UHM20 HX	5.42mm	0.213in	11.0mm	0.433in	6	4.88	2.71	1.80	1.4	44	1.00	.02	2°	SDA 6...
7005-125063	SDS 656 542 R UHM20 HX	5.42mm	0.213in	22.0mm	0.866in	6	4.88	2.71	1.80	1.4	56	1.00	.02	2°	SDA 6...
7005-125097	SDS 668 542 R UHM20 HX	5.42mm	0.213in	33.0mm	1.299in	6	4.88	2.71	1.80	1.4	68	1.50	.02	2°	SDA 6...
7005-125045	SDS 644 592 R UHM20 HX	5.92mm	0.233in	12.0mm	0.472in	6	5.33	2.96	1.97	1.5	44	1.50	.02	2°	SDA 6...
7005-125079	SDS 656 592 R UHM20 HX	5.92mm	0.233in	24.0mm	0.945in	6	5.33	2.96	1.97	1.5	56	1.50	.02	2°	SDA 6...
7005-125103	SDS 668 592 R UHM20 HX	5.92mm	0.233in	36.0mm	1.417in	6	5.33	2.96	1.97	1.5	68	1.50	.02	2°	SDA 6...
7005-125109	SDS 850 692 R UHM20 HX	6.92mm	0.272in	14.0mm	0.551in	8	6.23	3.46	2.30	1.7	50	1.50	.02	2°	SDA 8...
7005-125121	SDS 866 692 R UHM20 HX	6.92mm	0.272in	28.0mm	1.102in	8	6.23	3.46	2.30	1.7	66	1.50	.02	2°	SDA 8...
7005-125133	SDS 882 692 R UHM20 HX	6.92mm	0.272in	42.0mm	1.654in	8	6.23	3.46	2.30	1.7	82	1.50	.02	2°	SDA 8...
7005-125115	SDS 850 792 R UHM20 HX	7.92mm	0.312in	16.0mm	0.630in	8	7.13	3.96	2.64	2.0	50	2.00	.02	2°	SDA 8...
7005-125127	SDS 866 792 R UHM20 HX	7.92mm	0.312in	32.0mm	1.260in	8	7.13	3.96	2.64	2.0	66	2.00	.02	2°	SDA 8...
7005-125139	SDS 882 792 R UHM20 HX	7.92mm	0.312in	48.0mm	1.890in	8	7.13	3.96	2.64	2.0	82	2.00	.02	2°	SDA 8...

Standard Grade Offering: UHM20 HX - Coated Carbide for Most Applications - Other Coatings on Request

Applications Example





Ideal Cutting Materials

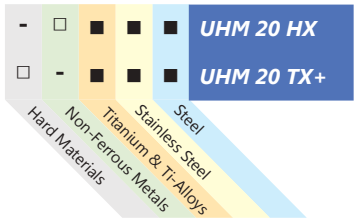

■ Preferred Application
□ Possible Application
- Application Not Recommended

SDT - Groove and Turn




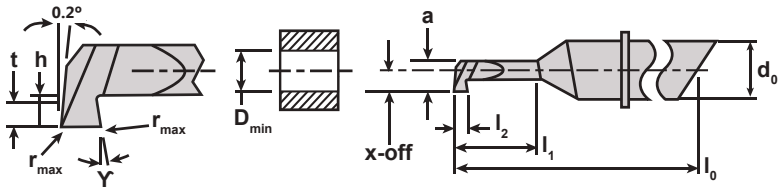


Item No.	Description	Min Hole Ø (D_{min})		Max Depth (l_1)		d_0	a	X-off	h	t	l_0	l_2	r_{max}	Y	Holder
7005-124384	SDT 440 392 R UHM20 HX	3.92mm	0.154in	12.0mm	0.472in	4	3.53	1.96	1.31	1.0	40	1.0	.02	1.5°	SDA 4...
7005-124390	SDT 448 392 R UHM20 HX	3.92mm	0.154in	20.0mm	0.787in	4	3.53	1.96	1.31	1.0	48	1.0	.02	1.5°	SDA 4...
7005-124396	SDT 644 592 R UHM20 HX	5.92mm	0.233in	12.0mm	0.472in	6	5.33	2.96	1.97	1.25	44	1.5	.02	1.5°	SDA 6...
7005-124402	SDT 656 592 R UHM20 HX	5.92mm	0.233in	24.0mm	0.944in	6	5.33	2.96	1.97	1.25	56	1.5	.02	1.5°	SDA 6...
7005-124408	SDT 668 592 R UHM20 HX	5.92mm	0.233in	36.0mm	1.417in	6	5.33	2.96	1.97	1.25	68	1.5	.02	1.5°	SDA 6...
7005-124414	SDT 850 792 R UHM20 HX	7.92mm	0.312in	16.0mm	0.629in	8	7.13	3.96	2.64	1.5	50	2.0	.02	1.5°	SDA 8...
7005-124420	SDT 866 792 R UHM20 HX	7.92mm	0.312in	32.0mm	1.259in	8	7.13	3.96	2.64	1.5	66	2.0	.02	1.5°	SDA 8...
7005-124426	SDT 882 792 R UHM20 HX	1.92mm	0.076in	6.0mm	0.236in	8	7.13	3.96	2.64	1.5	82	2.0	.02	1.5°	SDA 8...

Standard Grade Offering: UHM20 HX - Coated Carbide for Most Applications - Other Coatings on Request

Applications Example





Ideal Cutting Materials

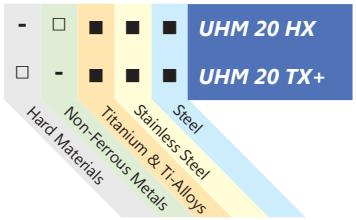

■ Preferred Application
□ Possible Application
- Application Not Recommended

SDU - Threading Partial Profile




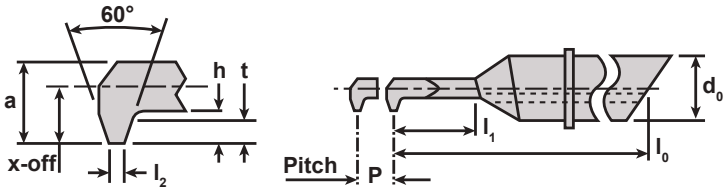


Item No.	Description	Thread	Pitch	Max Depth (l_1)		d_0	a	X-off	h	t	l_0	l_2	Holder
7005-126014	SDU 435 160 R UHM20 HX	M1.6-M2	0.35-0.4	3.0mm	0.118in	4	1.1	0.8	0.5	0.35	35	.02	SDA 4...
7005-126017	SDU 435 200 R UHM20 HX	M1.6-M2	0.4-0.5	4.5mm	0.177in	4	1.3	1.0	0.6	0.45	35	.03	SDA 4...
7005-126020	SDU 435 300 R UHM20 HX	M2-M3	0.5-0.7	6.0mm	0.236in	4	2.0	1.5	0.9	0.60	35	.04	SDA 4...
7005-126023	SDU 435 400 R UHM20 HX	M2-M3	0.7-0.8	7.5mm	0.295in	4	2.7	2.0	1.2	0.80	35	.05	SDA 4...
7005-122796	SDU 440 160 R UHM20 HX	M3-M4	0.35-0.4	4.8mm	0.189in	4	1.1	0.8	0.5	0.35	40	.02	SDA 4...
7005-122802	SDU 440 200 R UHM20 HX	M3-M4	0.4-0.5	6.0mm	0.236in	4	1.3	1.0	0.6	0.45	40	.03	SDA 4...
7005-122808	SDU 440 300 R UHM20 HX	M4-M5	0.5-0.7	9.0mm	0.354in	4	2.0	1.5	0.9	0.60	40	.04	SDA 4...
7005-122814	SDU 440 400 R UHM20 HX	M4-M5	0.7-0.8	12mm	0.472in	4	2.7	2.0	1.2	0.80	40	.05	SDA 4...
7005-136412	SDU 656 500 R UHM20 HX	M5-M6	0.8-1	15mm	0.591in	6	3.8	2.05	1.2	0.90	56	.06	SDA 6...
7005-136418	SDU 656 600 R UHM20 HX	M6-M7	1	18mm	0.709in	6	4.6	2.45	1.2	0.90	56	.07	SDA 6...
7005-136424	SDU 656 700 R UHM20 HX	M7-M8	1-1.25	21mm	0.827in	6	5.6	2.95	1.4	1.10	56	.08	SDA 6...

Standard Grade Offering: UHM20 HX - Coated Carbide for Most Applications - Other Coatings on Request

Applications Example





Ideal Cutting Materials

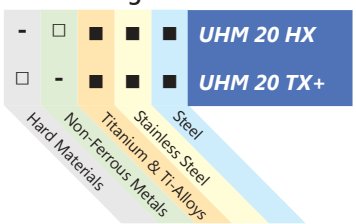


■ Preferred Application
□ Possible Application
- Application Not Recommended

SDV - Threading Full Profile






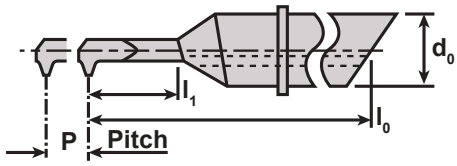


Item No.	Description	Thread	Pitch	Max Depth (l_1)		d_0	a	X-off	h	t	l_0	r_{max}	V_r	Holder
7005-111699	SDV 435 100 R UHM20 HX	M1	0.25	3.00mm	0.118in	4	0.6	0.5	0.2	.162	35	.02	0.04	SDA 4...
7005-111703	SDV 435 120 R UHM20 HX	M1.2	0.25	3.60mm	0.142in	4	0.76	0.6	0.2	.162	35	.02	0.04	SDA 4...
7005-138838	SDV 435 140 R UHM20 HX	M1.4	0.3	4.20mm	0.165in	4	0.92	0.7	0.23	.194	35	.02	0.05	SDA 4...
7005-111710	SDV 435 160 R UHM20 HX	M1.6	0.35	4.80mm	0.189in	4	1.08	0.8	0.26	.227	35	.03	0.05	SDA 4...
7005-111714	SDV 435 180 R UHM20 HX	M1.8	0.35	5.40mm	0.213in	4	1.24	0.9	0.26	.227	35	.03	0.05	SDA 4...
7005-111718	SDV 435 200 R UHM20 HX	M2	0.4	6.00mm	0.236in	4	1.4	1.0	0.3	.258	35	.03	0.05	SDA 4...
7005-111722	SDV 435 220 R UHM20 HX	M2.2	0.45	6.60mm	0.260in	4	1.56	1.1	0.33	.287	35	.03	0.05	SDA 4...
7005-111726	SDV 435 250 R UHM20 HX	M2.5	0.45	7.50mm	0.295in	4	1.8	1.25	0.33	.287	35	.03	0.05	SDA 4...
7005-111730	SDV 440 100 R UHM20 HX	M1	0.25	5.00mm	0.197in	4	0.6	0.5	0.2	.162	40	.02	0.04	SDA 4...
7005-111734	SDV 440 120 R UHM20 HX	M1.2	0.25	6.00mm	0.236in	4	0.76	0.6	0.2	.162	40	.02	0.04	SDA 4...
7005-111738	SDV 440 140 R UHM20 HX	M1.4	0.3	7.00mm	0.276in	4	0.92	0.7	0.23	.194	56	.02	0.05	SDA 4...
7005-111742	SDV 440 160 R UHM20 HX	M1.6	0.35	8.00mm	0.315in	4	1.08	0.8	0.26	.227	40	.03	0.05	SDA 4...
7005-111746	SDV 440 180 R UHM20 HX	M1.8	0.35	9.00mm	0.354in	4	1.24	0.9	0.26	.227	40	.03	0.05	SDA 4...
7005-111750	SDV 440 200 R UHM20 HX	M2	0.4	10.00mm	0.394in	4	1.4	1.0	0.3	.258	40	.03	0.05	SDA 4...
7005-111754	SDV 440 220 R UHM20 HX	M2.2	0.45	11.00mm	0.433in	4	1.56	1.1	0.33	.287	40	.03	0.05	SDA 4...
7005-111758	SDV 440 250 R UHM20 HX	M2.5	0.45	12.50mm	0.492in	4	1.8	1.25	0.33	.287	40	.03	0.05	SDA 4...
7005-111762	SDV 440 300 R UHM20 HX	M3	0.5	9.00mm	0.354in	4	2.2	1.5	0.37	.316	40	.04	0.06	SDA 4...
7005-111766	SDV 440 350 R UHM20 HX	M3.5	0.6	10.50mm	0.413in	4	2.6	1.75	0.43	.374	40	.04	0.06	SDA 4...
7005-111770	SDV 440 400 R UHM20 HX	M4	0.7	12.00mm	0.472in	4	3.0	2.0	0.5	.432	40	.05	0.06	SDA 4...
7005-111774	SDV 448 300 R UHM20 HX	M3	0.5	15.00mm	0.591in	4	2.2	1.5	0.57	.316	48	.04	0.06	SDA 4...
7005-111778	SDV 448 350 R UHM20 HX	M3.5	0.6	17.50mm	0.689in	4	2.6	1.75	0.7	.374	48	.04	0.06	SDA 4...
7005-111782	SDV 448 400 R UHM20 HX	M4	0.7	20.00mm	0.787in	4	3.0	2.0	0.86	.432	48	.05	0.06	SDA 4...
7005-110894	SDV 644 500 R UHM20 HX	M5	0.8	10.00mm	0.394in	6	3.8	2.5	0.57	.5	44	.05	0.07	SDA 6...
7005-110900	SDV 644 600 R UHM20 HX	M6/7	1	12.00mm	0.472in	6	4.6	3.0	0.7	.62	44	.05	0.08	SDA 6...
7005-110906	SDV 644 800 R UHM20 HX	M8	1.25	12.00mm	0.472in	6	5.62	3.0	0.86	.78	44	.05	0.09	SDA 6...
7005-110874	SDV 656 500 R UHM20 HX	M5	0.8	20.00mm	0.787in	6	3.8	2.5	0.57	.5	56	.05	0.07	SDA 6...
7005-110882	SDV 656 600 R UHM20 HX	M6/7	1.0	24.00mm	0.945in	6	4.6	3.0	0.7	.62	56	.05	0.08	SDA 6...
7005-110888	SDV 656 800 R UHM20 HX	M8	1.25	24.00mm	0.945in	6	5.62	3.0	0.86	.78	56	.05	0.09	SDA 6...
7005-110912	SDV 668 500 R UHM20 HX	M5	0.8	30.00mm	1.181in	6	3.8	2.5	0.57	.5	68	.05	0.07	SDA 6...
7005-110918	SDV 668 600 R UHM20 HX	M6/7	1.0	36.00mm	1.417in	6	4.6	3.0	0.7	.62	68	.05	0.08	SDA 6...
7005-110924	SDV 668 800 R UHM20 HX	M8	1.25	36.00mm	1.417in	6	5.62	3.0	0.86	.78	68	.05	0.09	SDA 6...

Standard Grade Offering: UHM20 HX - Coated Carbide for Most Applications - Other Coatings on Request

Applications Example




Ideal Cutting Materials

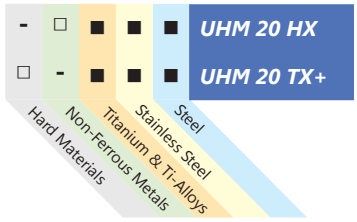

■ Preferred Application
□ Possible Application
- Application Not Recommended


SXJ - Copy Turning (axial)

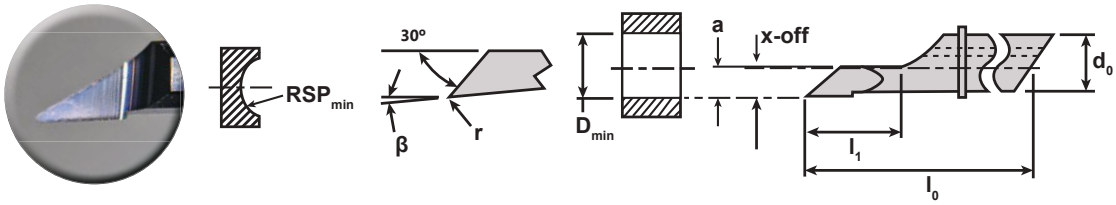


Item No.	Description	Min Hole Ø (D_{min})		Max Depth (l_1)		d_0	a	X-off	RSP_{min}	l_0	r	β	Holder
7005-114601	SXJ 435 042 R UHM20 HX	0.42mm	0.017in	1.5mm	0.059in	4	0.19	0.13	0.45	35	0.08	1.5°	SDA 4...
7005-114603	SXJ 435 092 R UHM20 HX	0.92mm	0.036in	3.0mm	0.118in	4	0.41	0.38	0.95	35	0.08	1.5°	SDA 4...
7005-114605	SXJ 435 142 R UHM20 HX	1.42mm	0.056in	4.5mm	0.177in	4	0.64	0.63	1.45	35	0.08	1.5°	SDA 4...
7005-114607	SXJ 435 192 R UHM20 HX	1.92mm	0.076in	6.0mm	0.236in	4	0.86	0.88	1.95	35	0.08	1.5°	SDA 4...
7005-114609	SXJ 435 242 R UHM20 HX	2.42mm	0.095in	7.5mm	0.295in	4	1.09	1.13	2.45	35	0.08	1.5°	SDA 4...
7005-114617	SXJ 440 092 R UHM20 HX	0.92mm	0.036in	5.0mm	0.197in	4	0.41	0.38	0.95	40	0.08	1.5°	SDA 4...
7005-114619	SXJ 440 142 R UHM20 HX	1.42mm	0.056in	7.5mm	0.295in	4	0.64	0.63	1.45	40	0.08	1.5°	SDA 4...
7005-114621	SXJ 440 192 R UHM20 HX	1.92mm	0.076in	10mm	0.394in	4	0.86	0.88	1.95	40	0.08	1.5°	SDA 4...
7005-114623	SXJ 440 242 R UHM20 HX	2.42mm	0.095in	12.5mm	0.492in	4	1.09	1.13	2.45	40	0.08	1.5°	SDA 4...
7005-114611	SXJ 440 292 R UHM20 HX	2.92mm	0.115in	9.0mm	0.354in	4	1.31	1.38	2.95	40	0.08	1.5°	SDA 4...
7005-114613	SXJ 440 342 R UHM20 HX	3.42mm	0.135in	10.5mm	0.413in	4	1.54	1.63	3.45	40	0.08	1.5°	SDA 4...
7005-114615	SXJ 440 392 R UHM20 HX	3.92mm	0.154in	12.0mm	0.472in	4	1.76	1.88	3.95	40	0.08	1.5°	SDA 4...
7005-114625	SXJ 448 292 R UHM20 HX	2.92mm	0.115in	15.0mm	0.591in	4	1.31	1.38	2.95	48	0.08	1.5°	SDA 4...
7005-114627	SXJ 448 342 R UHM20 HX	3.42mm	0.135in	17.5mm	0.689in	4	1.54	1.63	3.45	48	0.08	1.5°	SDA 4...
7005-114629	SXJ 448 392 R UHM20 HX	3.92mm	0.154in	20.0mm	0.787in	4	1.76	1.88	3.95	48	0.08	1.5°	SDA 4...
7005-114631	SXJ 644 442 R UHM20 HX	4.42mm	0.174in	9.0mm	0.354in	6	1.99	2.09	4.45	44	0.12	1.5°	SDA 6...
7005-114633	SXJ 644 492 R UHM20 HX	4.92mm	0.194in	10.0mm	0.394in	6	2.21	2.34	4.95	44	0.12	1.5°	SDA 6...
7005-114635	SXJ 644 542 R UHM20 HX	5.42mm	0.213in	11.0mm	0.433in	6	2.44	2.59	5.45	44	0.12	1.5°	SDA 6...
7005-114637	SXJ 644 592 R UHM20 HX	5.92mm	0.233in	12.0mm	0.472in	6	2.66	2.84	5.95	44	0.12	1.5°	SDA 6...
7005-114639	SXJ 656 442 R UHM20 HX	4.42mm	0.174in	18.0mm	0.709in	6	1.99	2.09	4.45	56	0.12	1.5°	SDA 6...
7005-114641	SXJ 656 492 R UHM20 HX	4.92mm	0.194in	20.0mm	0.787in	6	2.21	2.34	4.95	56	0.12	1.5°	SDA 6...
7005-114643	SXJ 656 542 R UHM20 HX	5.42mm	0.213in	22.0mm	0.866in	6	2.44	2.59	5.45	56	0.12	1.5°	SDA 6...
7005-114645	SXJ 656 592 R UHM20 HX	5.92mm	0.233in	24.0mm	0.945in	6	2.66	2.84	5.95	56	0.12	1.5°	SDA 6...
7005-114647	SXJ 668 442 R UHM20 HX	4.42mm	0.174in	27.0mm	1.063in	6	1.99	2.09	4.45	68	0.12	1.5°	SDA 6...
7005-114649	SXJ 668 492 R UHM20 HX	4.92mm	0.194in	30.0mm	1.181in	6	2.21	2.34	4.95	68	0.12	1.5°	SDA 6...
7005-114651	SXJ 668 542 R UHM20 HX	5.42mm	0.213in	33.0mm	1.299in	6	2.44	2.59	5.45	68	0.12	1.5°	SDA 6...
7005-114653	SXJ 668 592 R UHM20 HX	5.92mm	0.233in	36.0mm	1.417in	6	2.66	2.84	5.95	68	0.12	1.5°	SDA 6...
7005-114655	SXJ 850 692 R UHM20 HX	6.92mm	0.272in	14.0mm	0.551in	8	3.11	3.3	6.95	50	0.16	1.5°	SDA 8...
7005-114657	SXJ 850 792 R UHM20 HX	7.92mm	0.312in	16.0mm	0.630in	8	3.56	3.8	7.95	50	0.16	1.5°	SDA 8...
7005-114659	SXJ 866 692 R UHM20 HX	6.92mm	0.272in	28.0mm	1.102in	8	3.11	3.3	6.95	66	0.16	1.5°	SDA 8...
7005-114661	SXJ 866 792 R UHM20 HX	7.92mm	0.312in	32.0mm	1.260in	8	3.56	3.8	7.95	66	0.16	1.5°	SDA 8...
7005-114663	SXJ 882 692 R UHM20 HX	6.92mm	0.272in	42.0mm	1.654in	8	3.11	3.3	6.95	82	0.16	1.5°	SDA 8...
7005-114665	SXJ 882 792 R UHM20 HX	7.92mm	0.312in	48.0mm	1.890in	8	3.56	3.8	7.95	82	0.16	1.5°	SDA 8...

Standard Grade Offering: UHM20 HX - Coated Carbide for Most Applications - Other Coatings on Request

Applications Example




Ideal Cutting Materials

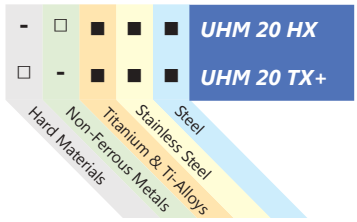


■ Preferred Application
□ Possible Application
- Application Not Recommended

SXP - Grooving (axial)






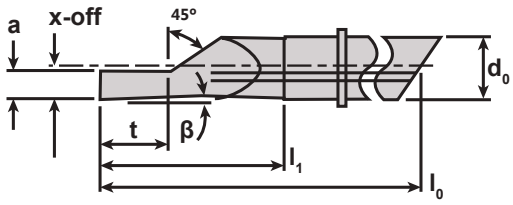


Item No.	Description	Min Hole Ø (D_{min})		max depth (t)		d_0	a	X-off	l_0	l_1	β	Holder
7005-114667	SXP 435 142 R UHM20 HX	1.42mm	0.056in	0.2mm	0.009in	4	0.35	0.71	35	4.5	1.5°	SDA 4...
7005-114669	SXP 435 192 R UHM20 HX	1.92mm	0.076in	0.2mm	0.008in	4	0.35	0.96	35	6.0	1.5°	SDA 4...
7005-114671	SXP 435 242 R UHM20 HX	2.42mm	0.095in	0.2mm	0.008in	4	0.35	1.21	35	7.5	1.5°	SDA 4...
7005-114679	SXP 440 142 R UHM20 HX	1.42mm	0.056in	0.4mm	0.014in	4	0.35	0.71	40	7.5	1.5°	SDA 4...
7005-114681	SXP 440 192 R UHM20 HX	1.92mm	0.076in	0.4mm	0.016in	4	0.35	0.96	40	10.0	1.5°	SDA 4...
7005-114683	SXP 440 242 R UHM20 HX	2.42mm	0.095in	0.4mm	0.016in	4	0.35	1.21	40	12.5	1.5°	SDA 4...
7005-114673	SXP 440 292 R UHM20 HX	2.92mm	0.115in	0.5mm	0.019in	4	0.35	1.46	40	9.0	1.5°	SDA 4...
7005-114675	SXP 440 342 R UHM20 HX	3.42mm	0.135in	0.5mm	0.020in	4	0.35	1.71	40	10.5	1.5°	SDA 4...
7005-114677	SXP 440 392 R UHM20 HX	3.92mm	0.154in	0.5mm	0.020in	4	0.35	1.96	40	12.0	1.5°	SDA 4...
7005-114685	SXP 448 292 R UHM20 HX	2.92mm	0.115in	0.6mm	0.024in	4	0.35	1.46	48	15.0	1.5°	SDA 4...
7005-114687	SXP 448 342 R UHM20 HX	3.42mm	0.135in	0.6mm	0.024in	4	0.35	1.71	48	17.5	1.5°	SDA 4...
7005-114689	SXP 448 392 R UHM20 HX	3.92mm	0.154in	0.6mm	0.024in	4	0.35	1.96	48	20.0	1.5°	SDA 4...
7005-114691	SXP 644 442 R UHM20 HX	4.42mm	0.174in	0.7mm	0.028in	6	0.5	2.21	44	9.0	1.5°	SDA 6...
7005-114693	SXP 644 492 R UHM20 HX	4.92mm	0.194in	0.7mm	0.028in	6	0.5	2.46	44	10.0	1.5°	SDA 6...
7005-114695	SXP 644 542 R UHM20 HX	5.42mm	0.213in	0.9mm	0.035in	6	0.5	2.71	44	11.0	1.5°	SDA 6...
7005-114697	SXP 644 592 R UHM20 HX	5.92mm	0.233in	0.9mm	0.035in	6	0.5	2.96	44	12.0	1.5°	SDA 6...
7005-114699	SXP 656 442 R UHM20 HX	4.42mm	0.174in	1.0mm	0.039in	6	0.5	2.21	56	18.0	1.5°	SDA 6...
7005-114701	SXP 656 492 R UHM20 HX	4.92mm	0.194in	1.0mm	0.039in	6	0.5	2.46	56	20.0	1.5°	SDA 6...
7005-114703	SXP 656 542 R UHM20 HX	5.42mm	0.213in	1.1mm	0.043in	6	0.5	2.71	56	22.0	1.5°	SDA 6...
7005-114705	SXP 656 592 R UHM20 HX	5.92mm	0.233in	1.1mm	0.043in	6	0.5	2.96	56	24.0	1.5°	SDA 6...
7005-114707	SXP 668 442 R UHM20 HX	4.42mm	0.174in	1.1mm	0.043in	6	0.5	2.21	68	27.0	1.5°	SDA 6...
7005-114709	SXP 668 492 R UHM20 HX	4.92mm	0.194in	1.2mm	0.047in	6	0.5	2.46	68	30.0	1.5°	SDA 6...
7005-114711	SXP 668 542 R UHM20 HX	5.42mm	0.213in	1.2mm	0.047in	6	0.5	2.71	68	33.0	1.5°	SDA 6...
7005-114713	SXP 668 592 R UHM20 HX	5.92mm	0.233in	1.2mm	0.047in	6	0.5	2.96	68	36.0	1.5°	SDA 6...
7005-114715	SXP 850 692 R UHM20 HX	6.92mm	0.272in	1.4mm	0.055in	8	0.75	3.46	50	14.0	1.5°	SDA 8...
7005-114717	SXP 850 792 R UHM20 HX	7.92mm	0.312in	1.4mm	0.055in	8	0.75	3.96	50	16.0	1.5°	SDA 8...
7005-114719	SXP 866 692 R UHM20 HX	6.92mm	0.272in	1.4mm	0.055in	8	0.75	3.46	66	28.0	1.5°	SDA 8...
7005-114721	SXP 866 792 R UHM20 HX	7.92mm	0.312in	1.5mm	0.059in	8	0.75	3.96	66	32.0	1.5°	SDA 8...
7005-114723	SXP 882 692 R UHM20 HX	6.92mm	0.272in	1.5mm	0.059in	8	0.75	3.46	82	42.0	1.5°	SDA 8...
7005-114725	SXP 882 792 R UHM20 HX	7.92mm	0.312in	1.5mm	0.059in	8	0.75	3.96	82	48.0	1.5°	SDA 8...

Standard Grade Offering: UHM20 HX - Coated Carbide for Most Applications - Other Coatings on Request

Applications Example



Ideal Cutting Materials

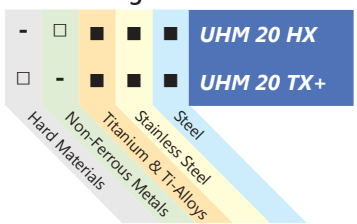

■ Preferred Application
□ Possible Application
- Application Not Recommended

Quick Change Micro Bore Tool Holder - Imperial Sizes

Shank Size	Item No.	Description	d_1	g	L_g	L_1	L_2	L_3	L_4	Tool
4mm	7005-137307	SDA 4 060 12.7	1/2"	R 1/8"	60	27	5	-	-	SD/SX...4
	7005-123909	SDA 4 060 19.05	3/4"	R 1/8"	60	27	5	-	-	SD/SX...4
	7005-111002	SDA 4 060 25.4	1.0"	R 1/8"	60	27	5	-	-	SD/SX...4
	7005-111004	SDA 4 120 12.7	1/2"	R 1/8"	120	27	5	27	5	SD/SX...4
	7005-125158	SDA 4 120 19.05	3/4"	R 1/8"	120	27	5	27	5	SD/SX...4
	7005-125163	SDA 4 120 25.4	1.00"	R 1/8"	120	27	5	27	5	SD/SX...4
6mm	7005-137308	SDA 6 065 12.7	1/2"	R 1/8"	65	27	5	-	-	SD/SX...6
	7005-123914	SDA 6 065 19.05	3/4"	R 1/8"	65	27	5	-	-	SD/SX...6
	7005-111007	SDA 6 065 25.4	1.0"	R 1/8"	65	27	5	-	-	SD/SX...6
	7005-111009	SDA 6 120 12.7	1/2"	R 1/8"	120	27	5	27	5	SD/SX...6
	7005-125169	SDA 6 120 19.05	3/4"	R 1/8"	120	27	5	27	5	SD/SX...6
	7005-125174	SDA 6 120 25.4	1.00"	R 1/8"	120	27	5	27	5	SD/SX...6
8mm	7005-123919	SDA 8 070 19.05	3/4"	R 1/8"	70	27	5	-	-	SD/SX...8
	7005-111013	SDA 8 070 25.4	1.00"	R 1/8"	70	27	5	-	-	SD/SX...8
	7005-125180	SDA 8 120 19.05	3/4"	R 1/8"	120	27	5	27	5	SD/SX...8
	7005-125185	SDA 8 120 25.4	1.00"	R 1/8"	120	27	5	27	5	SD/SX...8

For SD/SX... Micro Bore Tools




- **All holders are coolant-thru**
- **Extremely rapid tool changes**
- **No special wrenches required**
- **Repeats within .0004"**


Quick Change Micro Bore Tool Holder - Metric Sizes


Shank Size	Item No.	Description	d_1	g	L_g	L_1	L_2	L_3	L_4	Tool
4mm	7005-127909	SDA 4 060 07	7	M5	60	-	-	-	-	SD/SX...4
	7005-122083	SDA 4 060 08	8	M5	60	27	5	-	-	SD/SX...4
	7005-122030	SDA 4 060 10	10	M5	60	27	5	-	-	SD/SX...4
	7005-123906	SDA 4 060 12	12	R 1/8"	60	27	5	-	-	SD/SX...4
	7005-125154	SDA 4 060 14	14	R 1/8"	60	27	5	-	-	SD/SX...4
	7005-123907	SDA 4 060 16	16	R 1/8"	60	27	5	-	-	SD/SX...4
	7005-123908	SDA 4 060 18	18	R 1/8"	60	27	5	-	-	SD/SX...4
	7005-123910	SDA 4 060 20	20	R 1/8"	60	27	5	-	-	SD/SX...4
	7005-111000	SDA 4 060 22	22	R 1/8"	60	27	5	-	-	SD/SX...4
	7005-111001	SDA 4 060 25	25	R 1/8"	60	27	5	-	-	SD/SX...4
	7005-111003	SDA 4 060 28	28	R 1/8"	60	27	5	-	-	SD/SX...4
	7005-123001	SDA 4 100 08	8	R 1/8"	100	27	5	-	-	SD/SX...4
	7005-122082	SDA 4 100 10	10	R 1/8"	120	27	5	-	-	SD/SX...4
	7005-125153	SDA 4 120 12	12	R 1/8"	120	27	5	27	5	SD/SX...4
	7005-125155	SDA 4 120 14	14	R 1/8"	120	27	5	27	5	SD/SX...4
	7005-125156	SDA 4 120 16	16	R 1/8"	120	27	5	27	5	SD/SX...4
	7005-125158	SDA 4 120 19.05	19.05	R 1/8"	120	27	5	27	5	SD/SX...4
	7005-125159	SDA 4 120 20	20	R 1/8"	120	27	5	27	5	SD/SX...4
	7005-125160	SDA 4 120 22	22	R 1/8"	120	27	5	27	5	SD/SX...4
	7005-125162	SDA 4 120 25	25	R 1/8"	120	27	5	27	5	SD/SX...4
	7005-125163	SDA 4 120 25.4	25.4	R 1/8"	120	27	5	27	5	SD/SX...4
	7005-125164	SDA 4 120 28	28	R 1/8"	120	27	5	27	5	SD/SX...4
6mm	7005-123911	SDA 6 065 12	12	R 1/8"	65	27	5	-	-	SD/SX...6
	7005-125165	SDA 6 065 14	14	R 1/8"	65	27	5	-	-	SD/SX...6
	7005-123912	SDA 6 065 16	16	R 1/8"	65	27	5	-	-	SD/SX...6
	7005-123913	SDA 6 065 18	18	R 1/8"	65	27	5	-	-	SD/SX...6
	7005-123915	SDA 6 065 20	20	R 1/8"	65	27	5	-	-	SD/SX...6
	7005-111005	SDA 6 065 22	22	R 1/8"	65	27	5	-	-	SD/SX...6
	7005-111006	SDA 6 065 25	25	R 1/8"	65	27	5	-	-	SD/SX...6
	7005-111008	SDA 6 065 28	28	R 1/8"	65	27	5	-	-	SD/SX...6
	7005-123916	SDA 6 100 12	12	R 1/8"	100	27	5	-	-	SD/SX...6
	7005-125166	SDA 6 120 14	14	R 1/8"	120	27	5	27	5	SD/SX...6
	7005-125167	SDA 6 120 16	16	R 1/8"	120	27	5	27	5	SD/SX...6
	7005-125168	SDA 6 120 18	18	R 1/8"	120	27	5	27	5	SD/SX...6
	7005-125170	SDA 6 120 20	20	R 1/8"	120	27	5	27	5	SD/SX...6
	7005-125171	SDA 6 120 22	22	R 1/8"	120	27	5	27	5	SD/SX...6
	7005-125173	SDA 6 120 25	25	R 1/8"	120	27	5	27	5	SD/SX...6
	7005-125175	SDA 6 120 28	28	R 1/8"	120	27	5	27	5	SD/SX...6
8mm	7005-125176	SDA 8 070 14	14	R 1/8"	70	27	5	-	-	SD/SX...8
	7005-123917	SDA 8 070 16	16	R 1/8"	70	27	5	-	-	SD/SX...8
	7005-123920	SDA 8 070 20	20	R 1/8"	70	27	5	-	-	SD/SX...8
	7005-111010	SDA 8 070 22	22	R 1/8"	70	27	5	-	-	SD/SX...8
	7005-111012	SDA 8 070 25	25	R 1/8"	70	27	5	-	-	SD/SX...8
	7005-111014	SDA 8 070 28	28	R 1/8"	70	27	5	-	-	SD/SX...8
	7005-125177	SDA 8 100 14	14	R 1/8"	100	27	5	-	-	SD/SX...8
	7005-125178	SDA 8 120 16	16	R 1/8"	120	27	5	27	5	SD/SX...8
	7005-125179	SDA 8 120 18	18	R 1/8"	120	27	5	27	5	SD/SX...8
	7005-125181	SDA 8 120 20	20	R 1/8"	120	27	5	27	5	SD/SX...8
	7005-125182	SDA 8 120 22	22	R 1/8"	120	27	5	27	5	SD/SX...8
	7005-125184	SDA 8 120 25	25	R 1/8"	120	27	5	27	5	SD/SX...8
	7005-125186	SDA 8 120 28	28	R 1/8"	120	27	5	27	5	SD/SX...8

For SD/SX... Micro Bore Tools

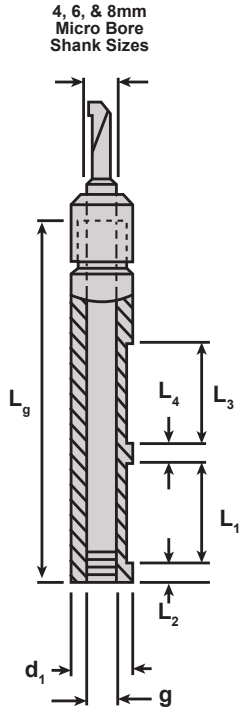

AKR Dogleg Micro Bore Holder

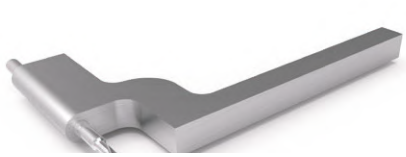

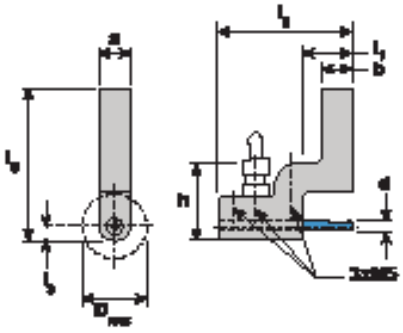

Item No.	Description	a	b	D_{max}	h	d	l_g	l_1	l_2	l_3
7005-113136	AKR M 0808x100 D4-3540	8	8	26	30	4	104	20	55	4
7005-113183	AKR M 0808x100 D4-48	8	8	26	30	4	104	30	65	4
7005-113139	AKR M 1010x100 D4-3540	10	10	26	31	4	105	20	55	5
7005-113185	AKR M 1010x100 D4-48	10	10	26	31	4	105	30	65	5
7005-113140	AKR M 1212x100 D4-3540	12	12	26	32	4	106	20	55	6
7005-113186	AKR M 1212x100 D4-48	12	12	26	32	4	106	30	65	6
7005-113141	AKR M 1/2"x100 D4-3540	.500"	.500"	26	32.5	4	106.5	20	55	6.5
7005-113187	AKR M 1/2"x100 D4-48	.500"	.500"	26	32.5	4	106.5	30	65	6.5
7005-113142	AKR M 1616x125 D4-3540	16	16	26	34	4	133	20	55	8
7005-113188	AKR M 1616x125 D4-48	16	16	26	34	4	133	30	65	8

Also Available for SD...6 / SX...6 Micro Bore Tools


Spare Clamping Nuts - 4, 6, & 8mm



Item No.	Description	Fits Holders	Diameter
7005-122031	MSP SDA 4 M	SDA 4...	M8x.5
7005-123921	MSP SDA 6 M	SDA 6...	M12x.6
7005-123922	MSP SDA 8 M	SDA 8...	M14x.75


Reduction Sleeves





Item No.	Description	d_1	d_2	L
7005-138046	MRH 1600 1230	16.0mm	12	30
7005-138047	MRH 1905 1240	.750in	12	40
7005-138050	MRH 1905 1640	.750in	16	40
7005-138048	MRH 2200 1240	22.0mm	12	40
7005-138049	MRH 2540 1240	1.00in	12	40
7005-138050	MRH 1905 1640	.750in	16	40
7005-138051	MRH 2200 1640	22.00mm	16	40
7005-138052	MRH 2540 1640	1.00in	16	40
7005-146026	MRH 2500 2040	25.00mm	20	40
7005-150030	MRH 2540 2040	1.00in	20	40


Coolant Fittings





Item No.	Description	g	G
4005-000104	FIT-MICRO-4x2-00	G1/8"	1/4" JIC
4005-000111	FIT-M5x1/4 JIC-SS	M5	1/4" JIC

Setup & Location Tool Alignment Device



Item No.	Description	Holders	G
7005-122387	MSP SDA 4X	SDA 4...	4mm
7005-123923	MSP SDA 6X	SDA 6...	6mm
7005-123924	MSP SDA 8X	SDA 8...	8mm

Retaining Rings




Item No.	Description	Holders
7005-125150	MSP SDA 4S	SDA 4...
7005-125151	MSP SDA 6S	SDA 6...
7005-125152	MSP SDA 8S	SDA 8...


Speeds And Feeds Multidec Micro Bore

MICRO BORE	Unalloyed Steel			Low-Alloy Steel			High-Alloy Steel		
Hardness (HB)-(HRC)	125-300 HB			180-250 HB			200-350 HB		
Category	I			II			III		
Machining Method	▼ Roughing	▼▼ Medium Cut	▼▼▼ Micro Finishing	▼ Roughing	▼▼ Medium Cut	▼▼▼ Micro Finishing	▼ Roughing	▼▼ Medium Cut	▼▼▼ Micro Finishing
Cutting speeds	vc(ft/min)								
Carbide grade									
UHM 20	-	-	70-390	-	-	70-330	-	-	70-300
UHM 20 HX	-	-	100-520	-	-	100-460	-	-	100-430
UHM 20 TX+	-	-	-	-	-	-	-	-	100-330

MICRO BORE	Stainless Steel			Stainless Steel			Titanium		
Hardness (HB)-(HRC)	180-220 HB			220-330 HB			-		
Category	V			VI			IV		
Machining Method	▼ Roughing	▼▼ Medium Cut	▼▼▼ Micro Finishing	▼ Roughing	▼▼ Medium Cut	▼▼▼ Micro Finishing	▼ Roughing	▼▼ Medium Cut	▼▼▼ Micro Finishing
Cutting Speeds	vc(ft/min)								
Carbide Grade									
UHM 20	-	-	70-260	-	-	70-200	-	-	70-230
UHM 20 HX	-	-	100-390	-	-	100-330	-	-	100-330
UHM 20 TX+	-	-	100-330	-	-	100-260	-	-	100-260

MICRO BORE	Aluminum			Brass			Hard Materials		
Hardness (HB)-(HRC)	60-130 HB			-			45-70 HRC		
Category	VII			VIII			X		
Machining Method	▼ Roughing	▼▼ Medium Cut	▼▼▼ Micro Finishing	▼ Roughing	▼▼ Medium Cut	▼▼▼ Micro Finishing	▼ Roughing	▼▼ Medium Cut	▼▼▼ Micro Finishing
Cutting Speeds	vc(ft/min)								
Carbide Grade									
UHM 20	-	-	160-720	-	-	100-360	-	-	-
UHM 20 HX	-	-	200-1150	-	-	160-590	-	-	-
UHM 20 TX+	-	-	-	-	-	-	-	-	50-130

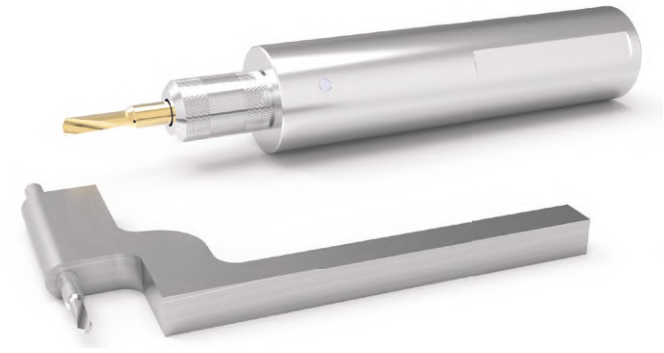

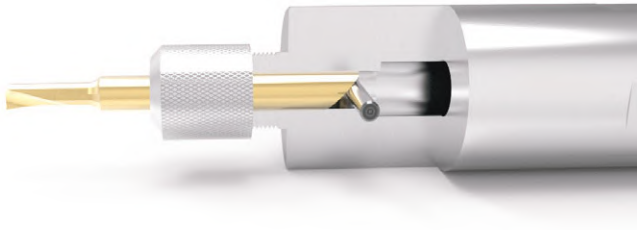

Micro Bore Feed & Depth Of Cut

SDG - SXG - SDH - SDI - SXI - SDY - SDZ

	Unalloyed Steel		Low-Alloy Steel		High-Alloy Steel		Stainless Steel		Titanium		Aluminum/ Brass		Hard Materials	
D(ipm)	f(ipm)	ap(ipm)	f(ipm)	ap(ipm)	f(ipm)	ap(ipm)	f(ipm)	ap(ipm)	f(ipm)	ap(ipm)	f(ipm)	ap(ipm)	f(ipm)	ap(ipm)
≤1	.0004-.0008	.004-.008	.0004-.0007	.004-.007	.0003-.0007	.003-.007	.0003-.0007	.003-.007	.0003-.0005	.003-.005	.0004-.001	.004-.010	0002-.0008	.002-.008
2	.0005-.0009	.005-.009	.0005-.0008	.005-.008	.0003-.0007	.003-.007	.0003-.0007	.003-.007	.0003-.0008	.003-.008	0006-.0011	.006-.011	.0003-.0008	.003-.008
3	.0006-.001	.006-.010	.0006-.0009	.006-.009	.0003-.0007	.003-.007	.0003-.0007	.003-.007	.0004-.0008	.004-.008	.0006-.0014	.006-.014	.0004-.0008	.004-.008
4	.0006-.0011	.006-.011	.0006-.001	.006-.010	.0004-.0008	.004-.008	.0004-.0008	.004-.008	.0004-.0008	.004-.008	.0006-.0014	.006-.014	.0004-.0008	.004-.008
6	.0006-.0012	.006-.012	.0006-.001	.006-.010	.0004-.0008	.004-.008	.0004-.0008	.004-.008	.0004-.001	.004-.010	.0006-.0016	.006-.016	.0004-.001	.004-.010
8	.0006-.0012	.006-.012	.0006-.001	.006-.010	.0004-.0008	.004-.008	.0004-.0008	.004-.008	.0004-.001	.004-.010	.0006-.002	.006-.020	.0004-.001	.004-.010

SDK - SDM - SDO - SDQ - SDW - SDT - SXJ - SXP

	Unalloyed Steel		Low-Alloy Steel		High-Alloy Steel		Stainless Steel		Titanium		Aluminum/ Brass		Hard Materials	
D(ipm)	f(ipm)	ap(ipm)	f(ipm)	ap(ipm)	f(ipm)	ap(ipm)	f(ipm)	ap(ipm)	f(ipm)	ap(ipm)	f(ipm)	ap(ipm)	f(ipm)	ap(ipm)
≤1	0004-.0008	.004-.008	.0004-.0007	.004-.007	.0003-.0006	.003-.006	.0003-.0006	.003-.006	.0002-.0005	.002-.005	.0003-.0005	.003-.005	.0002-.0005	.002-.005
2	.0004-.0009	.004-.009	0004-.0008	.004-.008	.0003-.0007	.003-.007	.0003-.0007	.003-.007	.0003-.0006	.003-.006	.0004-.0006	.004-.006	.0003-.0006	.003-.006
3	.0004-.001	.004-.010	.0004-.0009	.004-.009	.0004-.0008	.004-.008	.0004-.0008	.004-.008	.0003-.0007	.003-.007	.0004-.0008	.004-.008	.0003-.0007	.003-.007
4	.0004-.001	.004-.010	.0004-.001	.004-.010	.0004-.0009	.004-.009	.0004-.0009	.004-.009	.0003-.0008	.003-.008	.0004-.001	.004-.010	.0003-.0008	.003-.008
6	.0004-.001	.004-.010	.0004-.001	.004-.010	.0004-.001	.004-.010	.0004-.001	.004-.010	.0003-.0008	.003-.008	.0004-.0012	.004-.012	.0003-.0008	.003-.008
8	.0004-.001	.004-.010	.0004-.001	.004-.010	.0004-.001	.004-.010	.0004-.001	.004-.010	.0003-.0008	.003-.008	.0004-.0014	.004-.014	.0003-.0008	.003-.008

SDR - SDS

Unalloyed Steel	Low-Alloy Steel	High-Alloy Steel	Stainless Steel	Titanium	Aluminum/ Brass	Hard Materials
f(ipm)	f(ipm)	f(ipm)	f(ipm)	f(ipm)	f(ipm)	f(ipm)
.0003-.0008	.0002-.0006	.0002-.0006	.0002-.0006	.0002-.0006	.0003-.0008	.0002-.0006

Number Of Passes

Pitch	(mm)	.06-.09	0.1-0.35	0.4	0.45	0.5	0.75	0.8	1	1.25	1.5	1.75	2.25
	(tpi)	-	80/72	64	56	48/44	40/36	32	28/24	20/19	18/16	14	13/11
Steel		2-4	3-5	5-6	3-7	5-8	5-9	6-9	6-10	7-11	8-12	9-13	12-15
Stainless Steel		2-4	4-6	5-6	5-7	6-9	6-10	6-11	7-12	8-13	9-14	12-15	13-18
Titanium		2-5	4-7	5-6	5-7	6-9	6-10	6-11	7-13	8-14	9-14	12-15	13-19
Non-Ferrous metal		2-4	3-5	3-6	3-7	3-8	4-9	5-10	6-11	7-14	8-16	9-16	11-17
Hard materials		3-6	4-7	5-8	6-9	8-10	9-12	10-15	11-17	13-20	18-22	20-26	25-30



GenCut® Spot Drills

Highly repeatable, carbide ground inserts make old fashioned center drills obsolete for performing spotting operations. Precision ground carbide inserts repeat within +/- .0004", thus eliminating the need to adjust the axial location of the tool, unlike conventional spot tooling held by collets. The system also simplifies tool changing in that it only requires a torx wrench for insert removal. This eliminates the need for collet wrenches, reducing the chance of accidental tool breakage or personal injury.


Versatile tools that can:








Geometry Styles





Positive Fluted



Negative Spade

Insert Sizes:

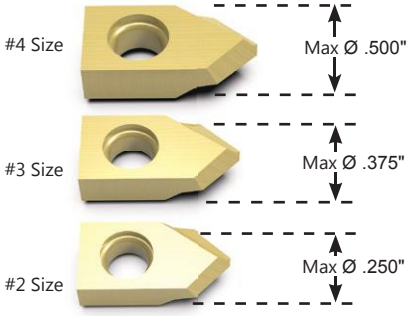




Available Web Thickness
.005" / .015" / .036"



Available Drill Point Angles
60°, 82°, 90°, 120° & 140°





60° insert

All 60° inserts feature a radial relief grind for spotting of small holes starting with an ID of .010". Note: 60° inserts do not conform to the standard insert max Ø and are intended for micro spotting only.


Reduces the Need for Collet Wrenches During Routine Tool Changes



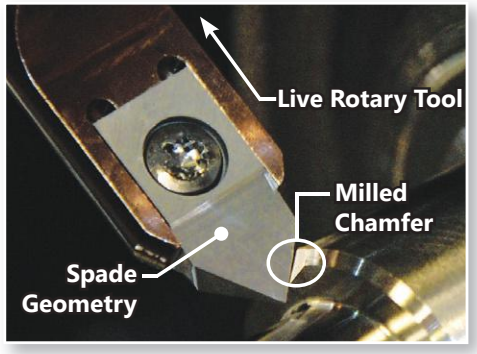

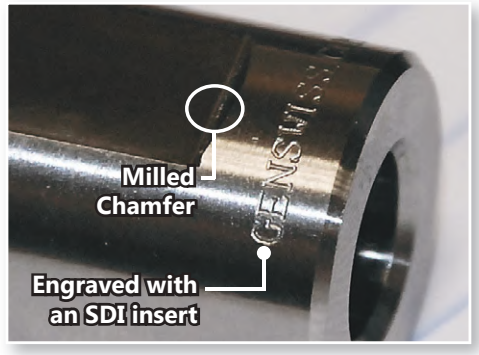

Example Ordering Nomenclature: SDI-2060-PRF-TiN Spot Drill Insert, #2 Size, 60 Degree Point Angle, Positive Geometry, Right Hand, (Fine).005" Web Thickness, TiN coated

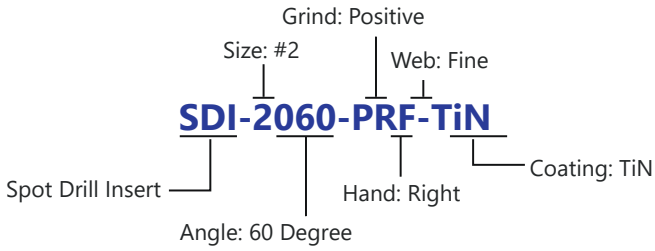


Micro Grain Carbide Spot Inserts


Size	Description	Angle	Geometry Positive/Negative	Hand Right / Left	Web Thickness F-.005" / M-.015" / H-.036"	Grade
#2	SDI-2060-	60°	P	R / L	F	MG-Uncoated TIN TLN- TiAlN ATN- AlTiN
	SDI-2082-	82°	P / N	R / L	F / M / H	
	SDI-2090-	90°	P / N	R / L	F / M / H	
	SDI-2120-	120°	P / N	R / L	F / M / H	
	SDI-2140-	140°	P / N	R / L	M / H	
#3	SDI-3060-	60°	P	R / L	F	
	SDI-3082-	82°	P / N	R / L	F / M / H	
	SDI-3090-	90°	P / N	R / L	F / M / H	
	SDI-3120-	120°	P / N	R / L	F / M / H	
	SDI-3140-	140°	P / N	R / L	M / H	
#4	SDI-4082-	82°	P / N	R / L	F / M / H	
	SDI-4090-	90°	P / N	R / L	F / M / H	
	SDI-4120-	120°	P / N	R / L	F / M / H	
	SDI-4140-	140°	P / N	R / L	M / H	

Spot Drill Holders

Size	Item No.	Description	L	D
#2 Single Ended	6060-000100	SDH-2-0250-2.0	2.0"	1/4"
	6060-000103	SDH-2-0375-2.5	2.5"	3/8"
	6060-000136	SDH-2-0500-2.5	2.5"	1/2"
	6060-000129	SDH-2-0625-3.0	3.0"	5/8"
	6060-000107	SDH-2-0750-5.0	5.0"	3/4"
	Call For Details	SDH-2-0866-5.0	5.0"	22mm
	6060-000149	SDH-2-1000-5.0	5.0"	1"
#3 Single Ended	6060-000113	SDH-3-0375-3.0	3.0"	3/8"
	6060-000114	SDH-3-0500-3.0	3.0"	1/2"
	6060-000139	SDH-3-0625-5.0	5.0"	5/8"
	6060-000117	SDH-3-0750-5.0	5.0"	3/4"
	Call For Details	SDH-3-0866-5.0	5.0"	22mm
	6060-000118	SDH-3-1000-5.0	5.0"	1"
#3 Double Ended	6060-000119	SDH-3D-625-3.0	3.0"	5/8"
	Call For Details	SDH-3D-750-4.0	4.0"	3/4"
#4 Single Ended	6060-000121	SDH-4-0375-3.5	3.5"	3/8"
	6060-000124	SDH-4-0500-3.5	3.5"	1/2"
	6060-000137	SDH-4-0625-5.0	5.0"	5/8"
	6060-000127	SDH-4-0750-5.0	5.0"	3/4"
	Call For Details	SDH-4-0866-5.0	5.0"	22mm
	6060-000128	SDH-4-1000-5.0	5.0"	1"

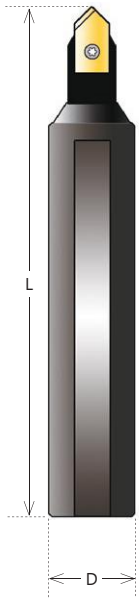

.009" True Orbital Float

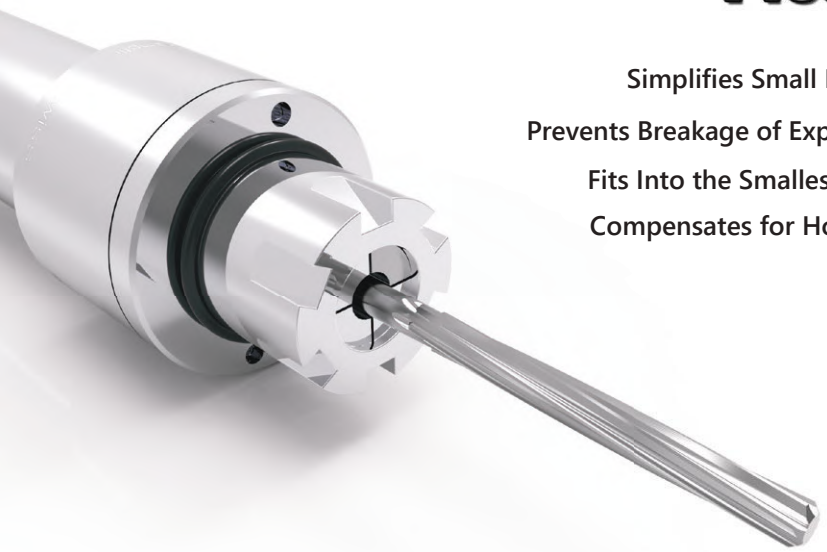


Simplifies Small Hole Reaming


Prevents Breakage of Expensive Micro Reamers

Fits Into the Smallest Swiss Machines

Compensates for Hole Misalignment

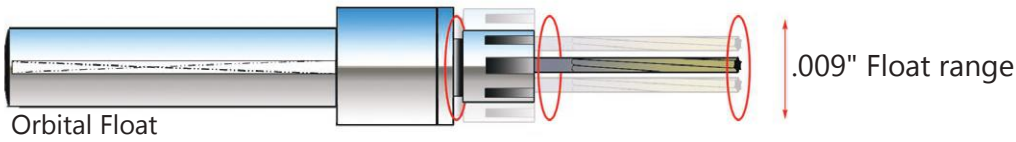

Designed with "True Orbital Float" capability, the micro reamer holder aligns the reamer perfectly to the drilled hole enabling better size control, reduces "bell-mouthing", and increases tool life.

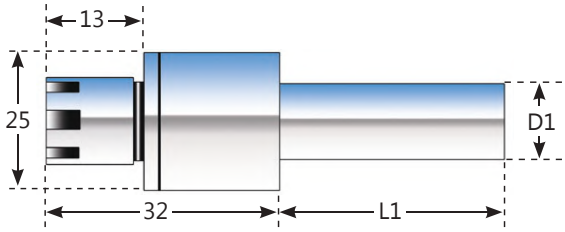


Item No.	Description	Shank (D1)	Length (L1)	Collet Size
3505-000100	RFH-08-008-042	8mm	42mm	ER8
3505-000103	RFH-08-190-070	3/4in	42mm	ER8
3505-000105	RFH-11-010-042	10mm	42mm	ER11
3505-000108	RFH-11-200-042	20mm	42mm	ER11
3505-000107	RFH-11-220-042	22mm	42mm	ER11
3505-000106	RFH-11-190-042	3/4in	42mm	ER11

Holds .5mm to 7mm diameter reamers


- Precision manufactured from K15 carbide
- Sizes ranging from .023" - .5138"
- Diameter tolerance of +.00012" / - 0.00"
- 10° left hand spiral right hand cut



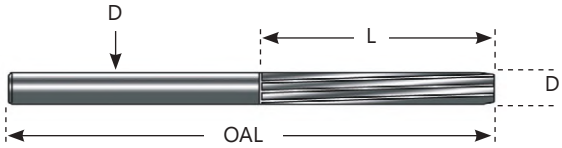


Item No.	Description	D mm	D Inch	L	OAL
3510-000176	TR-8600-0060	0.60	.0236	.281	1 5/16
3510-000387	TR-8600-0061	0.61	.0240	.281	1 5/16
3510-000215	TR-8600-0062	0.62	.0244	.281	1 5/16
3510-000278	TR-8600-0063	0.63	.0248	.281	1 5/16
3510-000152	TR-8600-0064	0.64	.0252	.281	1 5/16
3510-000153	TR-8600-0065	0.65	.0256	.281	1 5/16
3510-000168	TR-8600-0066	0.66	.0260	.281	1 5/16
3510-000343	TR-8600-0067	0.67	.0264	.281	1 5/16
3510-000324	TR-8600-0068	0.68	.0268	.281	1 5/16
3510-000176	TR-8600-0069	0.69	.0272	.281	1 5/16
3510-000217	TR-8600-0070	0.70	.0276	.281	1 5/16
3510-000202	TR-8600-0071	0.71	.0280	.281	1 5/16
3510-000100	TR-8600-0072	0.72	.0283	.281	1 5/16
3510-000364	TR-8600-0073	0.73	.0287	.281	1 5/16
3510-000102	TR-8600-0074	0.74	.0291	.281	1 5/16
3510-000256	TR-8600-0075	0.75	.0295	.281	1 5/16
Call For Details	TR-8600-0076	0.76	.0299	.281	1 5/16
3510-000178	TR-8600-0077	0.77	.0303	.281	1 5/16
3510-000103	TR-8600-0078	0.78	.0307	.281	1 5/16
3510-000104	TR-8600-0079	0.79	.0311	.281	1 5/16
3510-000301	TR-8600-0080	0.80	.0315	.281	1 5/16
Call For Details	TR-8600-0081	0.81	.0319	.281	1 5/16
3510-000197	TR-8600-0082	0.82	.0323	.281	1 5/16
3510-000376	TR-8600-0083	0.83	.0327	.281	1 5/16
3510-000388	TR-8600-0084	0.84	.0331	.281	1 5/16
3510-000200	TR-8600-0085	0.85	.0335	.281	1 5/16
3510-000294	TR-8600-0086	0.86	.0339	.281	1 5/16
Call For Details	TR-8600-0087	0.87	.0343	.281	1 5/16
3510-000377	TR-8600-0088	0.88	.0346	.281	1 5/16
3510-000203	TR-8600-0089	0.89	.0350	.281	1 5/16
3510-000105	TR-8600-0090	0.90	.0354	.281	1 5/16
3510-000394	TR-8600-0091	0.91	.0358	.281	1 5/16
3510-000392	TR-8600-0092	0.92	.0362	.281	1 5/16
3510-000323	TR-8600-0093	0.93	.0366	.281	1 5/16
Call For Details	TR-8600-0094	0.94	.0370	.281	1 5/16
Call For Details	TR-8600-0095	0.95	.0374	.281	1 5/16
3510-000160	TR-8600-0096	0.96	.0378	.281	1 5/16
Call For Details	TR-8600-0097	0.97	.0382	.281	1 5/16
3510-000296	TR-8600-0098	0.98	.0386	.281	1 5/16
3510-000297	TR-8600-0099	0.99	.0390	.281	1 5/16
3510-000298	TR-8600-0100	1.00	.0394	.281	1 5/16
3510-000187	TR-8600-0101	1.01	.0398	.281	1 5/16
3510-000289	TR-8600-0102	1.02	.0402	.281	1 5/16
Call For Details	TR-8600-0103	1.03	.0406	.281	1 5/16
3510-000107	TR-8600-0104	1.04	.0409	.281	1 5/16
3510-000108	TR-8600-0105	1.05	.0413	.281	1 5/16
3510-000367	TR-8600-0106	1.06	.0417	.406	1 9/16
3510-000368	TR-8600-0107	1.07	.0421	.406	1 9/16

Item No.	Description	D mm	D Inch	L	OAL
3510-000109	TR-8600-0108	1.08	.0425	.406	1 9/16
3510-000110	TR-8600-0109	1.09	.0429	.406	1 9/16
Call For Details	TR-8600-0110	1.10	.0433	.406	1 9/16
3510-000254	TR-8600-0111	1.11	.0437	.406	1 9/16
3510-000111	TR-8600-0112	1.12	.0441	.406	1 9/16
Call For Details	TR-8600-0113	1.13	.0445	.406	1 9/16
Call For Details	TR-8600-0114	1.14	.0449	.406	1 9/16
3510-000192	TR-8600-0115	1.15	.0453	.406	1 9/16
3510-000253	TR-8600-0116	1.16	.0457	.406	1 9/16
Call For Details	TR-8600-0117	1.17	.0461	.406	1 9/16
3510-000207	TR-8600-0118	1.18	.0465	.406	1 9/16
Call For Details	TR-8600-0119	1.19	.0469	.406	1 9/16
3510-000310	TR-8600-0120	1.20	.0472	.406	1 9/16
3510-000275	TR-8600-0121	1.21	.0476	.406	1 9/16
Call For Details	TR-8600-0122	1.22	.0480	.406	1 9/16
3510-000401	TR-8600-0123	1.23	.0484	.406	1 9/16
3510-000169	TR-8600-0124	1.24	.0488	.406	1 9/16
3510-000170	TR-8600-0125	1.25	.0492	.406	1 9/16
Call For Details	TR-8600-0126	1.26	.0496	.406	1 9/16
3510-000112	TR-8600-0127	1.27	.0500	.406	1 9/16
3510-000113	TR-8600-0128	1.28	.0504	.406	1 9/16
Call For Details	TR-8600-0129	1.29	.0508	.406	1 9/16
3510-000163	TR-8600-0130	1.30	.0512	.406	1 9/16
3510-000195	TR-8600-0131	1.31	.0516	.406	1 9/16
3510-000114	TR-8600-0132	1.32	.0520	.406	1 9/16
3510-000346	TR-8600-0133	1.33	.0524	.406	1 9/16
Call For Details	TR-8600-0134	1.34	.0528	.406	1 9/16
Call For Details	TR-8600-0135	1.35	.0531	.406	1 9/16
3510-000335	TR-8600-0136	1.36	.0535	.406	1 9/16
3510-000193	TR-8600-0137	1.37	.0539	.406	1 9/16
3510-000194	TR-8600-0138	1.38	.0543	.406	1 9/16
Call For Details	TR-8600-0139	1.39	.0547	.406	1 9/16
3510-000141	TR-8600-0140	1.40	.0551	.406	1 9/16
3510-000300	TR-8600-0141	1.41	.0555	.406	1 9/16
3510-000276	TR-8600-0142	1.42	.0559	.406	1 9/16
Call For Details	TR-8600-0143	1.43	.0563	.406	1 9/16
Call For Details	TR-8600-0144	1.44	.0567	.406	1 9/16
Call For Details	TR-8600-0145	1.45	.0571	.406	1 9/16
3510-000279	TR-8600-0146	1.46	.0575	.406	1 9/16
3510-000264	TR-8600-0147	1.47	.0579	.406	1 9/16
Call For Details	TR-8600-0148	1.48	.0583	.406	1 9/16
3510-000373	TR-8600-0149	1.49	.0587	.406	1 9/16
3510-000175	TR-8600-0150	1.50	.0591	.406	1 9/16
3510-000183	TR-8600-0151	1.51	.0594	.406	1 9/16
3510-000184	TR-8600-0152	1.52	.0598	.406	1 9/16
3510-000185	TR-8600-0153	1.53	.0602	.406	1 9/16
3510-000186	TR-8600-0154	1.54	.0606	.406	1 9/16
3510-000257	TR-8600-0155	1.55	.0610	.406	1 9/16

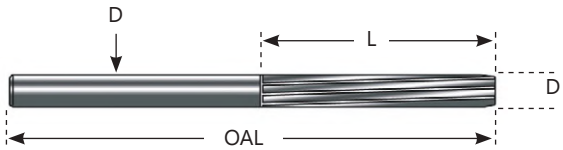

Item No.	Description	D mm	D Inch	L	OAL
3510-000309	TR-8600-0156	1.56	.0614	.437	2
3510-000191	TR-8600-0157	1.57	.0618	.437	2
3510-000190	TR-8600-0158	1.58	.0622	.437	2
3510-000115	TR-8600-0159	1.59	.0626	.437	2
3510-000158	TR-8600-0160	1.60	.0630	.437	2
3510-000116	TR-8600-0161	1.61	.0634	.437	2
3510-000248	TR-8600-0162	1.62	.0638	.437	2
3510-000177	TR-8600-0163	1.63	.0642	.437	2
3510-000180	TR-8600-0164	1.64	.0646	.437	2
3510-000117	TR-8600-0165	1.65	.0650	.437	2
Call For Details	TR-8600-0166	1.66	.0654	.437	2
Call For Details	TR-8600-0167	1.67	.0657	.437	2
3510-000344	TR-8600-0168	1.68	.0661	.437	2
3510-000345	TR-8600-0169	1.69	.0665	.437	2
3510-000342	TR-8600-0170	1.70	.0669	.437	2
3510-000118	TR-8600-0171	1.71	.0673	.437	2
3510-000336	TR-8600-0172	1.72	.0677	.437	2
3510-000144	TR-8600-0173	1.73	.0681	.437	2
Call For Details	TR-8600-0174	1.74	.0685	.437	2
3510-000150	TR-8600-0175	1.75	.0689	.437	2
3510-000361	TR-8600-0176	1.76	.0693	.437	2
Call For Details	TR-8600-0177	1.77	.0697	.437	2
3510-000363	TR-8600-0178	1.78	.0701	.437	2
3510-000378	TR-8600-0179	1.79	.0705	.437	2
3510-000277	TR-8600-0180	1.80	.0709	.437	2
Call For Details	TR-8600-0181	1.81	.0713	.437	2
Call For Details	TR-8600-0182	1.82	.0717	.437	2
3510-000208	TR-8600-0183	1.83	.0720	.437	2
Call For Details	TR-8600-0184	1.84	.0724	.437	2
3510-000370	TR-8600-0185	1.85	.0728	.437	2
3510-000381	TR-8600-0186	1.86	.0732	.437	2
3510-000382	TR-8600-0187	1.87	.0736	.437	2
Call For Details	TR-8600-0188	1.88	.0740	.437	2
3510-000155	TR-8600-0189	1.89	.0744	.437	2
3510-000360	TR-8600-0190	1.90	.0748	.437	2
3510-000156	TR-8600-0191	1.91	.0752	.437	2
Call For Details	TR-8600-0192	1.92	.0756	.437	2
3510-000157	TR-8600-0193	1.93	.0760	.437	2
3510-000119	TR-8600-0194	1.94	.0764	.437	2
3510-000230	TR-8600-0195	1.95	.0768	.437	2
3510-000120	TR-8600-0196	1.96	.0772	.437	2

Item No.	Description	D mm	D Inch	L	OAL
3510-000121	TR-8600-0197	1.97	.0776	.437	2
3510-000322	TR-8600-0198	1.98	.0780	.437	2
3510-000122	TR-8600-0199	1.99	.0783	.437	2
3510-000339	TR-8600-0200	2.00	.0787	.437	2
3510-000356	TR-8600-0201	2.01	.0791	.437	2
3510-0352	TR-8600-0202	2.02	.0795	.437	2
3510-000204	TR-8600-0203	2.03	.0799	.437	2
3510-000123	TR-8600-0204	2.04	.0803	.437	2
3510-000124	TR-8600-0205	2.05	.0807	.437	2
3510-000125	TR-8600-0206	2.06	.0811	.437	2
3510-000374	TR-8600-0207	2.07	.0815	.437	2
3510-000375	TR-8600-0208	2.08	.0819	.437	2
Call For Details	TR-8600-0209	2.09	.0823	.437	2
3510-000304	TR-8600-0210	2.10	.0827	.437	2
3510-000126	TR-8600-0211	2.11	.0831	.437	2
Call For Details	TR-8600-0212	2.12	.0835	.437	2
Call For Details	TR-8600-0213	2.13	.0839	.437	2
3510-000251	TR-8600-0214	2.14	.0843	.437	2
Call For Details	TR-8600-0215	2.15	.0846	.437	2
Call For Details	TR-8600-0216	2.16	.0850	.437	2
3510-000250	TR-8600-0217	2.17	.0854	.437	2
Call For Details	TR-8600-0218	2.18	.0858	.437	2
Call For Details	TR-8600-0219	2.19	.0862	.437	2
Call For Details	TR-8600-0220	2.20	.0866	.437	2
Call For Details	TR-8600-0221	2.21	.0870	.437	2
Call For Details	TR-8600-0222	2.22	.0874	.437	2
Call For Details	TR-8600-0223	2.23	.0878	.437	2
3510-000402	TR-8600-0224	2.24	.0882	.437	2
3510-000179	TR-8600-0225	2.25	.0886	.437	2
Call For Details	TR-8600-0226	2.26	.0890	.437	2
Call For Details	TR-8600-0227	2.27	.0894	.437	2
3510-000292	TR-8600-0228	2.28	.0898	.437	2
3510-000404	TR-8600-0229	2.29	.0902	.437	2
3510-000393	TR-8600-0230	2.30	.0906	.437	2
Call For Details	TR-8600-0231	2.31	.0909	.437	2
3510-000188	TR-8600-0232	2.32	.0913	.437	2
Call For Details	TR-8600-0233	2.33	.0917	.437	2
3510-000291	TR-8600-0234	2.34	.0921	.437	2
3510-000127	TR-8600-0235	2.35	.0925	.437	2
3510-000128	TR-8600-0236	2.36	.0929	.437	2

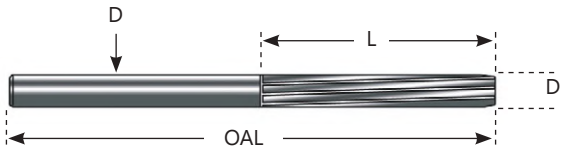

Item No.	Description	D mm	D Inch	L	OAL
3510-000129	TR-8600-0237	2.37	.0933	.593	2 1/4
3510-000130	TR-8600-0238	2.38	.0937	.593	2 1/4
3866-000351	TR-8600-0239	2.39	.0941	.593	2 1/4
3510-000145	TR-8600-0240	2.40	.0945	.593	2 1/4
3510-000347	TR-8600-0241	2.41	.0949	.593	2 1/4
Call For Details	TR-8600-0242	2.42	.0953	.593	2 1/4
Call For Details	TR-8600-0243	2.43	.0957	.593	2 1/4
3510-000371	TR-8600-0244	2.44	.0961	.593	2 1/4
3510-000196	TR-8600-0245	2.45	.0965	.593	2 1/4
3510-000189	TR-8600-0246	2.46	.0969	.593	2 1/4
3510-000287	TR-8600-0247	2.47	.0972	.593	2 1/4
3510-000288	TR-8600-0248	2.48	.0976	.593	2 1/4
3510-000131	TR-8600-0249	2.49	.0980	.593	2 1/4
3510-000159	TR-8600-0250	2.50	.0984	.593	2 1/4
3510-000365	TR-8600-0251	2.51	.0988	.593	2 1/4
Call For Details	TR-8600-0252	2.52	.0992	.593	2 1/4
Call For Details	TR-8600-0253	2.53	.0996	.593	2 1/4
3510-000182	TR-8600-0254	2.54	.1000	.593	2 1/4
3510-000198	TR-8600-0255	2.55	.1004	.593	2 1/4
3510-000398	TR-8600-0256	2.56	.1008	.593	2 1/4
Call For Details	TR-8600-0257	2.57	.1012	.593	2 1/4
3510-000399	TR-8600-0258	2.58	.1016	.593	2 1/4
3510-000400	TR-8600-0259	2.59	.1020	.593	2 1/4
Call For Details	TR-8600-0260	2.60	.1024	.593	2 1/4
3510-000341	TR-8600-0261	2.61	.1028	.593	2 1/4
3510-000340	TR-8600-0262	2.62	.1031	.593	2 1/4
3510-000132	TR-8600-0263	2.63	.1035	.593	2 1/4
Call For Details	TR-8600-0264	2.64	.1039	.593	2 1/4
Call For Details	TR-8600-0265	2.65	.1043	.593	2 1/4
Call For Details	TR-8600-0266	2.66	.1047	.593	2 1/4
3510-000173	TR-8600-0267	2.67	.1051	.593	2 1/4
3510-000174	TR-8600-0268	2.68	.1055	.593	2 1/4
3510-000379	TR-8600-0269	2.69	.1059	.593	2 1/4
Call For Details	TR-8600-0270	2.70	.1063	.593	2 1/4
Call For Details	TR-8600-0271	2.71	.1067	.593	2 1/4
3510-000359	TR-8600-0272	2.72	.1071	.593	2 1/4
Call For Details	TR-8600-0273	2.73	.1075	.593	2 1/4
Call For Details	TR-8600-0274	2.74	.1079	.593	2 1/4
Call For Details	TR-8600-0275	2.75	.1083	.593	2 1/4
Call For Details	TR-8600-0276	2.76	.1087	.593	2 1/4
3510-000143	TR-8600-0277	2.77	.1091	.593	2 1/4
3510-000362	TR-8600-0278	2.78	.1094	.593	2 1/4
3510-000380	TR-8600-0279	2.79	.1098	.593	2 1/4
3510-000372	TR-8600-0280	2.80	.1102	.593	2 1/4
Call For Details	TR-8600-0281	2.81	.1106	.593	2 1/4
Call For Details	TR-8600-0282	2.82	.1110	.593	2 1/4
3510-000151	TR-8600-0283	2.83	.1114	.593	2 1/4
3510-000316	TR-8600-0284	2.84	.1118	.593	2 1/4
Call For Details	TR-8600-0285	2.85	.1122	.593	2 1/4
Call For Details	TR-8600-0286	2.86	.1126	.593	2 1/4
Call For Details	TR-8600-0287	2.87	.1130	.593	2 1/4
3510-000263	TR-8600-0288	2.88	.1134	.593	2 1/4
Call For Details	TR-8600-0289	2.89	.1138	.593	2 1/4
Call For Details	TR-8600-0290	2.90	.1142	.593	2 1/4
Call For Details	TR-8600-0291	2.91	.1146	.593	2 1/4
3510-000295	TR-8600-0292	2.92	.1150	.593	2 1/4
3510-000302	TR-8600-0293	2.93	.1154	.593	2 1/4
Call For Details	TR-8600-0294	2.94	.1157	.593	2 1/4
3510-000233	TR-8600-0295	2.95	.1161	.593	2 1/4
3510-000234	TR-8600-0296	2.96	.1165	.593	2 1/4
Call For Details	TR-8600-0297	2.97	.1169	.593	2 1/4
3510-000252	TR-8600-0298	2.98	.1173	.593	2 1/4
3510-000210	TR-8600-0299	2.99	.1177	.593	2 1/4
3510-000255	TR-8600-0300	3.00	.1181	.593	2 1/4
3510-000231	TR-8600-0301	3.01	.1185	.593	2 1/4
3510-000337	TR-8600-0302	3.02	.1189	.593	2 1/4
3510-000338	TR-8600-0303	3.03	.1193	.593	2 1/4
Call For Details	TR-8600-0304	3.04	.1197	.593	2 1/4
3510-000134	TR-8600-0305	3.05	.1201	.593	2 1/4
3510-000354	TR-8600-0306	3.06	.1205	.593	2 1/4
Call For Details	TR-8600-0307	3.07	.1209	.593	2 1/4
Call For Details	TR-8600-0308	3.08	.1213	.593	2 1/4
3510-000232	TR-8600-0309	3.09	.1217	.593	2 1/4
3510-000315	TR-8600-0310	3.10	.1220	.593	2 1/4
3510-000135	TR-8600-0311	3.11	.1224	.593	2 1/4
3510-000355	TR-8600-0312	3.12	.1228	.593	2 1/4
3510-000235	TR-8600-0313	3.13	.1232	.593	2 1/4
3510-000236	TR-8600-0314	3.14	.1236	.593	2 1/4
Call For Details	TR-8600-0315	3.15	.1240	.593	2 1/4
3510-000136	TR-8600-0316	3.16	.1244	.593	2 1/4
3510-000357	TR-8600-0317	3.17	.1248	.593	2 1/4
3510-000138	TR-8600-0318	3.18	.1252	.593	2 1/4
3510-000206	TR-8600-0319	3.19	.1256	.593	2 1/4
3510-000161	TR-8600-0320	3.20	.1260	.593	2 1/4
3510-000171	TR-8600-0321	3.21	.1264	.593	2 1/4
3510-000303	TR-8600-0322	3.22	.1268	.593	2 1/4
3510-000172	TR-8600-0323	3.23	.1272	.593	2 1/4
3510-000201	TR-8600-0324	3.24	.1276	.593	2 1/4
3510-000282	TR-8600-0325	3.25	.1280	.593	2 1/4

Additional Sizes Available - Call for Details



ADVANCED PRECISION MICRO TOOL HOLDERS


TIR <.0002in

Perfect Concentricity For Micro Drills

Look to **GenSwiss Micro Drill Holders** for a new standard in holding micro drills in CNC Swiss Machines and Precision Lathes.

Take the **NEXT STEP** in precision micro drilling performance to meet today's ever changing demands for high performance, tight tolerance, micro parts production.



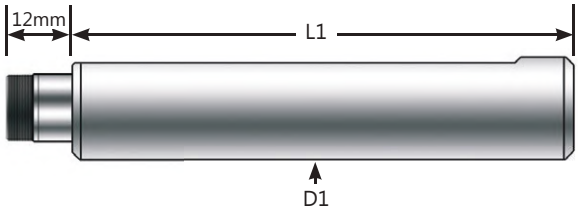

Advanced Precision Collet Sleeves

Item No.	Description	Collet	D1	L1	Nut & Wrench Included
1026-000101A	CS-CHK-127-026A	CHK	.500in	26mm	Yes
1026-000100A	CS-CHK-190-076A	CHK	.750in	76mm	Yes
1026-000102A	CS-CHK-254-121A	CHK	1.00in	121mm	Yes



Precision CHK Collets 0.5mm - 5.8mm ID

Item No.	Description	Size
1007-000100	CC-CHK-0.5	0.5mm
1007-000101	CC-CHK-0.6	0.6mm
1007-000102	CC-CHK-0.7	0.7mm
1007-000103	CC-CHK-0.8	0.8mm
1007-000104	CC-CHK-0.9	0.9mm
1007-000105	CC-CHK-1.0	1.0mm
1007-000106	CC-CHK-1.1	1.1mm
1007-000107	CC-CHK-1.2	1.2mm
1007-000108	CC-CHK-1.3	1.3mm
1007-000109	CC-CHK-1.4	1.4mm
1007-000110	CC-CHK-1.5	1.5mm
1007-000111	CC-CHK-1.6	1.6mm
1007-000112	CC-CHK-1.7	1.7mm
1007-000113	CC-CHK-1.8	1.8mm
1007-000114	CC-CHK-1.9	1.9mm
1007-000115	CC-CHK-2.0	2.0mm
1007-000116	CC-CHK-2.1	2.1mm
1007-000117	CC-CHK-2.2	2.2mm
1007-000118	CC-CHK-2.3	2.3mm

Item No.	Description	Size
1007-000119	CC-CHK-2.35	2.35mm
1007-000120	CC-CHK-2.4	2.4mm
1007-000121	CC-CHK-2.5	2.5mm
1007-000122	CC-CHK-2.6	2.6mm
1007-000123	CC-CHK-2.7	2.7mm
1007-000124	CC-CHK-2.8	2.8mm
1007-000125	CC-CHK-2.9	2.9mm
1007-000126	CC-CHK-3.0	3.0mm
1007-000127	CC-CHK-3.1	3.1mm
1007-000128	CC-CHK-3.175	1/8in
1007-000129	CC-CHK-3.2	3.2mm
1007-000130	CC-CHK-3.3	3.3mm
1007-000131	CC-CHK-3.4	3.4mm
1007-000132	CC-CHK-3.5	3.5mm
1007-000133	CC-CHK-3.6	3.6mm
1007-000134	CC-CHK-3.7	3.7mm
1007-000135	CC-CHK-3.8	3.8mm
1007-000136	CC-CHK-3.9	3.9mm
1007-000137	CC-CHK-4.0	4.0mm

Item No.	Description	Size
1007-000138	CC-CHK-4.1	4.1mm
1007-000139	CC-CHK-4.2	4.2mm
1007-000140	CC-CHK-4.3	4.3mm
1007-000141	CC-CHK-4.4	4.4mm
1007-000142	CC-CHK-4.5	4.5mm
1007-000143	CC-CHK-4.6	4.6mm
1007-000144	CC-CHK-4.7	4.7mm
1007-000145	CC-CHK-4.76	3/16in
1007-000146	CC-CHK-4.8	4.8mm
1007-000147	CC-CHK-4.9	4.9mm
1007-000148	CC-CHK-5.0	5.0mm
1007-000149	CC-CHK-5.1	5.1mm
1007-000150	CC-CHK-5.2	5.2mm
1007-000151	CC-CHK-5.3	5.3mm
1007-000152	CC-CHK-5.4	5.4mm
1007-000153	CC-CHK-5.5	5.5mm
1007-000154	CC-CHK-5.6	5.6mm
1007-000155	CC-CHK-5.7	5.7mm
1007-000156	CC-CHK-5.8	5.8mm



Nut

Item No.	Description
1017-000100	CN-CHK



Wrench

Item No.	Description
1035-000114	CW-CHK 14mm

Note: (1) Clamping Nut and Wrench Required*

COOLANT-THRU DRILLS SLEEVES


GenSwiss drill sleeves are a new product designed and manufactured by GenSwiss. These sleeves have precision ground inch and metric shanks and are a robust method for holding drills to tight tolerances. Each GenSwiss drill sleeve features coolant-thru holes, enabling coolant delivery to your coolant-thru drills. Standard tool bore sizes range from 3-8mm, but drill sleeves can be made to order.



1/8-28 BSPP Coolant Fitting

Precision Ground Shanks

3mm - 8mm Tool Bore Sizes

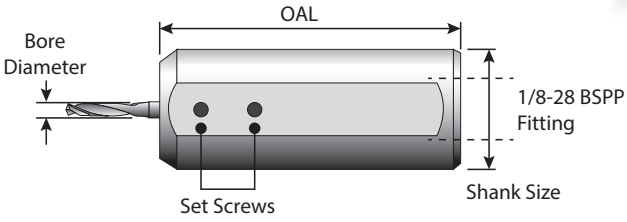

Coolant-thru Drill Sleeves

Item No.	Description	Shank Size	OAL	Set Screw	Bore Diameter
1027-000100	CTS-3.00-158760		3in	M4	3mm
1027-000101	CTS-3.18-158760		3in	M4	1/8in
1027-000102	CTS-4.00-158760		3in	M4	4mm
1027-000103	CTS-4.76-158760	**5/8in**	3in	M4	3/16in
1027-000104	CTS-6.00-158760		3in	M6	6mm
1027-000105	CTS-6.35-158760		3in	M6	1/4in
1027-000106	CTS-7.94-158760		3in	M6	5/16in
1027-000107	CTS-8.00-158760		3in	M6	8mm
1027-000108	CTS-3.00-190760		3in	M4	3mm
1027-000109	CTS-3.18-190760		3in	M4	1/8in
1027-000110	CTS-4.00-190760		3in	M4	4mm
1027-000111	CTS-4.76-190760	**3/4in**	3in	M4	3/16in
1027-000112	CTS-6.00-190760		3in	M6	6mm
1027-000113	CTS-6.35-190760		3in	M6	1/4in
1027-000114	CTS-7.94-190760		3in	M6	5/16in
1027-000115	CTS-8.00-190760		3in	M6	8mm
1027-000116	CTS-3.00-200760		3in	M4	3mm
1027-000117	CTS-3.18-200760		3in	M4	1/8in
1027-000118	CTS-4.00-200760		3in	M4	4mm
1027-000119	CTS-4.76-200760	**20mm**	3in	M4	3/16in
1027-000120	CTS-6.00-200760		3in	M6	6mm
1027-000121	CTS-6.35-200760		3in	M6	1/4in
1027-000122	CTS-7.94-200760		3in	M6	5/16in
1027-000123	CTS-8.00-200760		3in	M6	8mm
1027-000124	CTS-3.00-220760		3in	M4	3mm
1027-000125	CTS-3.18-220760		3in	M4	1/8in
1027-000126	CTS-4.00-220760		3in	M4	4mm
1027-000127	CTS-4.76-220760	**22mm**	3in	M4	3/16in
1027-000128	CTS-6.00-220760		3in	M6	6mm
1027-000129	CTS-6.35-220760		3in	M6	1/4in
1027-000130	CTS-7.94-220760		3in	M6	5/16in
1027-000131	CTS-8.00-220760		3in	M6	8mm
1027-000132	CTS-3.00-254760		3in	M4	3mm
1027-000133	CTS-3.18-254760		3in	M4	1/8in
1027-000134	CTS-4.00-254760		3in	M4	4mm
1027-000135	CTS-4.76-254760	**1in**	3in	M4	3/16in
1027-000136	CTS-6.00-254760		3in	M6	6mm
1027-000137	CTS-6.35-254760		3in	M6	1/4in
1027-000138	CTS-7.94-254760		3in	M6	5/16in
1027-000139	CTS-8.00-254760		3in	M6	8mm

MICRO DRILLS

GenSwiss Micro Drills are a cost-effective solution for hard-to-find small diameter solid carbide micro drills and micro spotting tools. Swiss-style precision ensures maximum reliability, accuracy and finish results. When consistency of hole tolerance control is paramount, look to GenSwiss Micro Drills.

Sizes From .1mm (.004in) Up To 3mm (.1181in)

Precision Ground & Finished

Makes Use Of Readily Available ER Collets



Micro Drill Series Descriptions

Series	Material	Depth	Flute Ø	Flute Length	Drill Point	Helix	# of Flutes	Tolerance	Coolant-Thru
3610	HSS	2-3 x Ø	0.20-3.0mm	0.6-5.3mm	120°	35°	2	h6	No
3620	HSS	5 x Ø	0.10-3.0mm	0.7-18.0mm	120°	24°	2	h6	No
3630	Solid Carbide	2-3 x Ø	0.20-3.0mm	0.9-7.5mm	120°	24°	2	h6	No
3680	Solid Carbide	4-5 x Ø	0.20-1.99mm	1.1-8.4mm	120°	24°	2	h6	No
3640	Solid Carbide	4-5 x Ø	0.20-1.37mm	1.1-6.7mm	120°	35°	2	h6	No
3650	Solid Carbide	5-7 x Ø	0.10-1.99mm	0.5-12.0mm	140°	35°	2	h6	No
3660	Solid Carbide	6-7 x Ø	0.50-3.0mm	3.5-21.0mm	140°	30°	2	h4	No
3670	Solid Carbide	12 x Ø	0.50-2.0mm	6.0-24.0mm	140°	30°	2	h5	No
3690	Solid Carbide	15 x Ø	2.05-3.0mm	34-50mm	140°	30°	2	h5	Yes
3700	Solid Carbide	10 x Ø	0.20-3.0mm	2.0-30.0mm	120°	None	Half Round	h5	No
3710	Solid Carbide	4-6 x Ø	0.50-1.5mm	3.0-5.0mm	140°	30°	3	h5	No
3720	Solid Carbide	4-6 x Ø	0.50-3.0mm	6.0-16.0mm	140°	30°	3	h5	No

See the following pages for part numbers and sizes

Ti-Loc Tool Holder


- **Enables micro tools to clear the guide bushing**
- **Maintains exceptional TIR at extended length**
- **Solves deflection and chatter issues**
- **Available in ER8, ER11, ER16, ER20, & ER25 sizes**



See Page 119

3610 Series - HiCo8 Cobalt - Center / Pilot / Spotting


Material	Execution	Drill Point	Flute Helix	Flutes	Hardness	Tolerance
HiCo8 HSS	Right Hand	120˚	35˚	2	HRC 65	H6

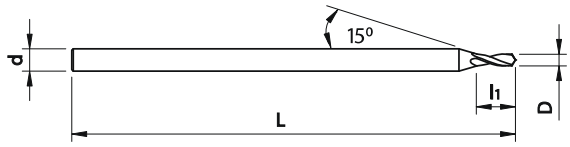

Item No.	Description	D Flute Ø (mm)	D Flute Ø (inch)	d Shank Ø (mm)	L1 Flute Length	OAL (mm)
3610-000100	GD1-020-1.5-060-H	0.20	0.0079	1.5	0.6	25
3610-000101	GD1-025-1.5-080-H	0.25	0.0098	1.5	0.8	25
3610-000102	GD1-030-1.5-090-H	0.30	0.0118	1.5	0.9	25
3610-000103	GD1-035-1.5-100-H	0.35	0.0138	1.5	1.0	25
3610-000104	GD1-040-1.5-100-H	0.40	0.0157	1.5	1.0	25
3610-000105	GD1-045-1.5-120-H	0.45	0.0177	1.5	1.2	25
3610-000106	GD1-050-1.5-120-H	0.50	0.0197	1.5	1.2	25
3610-000107	GD1-055-1.5-140-H	0.55	0.0217	1.5	1.4	25
3610-000108	GD1-060-1.5-140-H	0.60	0.0236	1.5	1.4	25
3610-000109	GD1-065-1.5-170-H	0.65	0.0256	1.5	1.7	25
3610-000110	GD1-070-1.5-170-H	0.70	0.0276	1.5	1.7	25
3610-000111	GD1-075-1.5-180-H	0.75	0.0295	1.5	1.8	25
3610-000112	GD1-080-1.5-180-H	0.80	0.0315	1.5	1.8	25
3610-000113	GD1-085-1.5-180-H	0.85	0.0335	1.5	1.8	25
3610-000114	GD1-090-1.5-180-H	0.90	0.0354	1.5	1.8	25
3610-000115	GD1-095-1.5-200-H	0.95	0.0374	1.5	2.0	25
3610-000116	GD1-100-1.5-200-H	1.00	0.0394	1.5	2.0	25
3610-000117	GD1-105-1.5-230-H	1.05	0.0413	1.5	2.3	25
3610-000118	GD1-110-1.5-230-H	1.10	0.0433	1.5	2.3	25
3610-000119	GD1-115-1.5-230-H	1.15	0.0453	1.5	2.3	25
3610-000120	GD1-120-1.5-230-H	1.20	0.0472	1.5	2.3	25
3610-000121	GD1-125-1.5-270-H	1.25	0.0492	1.5	2.7	25
3610-000122	GD1-130-1.5-270-H	1.30	0.0512	1.5	2.7	25
3610-000123	GD1-135-1.5-270-H	1.35	0.0531	1.5	2.7	25
3610-000124	GD1-140-1.5-270-H	1.40	0.0551	1.5	2.7	25
3610-000125	GD1-145-1.5-270-H	1.45	0.0571	1.5	2.7	25
3610-000126	GD1-150-2.0-300-H	1.50	0.0591	2.0	3.0	25
3610-000127	GD1-160-2.0-300-H	1.60	0.0630	2.0	3.0	25
3610-000128	GD1-170-2.0-330-H	1.70	0.0669	2.0	3.3	25
3610-000129	GD1-180-2.0-330-H	1.80	0.0709	2.0	3.3	25
3610-000130	GD1-190-2.0-300-H	1.90	0.0748	2.0	3.3	25
3610-000131	GD1-200-2.0-400-H	2.00	0.0787	2.0	4.0	25
3610-000132	GD1-210-2.5-400-H	2.10	0.0827	2.5	4.0	25
3610-000133	GD1-220-2.5-400-H	2.20	0.0866	2.5	4.0	25
3610-000134	GD1-230-2.5-460-H	2.30	0.0906	2.5	4.6	25
3610-000135	GD1-240-2.5-460-H	2.40	0.0945	2.5	4.6	25
3610-000136	GD1-250-2.5-460-H	2.50	0.0984	2.5	4.6	25
3610-000137	GD1-260-3.0-460-H	2.60	0.1024	3.0	4.6	25
3610-000138	GD1-270-3.0-530-H	2.70	0.1063	3.0	5.3	25
3610-000139	GD1-280-3.0-530-H	2.80	0.1102	3.0	5.3	25
3610-000140	GD1-290-3.0-530-H	2.90	0.1142	3.0	5.3	25
3610-000141	GD1-300-3.0-530-H	3.00	0.1181	3.0	5.3	25

3620 Series - HiCo8 Cobalt - 5 x D Depth


Material	Execution	Drill Point	Flute Helix	Flutes	Hardness	Tolerance
HiCo8 HSS	Right Hand	120˚	24˚	2	HRC 65	H6

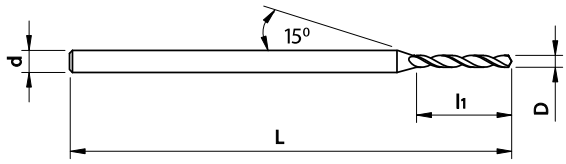

Item No.	Description	D Flute Ø (mm)	D Flute Ø (inch)	d Shank Ø (mm)	L1 Flute Length	OAL (mm)
3620-000100	GD2-010-1.0-070-H	0.10	0.0039	1.0	0.7	25
3620-000101	GD2-011-1.0-070-H	0.11	0.0043	1.0	0.7	25
3620-000102	GD2-012-1.0-070-H	0.12	0.0047	1.0	0.7	25
3620-000103	GD2-013-1.0-100-H	0.13	0.0051	1.0	1.0	25
3620-000104	GD2-014-1.0-100-H	0.14	0.0055	1.0	1.0	25
3620-000105	GD2-015-1.0-100-H	0.15	0.0059	1.0	1.0	25
3620-000106	GD2-016-1.0-140-H	0.16	0.0063	1.0	1.4	25
3620-000107	GD2-017-1.0-140-H	0.17	0.0067	1.0	1.4	25
3620-000108	GD2-018-1.0-140-H	0.18	0.0071	1.0	1.4	25
3620-000109	GD2-019-1.0-140-H	0.19	0.0075	1.0	1.4	25
3620-000110	GD2-020-1.0-180-H	0.20	0.0079	1.0	1.8	25
3620-000111	GD2-021-1.0-180-H	0.21	0.0083	1.0	1.8	25
3620-000112	GD2-022-1.0-180-H	0.22	0.0087	1.0	1.8	25
3620-000113	GD2-023-1.0-180-H	0.23	0.0091	1.0	1.8	25
3620-000114	GD2-024-1.0-180-H	0.24	0.0094	1.0	1.8	25
3620-000115	GD2-025-1.0-220-H	0.25	0.0098	1.0	2.2	25
3620-000116	GD2-026-1.0-220-H	0.26	0.0102	1.0	2.2	25
3620-000117	GD2-027-1.0-220-H	0.27	0.0106	1.0	2.2	25
3620-000118	GD2-028-1.0-220-H	0.28	0.0110	1.0	2.2	25
3620-000119	GD2-029-1.0-220-H	0.29	0.0114	1.0	2.2	25
3620-000120	GD2-030-1.0-220-H	0.30	0.0118	1.0	2.2	25
3620-000121	GD2-031-1.0-280-H	0.31	0.0122	1.0	2.8	25
3620-000122	GD2-032-1.0-280-H	0.32	0.0126	1.0	2.8	25
3620-000123	GD2-033-1.0-280-H	0.33	0.0130	1.0	2.8	25
3620-000124	GD2-034-1.0-280-H	0.34	0.0134	1.0	2.8	25
3620-000125	GD2-035-1.0-280-H	0.35	0.0138	1.0	2.8	25
3620-000126	GD2-036-1.0-280-H	0.36	0.0142	1.0	2.8	25
3620-000127	GD2-037-1.0-280-H	0.37	0.0146	1.0	2.8	25
3620-000128	GD2-038-1.0-280-H	0.38	0.0150	1.0	2.8	25
3620-000129	GD2-039-1.0-280-H	0.39	0.0154	1.0	2.8	25
3620-000130	GD2-040-1.0-320-H	0.40	0.0157	1.0	3.2	25
3620-000131	GD2-041-1.0-320-H	0.41	0.0161	1.0	3.2	25
3620-000132	GD2-042-1.0-320-H	0.42	0.0165	1.0	3.2	25
3620-000133	GD2-043-1.0-320-H	0.43	0.0169	1.0	3.2	25
3620-000134	GD2-044-1.0-320-H	0.44	0.0173	1.0	3.2	25
3620-000135	GD2-045-1.0-320-H	0.45	0.0177	1.0	3.2	25
3620-000136	GD2-046-1.0-360-H	0.46	0.0181	1.0	3.6	25
3620-000137	GD2-047-1.0-360-H	0.47	0.0185	1.0	3.6	25
3620-000138	GD2-048-1.0-360-H	0.48	0.0189	1.0	3.6	25
3620-000139	GD2-049-1.0-360-H	0.49	0.0193	1.0	3.6	25
3620-000140	GD2-050-1.0-360-H	0.50	0.0197	1.0	3.6	25
3620-000141	GD2-051-1.5-400-H	0.51	0.0201	1.5	4.0	25
3620-000142	GD2-052-1.5-400-H	0.52	0.0205	1.5	4.0	25
3620-000143	GD2-053-1.5-400-H	0.53	0.0209	1.5	4.0	25
3620-000144	GD2-054-1.5-400-H	0.54	0.0213	1.5	4.0	25
3620-000145	GD2-055-1.5-400-H	0.55	0.0217	1.5	4.0	25
3620-000146	GD2-056-1.5-450-H	0.56	0.0220	1.5	4.5	25
3620-000147	GD2-057-1.5-450-H	0.57	0.0224	1.5	4.5	25
3620-000148	GD2-058-1.5-450-H	0.58	0.0228	1.5	4.5	25

3620 Series - HiCo8 Cobalt - 5 x D Depth (Continued)


Material	Execution	Drill Point	Flute Helix	Flutes	Hardness	Tolerance
HiCo8 HSS	Right Hand	120˚	24˚	2	HRC 65	H6

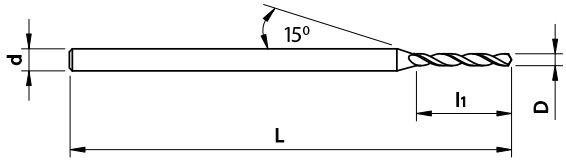

Item No.	Description	D Flute Ø (mm)	D Flute Ø (inch)	d Shank Ø (mm)	L1 Flute Length	OAL (mm)
3620-000149	GD2-059-1.5-450-H	0.59	0.0232	1.5	4.5	25
3620-000150	GD2-060-1.5-450-H	0.60	0.0236	1.5	4.5	25
3620-000151	GD2-061-1.5-470-H	0.61	0.0240	1.5	4.7	25
3620-000152	GD2-062-1.5-470-H	0.62	0.0244	1.5	4.7	25
3620-000153	GD2-063-1.5-470-H	0.63	0.0248	1.5	4.7	25
3620-000154	GD2-064-1.5-470-H	0.64	0.0252	1.5	4.7	25
3620-000155	GD2-065-1.5-470-H	0.65	0.0256	1.5	4.7	25
3620-000156	GD2-066-1.5-470-H	0.66	0.026	1.5	4.7	25
3620-000157	GD2-067-1.5-470-H	0.67	0.0264	1.5	4.7	25
3620-000158	GD2-068-1.5-520-H	0.68	0.0268	1.5	5.2	25
3620-000159	GD2-069-1.5-520-H	0.69	0.0272	1.5	5.2	25
3620-000160	GD2-070-1.5-520-H	0.70	0.0276	1.5	5.2	25
3620-000161	GD2-071-1.5-520-H	0.71	0.0280	1.5	5.2	25
3620-000162	GD2-072-1.5-520-H	0.72	0.0283	1.5	5.2	25
3620-000163	GD2-073-1.5-520-H	0.73	0.0287	1.5	5.2	25
3620-000164	GD2-074-1.5-520-H	0.74	0.0291	1.5	5.2	25
3620-000165	GD2-075-1.5-520-H	0.75	0.0295	1.5	5.2	25
3620-000166	GD2-076-1.5-550-H	0.76	0.0299	1.5	5.5	25
3620-000167	GD2-077-1.5-550-H	0.77	0.0303	1.5	5.5	25
3620-000168	GD2-078-1.5-550-H	0.78	0.0307	1.5	5.5	25
3620-000169	GD2-079-1.5-550-H	0.79	0.0311	1.5	5.5	25
3620-000170	GD2-080-1.5-550-H	0.80	0.0315	1.5	5.5	25
3620-000171	GD2-081-1.5-550-H	0.81	0.0319	1.5	5.5	25
3620-000172	GD2-082-1.5-550-H	0.82	0.0323	1.5	5.5	25
3620-000173	GD2-083-1.5-550-H	0.83	0.0327	1.5	5.5	25
3620-000174	GD2-084-1.5-550-H	0.84	0.0331	1.5	5.5	25
3620-000175	GD2-085-1.5-550-H	0.85	0.0335	1.5	5.5	25
3620-000176	GD2-086-1.5-600-H	0.86	0.0339	1.5	6.0	25
3620-000177	GD2-087-1.5-600-H	0.87	0.0343	1.5	6.0	25
3620-000178	GD2-088-1.5-600-H	0.88	0.0346	1.5	6.0	25
3620-000179	GD2-089-1.5-600-H	0.89	0.0350	1.5	6.0	25
3620-000180	GD2-090-1.5-600-H	0.90	0.0354	1.5	6.0	25
3620-000181	GD2-091-1.5-600-H	0.91	0.0358	1.5	6.0	25
3620-000182	GD2-092-1.5-600-H	0.92	0.0362	1.5	6.0	25
3620-000183	GD2-093-1.5-600-H	0.93	0.0366	1.5	6.0	25
3620-000184	GD2-094-1.5-600-H	0.94	0.0370	1.5	6.0	25
3620-000185	GD2-095-1.5-600-H	0.95	0.0374	1.5	6.0	25
3620-000186	GD2-096-1.5-650-H	0.96	0.0378	1.5	6.5	25
3620-000187	GD2-097-1.5-650-H	0.97	0.0382	1.5	6.5	25
3620-000188	GD2-098-1.5-650-H	0.98	0.0386	1.5	6.5	25
3620-000189	GD2-099-1.5-650-H	0.99	0.0390	1.5	6.5	25
3620-000190	GD2-100-1.5-650-H	1.00	0.0394	1.5	6.5	25
3620-000191	GD2-101-1.5-650-H	1.01	0.0398	1.5	6.5	25
3620-000192	GD2-102-1.5-650-H	1.02	0.0402	1.5	6.5	25
3620-000193	GD2-103-1.5-650-H	1.03	0.0406	1.5	6.5	25
3620-000194	GD2-104-1.5-650-H	1.04	0.0409	1.5	6.5	25
3620-000195	GD2-105-1.5-650-H	1.05	0.0413	1.5	6.5	25
3620-000196	GD2-106-1.5-700-H	1.06	0.0417	1.5	7.0	25
3620-000197	GD2-107-1.5-700-H	1.07	0.0421	1.5	7.0	25
3620-000198	GD2-108-1.5-700-H	1.08	0.0425	1.5	7.0	25

3620 Series - HiCo8 Cobalt - 5 x D Depth (Continued)


Material	Execution	Drill Point	Flute Helix	Flutes	Hardness	Tolerance
HiCo8 HSS	Right Hand	120˚	24˚	2	HRC 65	H6

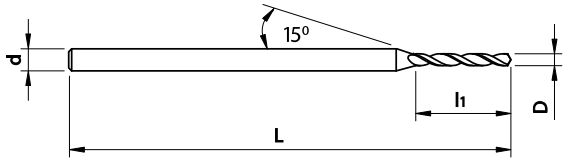

Item No.	Description	D Flute Ø (mm)	D Flute Ø (inch)	d Shank Ø (mm)	L1 Flute Length	OAL (mm)
3620-000199	GD2-109-1.5-700-H	1.09	0.0429	1.5	7.0	25
3620-000200	GD2-110-1.5-700-H	1.10	0.0433	1.5	7.0	25
3620-000201	GD2-111-1.5-700-H	1.11	0.0437	1.5	7.0	25
3620-000202	GD2-112-1.5-700-H	1.12	0.0441	1.5	7.0	25
3620-000203	GD2-113-1.5-700-H	1.13	0.0445	1.5	7.0	25
3620-000204	GD2-114-1.5-700-H	1.14	0.0449	1.5	7.0	25
3620-000205	GD2-115-1.5-700-H	1.15	0.0453	1.5	7.0	25
3620-000206	GD2-116-1.5-750-H	1.16	0.0457	1.5	7.5	25
3620-000207	GD2-117-1.5-750-H	1.17	0.0461	1.5	7.5	25
3620-000208	GD2-118-1.5-750-H	1.18	0.0465	1.5	7.5	25
3620-000209	GD2-119-1.5-750-H	1.19	0.0469	1.5	7.5	25
3620-000210	GD2-120-1.5-750-H	1.20	0.0472	1.5	7.5	25
3620-000211	GD2-121-1.5-750-H	1.21	0.0476	1.5	7.5	25
3620-000212	GD2-122-1.5-750-H	1.22	0.0480	1.5	7.5	25
3620-000213	GD2-123-1.5-750-H	1.23	0.0484	1.5	7.5	25
3620-000214	GD2-124-1.5-750-H	1.24	0.0488	1.5	7.5	25
3620-000215	GD2-125-1.5-750-H	1.25	0.0492	1.5	7.5	25
3620-000216	GD2-126-1.5-750-H	1.26	0.0496	1.5	7.5	25
3620-000217	GD2-127-1.5-750-H	1.27	0.0500	1.5	7.5	25
3620-000218	GD2-128-1.5-750-H	1.28	0.0504	1.5	7.5	25
3620-000219	GD2-129-1.5-750-H	1.29	0.0508	1.5	7.5	25
3620-000220	GD2-130-1.5-750-H	1.30	0.0512	1.5	7.5	25
3620-000221	GD2-131-1.5-850-H	1.31	0.0516	1.5	8.5	25
3620-000222	GD2-132-1.5-850-H	1.32	0.0520	1.5	8.5	25
3620-000223	GD2-133-1.5-850-H	1.33	0.0524	1.5	8.5	25
3620-000224	GD2-134-1.5-850-H	1.34	0.0528	1.5	8.5	25
3620-000225	GD2-135-1.5-850-H	1.35	0.0531	1.5	8.5	25
3620-000226	GD2-136-1.5-850-H	1.36	0.0535	1.5	8.5	25
3620-000227	GD2-137-1.5-850-H	1.37	0.0539	1.5	8.5	25
3620-000228	GD2-138-1.5-850-H	1.38	0.0543	1.5	8.5	25
3620-000229	GD2-139-1.5-850-H	1.39	0.0547	1.5	8.5	25
3620-000230	GD2-140-1.5-850-H	1.40	0.0551	1.5	8.5	25
3620-000231	GD2-141-1.5-850-H	1.41	0.0555	1.5	8.5	25
3620-000232	GD2-142-1.5-850-H	1.42	0.0559	1.5	8.5	25
3620-000233	GD2-143-1.5-850-H	1.43	0.0563	1.5	8.5	25
3620-000234	GD2-144-1.5-850-H	1.44	0.0567	1.5	8.5	25
3620-000235	GD2-145-1.5-850-H	1.45	0.0571	1.5	8.5	25
3620-000236	GD2-146-1.5-850-H	1.46	0.0575	1.5	8.5	25
3620-000237	GD2-147-1.5-850-H	1.47	0.0579	1.5	8.5	25
3620-000238	GD2-148-1.5-850-H	1.48	0.0583	1.5	8.5	25
3620-000239	GD2-149-1.5-850-H	1.49	0.0587	1.5	8.5	25
3620-000240	GD2-150-2.0-1000-H	1.50	0.0591	2.0	10.0	35
3620-000241	GD2-151-2.0-1000-H	1.51	0.0594	2.0	10.0	35
3620-000242	GD2-152-2.0-1000-H	1.52	0.0598	2.0	10.0	35
3620-000243	GD2-153-2.0-1000-H	1.53	0.0602	2.0	10.0	35
3620-000244	GD2-154-2.0-1000-H	1.54	0.0606	2.0	10.0	35
3620-000245	GD2-155-2.0-1000-H	1.55	0.0610	2.0	10.0	35
3620-000246	GD2-156-2.0-1000-H	1.56	0.0614	2.0	10.0	35
3620-000247	GD2-157-2.0-1000-H	1.57	0.0618	2.0	10.0	35

3620 Series - HiCo8 Cobalt - 5 x D Depth (Continued)


Material	Execution	Drill Point	Flute Helix	Flutes	Hardness	Tolerance
HiCo8 HSS	Right Hand	120˚	24˚	2	HRC 65	H6

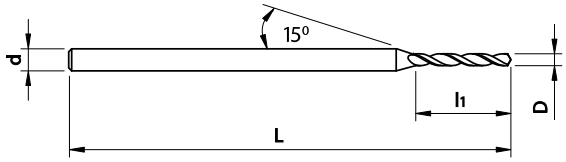

Item No.	Description	D Flute Ø (mm)	D Flute Ø (inch)	d Shank Ø (mm)	L1 Flute Length	OAL (mm)
3620-000248	GD2-158-2.0-1000-H	1.58	0.0622	2.0	10	35
3620-000249	GD2-159-2.0-1000-H	1.59	0.0626	2.0	10	35
3620-000250	GD2-160-2.0-1000-H	1.60	0.0630	2.0	10	35
3620-000251	GD2-161-2.0-1000-H	1.61	0.0634	2.0	10	35
3620-000252	GD2-162-2.0-1000-H	1.62	0.0638	2.0	10	35
3620-000253	GD2-163-2.0-1000-H	1.63	0.0642	2.0	10	35
3620-000254	GD2-164-2.0-1000-H	1.64	0.0646	2.0	10	35
3620-000255	GD2-165-2.0-1000-H	1.65	0.0650	2.0	10	35
3620-000256	GD2-166-2.0-1000-H	1.66	0.0654	2.0	10	35
3620-000257	GD2-167-2.0-1000-H	1.67	0.0657	2.0	10	35
3620-000258	GD2-168-2.0-1000-H	1.68	0.0661	2.0	10	35
3620-000259	GD2-169-2.0-1000-H	1.69	0.0665	2.0	10	35
3620-000260	GD2-170-2.0-1000-H	1.70	0.0669	2.0	10	35
3620-000261	GD2-171-2.0-1000-H	1.71	0.0673	2.0	10	35
3620-000262	GD2-172-2.0-1000-H	1.72	0.0677	2.0	10	35
3620-000263	GD2-173-2.0-1000-H	1.73	0.0681	2.0	10	35
3620-000264	GD2-174-2.0-1000-H	1.74	0.0685	2.0	10	35
3620-000265	GD2-175-2.0-1000-H	1.75	0.0689	2.0	10	35
3620-000266	GD2-176-2.0-1000-H	1.76	0.0693	2.0	10	35
3620-000267	GD2-177-2.0-1100-H	1.77	0.0697	2.0	11	35
3620-000268	GD2-178-2.0-1100-H	1.78	0.0701	2.0	11	35
3620-000269	GD2-179-2.0-1100-H	1.79	0.0705	2.0	11	35
3620-000270	GD2-180-2.0-1100-H	1.80	0.0709	2.0	11	35
3620-000271	GD2-181-2.0-1100-H	1.81	0.0713	2.0	11	35
3620-000272	GD2-182-2.0-1100-H	1.82	0.0717	2.0	11	35
3620-000273	GD2-183-2.0-1100-H	1.83	0.072	2.0	11	35
3620-000274	GD2-184-2.0-1100-H	1.84	0.0724	2.0	11	35
3620-000275	GD2-185-2.0-1100-H	1.85	0.0728	2.0	11	35
3620-000276	GD2-186-2.0-1100-H	1.86	0.0732	2.0	11	35
3620-000277	GD2-187-2.0-1100-H	1.87	0.0736	2.0	11	35
3620-000278	GD2-188-2.0-1100-H	1.88	0.0740	2.0	11	35
3620-000279	GD2-189-2.0-1100-H	1.89	0.0744	2.0	11	35
3620-000280	GD2-190-2.0-1100-H	1.90	0.0748	2.0	11	35
3620-000281	GD2-191-2.0-1100-H	1.91	0.0752	2.0	11	35
3620-000282	GD2-192-2.0-1100-H	1.92	0.0756	2.0	11	35
3620-000283	GD2-193-2.0-1100-H	1.93	0.0760	2.0	11	35
3620-000284	GD2-194-2.0-1100-H	1.94	0.0764	2.0	11	35
3620-000285	GD2-195-2.0-1100-H	1.95	0.0768	2.0	11	35
3620-000286	GD2-196-2.0-1100-H	1.96	0.0772	2.0	11	35
3620-000287	GD2-197-2.0-1100-H	1.97	0.0776	2.0	11	35
3620-000288	GD2-198-2.0-1100-H	1.98	0.0780	2.0	11	35
3620-000289	GD2-199-2.0-1100-H	1.99	0.0783	2.0	11	35
3620-000290	GD2-200-2.0-1100-H	2.00	0.0787	2.0	11	35
3620-000291	GD2-201-2.5-1200-H	2.01	0.0791	2.5	12	35
3620-000292	GD2-202-2.5-1200-H	2.02	0.0795	2.5	12	35
3620-000293	GD2-203-2.5-1200-H	2.03	0.0799	2.5	12	35
3620-000294	GD2-204-2.5-1200-H	2.04	0.0803	2.5	12	35
3620-000295	GD2-205-2.5-1200-H	2.05	0.0807	2.5	12	35
3620-000296	GD2-206-2.5-1200-H	2.06	0.0811	2.5	12	35

3620 Series - HiCo8 Cobalt - 5 x D Depth (Continued)


Material	Execution	Drill Point	Flute Helix	Flutes	Hardness	Tolerance
HiCo8 HSS	Right Hand	120˚	24˚	2	HRC 65	H6

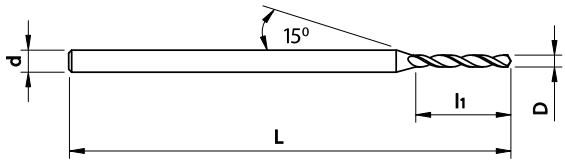

Item No.	Description	D Flute Ø (mm)	D Flute Ø (inch)	d Shank Ø (mm)	L1 Flute Length	OAL (mm)
3620-000297	GD2-207-2.5-1200-H	2.07	0.0815	2.5	12	35
3620-000298	GD2-208-2.5-1200-H	2.08	0.0819	2.5	12	35
3620-000299	GD2-209-2.5-1200-H	2.09	0.0823	2.5	12	35
3620-000300	GD2-210-2.5-1200-H	2.10	0.0827	2.5	12	35
3620-000301	GD2-211-2.5-1200-H	2.11	0.0831	2.5	12	35
3620-000302	GD2-212-2.5-1200-H	2.12	0.0835	2.5	12	35
3620-000303	GD2-213-2.5-1200-H	2.13	0.0839	2.5	12	35
3620-000304	GD2-214-2.5-1200-H	2.14	0.0843	2.5	12	35
3620-000305	GD2-215-2.5-1200-H	2.15	0.0846	2.5	12	35
3620-000306	GD2-216-2.5-1200-H	2.16	0.0850	2.5	12	35
3620-000307	GD2-217-2.5-1200-H	2.17	0.0854	2.5	12	35
3620-000308	GD2-218-2.5-1200-H	2.18	0.0858	2.5	12	35
3620-000309	GD2-219-2.5-1200-H	2.19	0.0862	2.5	12	35
3620-000310	GD2-220-2.5-1200-H	2.20	0.0866	2.5	12	35
3620-000311	GD2-221-2.5-1400-H	2.21	0.0870	2.5	14	35
3620-000312	GD2-222-2.5-1400-H	2.22	0.0874	2.5	14	35
3620-000313	GD2-223-2.5-1400-H	2.23	0.0878	2.5	14	35
3620-000314	GD2-224-2.5-1400-H	2.24	0.0882	2.5	14	35
3620-000315	GD2-225-2.5-1400-H	2.25	0.0886	2.5	14	35
3620-000316	GD2-226-2.5-1400-H	2.26	0.0890	2.5	14	35
3620-000317	GD2-227-2.5-1400-H	2.27	0.0894	2.5	14	35
3620-000318	GD2-228-2.5-1400-H	2.28	0.0898	2.5	14	35
3620-000319	GD2-229-2.5-1400-H	2.29	0.0902	2.5	14	35
3620-000320	GD2-230-2.5-1400-H	2.30	0.0906	2.5	14	35
3620-000321	GD2-231-2.5-1400-H	2.31	0.0909	2.5	14	35
3620-000322	GD2-232-2.5-1400-H	2.32	0.0913	2.5	14	35
3620-000323	GD2-233-2.5-1400-H	2.33	0.0917	2.5	14	35
3620-000324	GD2-234-2.5-1400-H	2.34	0.0921	2.5	14	35
3620-000325	GD2-235-2.5-1400-H	2.35	0.0925	2.5	14	35
3620-000326	GD2-236-2.5-1400-H	2.36	0.0929	2.5	14	35
3620-000327	GD2-237-2.5-1400-H	2.37	0.0933	2.5	14	35
3620-000328	GD2-238-2.5-1400-H	2.38	0.0937	2.5	14	35
3620-000329	GD2-239-2.5-1400-H	2.39	0.0941	2.5	14	35
3620-000330	GD2-240-2.5-1400-H	2.40	0.0945	2.5	14	35
3620-000331	GD2-241-2.5-1400-H	2.41	0.0949	2.5	14	35
3620-000332	GD2-242-2.5-1400-H	2.42	0.0953	2.5	14	35
3620-000333	GD2-243-2.5-1400-H	2.43	0.0957	2.5	14	35
3620-000334	GD2-244-2.5-1400-H	2.44	0.0961	2.5	14	35
3620-000335	GD2-245-2.5-1400-H	2.45	0.0965	2.5	14	35
3620-000336	GD2-246-2.5-1400-H	2.46	0.0969	2.5	14	35
3620-000337	GD2-247-2.5-1400-H	2.47	0.0972	2.5	14	35
3620-000338	GD2-248-2.5-1400-H	2.48	0.0976	2.5	14	35
3620-000339	GD2-249-2.5-1400-H	2.49	0.0980	2.5	14	35
3620-000340	GD2-250-2.5-1400-H	2.50	0.0984	2.5	14	35
3620-000341	GD2-251-300-1600-H	2.51	0.0988	3.0	16	40
3620-000342	GD2-252-300-1600-H	2.52	0.0992	3.0	16	40
3620-000343	GD2-253-300-1600-H	2.53	0.0996	3.0	16	40
3620-000344	GD2-254-300-1600-H	2.54	0.1000	3.0	16	40
3620-000345	GD2-255-300-1600-H	2.55	0.1004	3.0	16	40

3620 Series - HiCo8 Cobalt - 5 x D Depth (Continued)


Material	Execution	Drill Point	Flute Helix	Flutes	Hardness	Tolerance
HiCo8 HSS	Right Hand	120˚	24˚	2	HRC 65	H6

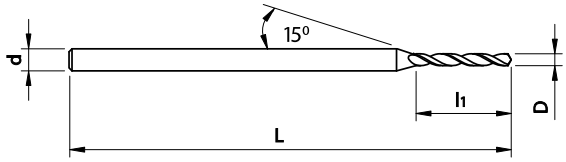

Item No.	Description	D Flute Ø (mm)	D Flute Ø (inch)	d Shank Ø (mm)	L1 Flute Length	OAL (mm)
3620-000346	GD2-256-300-1600-H	2.56	0.1008	3.0	16	40
3620-000347	GD2-257-300-1600-H	2.57	0.1012	3.0	16	40
3620-000348	GD2-258-300-1600-H	2.58	0.1016	3.0	16	40
3620-000349	GD2-259-300-1600-H	2.59	0.1020	3.0	16	40
3620-000350	GD2-260-300-1600-H	2.60	0.1024	3.0	16	40
3620-000351	GD2-261-300-1600-H	2.61	0.1028	3.0	16	40
3620-000352	GD2-262-300-1600-H	2.62	0.1031	3.0	16	40
3620-000353	GD2-263-300-1600-H	2.63	0.1035	3.0	16	40
3620-000354	GD2-264-300-1600-H	2.64	0.1039	3.0	16	40
3620-000355	GD2-265-300-1600-H	2.65	0.1043	3.0	16	40
3620-000356	GD2-266-300-1600-H	2.66	0.1047	3.0	16	40
3620-000357	GD2-267-300-1600-H	2.67	0.1051	3.0	16	40
3620-000358	GD2-268-300-1600-H	2.68	0.1055	3.0	16	40
3620-000359	GD2-269-300-1600-H	2.69	0.1059	3.0	16	40
3620-000360	GD2-270-300-1600-H	2.70	0.1063	3.0	16	40
3620-000361	GD2-271-300-1600-H	2.71	0.1067	3.0	16	40
3620-000362	GD2-272-300-1600-H	2.72	0.1071	3.0	16	40
3620-000363	GD2-273-300-1600-H	2.73	0.1075	3.0	16	40
3620-000364	GD2-274-300-1600-H	2.74	0.1079	3.0	16	40
3620-000365	GD2-275-300-1600-H	2.75	0.1083	3.0	16	40
3620-000366	GD2-276-300-1800-H	2.76	0.1087	3.0	18	40
3620-000367	GD2-277-300-1800-H	2.77	0.1091	3.0	18	40
3620-000368	GD2-278-300-1800-H	2.78	0.1094	3.0	18	40
3620-000369	GD2-279-300-1800-H	2.79	0.1098	3.0	18	40
3620-000370	GD2-280-300-1800-H	2.80	0.1102	3.0	18	40
3620-000371	GD2-281-300-1800-H	2.81	0.1106	3.0	18	40
3620-000372	GD2-282-300-1800-H	2.82	0.1110	3.0	18	40
3620-000373	GD2-283-300-1800-H	2.83	0.1114	3.0	18	40
3620-000374	GD2-284-300-1800-H	2.84	0.1118	3.0	18	40
3620-000375	GD2-285-300-1800-H	2.85	0.1122	3.0	18	40
3620-000376	GD2-286-300-1800-H	2.86	0.1126	3.0	18	40
3620-000377	GD2-287-300-1800-H	2.87	0.1130	3.0	18	40
3620-000378	GD2-288-300-1800-H	2.88	0.1134	3.0	18	40
3620-000379	GD2-289-300-1800-H	2.89	0.1138	3.0	18	40
3620-000380	GD2-290-300-1800-H	2.90	0.1142	3.0	18	40
3620-000381	GD2-291-300-1800-H	2.91	0.1146	3.0	18	40
3620-000382	GD2-292-300-1800-H	2.92	0.1150	3.0	18	40
3620-000383	GD2-293-300-1800-H	2.93	0.1154	3.0	18	40
3620-000384	GD2-294-300-1800-H	2.94	0.1157	3.0	18	40
3620-000385	GD2-295-300-1800-H	2.95	0.1161	3.0	18	40
3620-000386	GD2-296-300-1800-H	2.96	0.1165	3.0	18	40
3620-000387	GD2-297-300-1800-H	2.97	0.1169	3.0	18	40
3620-000388	GD2-298-300-1800-H	2.98	0.1173	3.0	18	40
3620-000389	GD2-299-300-1800-H	2.99	0.1177	3.0	18	40
3620-000390	GD2-300-300-1800-H	3.00	0.1181	3.0	18	40

3630 Series - Solid Carbide - Center / Pilot / Spotting


Material	Execution	Drill Point	Flute Helix	Flutes	Hardness	Tolerance
Micro Grain Carbide	Right Hand	120˚	24˚	2	HRC 65	H6

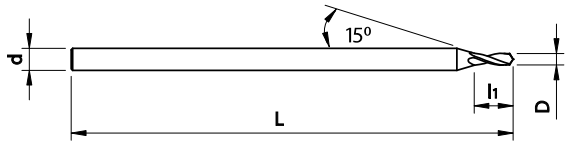

Item No.	Description	D Flute Ø (mm)	D Flute Ø (inch)	d Shank Ø (mm)	L1 Flute Length	OAL (mm)
3630-000100	GD3-020-1.5-090-C	0.20	0.0079	1.5	0.9	30
3630-000101	GD3-025-1.5-090-C	0.25	0.0098	1.5	0.9	30
3630-000102	GD3-030-1.5-090-C	0.30	0.0118	1.5	0.9	30
3630-000103	GD3-035-1.5-012-C	0.35	0.0138	1.5	1.2	30
3630-000104	GD3-040-1.5-150-C	0.40	0.0157	1.5	1.5	30
3630-000105	GD3-045-1.5-150-C	0.45	0.0177	1.5	1.5	30
3630-000106	GD3-050-1.5-190-C	0.50	0.0197	1.5	1.9	30
3630-000107	GD3-055-1.5-190-C	0.55	0.0217	1.5	1.9	30
3630-000108	GD3-060-1.5-190-C	0.60	0.0236	1.5	1.9	30
3630-000109	GD3-065-1.5-210-C	0.65	0.0256	1.5	2.1	30
3630-000110	GD3-070-1.5-240-C	0.70	0.0276	1.5	2.4	30
3630-000111	GD3-075-1.5-240-C	0.75	0.0295	1.5	2.4	30
3630-000112	GD3-080-1.5-260-C	0.80	0.0315	1.5	2.6	30
3630-000113	GD3-085-1.5-260-C	0.85	0.0335	1.5	2.6	30
3630-000114	GD3-090-1.5-300-C	0.90	0.0354	1.5	3.0	30
3630-000115	GD3-095-1.5-300-C	0.95	0.0374	1.5	3.0	30
3630-000116	GD3-100-1.5-340-C	1.00	0.0394	1.5	3.4	30
3630-000117	GD3-105-1.5-340-C	1.05	0.0413	1.5	3.4	30
3630-000118	GD3-110-1.5-380-C	1.10	0.0433	1.5	3.8	30
3630-000119	GD3-115-1.5-380-C	1.15	0.0453	1.5	3.8	30
3630-000120	GD3-120-1.5-420-C	1.20	0.0472	1.5	4.2	30
3630-000121	GD3-125-1.5-420-C	1.25	0.0492	1.5	4.2	30
3630-000122	GD3-130-1.5-420-C	1.30	0.0512	1.5	4.2	30
3630-000123	GD3-135-1.5-470-C	1.35	0.0531	1.5	4.7	30
3630-000124	GD3-140-1.5-470-C	1.40	0.0551	1.5	4.7	30
3630-000125	GD3-145-1.5-470-C	1.45	0.0571	1.5	4.7	30
3630-000126	GD3-150-2.0-470-C	1.50	0.0591	2.0	4.7	38
3630-000127	GD3-160-2.0-540-C	1.60	0.0630	2.0	5.4	38
3630-000128	GD3-170-2.0-540-C	1.70	0.0669	2.0	5.4	38
3630-000129	GD3-180-2.0-650-C	1.80	0.0709	2.0	6.5	38
3630-000130	GD3-190-2.0-650-C	1.90	0.0748	2.0	6.5	38
3630-000131	GD3-200-3.0-650-C	2.00	0.0787	3.0	6.5	38
3630-000132	GD3-210-3.0-650-C	2.10	0.0827	3.0	6.5	38
3630-000133	GD3-220-3.0-650-C	2.20	0.0866	3.0	6.5	38
3630-000134	GD3-230-3.0-650-C	2.30	0.0906	3.0	6.5	38
3630-000135	GD3-240-3.0-650-C	2.40	0.0945	3.0	6.5	38
3630-000136	GD3-250-3.0-750-C	2.50	0.0984	3.0	7.5	38
3630-000137	GD3-260-3.0-750-C	2.60	0.1024	3.0	7.5	38
3630-000138	GD3-270-3.0-750-C	2.70	0.1063	3.0	7.5	38
3630-000139	GD3-280-3.0-750-C	2.80	0.1102	3.0	7.5	38
3630-000140	GD3-290-3.0-750-C	2.90	0.1142	3.0	7.5	38
3630-000141	GD3-300-3.0-750-C	3.00	0.1181	3.0	7.5	38

3640 Series - Solid Carbide - 4 to 5 x Dia


Material	Execution	Drill Point	Flute Helix	Flutes	Hardness	Tolerance
Micro Grain Carbide	Right Hand	120˚	35˚	2	HRC 65	H6

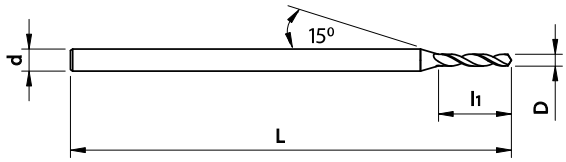

Item No.	Description	D Flute Ø (mm)	D Flute Ø (inch)	d Shank Ø (mm)	L1 Flute Length	OAL (mm)
3640-000100	GD4-020-1.0-110-C	0.20	0.0079	1.0	1.1	25
3640-000101	GD4-021-1.0-110-C	0.21	0.0083	1.0	1.1	25
3640-000102	GD4-022-1.0-110-C	0.22	0.0087	1.0	1.1	25
3640-000103	GD4-023-1.0-110-C	0.23	0.0091	1.0	1.1	25
3640-000104	GD4-024-1.0-110-C	0.24	0.0094	1.0	1.1	25
3640-000105	GD4-025-1.0-130-C	0.25	0.0098	1.0	1.3	25
3640-000106	GD4-026-1.0-130-C	0.26	0.0102	1.0	1.3	25
3640-000107	GD4-027-1.0-130-C	0.27	0.0106	1.0	1.3	25
3640-000108	GD4-028-1.0-130-C	0.28	0.0110	1.0	1.3	25
3640-000109	GD4-029-1.0-130-C	0.29	0.0114	1.0	1.3	25
3640-000110	GD4-030-1.0-160-C	0.30	0.0118	1.0	1.6	25
3640-000111	GD4-031-1.0-160-C	0.31	0.0122	1.0	1.6	25
3640-000112	GD4-032-1.0-160-C	0.32	0.0126	1.0	1.6	25
3640-000113	GD4-033-1.0-160-C	0.33	0.0130	1.0	1.6	25
3640-000114	GD4-034-1.0-160-C	0.34	0.0134	1.0	1.6	25
3640-000115	GD4-035-1.0-160-C	0.35	0.0138	1.0	1.6	25
3640-000116	GD4-036-1.0-160-C	0.36	0.0142	1.0	1.6	25
3640-000117	GD4-037-1.0-160-C	0.37	0.0146	1.0	1.6	25
3640-000118	GD4-038-1.0-160-C	0.38	0.0150	1.0	1.6	25
3640-000119	GD4-039-1.0-200-C	0.39	0.0154	1.0	2.0	25
3640-000120	GD4-040-1.0-200-C	0.40	0.0157	1.0	2.0	25
3640-000121	GD4-041-1.0-200-C	0.41	0.0161	1.0	2.0	25
3640-000122	GD4-042-1.0-200-C	0.42	0.0165	1.0	2.0	25
3640-000123	GD4-043-1.0-200-C	0.43	0.0169	1.0	2.0	25
3640-000124	GD4-044-1.0-200-C	0.44	0.0173	1.0	2.0	25
3640-000125	GD4-045-1.0-200-C	0.45	0.0177	1.0	2.0	25
3640-000126	GD4-046-1.0-200-C	0.46	0.0181	1.0	2.0	25
3640-000127	GD4-047-1.0-200-C	0.47	0.0185	1.0	2.0	25
3640-000128	GD4-048-1.0-200-C	0.48	0.0189	1.0	2.0	25
3640-000129	GD4-049-1.0-200-C	0.49	0.0193	1.0	2.0	25
3640-000130	GD4-050-1.0-240-C	0.50	0.0197	1.0	2.4	25
3640-000131	GD4-051-1.0-240-C	0.51	0.0201	1.0	2.4	25
3640-000132	GD4-052-1.0-240-C	0.52	0.0205	1.0	2.4	25
3640-000133	GD4-053-1.0-240-C	0.53	0.0209	1.0	2.4	25
3640-000134	GD4-054-1.0-280-C	0.54	0.0213	1.0	2.8	25
3640-000135	GD4-055-1.0-280-C	0.55	0.0217	1.0	2.8	25
3640-000136	GD4-056-1.0-280-C	0.56	0.0220	1.0	2.8	25
3640-000137	GD4-057-1.0-280-C	0.57	0.0224	1.0	2.8	25
3640-000138	GD4-058-1.0-280-C	0.58	0.0228	1.0	2.8	25
3640-000139	GD4-059-1.0-280-C	0.59	0.0232	1.0	2.8	25
3640-000140	GD4-060-1.5-280-C	0.60	0.0236	1.5	2.8	30
3640-000141	GD4-061-1.5-330-C	0.61	0.0240	1.5	3.3	30
3640-000142	GD4-062-1.5-330-C	0.62	0.0244	1.5	3.3	30
3640-000143	GD4-063-1.5-330-C	0.63	0.0248	1.5	3.3	30
3640-000144	GD4-064-1.5-330-C	0.64	0.0252	1.5	3.3	30
3640-000145	GD4-065-1.5-330-C	0.65	0.0256	1.5	3.3	30
3640-000146	GD4-066-1.5-330-C	0.66	0.0260	1.5	3.3	30
3640-000147	GD4-067-1.5-330-C	0.67	0.0264	1.5	3.3	30
3640-000148	GD4-068-1.5-380-C	0.68	0.0268	1.5	3.8	30
3640-000149	GD4-069-1.5-380-C	0.69	0.0272	1.5	3.8	30
3640-000150	GD4-070-1.5-380-C	0.70	0.0276	1.5	3.8	30
3640-000151	GD4-071-1.5-380-C	0.71	0.0280	1.5	3.8	30
3640-000152	GD4-072-1.5-380-C	0.72	0.0283	1.5	3.8	30
3640-000153	GD4-073-1.5-380-C	0.73	0.0287	1.5	3.8	30
3640-000154	GD4-074-1.5-380-C	0.74	0.0291	1.5	3.8	30
3640-000155	GD4-075-1.5-380-C	0.75	0.0295	1.5	3.8	30

3640 Series - Solid Carbide - 4 to 5 x Dia (Continued)


Material	Execution	Drill Point	Flute Helix	Flutes	Hardness	Tolerance
Micro Grain Carbide	Right Hand	120˚	35˚	2	HRC 65	H6

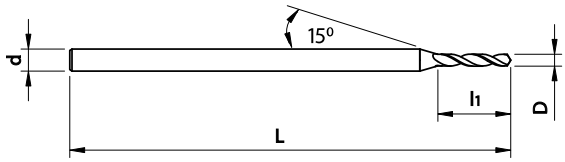

Item No.	Description	D Flute Ø (mm)	D Flute Ø (inch)	d Shank Ø (mm)	L1 Flute Length	OAL (mm)
3640-000156	GD4-076-1.5-420-C	0.76	0.0299	1.5	4.2	30
3640-000157	GD4-077-1.5-420-C	0.77	0.0303	1.5	4.2	30
3640-000158	GD4-078-1.5-420-C	0.78	0.0307	1.5	4.2	30
3640-000159	GD4-079-1.5-420-C	0.79	0.0311	1.5	4.2	30
3640-000160	GD4-080-1.5-440-C	0.80	0.0315	1.5	4.4	30
3640-000161	GD4-081-1.5-440-C	0.81	0.0319	1.5	4.4	30
3640-000162	GD4-082-1.5-440-C	0.82	0.0323	1.5	4.4	30
3640-000163	GD4-083-1.5-440-C	0.83	0.0327	1.5	4.4	30
3640-000164	GD4-084-1.5-440-C	0.84	0.0331	1.5	4.4	30
3640-000165	GD4-085-1.5-440-C	0.85	0.0335	1.5	4.4	30
3640-000166	GD4-086-1.5-480-C	0.86	0.0339	1.5	4.8	30
3640-000167	GD4-087-1.5-480-C	0.87	0.0343	1.5	4.8	30
3640-000168	GD4-088-1.5-480-C	0.88	0.0346	1.5	4.8	30
3640-000169	GD4-089-1.5-480-C	0.89	0.0350	1.5	4.8	30
3640-000170	GD4-090-1.5-480-C	0.90	0.0354	1.5	4.8	30
3640-000171	GD4-091-1.5-480-C	0.91	0.0358	1.5	4.8	30
3640-000172	GD4-092-1.5-480-C	0.92	0.0362	1.5	4.8	30
3640-000173	GD4-093-1.5-480-C	0.93	0.0366	1.5	4.8	30
3640-000174	GD4-094-1.5-480-C	0.94	0.0370	1.5	4.8	30
3640-000175	GD4-095-1.5-480-C	0.95	0.0374	1.5	4.8	30
3640-000176	GD4-096-1.5-480-C	0.96	0.0378	1.5	4.8	30
3640-000177	GD4-097-1.5-480-C	0.97	0.0382	1.5	4.8	30
3640-000178	GD4-098-1.5-480-C	0.98	0.0386	1.5	4.8	30
3640-000179	GD4-099-1.5-480-C	0.99	0.0390	1.5	4.8	30
3640-000180	GD4-100-1.5-480-C	1.00	0.0394	1.5	4.8	30
3640-000181	GD4-101-1.5-480-C	1.01	0.0398	1.5	4.8	30
3640-000182	GD4-102-1.5-480-C	1.02	0.0402	1.5	4.8	30
3640-000183	GD4-103-1.5-480-C	1.03	0.0406	1.5	4.8	30
3640-000184	GD4-104-1.5-480-C	1.04	0.0409	1.5	4.8	30
3640-000185	GD4-105-1.5-480-C	1.05	0.0413	1.5	4.8	30
3640-000186	GD4-106-1.5-480-C	1.06	0.0417	1.5	4.8	30
3640-000187	GD4-107-1.5-480-C	1.07	0.0421	1.5	4.8	30
3640-000188	GD4-108-1.5-480-C	1.08	0.0425	1.5	4.8	30
3640-000189	GD4-109-1.5-480-C	1.09	0.0429	1.5	4.8	30
3640-000190	GD4-110-1.5-540-C	1.10	0.0433	1.5	5.4	30
3640-000191	GD4-111-1.5-540-C	1.11	0.0437	1.5	5.4	30
3640-000192	GD4-112-1.5-540-C	1.12	0.0441	1.5	5.4	30
3640-000193	GD4-113-1.5-540-C	1.13	0.0445	1.5	5.4	30
3640-000194	GD4-114-1.5-540-C	1.14	0.0449	1.5	5.4	30
3640-000195	GD4-115-1.5-540-C	1.15	0.0453	1.5	5.4	30
3640-000196	GD4-116-1.5-540-C	1.16	0.0457	1.5	5.4	30
3640-000197	GD4-117-1.5-540-C	1.17	0.0461	1.5	5.4	30
3640-000198	GD4-118-1.5-540-C	1.18	0.0465	1.5	5.4	30
3640-000199	GD4-119-1.5-540-C	1.19	0.0469	1.5	5.4	30
3640-000200	GD4-120-1.5-600-C	1.20	0.0472	1.5	6.0	30
3640-000201	GD4-121-1.5-600-C	1.21	0.0476	1.5	6.0	30
3640-000202	GD4-122-1.5-600-C	1.22	0.0480	1.5	6.0	30
3640-000203	GD4-123-1.5-600-C	1.23	0.0484	1.5	6.0	30
3640-000204	GD4-124-1.5-600-C	1.24	0.0488	1.5	6.0	30
3640-000205	GD4-125-1.5-600-C	1.25	0.0492	1.5	6.0	30
3640-000206	GD4-126-1.5-600-C	1.26	0.0496	1.5	6.0	30
3640-000207	GD4-127-1.5-600-C	1.27	0.0500	1.5	6.0	30
3640-000208	GD4-128-1.5-600-C	1.28	0.0504	1.5	6.0	30
3640-000209	GD4-129-1.5-600-C	1.29	0.0508	1.5	6.0	30
3640-000210	GD4-130-1.5-670-C	1.30	0.0512	1.5	6.7	30

3640 Series - Solid Carbide - 4 to 5 x Dia (Continued)


Material	Execution	Drill Point	Flute Helix	Flutes	Hardness	Tolerance
Micro Grain Carbide	Right Hand	120˚	35˚	2	HRC 65	H6

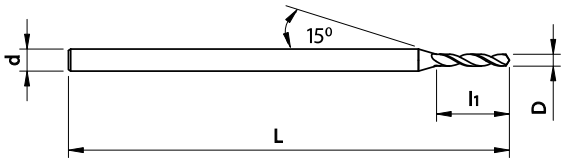

Item No.	Description	D Flute Ø (mm)	D Flute Ø (inch)	d Shank Ø (mm)	L1 Flute Length	OAL (mm)
3640-000211	GD4-131-1.5-670-C	1.31	0.0516	1.5	6.7	30
3640-000212	GD4-132-1.5-670-C	1.32	0.0520	1.5	6.7	30
3640-000213	GD4-133-1.5-670-C	1.33	0.0524	1.5	6.7	30
3640-000214	GD4-134-1.5-670-C	1.34	0.0528	1.5	6.7	30
3640-000215	GD4-135-1.5-670-C	1.35	0.0531	1.5	6.7	30
3640-000216	GD4-136-1.5-670-C	1.36	0.0535	1.5	6.7	30
3640-000217	GD4-137-1.5-670-C	1.37	0.0539	1.5	6.7	30
3640-000218	GD4-138-1.5-670-C	1.38	0.0542	1.5	6.7	30
3640-000219	GD4-139-1.5-670-C	1.39	0.0546	1.5	6.7	30
3640-000220	GD4-140-1.5-670-C	1.40	0.0550	1.5	6.7	30
3640-000221	GD4-141-1.5-670-C	1.41	0.0554	1.5	6.7	30
3640-000222	GD4-142-1.5-670-C	1.42	0.0558	1.5	6.7	30
3640-000223	GD4-143-1.5-670-C	1.43	0.0561	1.5	6.7	30
3640-000224	GD4-144-1.5-670-C	1.44	0.0565	1.5	6.7	30
3640-000225	GD4-145-1.5-670-C	1.45	0.0569	1.5	6.7	30
3640-000226	GD4-146-1.5-670-C	1.46	0.0573	1.5	6.7	30
3640-000227	GD4-147-1.5-670-C	1.47	0.0577	1.5	6.7	30
3640-000228	GD4-148-1.5-670-C	1.48	0.0581	1.5	6.7	30
3640-000229	GD4-149-1.5-670-C	1.49	0.0585	1.5	6.7	30
3640-000230	GD4-150-2.0-720-C	1.50	0.0589	2.0	7.2	30
3640-000231	GD4-151-2.0-720-C	1.51	0.0593	2.0	7.2	30
3640-000232	GD4-152-2.0-720-C	1.52	0.0597	2.0	7.2	30
3640-000233	GD4-153-2.0-720-C	1.53	0.0601	2.0	7.2	30
3640-000234	GD4-154-2.0-720-C	1.54	0.0605	2.0	7.2	30
3640-000235	GD4-155-2.0-720-C	1.55	0.0609	2.0	7.2	30
3640-000236	GD4-156-2.0-720-C	1.56	0.0612	2.0	7.2	30
3640-000237	GD4-157-2.0-720-C	1.57	0.0616	2.0	7.2	30
3640-000238	GD4-158-2.0-720-C	1.58	0.0620	2.0	7.2	30
3640-000239	GD4-159-2.0-720-C	1.59	0.0624	2.0	7.2	30
3640-000240	GD4-160-2.0-720-C	1.60	0.0628	2.0	7.2	30
3640-000241	GD4-161-2.0-720-C	1.61	0.0632	2.0	7.2	30
3640-000242	GD4-162-2.0-720-C	1.62	0.0636	2.0	7.2	30
3640-000243	GD4-163-2.0-720-C	1.63	0.0640	2.0	7.2	30
3640-000244	GD4-164-2.0-720-C	1.64	0.0644	2.0	7.2	30
3640-000245	GD4-165-2.0-720-C	1.65	0.0648	2.0	7.2	30
3640-000246	GD4-166-2.0-720-C	1.66	0.0652	2.0	7.2	30
3640-000247	GD4-167-2.0-720-C	1.67	0.0656	2.0	7.2	30
3640-000248	GD4-168-2.0-720-C	1.68	0.0660	2.0	7.2	30
3640-000249	GD4-169-2.0-720-C	1.69	0.0664	2.0	7.2	30
3640-000250	GD4-170-2.0-720-C	1.70	0.0667	2.0	7.2	30
3640-000251	GD4-171-2.0-720-C	1.71	0.0671	2.0	7.2	30
3640-000252	GD4-172-2.0-720-C	1.72	0.0675	2.0	7.2	30
3640-000253	GD4-173-2.0-720-C	1.73	0.0679	2.0	7.2	30
3640-000254	GD4-174-2.0-720-C	1.74	0.0683	2.0	7.2	30
3640-000255	GD4-175-2.0-720-C	1.75	0.0687	2.0	7.2	30
3640-000256	GD4-176-2.0-720-C	1.76	0.0691	2.0	7.2	30
3640-000257	GD4-177-2.0-720-C	1.77	0.0695	2.0	7.2	30
3640-000258	GD4-178-2.0-720-C	1.78	0.0699	2.0	7.2	30
3640-000259	GD4-179-2.0-720-C	1.79	0.0703	2.0	7.2	30
3640-000260	GD4-180-2.0-840-C	1.80	0.0707	2.0	8.4	30
3640-000261	GD4-181-2.0-840-C	1.81	0.0711	2.0	8.4	30
3640-000262	GD4-182-2.0-840-C	1.82	0.0715	2.0	8.4	30
3640-000263	GD4-183-2.0-840-C	1.83	0.0718	2.0	8.4	30
3640-000264	GD4-184-2.0-840-C	1.84	0.0722	2.0	8.4	30
3640-000265	GD4-185-2.0-840-C	1.85	0.0726	2.0	8.4	30
3640-000266	GD4-186-2.0-840-C	1.86	0.0730	2.0	8.4	30

3640 Series - Solid Carbide - 4 to 5 x Dia (Continued)


Material	Execution	Drill Point	Flute Helix	Flutes	Hardness	Tolerance
Micro Grain Carbide	Right Hand	120˚	35˚	2	HRC 65	H6

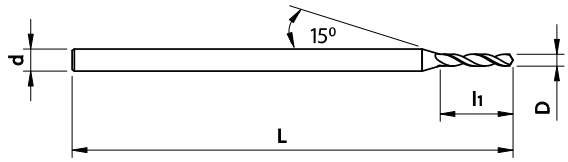

Item No.	Description	D Flute Ø (mm)	D Flute Ø (inch)	d Shank Ø (mm)	L1 Flute Length	OAL (mm)
3640-000267	GD4-187-2.0-840-C	1.87	0.0734	2.0	8.4	30
3640-000268	GD4-188-2.0-840-C	1.88	0.0738	2.0	8.4	30
3640-000269	GD4-189-2.0-840-C	1.89	0.0742	2.0	8.4	30
3640-000270	GD4-190-2.0-840-C	1.90	0.0746	2.0	8.4	30
3640-000271	GD4-191-2.0-840-C	1.91	0.0750	2.0	8.4	30
3640-000272	GD4-192-2.0-840-C	1.92	0.0754	2.0	8.4	30
3640-000273	GD4-193-2.0-840-C	1.93	0.0758	2.0	8.4	30
3640-000274	GD4-194-2.0-840-C	1.94	0.0762	2.0	8.4	30
3640-000275	GD4-195-2.0-840-C	1.95	0.0766	2.0	8.4	30
3640-000276	GD4-196-2.0-840-C	1.96	0.0770	2.0	8.4	30
3640-000277	GD4-197-2.0-840-C	1.97	0.0773	2.0	8.4	30
3640-000278	GD4-198-2.0-840-C	1.98	0.0777	2.0	8.4	30
3640-000279	GD4-199-2.0-840-C	1.99	0.0781	2.0	8.4	30
3640-000280	GD4-200-3.0-1200-C	2.00	0.0785	3.0	12.0	30
3640-000281	GD4-201-3.0-1200-C	2.01	0.0789	3.0	12.0	30
3640-000282	GD4-202-3.0-1200-C	2.02	0.0793	3.0	12.0	30
3640-000283	GD4-203-3.0-1200-C	2.03	0.0797	3.0	12.0	30
3640-000284	GD4-204-3.0-1200-C	2.04	0.0801	3.0	12.0	30
3640-000285	GD4-205-3.0-1200-C	2.05	0.0805	3.0	12.0	30
3640-000286	GD4-206-3.0-1200-C	2.06	0.0809	3.0	12.0	30
3640-000287	GD4-207-3.0-1200-C	2.07	0.0813	3.0	12.0	30
3640-000288	GD4-208-3.0-1200-C	2.08	0.0817	3.0	12.0	30
3640-000289	GD4-209-3.0-1200-C	2.09	0.0821	3.0	12.0	30
3640-000290	GD4-210-3.0-1200-C	2.10	0.0824	3.0	12.0	30
3640-000291	GD4-211-3.0-1200-C	2.11	0.0828	3.0	12.0	30
3640-000292	GD4-212-3.0-1200-C	2.12	0.0832	3.0	12.0	30
3640-000293	GD4-213-3.0-1200-C	2.13	0.0836	3.0	12.0	30
3640-000294	GD4-214-3.0-1200-C	2.14	0.0840	3.0	12.0	30
3640-000295	GD4-215-3.0-1200-C	2.15	0.0844	3.0	12.0	30
3640-000296	GD4-216-3.0-1200-C	2.16	0.0848	3.0	12.0	30
3640-000297	GD4-217-3.0-1200-C	2.17	0.0852	3.0	12.0	30
3640-000298	GD4-218-3.0-1200-C	2.18	0.0856	3.0	12.0	30
3640-000299	GD4-219-3.0-1200-C	2.19	0.0860	3.0	12.0	30
3640-000300	GD4-220-3.0-1200-C	2.20	0.0864	3.0	12.0	30
3640-000301	GD4-221-3.0-1200-C	2.21	0.0868	3.0	12.0	30
3640-000302	GD4-222-3.0-1200-C	2.22	0.0872	3.0	12.0	30
3640-000303	GD4-223-3.0-1200-C	2.23	0.0876	3.0	12.0	30
3640-000304	GD4-224-3.0-1200-C	2.24	0.0879	3.0	12.0	30
3640-000305	GD4-225-3.0-1200-C	2.25	0.0883	3.0	12.0	30
3640-000306	GD4-226-3.0-1200-C	2.26	0.0887	3.0	12.0	30
3640-000307	GD4-227-3.0-1200-C	2.27	0.0891	3.0	12.0	30
3640-000308	GD4-228-3.0-1200-C	2.28	0.0895	3.0	12.0	30
3640-000309	GD4-229-3.0-1200-C	2.29	0.0899	3.0	12.0	30
3640-000310	GD4-230-3.0-1200-C	2.30	0.0903	3.0	12.0	30
3640-000311	GD4-231-3.0-1200-C	2.31	0.0907	3.0	12.0	30
3640-000312	GD4-232-3.0-1200-C	2.32	0.0911	3.0	12.0	30
3640-000313	GD4-233-3.0-1200-C	2.33	0.0915	3.0	12.0	30
3640-000314	GD4-234-3.0-1200-C	2.34	0.0919	3.0	12.0	30
3640-000315	GD4-235-3.0-1200-C	2.35	0.0923	3.0	12.0	30
3640-000316	GD4-236-3.0-1200-C	2.36	0.0927	3.0	12.0	30
3640-000317	GD4-237-3.0-1200-C	2.37	0.0931	3.0	12.0	30
3640-000318	GD4-238-3.0-1200-C	2.38	0.0934	3.0	12.0	30
3640-000319	GD4-239-3.0-1200-C	2.39	0.0938	3.0	12.0	30
3640-000320	GD4-240-3.0-1200-C	2.40	0.0942	3.0	12.0	30
3640-000321	GD4-241-3.0-1200-C	2.41	0.0946	3.0	12.0	30
3640-000322	GD4-242-3.0-1200-C	2.42	0.0950	3.0	12.0	30

3650 Series - Solid Carbide - 5 to 7 x Dia


Material	Execution	Drill Point	Flute Helix	Flutes	Hardness	Tolerance
Micro Grain Carbide	Right Hand	120˚	35˚	2	HRC 65	H6

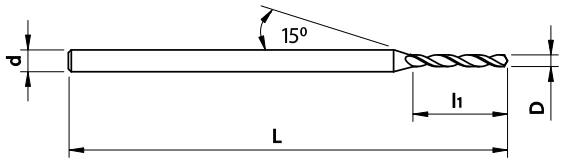

Item No.	Description	D Flute Ø (mm)	D Flute Ø (inch)	d Shank Ø (mm)	L1 Flute Length	OAL (mm)
3650-000100	GD5-010-1.0-050-C	0.10	0.0039	1.0	0.5	25
3650-000101	GD5-011-1.0-050-C	0.11	0.0043	1.0	0.5	25
3650-000102	GD5-012-1.0-050-C	0.12	0.0047	1.0	0.5	25
3650-000103	GD5-013-1.0-060-C	0.13	0.0051	1.0	0.6	25
3650-000104	GD5-014-1.0-070-C	0.14	0.0055	1.0	0.7	25
3650-000105	GD5-015-1.0-100-C	0.15	0.0059	1.0	1.0	25
3650-000106	GD5-016-1.0-100-C	0.16	0.0063	1.0	1.0	25
3650-000107	GD5-017-1.0-100-C	0.17	0.0067	1.0	1.0	25
3650-000108	GD5-018-1.0-100-C	0.18	0.0071	1.0	1.0	25
3650-000109	GD5-019-1.0-100-C	0.19	0.0075	1.0	1.0	25
3650-000110	GD5-020-1.0-180-C	0.20	0.0079	1.0	1.8	25
3650-000111	GD5-021-1.0-180-C	0.21	0.0083	1.0	1.8	25
3650-000112	GD5-022-1.0-180-C	0.22	0.0087	1.0	1.8	25
3650-000113	GD5-023-1.0-180-C	0.23	0.0091	1.0	1.8	25
3650-000114	GD5-024-1.0-180-C	0.24	0.0094	1.0	1.8	25
3650-000115	GD5-025-1.0-220-C	0.25	0.0098	1.0	2.2	25
3650-000116	GD5-026-1.0-220-C	0.26	0.0102	1.0	2.2	25
3650-000117	GD5-027-1.0-220-C	0.27	0.0106	1.0	2.2	25
3650-000118	GD5-028-1.0-220-C	0.28	0.0110	1.0	2.2	25
3650-000119	GD5-029-1.0-220-C	0.29	0.0114	1.0	2.2	25
3650-000120	GD5-030-1.0-220-C	0.30	0.0118	1.0	2.2	25
3650-000121	GD5-031-1.0-280-C	0.31	0.0122	1.0	2.8	25
3650-000122	GD5-032-1.0-280-C	0.32	0.0126	1.0	2.8	25
3650-000123	GD5-033-1.0-280-C	0.33	0.0130	1.0	2.8	25
3650-000124	GD5-034-1.0-280-C	0.34	0.0134	1.0	2.8	25
3650-000125	GD5-035-1.0-280-C	0.35	0.0138	1.0	2.8	25
3650-000126	GD5-036-1.0-280-C	0.36	0.0142	1.0	2.8	25
3650-000127	GD5-037-1.0-280-C	0.37	0.0146	1.0	2.8	25
3650-000128	GD5-038-1.0-280-C	0.38	0.0150	1.0	2.8	25
3650-000129	GD5-039-1.0-360-C	0.39	0.0154	1.0	3.6	25
3650-000130	GD5-040-1.0-360-C	0.40	0.0157	1.0	3.6	25
3650-000131	GD5-041-1.0-360-C	0.41	0.0161	1.0	3.6	25
3650-000132	GD5-042-1.0-360-C	0.42	0.0165	1.0	3.6	25
3650-000133	GD5-043-1.0-360-C	0.43	0.0169	1.0	3.6	25
3650-000134	GD5-044-1.0-360-C	0.44	0.0173	1.0	3.6	25
3650-000135	GD5-045-1.0-360-C	0.45	0.0177	1.0	3.6	25
3650-000136	GD5-046-1.0-360-C	0.46	0.0181	1.0	3.6	25
3650-000137	GD5-047-1.0-360-C	0.47	0.0185	1.0	3.6	25
3650-000138	GD5-048-1.0-360-C	0.48	0.0189	1.0	3.6	25
3650-000139	GD5-049-1.0-400-C	0.49	0.0193	1.0	4.0	25
3650-000140	GD5-050-1.0-400-C	0.50	0.0197	1.0	4.0	25
3650-000141	GD5-051-1.0-400-C	0.51	0.0201	1.0	4.0	25
3650-000142	GD5-052-1.0-400-C	0.52	0.0205	1.0	4.0	25
3650-000143	GD5-053-1.0-400-C	0.53	0.0209	1.0	4.0	25
3650-000144	GD5-054-1.0-400-C	0.54	0.0213	1.0	4.0	25
3650-000145	GD5-055-1.0-450-C	0.55	0.0217	1.0	4.5	25
3650-000146	GD5-056-1.0-450-C	0.56	0.0220	1.0	4.5	25
3650-000147	GD5-057-1.0-450-C	0.57	0.0224	1.0	4.5	25

3650 Series - Solid Carbide - 5 to 7 x Dia (Continued)


Material	Execution	Drill Point	Flute Helix	Flutes	Hardness	Tolerance
Micro Grain Carbide	Right Hand	120˚	35˚	2	HRC 65	H6

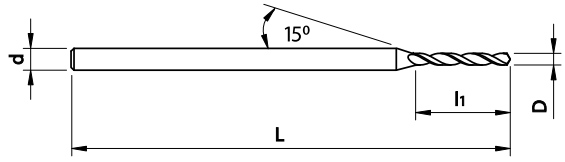

Item No.	Description	D Flute Ø (mm)	D Flute Ø (inch)	d Shank Ø (mm)	L1 Flute Length	OAL (mm)
3650-000148	GD5-058-1.0-450-C	0.58	0.0228	1.0	4.5	25
3650-000149	GD5-059-1.0-450-C	0.59	0.0232	1.0	4.5	25
3650-000150	GD5-060-1.5-450-C	0.60	0.0236	1.5	4.5	30
3650-000151	GD5-061-1.5-500-C	0.61	0.0240	1.5	5.0	30
3650-000152	GD5-062-1.5-500-C	0.62	0.0244	1.5	5.0	30
3650-000153	GD5-063-1.5-500-C	0.63	0.0248	1.5	5.0	30
3650-000154	GD5-064-1.5-500-C	0.64	0.0252	1.5	5.0	30
3650-000155	GD5-065-1.5-500-C	0.65	0.0256	1.5	5.0	30
3650-000156	GD5-066-1.5-500-C	0.66	0.0260	1.5	5.0	30
3650-000157	GD5-067-1.5-500-C	0.67	0.0264	1.5	5.0	30
3650-000158	GD5-068-1.5-500-C	0.68	0.0268	1.5	5.0	30
3650-000159	GD5-069-1.5-560-C	0.69	0.0272	1.5	5.6	30
3650-000160	GD5-070-1.5-560-C	0.70	0.0276	1.5	5.6	30
3650-000161	GD5-071-1.5-560-C	0.71	0.0280	1.5	5.6	30
3650-000162	GD5-072-1.5-560-C	0.72	0.0283	1.5	5.6	30
3650-000163	GD5-073-1.5-560-C	0.73	0.0287	1.5	5.6	30
3650-000164	GD5-074-1.5-560-C	0.74	0.0291	1.5	5.6	30
3650-000165	GD5-075-1.5-560-C	0.75	0.0295	1.5	5.6	30
3650-000166	GD5-076-1.5-630-C	0.76	0.0299	1.5	6.3	30
3650-000167	GD5-077-1.5-630-C	0.77	0.0303	1.5	6.3	30
3650-000168	GD5-078-1.5-630-C	0.78	0.0307	1.5	6.3	30
3650-000169	GD5-079-1.5-630-C	0.79	0.0311	1.5	6.3	30
3650-000170	GD5-080-1.5-630-C	0.80	0.0315	1.5	6.3	30
3650-000171	GD5-081-1.5-630-C	0.81	0.0319	1.5	6.3	30
3650-000172	GD5-082-1.5-630-C	0.82	0.0323	1.5	6.3	30
3650-000173	GD5-083-1.5-630-C	0.83	0.0327	1.5	6.3	30
3650-000174	GD5-084-1.5-630-C	0.84	0.0331	1.5	6.3	30
3650-000175	GD5-085-1.5-630-C	0.85	0.0335	1.5	6.3	30
3650-000176	GD5-086-1.5-710-C	0.86	0.0339	1.5	7.1	30
3650-000177	GD5-087-1.5-710-C	0.87	0.0343	1.5	7.1	30
3650-000178	GD5-088-1.5-710-C	0.88	0.0346	1.5	7.1	30
3650-000179	GD5-089-1.5-710-C	0.89	0.0350	1.5	7.1	30
3650-000180	GD5-090-1.5-710-C	0.90	0.0354	1.5	7.1	30
3650-000181	GD5-091-1.5-710-C	0.91	0.0358	1.5	7.1	30
3650-000182	GD5-092-1.5-710-C	0.92	0.0362	1.5	7.1	30
3650-000183	GD5-093-1.5-710-C	0.93	0.0366	1.5	7.1	30
3650-000184	GD5-094-1.5-710-C	0.94	0.0370	1.5	7.1	30
3650-000185	GD5-095-1.5-710-C	0.95	0.0374	1.5	7.1	30
3650-000186	GD5-096-1.5-800-C	0.96	0.0378	1.5	8.0	30
3650-000187	GD5-097-1.5-800-C	0.97	0.0382	1.5	8.0	30
3650-000188	GD5-098-1.5-800-C	0.98	0.0386	1.5	8.0	30
3650-000189	GD5-099-1.5-800-C	0.99	0.0390	1.5	8.0	30
3650-000190	GD5-100-1.5-800-C	1.00	0.0394	1.5	8.0	30
3650-000191	GD5-101-1.5-800-C	1.01	0.0398	1.5	8.0	30
3650-000192	GD5-102-1.5-800-C	1.02	0.0402	1.5	8.0	30
3650-000193	GD5-103-1.5-800-C	1.03	0.0406	1.5	8.0	30
3650-000194	GD5-104-1.5-800-C	1.04	0.0409	1.5	8.0	30
3650-000195	GD5-105-1.5-800-C	1.05	0.0413	1.5	8.0	30
3650-000196	GD5-106-1.5-900-C	1.06	0.0417	1.5	9.0	30

3650 Series - Solid Carbide - 5 to 7 x Dia (Continued)


Material	Execution	Drill Point	Flute Helix	Flutes	Hardness	Tolerance
Micro Grain Carbide	Right Hand	120˚	35˚	2	HRC 65	H6

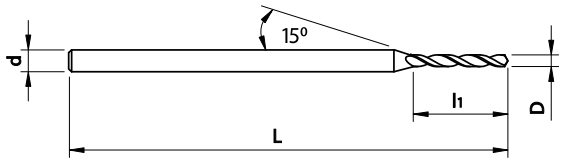

Item No.	Description	D Flute Ø (mm)	D Flute Ø (inch)	d Shank Ø (mm)	L1 Flute Length	OAL (mm)
3650-000197	GD5-107-1.5-900-C	1.07	0.0421	1.5	9.0	30
3650-000198	GD5-108-1.5-900-C	1.08	0.0425	1.5	9.0	30
3650-000199	GD5-109-1.5-900-C	1.09	0.0429	1.5	9.0	30
3650-000200	GD5-110-1.5-900-C	1.10	0.0433	1.5	9.0	30
3650-000201	GD5-111-1.5-900-C	1.11	0.0437	1.5	9.0	30
3650-000202	GD5-112-1.5-900-C	1.12	0.0441	1.5	9.0	30
3650-000203	GD5-113-1.5-900-C	1.13	0.0445	1.5	9.0	30
3650-000204	GD5-114-1.5-900-C	1.14	0.0449	1.5	9.0	30
3650-000205	GD5-115-1.5-900-C	1.15	0.0453	1.5	9.0	30
3650-000206	GD5-116-1.5-1000-C	1.16	0.0457	1.5	10.0	30
3650-000207	GD5-117-1.5-1000-C	1.17	0.0461	1.5	10.0	30
3650-000208	GD5-118-1.5-1000-C	1.18	0.0465	1.5	10.0	30
3650-000209	GD5-119-1.5-1000-C	1.19	0.0469	1.5	10.0	30
3650-000210	GD5-120-1.5-1000-C	1.20	0.0472	1.5	10.0	30
3650-000211	GD5-121-1.5-1000-C	1.21	0.0476	1.5	10.0	30
3650-000212	GD5-122-1.5-1000-C	1.22	0.0480	1.5	10.0	30
3650-000213	GD5-123-1.5-1000-C	1.23	0.0484	1.5	10.0	30
3650-000215	GD5-125-1.5-1000-C	1.25	0.0492	1.5	10.0	30
3650-000216	GD5-126-1.5-1000-C	1.26	0.0496	1.5	10.0	30
3650-000217	GD5-127-1.5-1000-C	1.27	0.0500	1.5	10.0	30
3650-000218	GD5-128-1.5-1000-C	1.28	0.0504	1.5	10.0	30
3650-000219	GD5-129-1.5-1000-C	1.29	0.0508	1.5	10.0	30
3650-000220	GD5-130-1.5-1000-C	1.30	0.0512	1.5	10.0	30
3650-000221	GD5-131-1.5-1120-C	1.31	0.0516	1.5	11.2	30
3650-000222	GD5-132-1.5-1120-C	1.32	0.0520	1.5	11.2	30
3650-000223	GD5-133-1.5-1120-C	1.33	0.0524	1.5	11.2	30
3650-000224	GD5-134-1.5-1120-C	1.34	0.0528	1.5	11.2	30
3650-000225	GD5-135-1.5-1120-C	1.35	0.0531	1.5	11.2	30
3650-000226	GD5-136-1.5-1120-C	1.36	0.0535	1.5	11.2	30
3650-000227	GD5-137-1.5-1120-C	1.37	0.0539	1.5	11.2	30
3650-000228	GD5-138-1.5-1120-C	1.38	0.0543	1.5	11.2	30
3650-000229	GD5-139-1.5-1120-C	1.39	0.0547	1.5	11.2	30
3650-000230	GD5-140-1.5-1120-C	1.40	0.0551	1.5	11.2	30
3650-000231	GD5-141-1.5-1120-C	1.41	0.0555	1.5	11.2	30
3650-000232	GD5-142-1.5-1120-C	1.42	0.0559	1.5	11.2	30
3650-000233	GD5-143-1.5-1120-C	1.43	0.0563	1.5	11.2	30
3650-000234	GD5-144-1.5-1120-C	1.44	0.0567	1.5	11.2	30
3650-000235	GD5-145-1.5-1120-C	1.45	0.0571	1.5	11.2	30
3650-000236	GD5-146-1.5-1120-C	1.46	0.0575	1.5	11.2	30
3650-000237	GD5-147-1.5-1120-C	1.47	0.0579	1.5	11.2	30
3650-000238	GD5-148-1.5-1120-C	1.48	0.0583	1.5	11.2	30
3650-000239	GD5-149-1.5-1120-C	1.49	0.0587	1.5	11.2	30
3650-000240	GD5-150-200-1200-C	1.50	0.0591	2.0	12.0	38
3650-000241	GD5-151-200-1200-C	1.51	0.0594	2.0	12.0	38
3650-000242	GD5-152-200-1200-C	1.52	0.0598	2.0	12.0	38
3650-000243	GD5-153-200-1200-C	1.53	0.0602	2.0	12.0	38
3650-000244	GD5-154-200-1200-C	1.54	0.0606	2.0	12.0	38
3650-000245	GD5-155-200-1200-C	1.55	0.0610	2.0	12.0	38
3650-000246	GD5-156-200-1200-C	1.56	0.0614	2.0	12.0	38

3650 Series - Solid Carbide - 5 to 7 x Dia (Continued)


Material	Execution	Drill Point	Flute Helix	Flutes	Hardness	Tolerance
Micro Grain Carbide	Right Hand	120˚	35˚	2	HRC 65	H6

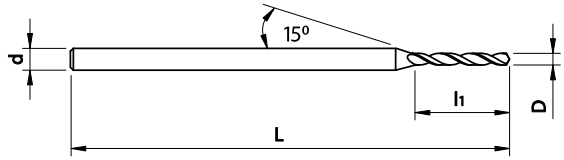

Item No.	Description	D Flute Ø (mm)	D Flute Ø (inch)	d Shank Ø (mm)	L1 Flute Length	OAL (mm)
3650-000247	GD5-157-200-1200-C	1.57	0.0618	2.0	12	38
3650-000248	GD5-158-200-1200-C	1.58	0.0622	2.0	12	38
3650-000249	GD5-159-200-1200-C	1.59	0.0626	2.0	12	38
3650-000250	GD5-160-200-1200-C	1.60	0.0630	2.0	12	38
3650-000251	GD5-161-200-1200-C	1.61	0.0634	2.0	12	38
3650-000252	GD5-162-200-1200-C	1.62	0.0638	2.0	12	38
3650-000253	GD5-163-200-1200-C	1.63	0.0642	2.0	12	38
3650-000254	GD5-164-200-1200-C	1.64	0.0646	2.0	12	38
3650-000255	GD5-165-200-1200-C	1.65	0.0650	2.0	12	38
3650-000256	GD5-166-200-1200-C	1.66	0.0654	2.0	12	38
3650-000257	GD5-167-200-1200-C	1.67	0.0657	2.0	12	38
3650-000258	GD5-168-200-1200-C	1.68	0.0661	2.0	12	38
3650-000259	GD5-169-200-1200-C	1.69	0.0665	2.0	12	38
3650-000260	GD5-170-200-1200-C	1.70	0.0669	2.0	12	38
3650-000261	GD5-171-200-1200-C	1.71	0.0673	2.0	12	38
3650-000262	GD5-172-200-1200-C	1.72	0.0677	2.0	12	38
3650-000263	GD5-173-200-1200-C	1.73	0.0681	2.0	12	38
3650-000264	GD5-174-200-1200-C	1.74	0.0685	2.0	12	38
3650-000265	GD5-175-200-1200-C	1.75	0.0689	2.0	12	38
3650-000266	GD5-176-200-1200-C	1.76	0.0693	2.0	12	38
3650-000267	GD5-177-200-1200-C	1.77	0.0697	2.0	12	38
3650-000268	GD5-178-200-1200-C	1.78	0.0701	2.0	12	38
3650-000269	GD5-179-200-1200-C	1.79	0.0705	2.0	12	38
3650-000270	GD5-180-200-1200-C	1.80	0.0709	2.0	12	38
3650-000271	GD5-181-200-1200-C	1.81	0.0713	2.0	12	38
3650-000272	GD5-182-200-1200-C	1.82	0.0717	2.0	12	38
3650-000273	GD5-183-200-1200-C	1.83	0.0720	2.0	12	38
3650-000274	GD5-184-200-1200-C	1.84	0.0724	2.0	12	38
3650-000275	GD5-185-200-1200-C	1.85	0.0728	2.0	12	38
3650-000276	GD5-186-200-1200-C	1.86	0.0732	2.0	12	38
3650-000277	GD5-187-200-1200-C	1.87	0.0736	2.0	12	38
3650-000278	GD5-188-200-1200-C	1.88	0.0740	2.0	12	38
3650-000279	GD5-189-200-1200-C	1.89	0.0744	2.0	12	38
3650-000280	GD5-190-200-1200-C	1.90	0.0748	2.0	12	38
3650-000281	GD5-191-200-1200-C	1.91	0.0752	2.0	12	38
3650-000282	GD5-192-200-1200-C	1.92	0.0756	2.0	12	38
3650-000283	GD5-193-200-1200-C	1.93	0.0760	2.0	12	38
3650-000284	GD5-194-200-1200-C	1.94	0.0764	2.0	12	38
3650-000285	GD5-195-200-1200-C	1.95	0.0768	2.0	12	38
3650-000286	GD5-196-200-1200-C	1.96	0.0772	2.0	12	38
3650-000287	GD5-197-200-1200-C	1.97	0.0776	2.0	12	38
3650-000288	GD5-198-200-1200-C	1.98	0.0780	2.0	12	38
3650-000289	GD5-199-200-1200-C	1.99	0.0783	2.0	12	38

3660 Series - Solid Carbide - 6 to 7 x Dia - XP Performance


Material	Execution	Drill Point	Flute Helix	Flutes	Hardness	Tolerance
Micro Grain Carbide	Right Hand	140˚	30˚	2	HRC 65	H4

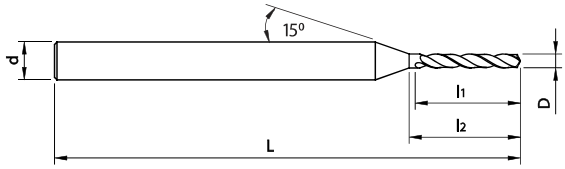

Item No.	Description	D Flute Ø (mm)	D Flute Ø (inch)	d Shank Ø (mm)	L1 Flute Length	L2 Flute Length	OAL (mm)
3660-000100	GD6-050-3.0-440-C	0.50	0.0197	3.0	3.5	4.4	50
3660-000101	GD6-055-3.0-500-C	0.55	0.0217	3.0	4.0	5.0	50
3660-000102	GD6-060-3.0-560-C	0.60	0.0236	3.0	4.5	5.6	50
3660-000103	GD6-065-3.0-630-C	0.65	0.0256	3.0	5.0	6.3	50
3660-000104	GD6-070-3.0-630-C	0.70	0.0276	3.0	5.0	6.3	50
3660-000105	GD6-075-3.0-690-C	0.75	0.0295	3.0	5.5	6.9	50
3660-000106	GD6-080-3.0-720-C	0.80	0.0315	3.0	5.6	7.2	50
3660-000107	GD6-085-3.0-760-C	0.85	0.0335	3.0	6.0	7.6	50
3660-000108	GD6-090-3.0-810-C	0.90	0.0354	3.0	6.5	8.1	50
3660-000109	GD6-095-3.0-850-C	0.95	0.0374	3.0	6.7	8.5	50
3660-000110	GD6-100-3.0-880-C	1.00	0.0394	3.0	7.0	8.8	50
3660-000111	GD6-105-3.0-940-C	1.05	0.0413	3.0	7.5	9.4	50
3660-000112	GD6-110-3.0-101-C	1.10	0.0433	3.0	8.0	10.1	50
3660-000113	GD6-115-3.0-104-C	1.15	0.0453	3.0	8.1	10.4	50
3660-000114	GD6-120-3.0-110-C	1.20	0.0472	3.0	8.5	11.0	50
3660-000115	GD6-125-3.0-113-C	1.25	0.0492	3.0	8.9	11.3	50
3660-000116	GD6-130-3.0-117-C	1.30	0.0512	3.0	9.2	11.7	50
3660-000117	GD6-135-3.0-122-C	1.35	0.0531	3.0	9.6	12.2	50
3660-000118	GD6-140-3.0-125-C	1.40	0.0551	3.0	10.0	12.5	50
3660-000119	GD6-145-3.0-130-C	1.45	0.0571	3.0	10.5	13.0	50
3660-000120	GD6-150-3.0-130-C	1.50	0.0591	3.0	10.5	13.0	50
3660-000121	GD6-155-3.0-135-C	1.55	0.0610	3.0	11.0	13.5	50
3660-000122	GD6-160-3.0-140-C	1.60	0.0630	3.0	11.5	14.0	50
3660-000123	GD6-165-3.0-150-C	1.65	0.0650	3.0	12.0	15.0	50
3660-000124	GD6-170-3.0-150-C	1.70	0.0669	3.0	12.0	15.0	50
3660-000125	GD6-175-3.0-155-C	1.75	0.0689	3.0	12.5	15.5	50
3660-000126	GD6-180-3.0-160-C	1.80	0.0709	3.0	13.0	16.0	50
3660-000127	GD6-185-3.0-160-C	1.85	0.0728	3.0	13.0	16.0	50
3660-000128	GD6-190-3.0-175-C	1.90	0.0748	3.0	13.5	17.5	50
3660-000129	GD6-195-3.0-180-C	1.95	0.0768	3.0	14.0	18.0	50
3660-000130	GD6-200-3.0-180-C	2.00	0.0787	3.0	14.0	18.0	50
3660-000131	GD6-205-3.0-185-C	2.05	0.0807	3.0	14.5	18.5	50
3660-000132	GD6-210-3.0-190-C	2.10	0.0827	3.0	15.0	19.0	50
3660-000133	GD6-215-3.0-190-C	2.15	0.0846	3.0	15.0	19.0	50
3660-000134	GD6-220-3.0-200-C	2.20	0.0866	3.0	16.0	20.0	50
3660-000135	GD6-225-3.0-200-C	2.25	0.0886	3.0	16.0	20.0	50
3660-000136	GD6-230-3.0-210-C	2.30	0.0906	3.0	16.5	21.0	50
3660-000137	GD6-235-3.0-210-C	2.35	0.0925	3.0	16.5	21.0	50
3660-000138	GD6-240-3.0-220-C	2.40	0.0945	3.0	17.0	22.0	50
3660-000139	GD6-245-3.0-225-C	2.45	0.0965	3.0	17.5	22.5	50
3660-000140	GD6-250-3.0-230-C	2.50	0.0984	3.0	18.0	23.0	50
3660-000141	GD6-255-3.0-230-C	2.55	0.1004	3.0	18.0	23.0	50
3660-000142	GD6-260-3.0-235-C	2.60	0.1024	3.0	18.5	23.5	50
3660-000143	GD6-265-3.0-235-C	2.65	0.1043	3.0	18.5	23.5	50
3660-000144	GD6-270-3.0-240-C	2.70	0.1063	3.0	19.0	24.0	50
3660-000145	GD6-275-3.0-240-C	2.75	0.1083	3.0	19.0	24.0	50
3660-000146	GD6-280-3.0-250-C	2.80	0.1102	3.0	20.0	25.0	50
3660-000147	GD6-285-3.0-250-C	2.85	0.1122	3.0	20.0	25.0	50
3660-000148	GD6-290-3.0-260-C	2.90	0.1142	3.0	21.0	26.0	50
3660-000149	GD6-295-3.0-260-C	2.95	0.1161	3.0	21.0	26.0	50
3660-000150	GD6-300-3.0-260C	3.00	0.1181	3.0	21.0	26.0	50

3670 Series - Solid Carbide - 12 x Dia


Material	Execution	Drill Point	Flute Helix	Flutes	Hardness	Tolerance
Micro Grain Carbide	Right Hand	140˚	30˚	2	HRC 65	H5

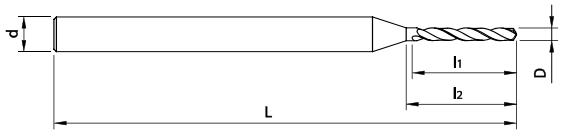

Item No.	Description	D Flute Ø (mm)	D Flute Ø (inch)	d Shank Ø (mm)	L1 Flute Length	L2 Flute Length	OAL (mm)
Call For Details	GD7-050-3.0-600-C	0.50	0.0197	3.0	6.0	7.20	50
Call For Details	GD7-055-3.0-660-C	0.55	0.0217	3.0	6.6	7.92	50
3670-000101	GD7-060-3.0-720-C	0.60	0.0236	3.0	7.2	8.64	50
Call For Details	GD7-065-3.0-780-C	0.65	0.0256	3.0	7.8	9.36	50
3670-000106	GD7-070-3.0-840-C	0.70	0.0276	3.0	8.4	10.08	50
Call For Details	GD7-075-3.0-900-C	0.75	0.0295	3.0	9.0	10.80	50
Call For Details	GD7-080-3.0-960-C	0.80	0.0315	3.0	9.6	11.52	50
Call For Details	GD7-085-3.0-1020-C	0.85	0.0335	3.0	10.2	12.24	50
Call For Details	GD7-090-3.0-1080-C	0.90	0.0354	3.0	10.8	12.96	50
Call For Details	GD7-095-3.0-1140-C	0.95	0.0374	3.0	11.4	13.68	50
Call For Details	GD7-100-3.0-1200-C	1.00	0.0394	3.0	12.0	14.40	50
Call For Details	GD7-105-3.0-1260-C	1.05	0.0413	3.0	12.6	15.12	50
Call For Details	GD7-110-3.0-1320-C	1.10	0.0433	3.0	13.2	15.84	50
Call For Details	GD7-115-3.0-1380-C	1.15	0.0453	3.0	13.8	16.56	50
Call For Details	GD7-120-3.0-1440-C	1.20	0.0472	3.0	14.4	17.28	50
Call For Details	GD7-125-3.0-1500-C	1.25	0.0492	3.0	15.0	18.00	50
Call For Details	GD7-130-3.0-1560-C	1.30	0.0512	3.0	15.6	18.72	50
Call For Details	GD7-135-3.0-1620-C	1.35	0.0531	3.0	16.2	19.44	50
Call For Details	GD7-140-3.0-1680-C	1.40	0.0551	3.0	16.8	20.16	50
Call For Details	GD7-145-3.0-1740-C	1.45	0.0571	3.0	17.4	20.88	50
Call For Details	GD7-150-3.0-1800-C	1.50	0.0591	3.0	18.0	21.60	50
Call For Details	GD7-155-3.0-1860-C	1.55	0.0610	3.0	18.6	22.32	60
Call For Details	GD7-160-3.0-1920-C	1.60	0.0630	3.0	19.2	23.04	60
Call For Details	GD7-165-3.0-1980-C	1.65	0.0650	3.0	19.8	23.76	60
Call For Details	GD7-170-3.0-2040-C	1.70	0.0669	3.0	20.4	24.48	60
Call For Details	GD7-175-3.0-2100-C	1.75	0.0689	3.0	21.0	25.20	60
Call For Details	GD7-180-3.0-2160-C	1.80	0.0709	3.0	21.6	25.92	60
Call For Details	GD7-185-3.0-2220-C	1.85	0.0728	3.0	22.2	26.64	60
Call For Details	GD7-190-3.0-2280-C	1.90	0.0748	3.0	22.8	27.36	60
Call For Details	GD7-195-3.0-2340-C	1.95	0.0768	3.0	23.4	28.08	60
Call For Details	GD7-200-3.0-2400-C	2.00	0.0787	3.0	24.0	28.80	60

3680 Series - Solid Carbide - 4 to 5 x Dia


Material	Execution	Drill Point	Flute Helix	Flutes	Hardness	Tolerance
Micro Grain Carbide	Right Hand	120˚	24˚	2	HRC 65	H6

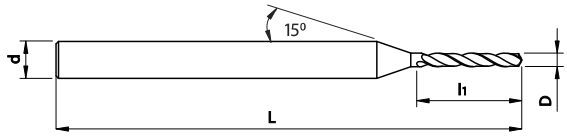

Item No.	Description	D Flute Ø (mm)	D Flute Ø (inch)	d Shank Ø (mm)	L1 Flute Length	OAL (mm)
Call For Details	GD8-020-3.0-110-C	0.20	0.0079	3.0	1.1	38
Call For Details	GD8-021-3.0-110-C	0.21	0.0083	3.0	1.1	38
Call For Details	GD8-022-3.0-110-C	0.22	0.0087	3.0	1.1	38
Call For Details	GD8-023-3.0-110-C	0.23	0.0091	3.0	1.1	38
Call For Details	GD8-024-3.0-110-C	0.24	0.0094	3.0	1.1	38
Call For Details	GD8-025-3.0-130-C	0.25	0.0098	3.0	1.3	38
Call For Details	GD8-026-3.0-130-C	0.26	0.0102	3.0	1.3	38
Call For Details	GD8-027-3.0-130-C	0.27	0.0106	3.0	1.3	38
Call For Details	GD8-028-3.0-130-C	0.28	0.0110	3.0	1.3	38
Call For Details	GD8-029-3.0-130-C	0.29	0.0114	3.0	1.3	38
Call For Details	GD8-030-3.0-160-C	0.30	0.0118	3.0	1.6	38
Call For Details	GD8-031-3.0-160-C	0.31	0.0122	3.0	1.6	38
Call For Details	GD8-032-3.0-160-C	0.32	0.0126	3.0	1.6	38
Call For Details	GD8-033-3.0-160-C	0.33	0.0130	3.0	1.6	38
Call For Details	GD8-034-3.0-160-C	0.34	0.0134	3.0	1.6	38
Call For Details	GD8-035-3.0-160-C	0.35	0.0138	3.0	1.6	38
Call For Details	GD8-036-3.0-160-C	0.36	0.0142	3.0	1.6	38
Call For Details	GD8-037-3.0-160-C	0.37	0.0146	3.0	1.6	38
Call For Details	GD8-038-3.0-160-C	0.38	0.0150	3.0	1.6	38
Call For Details	GD8-039-3.0-200-C	0.39	0.0154	3.0	2.0	38
3680-000100	GD8-040-3.0-200-C	0.40	0.0157	3.0	2.0	38
Call For Details	GD8-041-3.0-200-C	0.41	0.0161	3.0	2.0	38
Call For Details	GD8-042-3.0-200-C	0.42	0.0165	3.0	2.0	38
Call For Details	GD8-043-3.0-200-C	0.43	0.0169	3.0	2.0	38
Call For Details	GD8-044-3.0-200-C	0.44	0.0173	3.0	2.0	38
Call For Details	GD8-045-3.0-200-C	0.45	0.0177	3.0	2.0	38
Call For Details	GD8-046-3.0-200-C	0.46	0.0181	3.0	2.0	38
Call For Details	GD8-047-3.0-200-C	0.47	0.0185	3.0	2.0	38
Call For Details	GD8-048-3.0-200-C	0.48	0.0189	3.0	2.0	38
Call For Details	GD8-049-3.0-200-C	0.49	0.0193	3.0	2.0	38
Call For Details	GD8-050-3.0-240-C	0.50	0.0197	3.0	2.4	38
Call For Details	GD8-051-3.0-240-C	0.51	0.0201	3.0	2.4	38
Call For Details	GD8-052-3.0-240-C	0.52	0.0205	3.0	2.4	38
Call For Details	GD8-053-3.0-240-C	0.53	0.0209	3.0	2.4	38
Call For Details	GD8-054-3.0-280-C	0.54	0.0213	3.0	2.8	38
Call For Details	GD8-055-3.0-280-C	0.55	0.0217	3.0	2.8	38
Call For Details	GD8-056-3.0-280-C	0.56	0.0220	3.0	2.8	38
Call For Details	GD8-057-3.0-280-C	0.57	0.0224	3.0	2.8	38
Call For Details	GD8-058-3.0-280-C	0.58	0.0228	3.0	2.8	38
Call For Details	GD8-059-3.0-280-C	0.59	0.0232	3.0	2.8	38
Call For Details	GD8-060-3.0-280-C	0.60	0.0236	3.0	2.8	38
Call For Details	GD8-061-3.0-330-C	0.61	0.0240	3.0	3.3	38
Call For Details	GD8-062-3.0-330-C	0.62	0.0244	3.0	3.3	38
Call For Details	GD8-063-3.0-330-C	0.63	0.0248	3.0	3.3	38
Call For Details	GD8-064-3.0-330-C	0.64	0.0252	3.0	3.3	38
Call For Details	GD8-065-3.0-330-C	0.65	0.0256	3.0	3.3	38
Call For Details	GD8-066-3.0-330-C	0.66	0.0260	3.0	3.3	38
Call For Details	GD8-067-3.0-330-C	0.67	0.0264	3.0	3.3	38
Call For Details	GD8-068-3.0-380-C	0.68	0.0268	3.0	3.8	38
Call For Details	GD8-069-3.0-380-C	0.69	0.0272	3.0	3.8	38
Call For Details	GD8-070-3.0-380-C	0.70	0.0276	3.0	3.8	38

3680 Series - Solid Carbide - 4 to 5 x Dia (Continued)


Material	Execution	Drill Point	Flute Helix	Flutes	Hardness	Tolerance
Micro Grain Carbide	Right Hand	120˚	24˚	2	HRC 65	H6

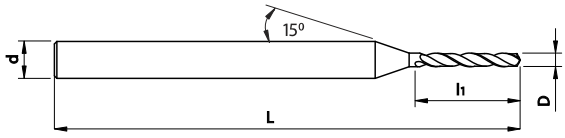

Item No.	Description	D Flute Ø (mm)	D Flute Ø (inch)	d Shank Ø (mm)	L1 Flute Length	OAL (mm)
Call For Details	GD8-071-3.0-380-C	0.71	0.0280	3	3.8	38
Call For Details	GD8-072-3.0-380-C	0.72	0.0283	3	3.8	38
Call For Details	GD8-073-3.0-380-C	0.73	0.0287	3	3.8	38
Call For Details	GD8-074-3.0-380-C	0.74	0.0291	3	3.8	38
Call For Details	GD8-075-3.0-380-C	0.75	0.0295	3	3.8	38
Call For Details	GD8-076-3.0-420-C	0.76	0.0299	3	4.2	38
Call For Details	GD8-077-3.0-420-C	0.77	0.0303	3	4.2	38
Call For Details	GD8-078-3.0-420-C	0.78	0.0307	3	4.2	38
Call For Details	GD8-079-3.0-420-C	0.79	0.0311	3	4.2	38
Call For Details	GD8-080-3.0-440-C	0.8	0.0315	3	4.4	38
Call For Details	GD8-081-3.0-440-C	0.81	0.0319	3	4.4	38
Call For Details	GD8-082-3.0-440-C	0.82	0.0323	3	4.4	38
Call For Details	GD8-083-3.0-440-C	0.83	0.0327	3	4.4	38
Call For Details	GD8-084-3.0-440-C	0.84	0.0331	3	4.4	38
Call For Details	GD8-085-3.0-440-C	0.85	0.0335	3	4.4	38
Call For Details	GD8-086-3.0-480-C	0.86	0.0339	3	4.8	38
Call For Details	GD8-087-3.0-480-C	0.87	0.0343	3	4.8	38
Call For Details	GD8-088-3.0-480-C	0.88	0.0346	3	4.8	38
Call For Details	GD8-089-3.0-480-C	0.89	0.0350	3	4.8	38
Call For Details	GD8-090-3.0-480-C	0.9	0.0354	3	4.8	38
Call For Details	GD8-091-3.0-480-C	0.91	0.0358	3	4.8	38
Call For Details	GD8-092-3.0-480-C	0.92	0.0362	3	4.8	38
Call For Details	GD8-093-3.0-480-C	0.93	0.0366	3	4.8	38
Call For Details	GD8-094-3.0-480-C	0.94	0.0370	3	4.8	38
Call For Details	GD8-095-3.0-480-C	0.95	0.0374	3	4.8	38
Call For Details	GD8-096-3.0-480-C	0.96	0.0378	3	4.8	38
Call For Details	GD8-097-3.0-480-C	0.97	0.0382	3	4.8	38
Call For Details	GD8-098-3.0-480-C	0.98	0.0386	3	4.8	38
Call For Details	GD8-099-3.0-480-C	0.99	0.0390	3	4.8	38
Call For Details	GD8-100-3.0-480-C	1	0.0394	3	4.8	38
Call For Details	GD8-101-3.0-480-C	1.01	0.0398	3	4.8	38
Call For Details	GD8-102-3.0-480-C	1.02	0.0402	3	4.8	38
Call For Details	GD8-103-3.0-480-C	1.03	0.0406	3	4.8	38
Call For Details	GD8-104-3.0-480-C	1.04	0.0409	3	4.8	38
Call For Details	GD8-105-3.0-480-C	1.05	0.0413	3	4.8	38
Call For Details	GD8-106-3.0-480-C	1.06	0.0417	3	4.8	38
Call For Details	GD8-107-3.0-480-C	1.07	0.0421	3	4.8	38
Call For Details	GD8-108-3.0-480-C	1.08	0.0425	3	4.8	38
Call For Details	GD8-109-3.0-480-C	1.09	0.0429	3	4.8	38
Call For Details	GD8-110-3.0-540-C	1.1	0.0433	3	5.4	38
Call For Details	GD8-111-3.0-540-C	1.11	0.0437	3	5.4	38
Call For Details	GD8-112-3.0-540-C	1.12	0.0441	3	5.4	38
Call For Details	GD8-113-3.0-540-C	1.13	0.0445	3	5.4	38
Call For Details	GD8-114-3.0-540-C	1.14	0.0449	3	5.4	38
Call For Details	GD8-115-3.0-540-C	1.15	0.0453	3	5.4	38
Call For Details	GD8-116-3.0-540-C	1.16	0.0457	3	5.4	38
Call For Details	GD8-117-3.0-540-C	1.17	0.0461	3	5.4	38
Call For Details	GD8-118-3.0-540-C	1.18	0.0465	3	5.4	38
Call For Details	GD8-119-3.0-540-C	1.19	0.0469	3	5.4	38
Call For Details	GD8-120-3.0-600-C	1.2	0.0472	3	6	38
Call For Details	GD8-121-3.0-600-C	1.21	0.0476	3	6	38

3680 Series - Solid Carbide - 4 to 5 x Dia (Continued)


Material	Execution	Drill Point	Flute Helix	Flutes	Hardness	Tolerance
Micro Grain Carbide	Right Hand	120˚	24˚	2	HRC 65	H6

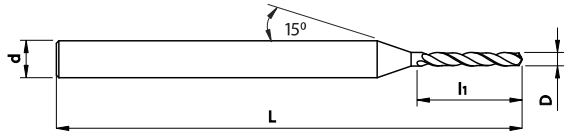

Item No.	Description	D Flute Ø (mm)	D Flute Ø (inch)	d Shank Ø (mm)	L1 Flute Length	OAL (mm)
Call For Details	GD8-122-3.0-600-C	1.22	0.0480	3	6	38
Call For Details	GD8-123-3.0-600-C	1.23	0.0484	3	6	38
Call For Details	GD8-124-3.0-600-C	1.24	0.0488	3	6	38
Call For Details	GD8-125-3.0-600-C	1.25	0.0492	3	6	38
Call For Details	GD8-126-3.0-600-C	1.26	0.0496	3	6	38
Call For Details	GD8-127-3.0-600-C	1.27	0.0500	3	6	38
Call For Details	GD8-128-3.0-600-C	1.28	0.0504	3	6	38
Call For Details	GD8-129-3.0-600-C	1.29	0.0508	3	6	38
Call For Details	GD8-130-3.0-670-C	1.3	0.0512	3	6.7	38
Call For Details	GD8-131-3.0-670-C	1.31	0.0516	3	6.7	38
Call For Details	GD8-132-3.0-670-C	1.32	0.0520	3	6.7	38
Call For Details	GD8-133-3.0-670-C	1.33	0.0524	3	6.7	38
Call For Details	GD8-134-3.0-670-C	1.34	0.0528	3	6.7	38
Call For Details	GD8-135-3.0-670-C	1.35	0.0531	3	6.7	38
Call For Details	GD8-136-3.0-670-C	1.36	0.0535	3	6.7	38
Call For Details	GD8-137-3.0-670-C	1.37	0.0539	3	6.7	38
Call For Details	GD8-138-3.0-670-C	1.38	0.0543	3	6.7	38
Call For Details	GD8-139-3.0-670-C	1.39	0.0547	3	6.7	38
Call For Details	GD8-140-3.0-670-C	1.4	0.0551	3	6.7	38
Call For Details	GD8-141-3.0-670-C	1.41	0.0555	3	6.7	38
Call For Details	GD8-142-3.0-670-C	1.42	0.0559	3	6.7	38
Call For Details	GD8-143-3.0-670-C	1.43	0.0563	3	6.7	38
Call For Details	GD8-144-3.0-670-C	1.44	0.0567	3	6.7	38
Call For Details	GD8-145-3.0-670-C	1.45	0.0571	3	6.7	38
Call For Details	GD8-146-3.0-670-C	1.46	0.0575	3	6.7	38
Call For Details	GD8-147-3.0-670-C	1.47	0.0579	3	6.7	38
Call For Details	GD8-148-3.0-670-C	1.48	0.0583	3	6.7	38
Call For Details	GD8-149-3.0-670-C	1.49	0.0587	3	6.7	38
Call For Details	GD8-150-3.0-720-C	1.5	0.0591	3	7.2	38
Call For Details	GD8-151-3.0-720-C	1.51	0.0594	3	7.2	38
Call For Details	GD8-152-3.0-720-C	1.52	0.0598	3	7.2	38
Call For Details	GD8-153-3.0-720-C	1.53	0.0602	3	7.2	38
Call For Details	GD8-154-3.0-720-C	1.54	0.0606	3	7.2	38
Call For Details	GD8-155-3.0-720-C	1.55	0.0610	3	7.2	38
Call For Details	GD8-156-3.0-720-C	1.56	0.0614	3	7.2	38
Call For Details	GD8-157-3.0-720-C	1.57	0.0618	3	7.2	38
Call For Details	GD8-158-3.0-720-C	1.58	0.0622	3	7.2	38
Call For Details	GD8-159-3.0-720-C	1.59	0.0626	3	7.2	38
Call For Details	GD8-160-3.0-720-C	1.6	0.0630	3	7.2	38
Call For Details	GD8-161-3.0-720-C	1.61	0.0634	3	7.2	38
Call For Details	GD8-162-3.0-720-C	1.62	0.0638	3	7.2	38
Call For Details	GD8-163-3.0-720-C	1.63	0.0642	3	7.2	38
Call For Details	GD8-164-3.0-720-C	1.64	0.0646	3	7.2	38
Call For Details	GD8-165-3.0-720-C	1.65	0.0650	3	7.2	38
Call For Details	GD8-166-3.0-720-C	1.66	0.0654	3	7.2	38
Call For Details	GD8-167-3.0-720-C	1.67	0.0657	3	7.2	38
Call For Details	GD8-168-3.0-720-C	1.68	0.0661	3	7.2	38
Call For Details	GD8-169-3.0-720-C	1.69	0.0665	3	7.2	38
Call For Details	GD8-170-3.0-720-C	1.7	0.0669	3	7.2	38
Call For Details	GD8-171-3.0-720-C	1.71	0.0673	3	7.2	38
Call For Details	GD8-172-3.0-720-C	1.72	0.0677	3	7.2	38

3680 Series - Solid Carbide - 4 to 5 x Dia (Continued)


Material	Execution	Drill Point	Flute Helix	Flutes	Hardness	Tolerance
Micro Grain Carbide	Right Hand	120˚	24˚	2	HRC 65	H6

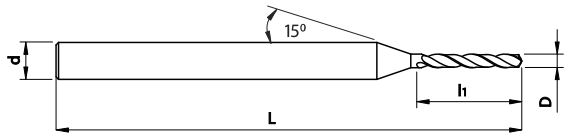

Item No.	Description	D Flute Ø (mm)	D Flute Ø (inch)	d Shank Ø (mm)	L1 Flute Length	OAL (mm)
Call For Details	GD8-173-3.0-720-C	1.73	0.0681	3	7.2	38
Call For Details	GD8-174-3.0-720-C	1.74	0.0685	3	7.2	38
Call For Details	GD8-175-3.0-720-C	1.75	0.0689	3	7.2	38
Call For Details	GD8-176-3.0-720-C	1.76	0.0693	3	7.2	38
Call For Details	GD8-177-3.0-720-C	1.77	0.0697	3	7.2	38
Call For Details	GD8-178-3.0-720-C	1.78	0.0701	3	7.2	38
Call For Details	GD8-179-3.0-720-C	1.79	0.0705	3	7.2	38
Call For Details	GD8-180-3.0-840-C	1.8	0.0709	3	8.4	38
Call For Details	GD8-181-3.0-840-C	1.81	0.0713	3	8.4	38
Call For Details	GD8-182-3.0-840-C	1.82	0.0717	3	8.4	38
Call For Details	GD8-183-3.0-840-C	1.83	0.0720	3	8.4	38
Call For Details	GD8-184-3.0-840-C	1.84	0.0724	3	8.4	38
Call For Details	GD8-185-3.0-840-C	1.85	0.0728	3	8.4	38
Call For Details	GD8-186-3.0-840-C	1.86	0.0732	3	8.4	38
Call For Details	GD8-187-3.0-840-C	1.87	0.0736	3	8.4	38
Call For Details	GD8-188-3.0-840-C	1.88	0.0740	3	8.4	38
Call For Details	GD8-189-3.0-840-C	1.89	0.0744	3	8.4	38
Call For Details	GD8-190-3.0-840-C	1.9	0.0748	3	8.4	38
Call For Details	GD8-191-3.0-840-C	1.91	0.0752	3	8.4	38
Call For Details	GD8-192-3.0-840-C	1.92	0.0756	3	8.4	38
Call For Details	GD8-193-3.0-840-C	1.93	0.0760	3	8.4	38
Call For Details	GD8-194-3.0-840-C	1.94	0.0764	3	8.4	38
Call For Details	GD8-195-3.0-840-C	1.95	0.0768	3	8.4	38
Call For Details	GD8-196-3.0-840-C	1.96	0.0772	3	8.4	38
Call For Details	GD8-197-3.0-840-C	1.97	0.0776	3	8.4	38
Call For Details	GD8-198-3.0-840-C	1.98	0.0780	3	8.4	38
Call For Details	GD8-199-3.0-840-C	1.99	0.0783	3	8.4	38

3690 Series - Solid Carbide - 15 x Dia - Coolant-Thru


Material	Execution	Drill Point	Flute Helix	Flutes	Hardness	Tolerance
Micro Grain Carbide	Right Hand	140˚	30˚	2	HRC 65	H5

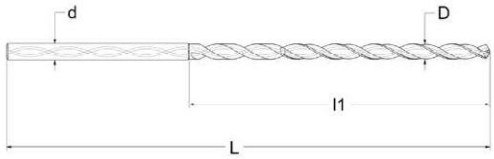

Item No.	Description	D Flute Ø (mm)	D Flute Ø (inch)	d Shank Ø (mm)	L1 Flute Length	OAL (mm)
Call For Details	GD9-205-3.0-034-C	2.05	0.0807	3	34	70
Call For Details	GD9-210-3.0-034-C	2.1	0.0827	3	34	70
Call For Details	GD9-215-3.0-036-C	2.15	0.0846	3	36	70
Call For Details	GD9-220-3.0-036-C	2.2	0.0866	3	36	70
Call For Details	GD9-225-3.0-038-C	2.25	0.0886	3	38	70
Call For Details	GD9-230-3.0-038-C	2.3	0.0906	3	38	70
Call For Details	GD9-235-3.0-040-C	2.35	0.0925	3	40	70
Call For Details	GD9-240-3.0-040-C	2.4	0.0945	3	40	70
Call For Details	GD9-245-3.0-042-C	2.45	0.0965	3	42	70
Call For Details	GD9-250-3.0-042-C	2.5	0.0984	3	42	70
Call For Details	GD9-255-3.0-044-C	2.55	0.1004	3	44	90
Call For Details	GD9-260-3.0-044-C	2.6	0.1024	3	44	90
Call For Details	GD9-265-3.0-046-C	2.65	0.1043	3	46	90
Call For Details	GD9-270-3.0-046-C	2.7	0.1063	3	46	90
Call For Details	GD9-275-3.0-048-C	2.75	0.1083	3	48	90
Call For Details	GD9-280-3.0-048-C	2.8	0.1102	3	48	90
Call For Details	GD9-285-3.0-050-C	2.85	0.1122	3	50	90
Call For Details	GD9-290-3.0-050-C	2.9	0.1142	3	50	90
Call For Details	GD9-295-3.0-050-C	2.95	0.1161	3	50	90
Call For Details	GD9-300-3.0-050-C	3	0.1181	3	50	90

3700 Series - Solid Carbide - 10 x Dia - Gun Drills


Material	Execution	Drill Point	Flute Helix	Flutes	Hardness	Tolerance
Micro Grain Carbide	Right Hand	120˚	None	Half Round	HRC 65	H5



Item No.	Description	D Flute Ø (mm)	D Flute Ø (inch)	d Shank Ø (mm)	L1 Flute Length	OAL (mm)
Call For Details	GD10-020-1.5-020-C	0.2	0.0079	1.5	2	30
Call For Details	GD10-025-1.5-025-C	0.25	0.0098	1.5	2.5	30
Call For Details	GD10-030-1.5-030-C	0.3	0.0118	1.5	3	30
Call For Details	GD10-035-1.5-035-C	0.35	0.0138	1.5	3.5	30
Call For Details	GD10-040-1.5-040-C	0.4	0.0157	1.5	4	30
Call For Details	GD10-045-1.5-045-C	0.45	0.0177	1.5	4.5	30
Call For Details	GD10-050-1.5-050-C	0.5	0.0197	1.5	5	30
Call For Details	GD10-055-1.5-055-C	0.55	0.0217	1.5	5.5	30
Call For Details	GD10-060-1.5-060-C	0.6	0.0236	1.5	6	30
Call For Details	GD10-065-1.5-065-C	0.65	0.0256	1.5	6.5	30
Call For Details	GD10-070-1.5-070-C	0.7	0.0276	1.5	7	30
Call For Details	GD10-075-1.5-075-C	0.75	0.0295	1.5	7.5	30
Call For Details	GD10-080-1.5-080-C	0.8	0.0315	1.5	8	30
Call For Details	GD10-085-1.5-085-C	0.85	0.0335	1.5	8.5	30
Call For Details	GD10-090-1.5-090-C	0.9	0.0354	1.5	9	30
Call For Details	GD10-095-1.5-095-C	0.95	0.0374	1.5	9.5	30
Call For Details	GD10-100-1.5-100-C	1	0.0394	1.5	10	30
Call For Details	GD10-105-1.5-105-C	1.05	0.0413	1.5	10.5	30
Call For Details	GD10-110-1.5-110-C	1.1	0.0433	1.5	11	30
Call For Details	GD10-115-1.5-115-C	1.15	0.0453	1.5	11.5	30
Call For Details	GD10-120-1.5-120-C	1.2	0.0472	1.5	12	30
Call For Details	GD10-125-1.5-125-C	1.25	0.0492	1.5	12.5	30
Call For Details	GD10-130-1.5-130-C	1.3	0.0512	1.5	13	30
Call For Details	GD10-135-1.5-135-C	1.35	0.0531	1.5	13.5	30
Call For Details	GD10-140-1.5-140-C	1.4	0.0551	1.5	14	30
Call For Details	GD10-145-1.5-145-C	1.45	0.0571	1.5	14.5	30
Call For Details	GD10-150-2.0-150-C	1.5	0.0591	2	15	38
Call For Details	GD10-155-2.0-155-C	1.55	0.0610	2	15.5	38
Call For Details	GD10-160-2.0-160-C	1.6	0.0630	2	16	38
Call For Details	GD10-165-2.0-165-C	1.65	0.0650	2	16.5	38
Call For Details	GD10-170-2.0-170-C	1.7	0.0669	2	17	38
Call For Details	GD10-175-2.0-175-C	1.75	0.0689	2	17.5	38
Call For Details	GD10-180-2.0-180-C	1.8	0.0709	2	18	38
Call For Details	GD10-185-2.0-185-C	1.85	0.0728	2	18.5	38
Call For Details	GD10-190-2.0-190-C	1.9	0.0748	2	19	38
Call For Details	GD10-195-2.0-195-C	1.95	0.0768	2	19.5	38
Call For Details	GD10-200-3.0-200-C	2	0.0787	3	20	50
Call For Details	GD10-210-3.0-210-C	2.1	0.0827	3	21	50
Call For Details	GD10-220-3.0-220-C	2.2	0.0866	3	22	50
Call For Details	GD10-230-3.0-230-C	2.3	0.0906	3	23	50
Call For Details	GD10-240-3.0-240-C	2.4	0.0945	3	24	50
Call For Details	GD10-250-3.0-250-C	2.5	0.0984	3	25	50
Call For Details	GD10-260-3.0-260-C	2.6	0.1024	3	26	50
Call For Details	GD10-270-3.0-270-C	2.7	0.1063	3	27	50
Call For Details	GD10-280-3.0-280-C	2.8	0.1102	3	28	50
Call For Details	GD10-290-3.0-290-C	2.9	0.1142	3	29	50
Call For Details	GD10-300-3.0-300-C	3	0.1181	3	30	50

3710 Series - Solid Carbide - 4 to 6 x Dia


Material	Execution	Drill Point	Flute Helix	Flutes	Hardness	Tolerance
Micro Grain Carbide	Right Hand	140˚	30˚	3	HRC 65	H5



Item No.	Description	D Flute Ø (mm)	D Flute Ø (inch)	d Shank Ø (mm)	L1 Flute Length	OAL (mm)
Call For Details	GD11-050-3.0-300-C	0.5	0.0197	3	3	30
Call For Details	GD11-055-3.0-300-C	0.55	0.0217	3	3	30
Call For Details	GD11-060-3.0-300-C	0.6	0.0236	3	3	30
Call For Details	GD11-065-3.0-300-C	0.65	0.0256	3	3	30
Call For Details	GD11-070-3.0-300-C	0.7	0.0276	3	3	30
Call For Details	GD11-075-3.0-350-C	0.75	0.0295	3	3.5	30
Call For Details	GD11-080-3.0-350-C	0.8	0.0315	3	3.5	30
Call For Details	GD11-085-3.0-350-C	0.85	0.0335	3	3.5	30
Call For Details	GD11-090-3.0-350-C	0.9	0.0354	3	3.5	30
Call For Details	GD11-095-3.0-350-C	0.95	0.0374	3	3.5	30
Call For Details	GD11-100-3.0-350-C	1	0.0394	3	3.5	30
Call For Details	GD11-105-3.0-400-C	1.05	0.0413	3	4	30
Call For Details	GD11-110-3.0-400-C	1.1	0.0433	3	4	30
Call For Details	GD11-115-3.0-400-C	1.15	0.0453	3	4	30
Call For Details	GD11-120-3.0-400-C	1.2	0.0472	3	4	30
Call For Details	GD11-125-3.0-400-C	1.25	0.0492	3	4	30
Call For Details	GD11-130-3.0-500-C	1.3	0.0512	3	5	30
Call For Details	GD11-135-3.0-500-C	1.35	0.0531	3	5	30
Call For Details	GD11-140-3.0-500-C	1.4	0.0551	3	5	30
Call For Details	GD11-145-3.0-500-C	1.45	0.0571	3	5	30
Call For Details	GD11-150-3.0-500-C	1.5	0.0591	3	5	30

3720 Series - Solid Carbide - 4 to 6 x Dia - 3 Flute

Material	Execution	Drill Point	Flute Helix	Flutes	Hardness	Tolerance
Micro Grain Carbide	Right Hand	140˚	30˚	3	HRC 65	H5

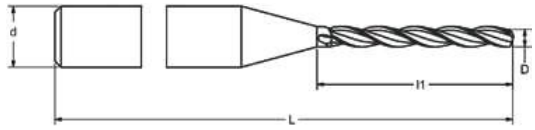

Item No.	Description	D Flute Ø (mm)	D Flute Ø (inch)	d Shank Ø (mm)	L1 Flute Length	OAL (mm)
Call For Details	GD12-050-3.0-060-C	0.5	0.0197	3	6	38
Call For Details	GD12-055-3.0-070-C	0.55	0.0217	3	7	38
Call For Details	GD12-060-3.0-070-C	0.6	0.0236	3	7	38
Call For Details	GD12-065-3.0-070-C	0.65	0.0256	3	7	38
Call For Details	GD12-070-3.0-095-C	0.7	0.0276	3	9.5	38
Call For Details	GD12-075-3.0-095-C	0.75	0.0295	3	9.5	38
Call For Details	GD12-080-3.0-095-C	0.8	0.0315	3	9.5	38
Call For Details	GD12-085-3.0-095-C	0.85	0.0335	3	9.5	38
Call For Details	GD12-090-3.0-095-C	0.9	0.0354	3	9.5	38
Call For Details	GD12-095-3.0-095-C	0.95	0.0374	3	9.5	38
Call For Details	GD12-100-3.0-095-C	1	0.0394	3	9.5	38
Call For Details	GD12-105-3.0-105-C	1.05	0.0413	3	10.5	38
Call For Details	GD12-110-3.0-105-C	1.1	0.0433	3	10.5	38
Call For Details	GD12-115-3.0-105-C	1.15	0.0453	3	10.5	38
Call For Details	GD12-120-3.0-105-C	1.2	0.0472	3	10.5	38
Call For Details	GD12-125-3.0-105-C	1.25	0.0492	3	10.5	38
Call For Details	GD12-130-3.0-105-C	1.3	0.0512	3	10.5	38
Call For Details	GD12-135-3.0-105-C	1.35	0.0531	3	10.5	38
Call For Details	GD12-140-3.0-105-C	1.4	0.0551	3	10.5	38
Call For Details	GD12-145-3.0-105-C	1.45	0.0571	3	10.5	38
3720-000120	GD12-150-3.0-105-C	1.5	0.0591	3	10.5	38
Call For Details	GD12-160-3.0-120-C	1.6	0.0630	3	12	38
Call For Details	GD12-170-3.0-120-C	1.7	0.0669	3	12	38
Call For Details	GD12-180-3.0-120-C	1.8	0.0709	3	12	38
Call For Details	GD12-190-3.0-120-C	1.9	0.0748	3	12	38
Call For Details	GD12-200-3.0-120-C	2	0.0787	3	12	38
Call For Details	GD12-210-3.0-140-C	2.1	0.0827	3	14	38
Call For Details	GD12-220-3.0-140-C	2.2	0.0866	3	14	38
Call For Details	GD12-230-3.0-140-C	2.3	0.0906	3	14	38
Call For Details	GD12-240-3.0-140-C	2.4	0.0945	3	14	38
Call For Details	GD12-250-3.0-140-C	2.5	0.0984	3	14	38
Call For Details	GD12-260-3.0-160-C	2.6	0.1024	3	16	38
Call For Details	GD12-270-3.0-160-C	2.7	0.1063	3	16	38
Call For Details	GD12-280-3.0-160-C	2.8	0.1102	3	16	38
Call For Details	GD12-290-3.0-160-C	2.9	0.1142	3	16	38
Call For Details	GD12-300-3.0-160-C	3	0.1181	3	16	38

LOUIS BELET®
Swiss Cutting tools



Micro End Mills



Micro Drills



Key Cutters

Gear Hobs



Custom Tool Engineering


Saw Blades



Genevieve Swiss is committed to bringing the industry's finest cutting tools to the North American metalworking market. Louis Belet of Switzerland is a leading manufacturer of super precision micro tooling, drills and end mills as well as a large variety of specialty cutters. With over 6,500 standard tool offerings as well as advanced production capability, Louis Belet has the precision micro tooling you need to achieve optimal production efficiency.

Tooling Optimized for Medical Technology Applications:

Cutting tools for titanium and medical stainless that have been tested and optimized through research and assistance from Louis Belet's customers.

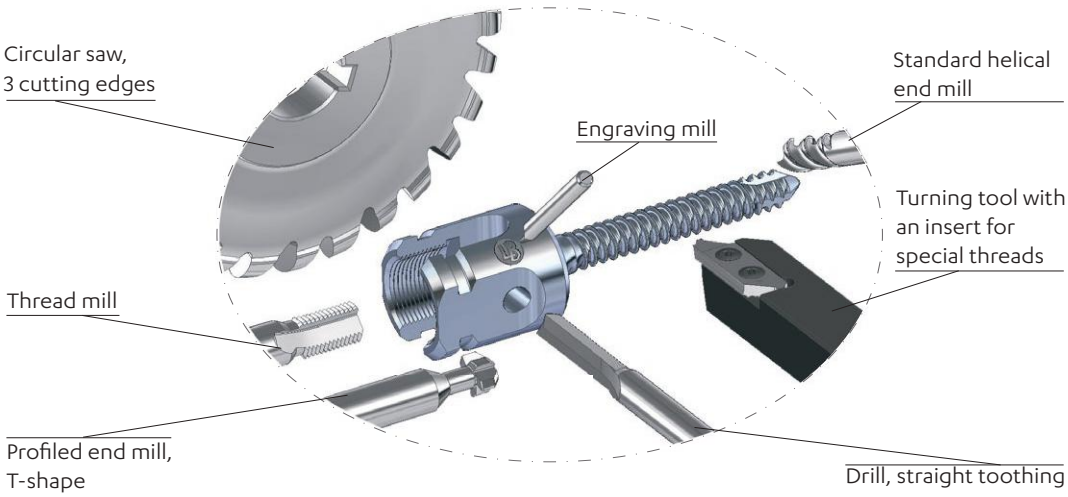


337 Series: Center Drills

GEOMETRY:	
Flutes:	2
Helix:	24˚
Drill Point:	60˚,90˚,120˚

TOLERANCE:	
D1 Under 1mm:	+/-.01mm
D1 Over 1mm	+/-.02mm
D Shank:	h5

OPTIONAL COATINGS:	
TRIO:	Steel & Stainless
SOLO:	Brass & Bronze
RICO:	Titanium & Aluminum



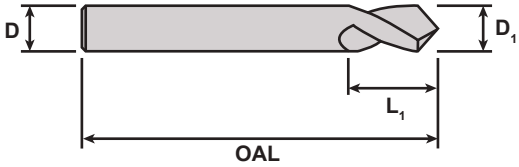

60˚ - 2 Flute

Item No.	Description	D_1	D	L_1	OAL
3968-000100	TD-337-3-0.5	0.5	2	2	38
3968-000101	TD-337-3-0.6	0.6	2	2	38
3968-000102	TD-337-3-0.7	0.7	2	2	38
3968-000103	TD-337-3-0.8	0.8	2	3	38
3968-000104	TD-337-3-0.9	0.9	2	3	38
3968-000105	TD-337-3-1	1	2	3	38
3968-000106	TD-337-3-1.1	1.1	2	3	38
3968-000107	TD-337-3-1.2	1.2	2	3	38
3968-000108	TD-337-3-1.3	1.3	2	3	38
3968-000109	TD-337-3-1.4	1.4	2	3	38
3968-000110	TD-337-3-1.5	1.5	2	5	38
3968-000111	TD-337-3-1.6	1.6	2	5	38
3968-000112	TD-337-3-1.7	1.7	2	5	38
3968-000113	TD-337-3-1.8	1.8	2	5	38
3968-000114	TD-337-3-1.9	1.9	2	5	38
3968-000115	TD-337-3-2	2	2	8	38
3968-000116	TD-337-3-2.5	2.5	2.5	8	38
3968-000117	TD-337-3-3	3	3	8	44
3968-000118	TD-337-3-4	4	4	12	50
3968-000119	TD-337-3-5	5	5	12	50
3968-000120	TD-337-3-6	6	6	15	61
3968-000121	TD-337-3-8	8	8	20	72
3968-000122	TD-337-3-10	10	10	20	72
3968-000123	TD-337-3-12	12	12	25	83
3968-000124	TD-337-3-16	16	16	25	83
3968-000125	TD-337-3-20	20	20	35	104

90˚ - 2 Flute

Item No.	Description	D_1	D	L_1	OAL
Call For Details	TD-337-0.40	0.4	2	2	38
3962-000100	TD-337-0.5	0.5	2	2	38
3962-000101	TD-337-0.55	0.55	2	2	38
3962-000102	TD-337-0.6	0.6	2	2	38
3962-000103	TD-337-0.65	0.65	2	2	38
3962-000104	TD-337-0.7	0.7	2	2	38
3962-000105	TD-337-0.75	0.75	2	2	38
3962-000106	TD-337-0.8	0.8	2	3	38
3962-000107	TD-337-0.85	0.85	2	3	38
3962-000108	TD-337-0.9	0.9	2	3	38
3962-000109	TD-337-0.95	0.95	2	3	38
3962-000110	TD-337-1	1	2	3	38
3962-000111	TD-337-1.05	1.05	2	3	38
3962-000112	TD-337-1.1	1.1	2	3	38
3962-000113	TD-337-1.15	1.15	2	3	38
3962-000114	TD-337-1.2	1.2	2	3	38
3962-000115	TD-337-1.25	1.25	2	3	38
3962-000116	TD-337-1.3	1.3	2	3	38
3962-000117	TD-337-1.35	1.35	2	3	38
3962-000118	TD-337-1.4	1.4	2	3	38
3962-000119	TD-337-1.45	1.45	2	3	38
3962-000120	TD-337-1.5	1.5	2	5	38
3962-000121	TD-337-1.6	1.6	2	5	38
3962-000122	TD-337-1.7	1.7	2	5	38
3962-000123	TD-337-1.8	1.8	2	5	38
3962-000124	TD-337-1.9	1.9	2	5	38
3962-000125	TD-337-2	2	2	8	38
3962-000126	TD-337-2.5	2.5	2.5	8	38
3962-000127	TD-337-3	3	3	8	44
3962-000128	TD-337-4	4	4	12	50
3962-000129	TD-337-5	5	5	12	50
3962-000130	TD-337-6	6	6	15	61
3962-000131	TD-337-8	8	8	20	72
3962-000132	TD-337-10	10	10	20	72
3962-000133	TD-337-12	12	12	25	83
3962-000134	TD-337-16	16	16	25	83
3962-000135	TD-337-20	20	20	35	104

120˚ - 2 Flute


Item No.	Description	D_1	D	L_1	OAL
3966-000100	TD-337-2-0.5	0.5	2	2	38
3966-000101	TD-337-2-0.55	0.55	2	2	38
3966-000102	TD-337-2-0.6	0.6	2	2	38
3966-000103	TD-337-2-0.65	0.65	2	2	38
3966-000104	TD-337-2-0.7	0.7	2	2	38
3966-000105	TD-337-2-0.75	0.75	2	2	38
3966-000106	TD-337-2-0.8	0.8	2	3	38
3966-000107	TD-337-2-0.85	0.85	2	3	38
3966-000108	TD-337-2-0.9	0.9	2	3	38
3966-000109	TD-337-2-0.95	0.95	2	3	38
3966-000110	TD-337-2-1	1	2	3	38
3966-000111	TD-337-2-1.05	1.05	2	3	38
3966-000112	TD-337-2-1.1	1.1	2	3	38
3966-000113	TD-337-2-1.15	1.15	2	3	38
3966-000114	TD-337-2-1.2	1.2	2	3	38
3966-000115	TD-337-2-1.25	1.25	2	3	38
3966-000116	TD-337-2-1.3	1.3	2	3	38
3966-000117	TD-337-2-1.35	1.35	2	3	38
3966-000118	TD-337-2-1.4	1.4	2	3	38
3966-000119	TD-337-2-1.45	1.45	2	3	38
3966-000120	TD-337-2-1.5	1.5	2	5	38
3966-000121	TD-337-2-1.6	1.6	2	5	38
3966-000122	TD-337-2-1.7	1.7	2	5	38
3966-000123	TD-337-2-1.8	1.8	2	5	38
3966-000124	TD-337-2-1.9	1.9	2	5	38
3966-000125	TD-337-2-2	2	2	8	38
3966-000126	TD-337-2-2.5	2.5	2.5	8	38
3966-000127	TD-337-2-3	3	3	8	44
3966-000128	TD-337-2-4	4	4	12	50
3966-000129	TD-337-2-5	5	5	12	50
3966-000130	TD-337-2-6	6	6	15	61
3966-000131	TD-337-2-8	8	8	20	72
3966-000132	TD-337-2-10	10	10	20	72
3966-000133	TD-337-2-12	12	12	25	83
3966-000134	TD-337-2-16	16	16	25	83
3966-000135	TD-337-2-20	20	20	35	104

Through rigorous testing, feedback from customers as well as years of advancement in grinding and geometry development, Louis Belet has introduced the EXPERT series of application specific drills and cutting tools. The INOX370 Series has been developed for advanced tool life, cutting reliability and chip control in stainless steels.

Comparative Trial Test:
- Test: INOX370 vs Conventional Twist Drill
- Diameter: 1.85mm x 12mm Flute Length
- Material: 316L Stainless
- Hole: 8mm deep thru-hole

End of Life Criteria:
- Tool breakage
- Conical holes
- Excessive burrs
- Deviation of hole location
- Diameter tolerance +/-.01mm

Cutting Parameters:
Vc = 30m / min or 98.4 SFM
f = .04mm per rev or .0015" IPR
RPM = 5164
Peck Cycle = .37mm

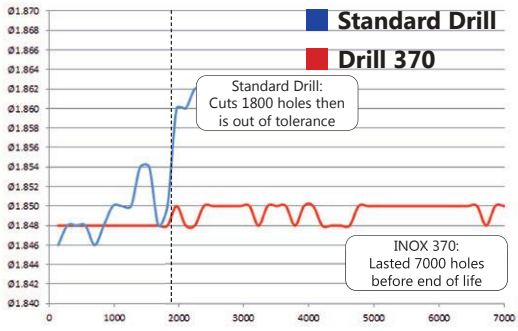




Test Results

INOX 370 Drill
- Cut 7000 Holes
- Fragmented Chips
- Cleaner, Tight Tolerance Holes



Standard Drill
- Cut 1800 Holes
- Long Stringy Chips
- Poor Finish, Burrs

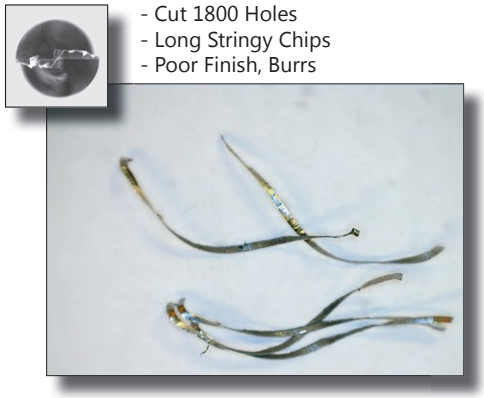


342 Series: Precision Micro Drills - 2 Flute

GEOMETRY:	
Flutes:	2
Helix:	34˚
Drill Point:	118˚

TOLERANCE:	
D1:	-0.02mm / -0.004mm
OAL:	-0.02mm / -0.00mm
D Shank:	h5

OPTIONAL COATINGS:	
TRIO:	Steel & Stainless
SOLO:	Brass & Bronze
RICO:	Titanium & Aluminum





Item No.	Description	D_1	L_1
3982-000100	TD-342-0.05	0.05	0.3
3982-000101	TD-342-0.06	0.06	0.4
3982-000102	TD-342-0.07	0.07	0.4
3982-000103	TD-342-0.08	0.08	0.5
3982-000104	TD-342-0.09	0.09	0.5
3982-000105	TD-342-0.1	0.10	0.5
3982-000106	TD-342-0.11	0.11	0.5
3982-000107	TD-342-0.12	0.12	0.5
3982-000108	TD-342-0.13	0.13	0.5
3982-000109	TD-342-0.14	0.14	0.5
3982-000110	TD-342-0.15	0.15	0.8
3982-000111	TD-342-0.16	0.16	0.8
3982-000112	TD-342-0.17	0.17	0.8
3982-000113	TD-342-0.18	0.18	0.8
3982-000114	TD-342-0.19	0.19	0.8
3982-000115	TD-342-0.2	0.20	0.8
3982-000116	TD-342-0.21	0.21	1.0
3982-000117	TD-342-0.22	0.22	1.0
3982-000118	TD-342-0.23	0.23	1.0
3982-000119	TD-342-0.24	0.24	1.0
3982-000120	TD-342-0.25	0.25	1.0
3982-000121	TD-342-0.26	0.26	1.5
3982-000122	TD-342-0.27	0.27	1.5
3982-000123	TD-342-0.28	0.28	1.5
3982-000124	TD-342-0.29	0.29	1.5
3982-000125	TD-342-0.3	0.30	1.5
3982-000126	TD-342-0.31	0.31	2.0
3982-000127	TD-342-0.32	0.32	2.0
3982-000128	TD-342-0.33	0.33	2.0
3982-000129	TD-342-0.34	0.34	2.0
3982-000130	TD-342-0.35	0.35	2.0
3982-000131	TD-342-0.36	0.36	3.0
3982-000132	TD-342-0.37	0.37	3.0
3982-000133	TD-342-0.38	0.38	3.0
3982-000134	TD-342-0.39	0.39	3.0
3982-000135	TD-342-0.4	0.40	3.0
3982-000136	TD-342-0.41	0.41	3.0
3982-000137	TD-342-0.42	0.42	3.0
3982-000138	TD-342-0.43	0.43	3.0
3982-000139	TD-342-0.44	0.44	3.0
3982-000140	TD-342-0.45	0.45	3.0
3982-000141	TD-342-0.46	0.46	3.0
3982-000142	TD-342-0.47	0.47	4.0
3982-000143	TD-342-0.48	0.48	4.0
3982-000144	TD-342-0.49	0.49	4.0
3982-000145	TD-342-0.5	0.50	4.0
3982-000146	TD-342-0.51	0.51	4.0
3982-000147	TD-342-0.52	0.52	4.0
3982-000148	TD-342-0.53	0.53	4.0
3982-000149	TD-342-0.54	0.54	4.0
3982-000150	TD-342-0.55	0.55	4.0

Item No.	Description	D_1	L_1
3982-000151	TD-342-0.56	0.56	4.0
3982-000152	TD-342-0.57	0.57	4.0
3982-000153	TD-342-0.58	0.58	4.0
3982-000154	TD-342-0.59	0.59	4.0
3982-000155	TD-342-0.6	0.60	4.0
3982-000156	TD-342-0.61	0.61	5.0
3982-000157	TD-342-0.62	0.62	5.0
3982-000158	TD-342-0.63	0.63	5.0
3982-000159	TD-342-0.64	0.64	5.0
3982-000160	TD-342-0.65	0.65	5.0
3982-000161	TD-342-0.66	0.66	5.0
3982-000162	TD-342-0.67	0.67	5.0
3982-000163	TD-342-0.68	0.68	5.0
3982-000164	TD-342-0.69	0.69	5.0
3982-000165	TD-342-0.7	0.70	5.0
3982-000166	TD-342-0.71	0.71	5.0
3982-000167	TD-342-0.72	0.72	5.0
3982-000168	TD-342-0.73	0.73	5.0
3982-000169	TD-342-0.74	0.74	5.0
3982-000170	TD-342-0.75	0.75	5.0
3982-000171	TD-342-0.76	0.76	5.0
3982-000172	TD-342-0.77	0.77	5.0
3982-000173	TD-342-0.78	0.78	5.0
3982-000174	TD-342-0.79	0.79	5.0
3982-000175	TD-342-0.8	0.80	5.0
3982-000176	TD-342-0.81	0.81	6.0
3982-000177	TD-342-0.82	0.82	6.0
3982-000178	TD-342-0.83	0.83	6.0
3982-000179	TD-342-0.84	0.84	6.0
3982-000180	TD-342-0.85	0.85	6.0
3982-000181	TD-342-0.86	0.86	6.0
3982-000182	TD-342-0.87	0.87	6.0
3982-000183	TD-342-0.88	0.88	6.0
3982-000184	TD-342-0.89	0.89	6.0
3982-000185	TD-342-0.9	0.90	6.0
3982-000186	TD-342-0.91	0.91	6.0
3982-000187	TD-342-0.92	0.92	6.0
3982-000188	TD-342-0.93	0.93	6.0
3982-000189	TD-342-0.94	0.94	6.0
3982-000190	TD-342-0.95	0.95	6.0
3982-000191	TD-342-0.96	0.96	6.0
3982-000192	TD-342-0.97	0.97	6.0
3982-000193	TD-342-0.98	0.98	6.0
3982-000194	TD-342-0.99	0.99	6.0
3982-000195	TD-342-1	1.00	6.0
3982-000196	TD-342-1.01	1.01	6.0
3982-000197	TD-342-1.02	1.02	6.0
3982-000198	TD-342-1.03	1.03	6.0
3982-000199	TD-342-1.04	1.04	6.0
3982-000200	TD-342-1.05	1.05	6.0
3982-000201	TD-342-1.06	1.06	6.0


342 Series: Precision Micro Drills - 2 Flute (continued)

GEOMETRY:	
Flutes:	2
Helix:	34˚
Drill Point:	118˚

TOLERANCE:	
D1:	-0.02mm / -0.004mm
OAL:	-0.02mm / -0.00mm
D Shank:	h5

OPTIONAL COATINGS:	
TRIO:	Steel & Stainless
SOLO:	Brass & Bronze
RICO:	Titanium & Aluminum





Item No.	Description	D_1	L_1
3982-000202	TD-342-1.07	1.07	6.0
3982-000203	TD-342-1.08	1.08	6.0
3982-000204	TD-342-1.09	1.09	6.0
3982-000205	TD-342-1.1	1.10	6.0
3982-000206	TD-342-1.12	1.12	6.0
3982-000207	TD-342-1.13	1.13	6.0
3982-000208	TD-342-1.14	1.14	6.0
3982-000209	TD-342-1.15	1.15	6.0
3982-000210	TD-342-1.16	1.16	6.0
3982-000211	TD-342-1.17	1.17	6.0
3982-000212	TD-342-1.18	1.18	6.0
3982-000213	TD-342-1.19	1.19	6.0
3982-000214	TD-342-1.2	1.20	6.0
3982-000215	TD-342-1.21	1.21	8.0
3982-000216	TD-342-1.22	1.22	8.0
3982-000217	TD-342-1.23	1.23	8.0
3982-000218	TD-342-1.24	1.24	8.0
3982-000219	TD-342-1.25	1.25	8.0
3982-000220	TD-342-1.26	1.26	8.0
3982-000221	TD-342-1.27	1.27	8.0
3982-000222	TD-342-1.28	1.28	8.0
3982-000223	TD-342-1.29	1.29	8.0
3982-000224	TD-342-1.3	1.30	8.0
3982-000225	TD-342-1.31	1.31	8.0
3982-000226	TD-342-1.32	1.32	8.0
3982-000227	TD-342-1.33	1.33	8.0
3982-000228	TD-342-1.34	1.34	8.0
3982-000229	TD-342-1.35	1.35	8.0
3982-000230	TD-342-1.36	1.36	8.0
3982-000231	TD-342-1.37	1.37	8.0
3982-000232	TD-342-1.38	1.38	8.0
3982-000233	TD-342-1.39	1.39	8.0
3982-000234	TD-342-1.4	1.40	8.0
3982-000235	TD-342-1.41	1.41	8.0
3982-000236	TD-342-1.42	1.42	8.0
3982-000237	TD-342-1.43	1.43	8.0
3982-000238	TD-342-1.44	1.44	8.0
3982-000239	TD-342-1.45	1.45	8.0
3982-000240	TD-342-1.46	1.46	8.0
3982-000241	TD-342-1.47	1.47	8.0
3982-000242	TD-342-1.48	1.48	8.0
3982-000243	TD-342-1.49	1.49	8.0
3982-000244	TD-342-1.5	1.50	8.0
3982-000245	TD-342-1.51	1.51	8.0
3982-000246	TD-342-1.52	1.52	8.0
3982-000247	TD-342-1.53	1.53	8.0
3982-000248	TD-342-1.54	1.54	8.0
3982-000249	TD-342-1.55	1.55	8.0
3982-000250	TD-342-1.56	1.56	8.0
3982-000251	TD-342-1.57	1.57	8.0
3982-000252	TD-342-1.58	1.58	8.0

Item No.	Description	D_1	L_1
3982-000253	TD-342-1.59	1.59	8.0
3982-000254	TD-342-1.6	1.60	8.0
3982-000255	TD-342-1.61	1.61	8.0
3982-000256	TD-342-1.62	1.62	8.0
3982-000257	TD-342-1.63	1.63	8.0
3982-000258	TD-342-1.64	1.64	8.0
3982-000259	TD-342-1.65	1.65	8.0
3982-000260	TD-342-1.66	1.66	8.0
3982-000261	TD-342-1.67	1.67	8.0
3982-000262	TD-342-1.68	1.68	8.0
3982-000263	TD-342-1.69	1.69	8.0
3982-000264	TD-342-1.7	1.70	8.0
3982-000265	TD-342-1.71	1.71	12.0
3982-000266	TD-342-1.72	1.72	12.0
3982-000267	TD-342-1.73	1.73	12.0
3982-000268	TD-342-1.74	1.74	12.0
3982-000269	TD-342-1.75	1.75	12.0
3982-000270	TD-342-1.76	1.76	12.0
3982-000271	TD-342-1.77	1.77	12.0
3982-000272	TD-342-1.78	1.78	12.0
3982-000273	TD-342-1.79	1.79	12.0
3982-000274	TD-342-1.8	1.80	12.0
3982-000275	TD-342-1.81	1.81	12.0
3982-000276	TD-342-1.82	1.82	12.0
3982-000277	TD-342-1.83	1.83	12.0
3982-000278	TD-342-1.84	1.84	12.0
3982-000279	TD-342-1.85	1.85	12.0
3982-000280	TD-342-1.86	1.86	12.0
3982-000281	TD-342-1.87	1.87	12.0
3982-000282	TD-342-1.88	1.88	12.0
3982-000283	TD-342-1.89	1.89	12.0
3982-000284	TD-342-1.9	1.90	12.0
3982-000285	TD-342-1.91	1.91	12.0
3982-000286	TD-342-1.92	1.92	12.0
3982-000287	TD-342-1.93	1.93	12.0
3982-000288	TD-342-1.94	1.94	12.0
3982-000289	TD-342-1.95	1.95	12.0
3982-000290	TD-342-1.96	1.96	12.0
3982-000291	TD-342-1.97	1.97	12.0
3982-000292	TD-342-1.98	1.98	12.0
3982-000293	TD-342-1.99	1.99	12.0
3982-000294	TD-342-2	2.00	12.0
3982-000295	TD-342-2.05	2.05	12.0
3982-000296	TD-342-2.1	2.10	12.0
3982-000297	TD-342-2.15	2.15	12.0
3982-000298	TD-342-2.2	2.20	12.0
3982-000299	TD-342-2.25	2.25	12.0
3982-000300	TD-342-2.3	2.30	12.0
3982-000301	TD-342-2.35	2.35	12.0
3982-000302	TD-342-2.4	2.40	12.0
3982-000303	TD-342-2.45	2.45	12.0
3982-000304	TD-342-2.5	2.50	12.0


343-6 Series: Precision Micro Drills - 2 Flute

GEOMETRY:	
Flutes:	2
Helix:	34˚
Drill Point:	118˚

TOLERANCE:	
D1:	-0.002mm / -0.004mm
OAL:	-0.02mm / -0.00mm
D Shank:	h5

OPTIONAL COATINGS:	
TRIO:	Steel & Stainless
SOLO:	Brass & Bronze
RICO:	Titanium & Aluminum





Item No.	Description	D_1	D_{shank}
3986-000109	TD-343-6-0.80	0.80mm	2.0mm
3986-000100	TD-343-6-0.81	0.81mm	2.0mm
3986-000101	TD-343-6-0.82	0.82mm	2.0mm
3986-000102	TD-343-6-0.83	0.83mm	2.0mm
3986-000103	TD-343-6-0.84	0.84mm	2.0mm
3986-000104	TD-343-6-0.85	0.85mm	2.0mm
3986-000105	TD-343-6-0.86	0.86mm	2.0mm
3986-000106	TD-343-6-0.87	0.87mm	2.0mm
3986-000107	TD-343-6-0.88	0.88mm	2.0mm
3986-000108	TD-343-6-0.89	0.89mm	2.0mm
3986-000119	TD-343-6-0.90	0.90mm	2.0mm
3986-000110	TD-343-6-0.91	0.91mm	2.0mm
3986-000111	TD-343-6-0.92	0.92mm	2.0mm
3986-000112	TD-343-6-0.93	0.93mm	2.0mm
3986-000113	TD-343-6-0.94	0.94mm	2.0mm
3986-000114	TD-343-6-0.95	0.95mm	2.0mm
3986-000115	TD-343-6-0.96	0.96mm	2.0mm
3986-000116	TD-343-6-0.97	0.97mm	2.0mm
3986-000117	TD-343-6-0.98	0.98mm	2.0mm
3986-000118	TD-343-6-0.99	0.99mm	2.0mm
3986-000219	TD-343-6-1.00	1.00mm	2.0mm
3986-000120	TD-343-6-1.01	1.01mm	2.0mm
3986-000121	TD-343-6-1.02	1.02mm	2.0mm
3986-000122	TD-343-6-1.03	1.03mm	2.0mm
3986-000123	TD-343-6-1.04	1.04mm	2.0mm
3986-000124	TD-343-6-1.05	1.05mm	2.0mm
3986-000125	TD-343-6-1.06	1.06mm	2.0mm
3986-000126	TD-343-6-1.07	1.07mm	2.0mm
3986-000127	TD-343-6-1.08	1.08mm	2.0mm
3986-000128	TD-343-6-1.09	1.09mm	2.0mm
3986-000138	TD-343-6-1.10	1.10mm	2.0mm
3986-000129	TD-343-6-1.11	1.11mm	2.0mm
3986-000130	TD-343-6-1.12	1.12mm	2.0mm
3986-000131	TD-343-6-1.13	1.13mm	2.0mm
3986-000132	TD-343-6-1.14	1.14mm	2.0mm
3986-000133	TD-343-6-1.15	1.15mm	2.0mm
3986-000134	TD-343-6-1.16	1.16mm	2.0mm
3986-000135	TD-343-6-1.17	1.17mm	2.0mm
3986-000136	TD-343-6-1.18	1.18mm	2.0mm
3986-000137	TD-343-6-1.19	1.19mm	2.0mm

Item No.	Description	D_1	D_{shank}
3986-000148	TD-343-6-1.2	1.20mm	2.0mm
3986-000139	TD-343-6-1.21	1.21mm	2.0mm
3986-000140	TD-343-6-1.22	1.22mm	2.0mm
3986-000141	TD-343-6-1.23	1.23mm	2.0mm
3986-000142	TD-343-6-1.24	1.24mm	2.0mm
3986-000143	TD-343-6-1.25	1.25mm	2.0mm
3986-000144	TD-343-6-1.26	1.26mm	2.0mm
3986-000145	TD-343-6-1.27	1.27mm	2.0mm
3986-000146	TD-343-6-1.28	1.28mm	2.0mm
3986-000147	TD-343-6-1.29	1.29mm	2.0mm
3986-000158	TD-343-6-1.3	1.30mm	2.0mm
3986-000149	TD-343-6-1.31	1.31mm	2.0mm
3986-000150	TD-343-6-1.32	1.32mm	2.0mm
3986-000151	TD-343-6-1.33	1.33mm	2.0mm
3986-000152	TD-343-6-1.34	1.34mm	2.0mm
3986-000153	TD-343-6-1.35	1.35mm	2.0mm
3986-000154	TD-343-6-1.36	1.36mm	2.0mm
3986-000155	TD-343-6-1.37	1.37mm	2.0mm
3986-000156	TD-343-6-1.38	1.38mm	2.0mm
3986-000157	TD-343-6-1.39	1.39mm	2.0mm
3986-000168	TD-343-6-1.4	1.40mm	2.0mm
3986-000159	TD-343-6-1.41	1.41mm	2.0mm
3986-000160	TD-343-6-1.42	1.42mm	2.0mm
3986-000161	TD-343-6-1.43	1.43mm	2.0mm
3986-000162	TD-343-6-1.44	1.44mm	2.0mm
3986-000163	TD-343-6-1.45	1.45mm	2.0mm
3986-000164	TD-343-6-1.46	1.46mm	2.0mm
3986-000165	TD-343-6-1.47	1.47mm	2.0mm
3986-000166	TD-343-6-1.48	1.48mm	2.0mm
3986-000167	TD-343-6-1.49	1.49mm	2.0mm
3986-000178	TD-343-6-1.5	1.50mm	2.0mm
3986-000169	TD-343-6-1.51	1.51mm	2.0mm
3986-000170	TD-343-6-1.52	1.52mm	2.0mm
3986-000171	TD-343-6-1.53	1.53mm	2.0mm
3986-000172	TD-343-6-1.54	1.54mm	2.0mm
3986-000173	TD-343-6-1.55	1.55mm	2.0mm
3986-000174	TD-343-6-1.56	1.56mm	2.0mm
3986-000175	TD-343-6-1.57	1.57mm	2.0mm
3986-000176	TD-343-6-1.58	1.58mm	2.0mm
3986-000177	TD-343-6-1.59	1.59mm	2.0mm


Item No.	Description	D_1	D_{shank}
3986-000188	TD-343-6-1.6	1.60mm	2.0mm
3986-000179	TD-343-6-1.61	1.61mm	2.0mm
3986-000180	TD-343-6-1.62	1.62mm	2.0mm
3986-000181	TD-343-6-1.63	1.63mm	2.0mm
3986-000182	TD-343-6-1.64	1.64mm	2.0mm
3986-000183	TD-343-6-1.65	1.65mm	2.0mm
3986-000184	TD-343-6-1.66	1.66mm	2.0mm
3986-000185	TD-343-6-1.67	1.67mm	2.0mm
3986-000186	TD-343-6-1.68	1.68mm	2.0mm
3986-000187	TD-343-6-1.69	1.69mm	2.0mm
3986-000198	TD-343-6-1.7	1.70mm	2.0mm
3986-000189	TD-343-6-1.71	1.71mm	2.0mm
3986-000190	TD-343-6-1.72	1.72mm	2.0mm
3986-000191	TD-343-6-1.73	1.73mm	2.0mm
3986-000192	TD-343-6-1.74	1.74mm	2.0mm
3986-000193	TD-343-6-1.75	1.75mm	2.0mm
3986-000194	TD-343-6-1.76	1.76mm	2.0mm
3986-000195	TD-343-6-1.77	1.77mm	2.0mm
3986-000196	TD-343-6-1.78	1.78mm	2.0mm
3986-000197	TD-343-6-1.79	1.79mm	2.0mm
3986-000208	TD-343-6-1.8	1.80mm	2.0mm
3986-000199	TD-343-6-1.81	1.81mm	2.0mm
3986-000200	TD-343-6-1.82	1.82mm	2.0mm
3986-000201	TD-343-6-1.83	1.83mm	2.0mm
3986-000202	TD-343-6-1.84	1.84mm	2.0mm
3986-000203	TD-343-6-1.85	1.85mm	2.0mm
3986-000204	TD-343-6-1.86	1.86mm	2.0mm
3986-000205	TD-343-6-1.87	1.87mm	2.0mm
3986-000206	TD-343-6-1.88	1.88mm	2.0mm
3986-000207	TD-343-6-1.89	1.89mm	2.0mm
3986-000218	TD-343-6-1.9	1.90mm	2.0mm
3986-000209	TD-343-6-1.91	1.91mm	2.0mm
3986-000210	TD-343-6-1.92	1.92mm	2.0mm
3986-000211	TD-343-6-1.93	1.93mm	2.0mm
3986-000212	TD-343-6-1.94	1.94mm	2.0mm
3986-000213	TD-343-6-1.95	1.95mm	2.0mm
3986-000214	TD-343-6-1.96	1.96mm	2.0mm
3986-000215	TD-343-6-1.97	1.97mm	2.0mm
3986-000216	TD-343-6-1.98	1.98mm	2.0mm
3986-000217	TD-343-6-1.99	1.99mm	2.0mm
3986-000220	TD-343-6-2.0	2.00mm	2.0mm

343-8 Series: Precision Micro Drills - 2 Flute

GEOMETRY:	
Flutes:	2
Helix:	34˚
Drill Point:	118˚

TOLERANCE:	
D1:	-0.002mm / -0.004mm
OAL:	-0.02mm / -0.00mm
D Shank:	h5

OPTIONAL COATINGS:	
TRIO:	Steel & Stainless
SOLO:	Brass & Bronze
RICO:	Titanium & Aluminum

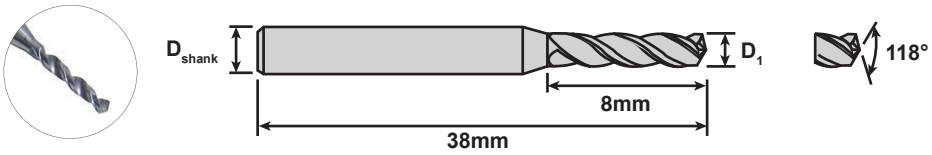

Item No.	Description	D_1	D_{shank}
3988-000100	TD-343-8-0.8	0.80mm	2.0mm
3988-000101	TD-343-8-0.81	0.81mm	2.0mm
3988-000102	TD-343-8-0.82	0.82mm	2.0mm
3988-000103	TD-343-8-0.83	0.83mm	2.0mm
3988-000104	TD-343-8-0.84	0.84mm	2.0mm
3988-000105	TD-343-8-0.85	0.85mm	2.0mm
3988-000106	TD-343-8-0.86	0.86mm	2.0mm
3988-000107	TD-343-8-0.87	0.87mm	2.0mm
3988-000108	TD-343-8-0.88	0.88mm	2.0mm
3988-000109	TD-343-8-0.89	0.89mm	2.0mm
3988-000110	TD-343-8-0.9	0.90mm	2.0mm
3988-000111	TD-343-8-0.91	0.91mm	2.0mm
3988-000112	TD-343-8-0.92	0.92mm	2.0mm
3988-000113	TD-343-8-0.93	0.93mm	2.0mm
3988-000114	TD-343-8-0.94	0.94mm	2.0mm
3988-000115	TD-343-8-0.95	0.95mm	2.0mm
3988-000116	TD-343-8-0.96	0.96mm	2.0mm
3988-000117	TD-343-8-0.97	0.97mm	2.0mm
3988-000118	TD-343-8-0.98	0.98mm	2.0mm
3988-000119	TD-343-8-0.99	0.99mm	2.0mm
3988-000120	TD-343-8-1.0	1.00mm	2.0mm
3988-000121	TD-343-8-1.01	1.01mm	2.0mm
3988-000122	TD-343-8-1.02	1.02mm	2.0mm
3988-000123	TD-343-8-1.03	1.03mm	2.0mm
3988-000124	TD-343-8-1.04	1.04mm	2.0mm
3988-000125	TD-343-8-1.05	1.05mm	2.0mm
3988-000126	TD-343-8-1.06	1.06mm	2.0mm
3988-000127	TD-343-8-1.07	1.07mm	2.0mm
3988-000128	TD-343-8-1.08	1.08mm	2.0mm
3988-000129	TD-343-8-1.09	1.09mm	2.0mm
3988-000130	TD-343-8-1.1	1.10mm	2.0mm
3988-000131	TD-343-8-1.11	1.11mm	2.0mm
3988-000132	TD-343-8-1.12	1.12mm	2.0mm
3988-000133	TD-343-8-1.13	1.13mm	2.0mm
3988-000134	TD-343-8-1.14	1.14mm	2.0mm
3988-000135	TD-343-8-1.15	1.15mm	2.0mm
3988-000136	TD-343-8-1.16	1.16mm	2.0mm
3988-000137	TD-343-8-1.17	1.17mm	2.0mm
3988-000138	TD-343-8-1.18	1.18mm	2.0mm
3988-000139	TD-343-8-1.19	1.19mm	2.0mm
3988-000140	TD-343-8-1.2	1.20mm	2.0mm
3988-000141	TD-343-8-1.21	1.21mm	2.0mm
3988-000142	TD-343-8-1.22	1.22mm	2.0mm
3988-000143	TD-343-8-1.23	1.23mm	2.0mm
3988-000144	TD-343-8-1.24	1.24mm	2.0mm
3988-000145	TD-343-8-1.25	1.25mm	2.0mm
3988-000146	TD-343-8-1.26	1.26mm	2.0mm
3988-000147	TD-343-8-1.27	1.27mm	2.0mm
3988-000148	TD-343-8-1.28	1.28mm	2.0mm
3988-000149	TD-343-8-1.29	1.29mm	2.0mm
3988-000150	TD-343-8-1.3	1.30mm	2.0mm
3988-000151	TD-343-8-1.31	1.31mm	2.0mm
3988-000152	TD-343-8-1.32	1.32mm	2.0mm
3988-000153	TD-343-8-1.33	1.33mm	2.0mm
3988-000154	TD-343-8-1.34	1.34mm	2.0mm

Item No.	Description	D_1	D_{shank}
3988-000154	TD-343-8-1.34	1.34mm	2.0mm
3988-000155	TD-343-8-1.35	1.35mm	2.0mm
3988-000156	TD-343-8-1.36	1.36mm	2.0mm
3988-000157	TD-343-8-1.37	1.37mm	2.0mm
3988-000158	TD-343-8-1.38	1.38mm	2.0mm
3988-000159	TD-343-8-1.39	1.39mm	2.0mm
3988-000160	TD-343-8-1.4	1.40mm	2.0mm
3988-000161	TD-343-8-1.41	1.41mm	2.0mm
3988-000162	TD-343-8-1.42	1.42mm	2.0mm
3988-000163	TD-343-8-1.43	1.43mm	2.0mm
3988-000164	TD-343-8-1.44	1.44mm	2.0mm
3988-000165	TD-343-8-1.45	1.45mm	2.0mm
3988-000166	TD-343-8-1.46	1.46mm	2.0mm
3988-000167	TD-343-8-1.47	1.47mm	2.0mm
3988-000168	TD-343-8-1.48	1.48mm	2.0mm
3988-000169	TD-343-8-1.49	1.49mm	2.0mm
3988-000170	TD-343-8-1.5	1.50mm	2.0mm
3988-000171	TD-343-8-1.51	1.51mm	2.0mm
3988-000172	TD-343-8-1.52	1.52mm	2.0mm
3988-000173	TD-343-8-1.53	1.53mm	2.0mm
3988-000174	TD-343-8-1.54	1.54mm	2.0mm
3988-000175	TD-343-8-1.55	1.55mm	2.0mm
3988-000176	TD-343-8-1.56	1.56mm	2.0mm
3988-000177	TD-343-8-1.57	1.57mm	2.0mm
3988-000178	TD-343-8-1.58	1.58mm	2.0mm
3988-000179	TD-343-8-1.59	1.59mm	2.0mm
3988-000180	TD-343-8-1.6	1.60mm	2.0mm
3988-000181	TD-343-8-1.61	1.61mm	2.0mm
3988-000182	TD-343-8-1.62	1.62mm	2.0mm
3988-000183	TD-343-8-1.63	1.63mm	2.0mm
3988-000184	TD-343-8-1.64	1.64mm	2.0mm
3988-000185	TD-343-8-1.65	1.65mm	2.0mm
3988-000186	TD-343-8-1.66	1.66mm	2.0mm
3988-000187	TD-343-8-1.67	1.67mm	2.0mm
3988-000188	TD-343-8-1.68	1.68mm	2.0mm
3988-000189	TD-343-8-1.69	1.69mm	2.0mm
3988-000190	TD-343-8-1.7	1.70mm	2.0mm
3988-000191	TD-343-8-1.71	1.71mm	2.0mm
3988-000192	TD-343-8-1.72	1.72mm	2.0mm
3988-000193	TD-343-8-1.73	1.73mm	2.0mm
3988-000194	TD-343-8-1.74	1.74mm	2.0mm
3988-000195	TD-343-8-1.75	1.75mm	2.0mm
3988-000196	TD-343-8-1.76	1.76mm	2.0mm
3988-000197	TD-343-8-1.77	1.77mm	2.0mm
3988-000198	TD-343-8-1.78	1.78mm	2.0mm
3988-000199	TD-343-8-1.79	1.79mm	2.0mm
3988-000200	TD-343-8-1.8	1.80mm	2.0mm
3988-000201	TD-343-8-1.81	1.81mm	2.0mm
3988-000202	TD-343-8-1.82	1.82mm	2.0mm
3988-000203	TD-343-8-1.83	1.83mm	2.0mm
3988-000204	TD-343-8-1.84	1.84mm	2.0mm
3988-000205	TD-343-8-1.85	1.85mm	2.0mm
3988-000206	TD-343-8-1.86	1.86mm	2.0mm
3988-000207	TD-343-8-1.87	1.87mm	2.0mm

Item No.	Description	D_1	D_{shank}
3988-000208	TD-343-8-1.88	1.88mm	2.0mm
3988-000209	TD-343-8-1.89	1.89mm	2.0mm
3988-000210	TD-343-8-1.9	1.90mm	2.0mm
3988-000211	TD-343-8-1.91	1.91mm	2.0mm
3988-000212	TD-343-8-1.92	1.92mm	2.0mm
3988-000213	TD-343-8-1.93	1.93mm	2.0mm
3988-000214	TD-343-8-1.94	1.94mm	2.0mm
3988-000215	TD-343-8-1.95	1.95mm	2.0mm
3988-000216	TD-343-8-1.96	1.96mm	2.0mm
3988-000217	TD-343-8-1.97	1.97mm	2.0mm
3988-000218	TD-343-8-1.98	1.98mm	2.0mm
3988-000219	TD-343-8-1.99	1.99mm	2.0mm
3988-000221	TD-343-8-2.05	2.05mm	2.0mm
3988-000222	TD-343-8-2.1	2.10mm	2.0mm
3988-000223	TD-343-8-2.15	2.15mm	2.0mm
3988-000224	TD-343-8-2.17	2.17mm	2.0mm
3988-000225	TD-343-8-2.18	2.18mm	2.0mm
3988-000226	TD-343-8-2.2	2.20mm	2.0mm
3988-000227	TD-343-8-2.25	2.25mm	2.0mm
3988-000228	TD-343-8-2.27	2.27mm	2.0mm
3988-000229	TD-343-8-2.28	2.28mm	2.0mm
3988-000230	TD-343-8-2.3	2.30mm	2.0mm
3988-000231	TD-343-8-2.35	2.35mm	2.0mm
3988-000232	TD-343-8-2.37	2.37mm	2.0mm
3988-000233	TD-343-8-2.38	2.38mm	2.0mm
3988-000234	TD-343-8-2.4	2.40mm	2.0mm
3988-000235	TD-343-8-2.45	2.45mm	2.0mm
3988-000236	TD-343-8-2.5	2.50mm	2.0mm
3988-000237	TD-343-8-2.55	2.55mm	2.0mm
3988-000238	TD-343-8-2.6	2.60mm	2.0mm
3988-000239	TD-343-8-2.65	2.65mm	2.0mm
3988-000240	TD-343-8-2.7	2.70mm	2.0mm
3988-000241	TD-343-8-2.8	2.80mm	2.0mm
3988-000242	TD-343-8-2.9	2.90mm	2.0mm
3988-000243	TD-343-8-2.95	2.95mm	2.0mm
3988-000220	TD-343-8-20	2.00mm	2.0mm
3988-000244	TD-343-8-3.0	3.00mm	3.0mm
3988-000245	TD-343-8-3.1	3.10mm	4.0mm
3988-000246	TD-343-8-3.2	3.20mm	4.0mm
3988-000247	TD-343-8-3.3	3.30mm	4.0mm
3988-000248	TD-343-8-3.4	3.40mm	4.0mm
3988-000249	TD-343-8-3.5	3.50mm	4.0mm
3988-000250	TD-343-8-3.6	3.60mm	4.0mm
3988-000251	TD-343-8-3.7	3.70mm	4.0mm
3988-000252	TD-343-8-3.8	3.80mm	4.0mm
3988-000253	TD-343-8-3.9	3.90mm	4.0mm
3988-000254	TD-343-8-4.0	4.00mm	4.0mm
3988-000255	TD-343-8-4.1	4.10mm	4.5mm
3988-000256	TD-343-8-4.2	4.20mm	4.5mm
3988-000257	TD-343-8-4.3	4.30mm	4.5mm
3988-000258	TD-343-8-4.4	4.40mm	4.5mm
3988-000259	TD-343-8-4.5	4.50mm	4.5mm
3988-000260	TD-343-8-5.0	5.00mm	5.0mm
3988-000261	TD-343-8-5.5	5.50mm	5.5mm
3988-000262	TD-343-8-6.0	6.00mm	6.0mm


343-12 Series: Precision Micro Drills - 2 Flute

GEOMETRY:	
Flutes:	2
Helix:	34˚
Drill Point:	118˚

TOLERANCE:	
D1:	-0.002mm / -0.004mm
OAL:	-0.02mm / -0.00mm
D Shank:	h5

OPTIONAL COATINGS:	
TRIO:	Steel & Stainless
SOLO:	Brass & Bronze
RICO:	Titanium & Aluminum





Item No.	Description	D_1	D_{shank}
3984-000100	TD-343-12-0.8	0.80mm	2.0mm
3984-000101	TD-343-12-0.81	0.81mm	2.0mm
3984-000102	TD-343-12-0.82	0.82mm	2.0mm
3984-000103	TD-343-12-0.83	0.83mm	2.0mm
3984-000104	TD-343-12-0.84	0.84mm	2.0mm
3984-000105	TD-343-12-0.85	0.85mm	2.0mm
3984-000106	TD-343-12-0.86	0.86mm	2.0mm
3984-000107	TD-343-12-0.87	0.87mm	2.0mm
3984-000108	TD-343-12-0.88	0.88mm	2.0mm
3984-000109	TD-343-12-0.89	0.89mm	2.0mm
3984-000110	TD-343-12-0.9	0.90mm	2.0mm
3984-000111	TD-343-12-0.91	0.91mm	2.0mm
3984-000112	TD-343-12-0.92	0.92mm	2.0mm
3984-000113	TD-343-12-0.93	0.93mm	2.0mm
3984-000114	TD-343-12-0.94	0.94mm	2.0mm
3984-000115	TD-343-12-0.95	0.95mm	2.0mm
3984-000116	TD-343-12-0.96	0.96mm	2.0mm
3984-000117	TD-343-12-0.97	0.97mm	2.0mm
3984-000118	TD-343-12-0.98	0.98mm	2.0mm
3984-000119	TD-343-12-0.99	0.99mm	2.0mm
3984-000120	TD-343-12-1.0	1.00mm	2.0mm
3984-000121	TD-343-12-1.01	1.01mm	2.0mm
3984-000122	TD-343-12-1.02	1.02mm	2.0mm
3984-000123	TD-343-12-1.03	1.03mm	2.0mm
3984-000124	TD-343-12-1.04	1.04mm	2.0mm
3984-000125	TD-343-12-1.05	1.05mm	2.0mm
3984-000126	TD-343-12-1.06	1.06mm	2.0mm
3984-000127	TD-343-12-1.07	1.07mm	2.0mm
3984-000128	TD-343-12-1.08	1.08mm	2.0mm
3984-000129	TD-343-12-1.09	1.09mm	2.0mm
3984-000130	TD-343-12-1.1	1.10mm	2.0mm
3984-000131	TD-343-12-1.11	1.11mm	2.0mm
3984-000132	TD-343-12-1.12	1.12mm	2.0mm
3984-000133	TD-343-12-1.13	1.13mm	2.0mm
3984-000134	TD-343-12-1.14	1.14mm	2.0mm
3984-000135	TD-343-12-1.15	1.15mm	2.0mm
3984-000136	TD-343-12-1.16	1.16mm	2.0mm
3984-000137	TD-343-12-1.17	1.17mm	2.0mm
3984-000138	TD-343-12-1.18	1.18mm	2.0mm
3984-000139	TD-343-12-1.19	1.19mm	2.0mm
3984-000140	TD-343-12-1.2	1.20mm	2.0mm
3984-000141	TD-343-12-1.21	1.21mm	2.0mm
3984-000142	TD-343-12-1.22	1.22mm	2.0mm
3984-000143	TD-343-12-1.23	1.23mm	2.0mm
3984-000144	TD-343-12-1.24	1.24mm	2.0mm
3984-000145	TD-343-12-1.25	1.25mm	2.0mm
3984-000146	TD-343-12-1.26	1.26mm	2.0mm
3984-000147	TD-343-12-1.27	1.27mm	2.0mm
3984-000148	TD-343-12-1.28	1.28mm	2.0mm
3984-000149	TD-343-12-1.29	1.29mm	2.0mm
3984-000150	TD-343-12-1.3	1.30mm	2.0mm
3984-000151	TD-343-12-1.31	1.31mm	2.0mm
3984-000152	TD-343-12-1.32	1.32mm	2.0mm
3984-000153	TD-343-12-1.33	1.33mm	2.0mm
3984-000154	TD-343-12-1.34	1.34mm	2.0mm
3984-000155	TD-343-12-1.35	1.35mm	2.0mm
3984-000156	TD-343-12-1.36	1.36mm	2.0mm
3984-000157	TD-343-12-1.37	1.37mm	2.0mm
3984-000158	TD-343-12-1.38	1.38mm	2.0mm
3984-000159	TD-343-12-1.39	1.39mm	2.0mm
3984-000160	TD-343-12-1.4	1.40mm	2.0mm
3984-000161	TD-343-12-1.41	1.41mm	2.0mm
3984-000162	TD-343-12-1.42	1.42mm	2.0mm
3984-000163	TD-343-12-1.43	1.43mm	2.0mm
3984-000164	TD-343-12-1.44	1.44mm	2.0mm
3984-000165	TD-343-12-1.45	1.45mm	2.0mm
3984-000166	TD-343-12-1.46	1.46mm	2.0mm
3984-000167	TD-343-12-1.47	1.47mm	2.0mm
3984-000168	TD-343-12-1.48	1.48mm	2.0mm
3984-000169	TD-343-12-1.49	1.49mm	2.0mm
3984-000170	TD-343-12-1.5	1.50mm	2.0mm
3984-000171	TD-343-12-1.51	1.51mm	2.0mm
3984-000172	TD-343-12-1.52	1.52mm	2.0mm
3984-000173	TD-343-12-1.53	1.53mm	2.0mm
3984-000174	TD-343-12-1.54	1.54mm	2.0mm
3984-000175	TD-343-12-1.55	1.55mm	2.0mm
3984-000176	TD-343-12-1.56	1.56mm	2.0mm
3984-000177	TD-343-12-1.57	1.57mm	2.0mm
3984-000178	TD-343-12-1.58	1.58mm	2.0mm
3984-000179	TD-343-12-1.59	1.59mm	2.0mm
3984-000180	TD-343-12-1.6	1.60mm	2.0mm
3984-000181	TD-343-12-1.61	1.61mm	2.0mm
3984-000182	TD-343-12-1.62	1.62mm	2.0mm
3984-000183	TD-343-12-1.63	1.63mm	2.0mm
3984-000184	TD-343-12-1.64	1.64mm	2.0mm
3984-000185	TD-343-12-1.65	1.65mm	2.0mm
3984-000186	TD-343-12-1.66	1.66mm	2.0mm
3984-000187	TD-343-12-1.67	1.67mm	2.0mm
3984-000188	TD-343-12-1.68	1.68mm	2.0mm
3984-000189	TD-343-12-1.69	1.69mm	2.0mm
3984-000190	TD-343-12-1.7	1.70mm	2.0mm
3984-000191	TD-343-12-1.71	1.71mm	2.0mm
3984-000192	TD-343-12-1.72	1.72mm	2.0mm
3984-000193	TD-343-12-1.73	1.73mm	2.0mm
3984-000194	TD-343-12-1.74	1.74mm	2.0mm
3984-000195	TD-343-12-1.75	1.75mm	2.0mm
3984-000196	TD-343-12-1.76	1.76mm	2.0mm
3984-000197	TD-343-12-1.77	1.77mm	2.0mm
3984-000198	TD-343-12-1.78	1.78mm	2.0mm
3984-000199	TD-343-12-1.79	1.79mm	2.0mm
3984-000200	TD-343-12-1.8	1.80mm	2.0mm
3984-000201	TD-343-12-1.81	1.81mm	2.0mm
3984-000202	TD-343-12-1.82	1.82mm	2.0mm
3984-000203	TD-343-12-1.83	1.83mm	2.0mm
3984-000204	TD-343-12-1.84	1.84mm	2.0mm
3984-000205	TD-343-12-1.85	1.85mm	2.0mm
3984-000206	TD-343-12-1.86	1.86mm	2.0mm
3984-000207	TD-343-12-1.87	1.87mm	2.0mm
3984-000208	TD-343-12-1.88	1.88mm	2.0mm
3984-000209	TD-343-12-1.89	1.89mm	2.0mm
3984-000210	TD-343-12-1.9	1.90mm	2.0mm
3984-000211	TD-343-12-1.91	1.91mm	2.0mm
3984-000212	TD-343-12-1.92	1.92mm	2.0mm
3984-000213	TD-343-12-1.93	1.93mm	2.0mm
3984-000214	TD-343-12-1.94	1.94mm	2.0mm
3984-000215	TD-343-12-1.95	1.95mm	2.0mm
3984-000216	TD-343-12-1.96	1.96mm	2.0mm
3984-000217	TD-343-12-1.97	1.97mm	2.0mm
3984-000218	TD-343-12-1.98	1.98mm	2.0mm
3984-000219	TD-343-12-1.99	1.99mm	2.0mm
3984-000220	TD-343-12-2.0	2.00mm	2.0mm
3984-000221	TD-343-12-2.05	2.05mm	2.0mm
3984-000222	TD-343-12-2.1	2.10mm	2.0mm
3984-000223	TD-343-12-2.15	2.15mm	2.0mm
3984-000224	TD-343-12-2.17	2.17mm	2.0mm
3984-000225	TD-343-12-2.18	2.18mm	2.0mm
3984-000226	TD-343-12-2.2	2.20mm	2.0mm
3984-000227	TD-343-12-2.25	2.25mm	2.0mm
3984-000228	TD-343-12-2.27	2.27mm	2.0mm
3984-000229	TD-343-12-2.28	2.28mm	2.0mm
3984-000230	TD-343-12-2.3	2.30mm	2.0mm
3984-000231	TD-343-12-2.35	2.35mm	2.0mm
3984-000232	TD-343-12-2.37	2.37mm	2.0mm
3984-000233	TD-343-12-2.38	2.38mm	2.0mm
3984-000234	TD-343-12-2.4	2.40mm	2.0mm
3984-000235	TD-343-12-2.45	2.45mm	2.0mm
3984-000236	TD-343-12-2.5	2.50mm	2.0mm
3984-000237	TD-343-12-2.55	2.55mm	2.0mm
3984-000238	TD-343-12-2.6	2.60mm	2.0mm
3984-000239	TD-343-12-2.65	2.65mm	2.0mm
3984-000240	TD-343-12-2.7	2.70mm	2.0mm
3984-000241	TD-343-12-2.8	2.80mm	2.0mm
3984-000242	TD-343-12-2.9	2.90mm	2.0mm
3984-000243	TD-343-12-2.95	2.95mm	2.0mm
3984-000244	TD-343-12-3.0	3.00mm	3.0mm
3984-000245	TD-343-12-3.1	3.10mm	4.0mm
3984-000246	TD-343-12-3.2	3.20mm	4.0mm
3984-000247	TD-343-12-3.3	3.30mm	4.0mm
3984-000248	TD-343-12-3.4	3.40mm	4.0mm
3984-000249	TD-343-12-3.5	3.50mm	4.0mm
3984-000250	TD-343-12-3.6	3.60mm	4.0mm
3984-000251	TD-343-12-3.7	3.70mm	4.0mm
3984-000252	TD-343-12-3.8	3.80mm	4.0mm
3984-000253	TD-343-12-3.9	3.90mm	4.0mm
3984-000254	TD-343-12-4.0	4.00mm	4.0mm
3984-000255	TD-343-12-4.1	4.10mm	4.5mm
3984-000256	TD-343-12-4.2	4.20mm	4.5mm
3984-000257	TD-343-12-4.3	4.30mm	4.5mm
3984-000258	TD-343-12-4.4	4.40mm	4.5mm
3984-000259	TD-343-12-4.5	4.50mm	4.5mm
3984-000260	TD-343-12-5.0	5.00mm	5.0mm
3984-000261	TD-343-12-5.5	5.50mm	5.5mm
3984-000262	TD-343-12-6.0	6.00mm	6.0mm


344 Series: Coolant-Thru Micro Drills - 2 Flute

GEOMETRY:	
Flutes:	2
Helix:	34˚
Drill Point:	118˚

TOLERANCE:	
D1:	-0.02mm / -0.004mm
OAL:	-0.02mm / -0.00mm
D Shank:	h5

OPTIONAL COATINGS:	
TRIO:	Steel & Stainless
SOLO:	Brass & Bronze
RICO:	Titanium & Aluminum



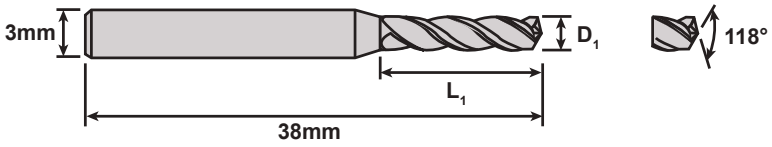

Item No.	Description	D_1	L_1
Call For Details	TD-344-0.70	0.70	5mm
Call For Details	TD-344-0.75	0.75	5mm
Call For Details	TD-344-0.80	0.80	6mm
Call For Details	TD-344-0.85	0.85	6mm
Call For Details	TD-344-0.90	0.90	6mm
Call For Details	TD-344-1.00	1.00	8mm
Call For Details	TD-344-1.05	1.05	8mm
Call For Details	TD-344-1.10	1.10	8mm
Call For Details	TD-344-1.20	1.20	8mm
Call For Details	TD-344-1.25	1.25	8mm

Item No.	Description	D_1	L_1
Call For Details	TD-344-1.30	1.30	8mm
Call For Details	TD-344-1.40	1.40	8mm
Call For Details	TD-344-1.50	1.50	12mm
Call For Details	TD-344-1.60	1.60	12mm
Call For Details	TD-344-1.70	1.70	12mm
Call For Details	TD-344-1.75	1.75	12mm
Call For Details	TD-344-1.80	1.80	12mm
Call For Details	TD-344-1.90	1.90	12mm
Call For Details	TD-344-2.00	2.00	12mm
Call For Details	TD-344-2.10	2.10	12mm

Item No.	Description	D_1	L_1
Call For Details	TD-344-2.20	2.20	12mm
Call For Details	TD-344-2.30	2.30	12mm
Call For Details	TD-344-2.40	2.40	12mm
Call For Details	TD-344-2.50	2.50	12mm
Call For Details	TD-344-2.60	2.60	12mm
Call For Details	TD-344-2.70	2.70	12mm
Call For Details	TD-344-2.80	2.80	12mm
Call For Details	TD-344-2.90	2.90	12mm
Call For Details	TD-344-3.00	3.00	12mm

WE CAN DO SPECIALS! CALL TODAY


353 Series: Triple Fluted Precision Micro Drill

GEOMETRY:	
Flutes:	3
Helix:	34˚
Drill Point:	140˚

TOLERANCE:	
D1:	-0.02mm / -0.004mm
OAL:	-0.02mm / -0.00mm
D Shank:	h5

OPTIONAL COATINGS:	
TRIO:	Steel & Stainless
SOLO:	Brass & Bronze
RICO:	Titanium & Aluminum



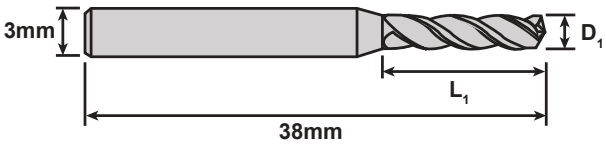



353 - Standard

353 - Standard

Item No.	Description	D_1	L_1
3998-000100	TD-353-0.15	0.15	2.0
3998-000101	TD-353-0.2	0.20	3.0
3998-000102	TD-353-0.25	0.25	3.5
3998-000103	TD-353-0.3	0.30	5.0
3998-000104	TD-353-0.35	0.35	5.0
3998-000105	TD-353-0.4	0.40	6.0
3998-000106	TD-353-0.45	0.45	6.0
3998-000107	TD-353-0.5	0.50	6.0
3998-000108	TD-353-0.55	0.55	7.0
3998-000109	TD-353-0.6	0.60	7.0
3998-000110	TD-353-0.65	0.65	7.0
3998-000111	TD-353-0.7	0.70	9.5
3998-000112	TD-353-0.75	0.75	9.5
3998-000113	TD-353-0.8	0.80	9.5
3998-000114	TD-353-0.85	0.85	9.5
3998-000115	TD-353-0.9	0.90	9.5
3998-000116	TD-353-0.95	0.95	9.5
3998-000117	TD-353-1	1.00	9.5
3998-000118	TD-353-1.05	1.05	10.5
3998-000119	TD-353-1.1	1.10	10.5
3998-000120	TD-353-1.15	1.15	10.5
3998-000121	TD-353-1.2	1.20	10.5

Item No.	Description	D_1	L_1
3998-000122	TD-353-1.25	1.25	10.5
3998-000123	TD-353-1.3	1.30	10.5
3998-000124	TD-353-1.35	1.35	10.5
3998-000125	TD-353-1.4	1.40	10.5
3998-000126	TD-353-1.45	1.45	10.5
3998-000127	TD-353-1.5	1.50	10.5
3998-000128	TD-353-1.6	1.60	10.5
3998-000129	TD-353-1.7	1.70	10.5
3998-000130	TD-353-1.8	1.80	10.5
3998-000131	TD-353-1.9	1.90	10.5
3998-000132	TD-353-2	2.00	10.5
3998-000133	TD-353-2.1	2.10	10.5
3998-000134	TD-353-2.2	2.20	10.5
3998-000135	TD-353-2.3	2.30	10.5
3998-000136	TD-353-2.4	2.40	10.5
3998-000137	TD-353-2.5	2.50	10.5
3998-000138	TD-353-2.6	2.60	10.5
3998-000139	TD-353-2.7	2.70	10.5
3998-000140	TD-353-2.8	2.80	10.5
3998-000141	TD-353-2.9	2.90	10.5
3998-000142	TD-353-3	3.00	10.5


353 Series: Triple Fluted Precision Micro Drill

GEOMETRY:	
Flutes:	3
Helix:	34˚
Drill Point:	140˚

TOLERANCE:	
D1:	-0.02mm / -0.004mm
OAL:	-0.02mm / -0.00mm
D Shank:	h5

OPTIONAL COATINGS:	
TRIO:	Steel & Stainless
SOLO:	Brass & Bronze
RICO:	Titanium & Aluminum



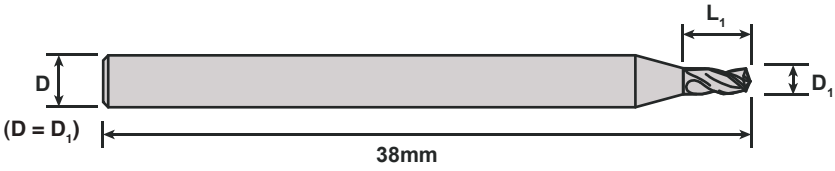

353-0 - Stub Type

353-0 - Stub Type

Item No.	Description	D_1	L_1
3858-000100	TD-353-0-0.15	0.15	1.5
3858-000101	TD-353-0-0.2	0.20	2.0
3858-000102	TD-353-0-0.25	0.25	2.0
3858-000103	TD-353-0-0.3	0.30	2.0
3858-000104	TD-353-0-0.31	0.31	2.0
3858-000105	TD-353-0-0.32	0.32	2.0
3858-000106	TD-353-0-0.33	0.33	2.0
3858-000107	TD-353-0-0.34	0.34	2.0
3858-000108	TD-353-0-0.35	0.35	2.0
3858-000109	TD-353-0-0.36	0.36	2.0
3858-000110	TD-353-0-0.37	0.37	2.0
3858-000111	TD-353-0-0.38	0.38	2.0
3858-000112	TD-353-0-0.39	0.39	2.0
3858-000113	TD-353-0-0.4	0.40	2.0
3858-000114	TD-353-0-0.41	0.41	2.0
3858-000115	TD-353-0-0.42	0.42	2.0
3858-000116	TD-353-0-0.43	0.43	2.0
3858-000117	TD-353-0-0.44	0.44	2.0
3858-000118	TD-353-0-0.45	0.45	2.0
3858-000119	TD-353-0-0.46	0.46	2.0
3858-000120	TD-353-0-0.47	0.47	2.0
3858-000121	TD-353-0-0.48	0.48	2.0
3858-000122	TD-353-0-0.49	0.49	2.0
3858-000123	TD-353-0-0.5	0.50	3.0
3858-000124	TD-353-0-0.51	0.51	3.0
3858-000125	TD-353-0-0.52	0.52	3.0
3858-000126	TD-353-0-0.53	0.53	3.0
3858-000127	TD-353-0-0.54	0.54	3.0
3858-000128	TD-353-0-0.55	0.55	3.0
3858-000129	TD-353-0-0.56	0.56	3.0
3858-000130	TD-353-0-0.57	0.57	3.0
3858-000131	TD-353-0-0.58	0.58	3.0
3858-000132	TD-353-0-0.59	0.59	3.0
3858-000133	TD-353-0-0.6	0.60	3.0
3858-000134	TD-353-0-0.61	0.61	3.0
3858-000135	TD-353-0-0.62	0.62	3.0
3858-000136	TD-353-0-0.63	0.63	3.0
3858-000137	TD-353-0-0.64	0.64	3.0
3858-000138	TD-353-0-0.65	0.65	3.0
3858-000139	TD-353-0-0.66	0.66	3.0
3858-000140	TD-353-0-0.67	0.67	3.0
3858-000141	TD-353-0-0.68	0.68	3.0
3858-000142	TD-353-0-0.69	0.69	3.0
3858-000143	TD-353-0-0.7	0.70	3.0
3858-000144	TD-353-0-0.71	0.71	3.0
3858-000145	TD-353-0-0.72	0.72	3.0
3858-000146	TD-353-0-0.73	0.73	3.0
3858-000147	TD-353-0-0.74	0.74	3.0
3858-000148	TD-353-0-0.75	0.75	3.0
3858-000149	TD-353-0-0.76	0.76	3.0
3858-000150	TD-353-0-0.77	0.77	3.0
3858-000151	TD-353-0-0.78	0.78	3.0
3858-000152	TD-353-0-0.79	0.79	3.0
3858-000153	TD-353-0-0.8	0.80	3.0
3858-000154	TD-353-0-0.81	0.81	3.0
3858-000155	TD-353-0-0.82	0.82	3.0
3858-000156	TD-353-0-0.83	0.83	3.0
3858-000157	TD-353-0-0.84	0.84	3.0
3858-000158	TD-353-0-0.85	0.85	3.0
3858-000159	TD-353-0-0.86	0.86	3.0
3858-000160	TD-353-0-0.87	0.87	3.0
3858-000161	TD-353-0-0.88	0.88	3.0
3858-000162	TD-353-0-0.89	0.89	3.0
3858-000163	TD-353-0-0.9	0.90	3.0
3858-000164	TD-353-0-0.91	0.91	3.0
3858-000165	TD-353-0-0.92	0.92	3.0
3858-000166	TD-353-0-0.93	0.93	3.0
3858-000167	TD-353-0-0.94	0.94	3.0
3858-000168	TD-353-0-0.95	0.95	3.0
3858-000169	TD-353-0-0.96	0.96	3.0
3858-000170	TD-353-0-0.97	0.97	3.0
3858-000171	TD-353-0-0.98	0.98	3.0
3858-000172	TD-353-0-0.99	0.99	3.0
3858-000173	TD-353-0-1	1.00	3.5
3858-000174	TD-353-0-1.01	1.01	3.5
3858-000175	TD-353-0-1.02	1.02	3.5
3858-000176	TD-353-0-1.03	1.03	3.5
3858-000177	TD-353-0-1.04	1.04	3.5
3858-000178	TD-353-0-1.05	1.05	3.5
3858-000179	TD-353-0-1.06	1.06	3.5
3858-000180	TD-353-0-1.07	1.07	3.5
3858-000181	TD-353-0-1.08	1.08	3.5
3858-000182	TD-353-0-1.09	1.09	3.5
3858-000183	TD-353-0-1.1	1.10	3.5
3858-000184	TD-353-0-1.11	1.11	3.5
3858-000185	TD-353-0-1.12	1.12	3.5
3858-000186	TD-353-0-1.13	1.13	3.5
3858-000187	TD-353-0-1.14	1.14	3.5
3858-000188	TD-353-0-1.15	1.15	3.5
3858-000189	TD-353-0-1.16	1.16	3.5
3858-000190	TD-353-0-1.17	1.17	3.5
3858-000191	TD-353-0-1.18	1.18	3.5
3858-000192	TD-353-0-1.19	1.19	3.5
3858-000193	TD-353-0-1.2	1.20	3.5
3858-000194	TD-353-0-1.21	1.21	3.5
3858-000195	TD-353-0-1.22	1.22	3.5
3858-000196	TD-353-0-1.23	1.23	3.5
3858-000197	TD-353-0-1.24	1.24	3.5
3858-000198	TD-353-0-1.25	1.25	3.5
3858-000199	TD-353-0-1.26	1.26	3.5
3858-000200	TD-353-0-1.27	1.27	3.5
3858-000201	TD-353-0-1.28	1.28	3.5
3858-000202	TD-353-0-1.29	1.29	3.5
3858-000203	TD-353-0-1.3	1.30	3.5
3858-000204	TD-353-0-1.31	1.31	3.5
3858-000205	TD-353-0-1.32	1.32	3.5
3858-000206	TD-353-0-1.33	1.33	3.5
3858-000207	TD-353-0-1.34	1.34	3.5
3858-000208	TD-353-0-1.35	1.35	3.5
3858-000209	TD-353-0-1.36	1.36	3.5
3858-000210	TD-353-0-1.37	1.37	3.5
3858-000211	TD-353-0-1.38	1.38	3.5
3858-000212	TD-353-0-1.39	1.39	3.5
3858-000213	TD-353-0-1.4	1.40	3.5
3858-000214	TD-353-0-1.41	1.41	3.5
3858-000215	TD-353-0-1.42	1.42	3.5
3858-000216	TD-353-0-1.43	1.43	3.5
3858-000217	TD-353-0-1.44	1.44	3.5
3858-000218	TD-353-0-1.45	1.45	3.5
3858-000219	TD-353-0-1.46	1.46	3.5
3858-000220	TD-353-0-1.47	1.47	3.5
3858-000221	TD-353-0-1.48	1.48	3.5
3858-000222	TD-353-0-1.49	1.49	3.5
3858-000223	TD-353-0-1.5	1.50	3.5


353 Series: Triple Fluted Precision Micro Drill

GEOMETRY:	
Flutes:	3
Helix:	34˚
Drill Point:	140˚

TOLERANCE:	
D1:	-0.02mm / -0.004mm
OAL:	-0.02mm / -0.00mm
D Shank:	h5

OPTIONAL COATINGS:	
TRIO:	Steel & Stainless
SOLO:	Brass & Bronze
RICO:	Titanium & Aluminum



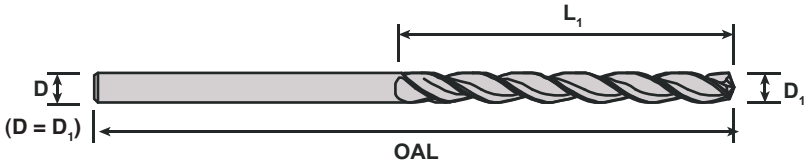

353-2 - Extra Length

353-2 Series - Extra Length

Item No.	Description	D_1	L_1	OAL
3862-000100	TD-353-2-1	1.00	11.5	34
3862-000101	TD-353-2-1.1	1.10	13.0	36
3862-000102	TD-353-2-1.2	1.20	15.0	38
3862-000103	TD-353-2-1.3	1.30	15.0	38
3862-000104	TD-353-2-1.4	1.40	17.0	40
3862-000105	TD-353-2-1.5	1.50	17.0	40
3862-000106	TD-353-2-1.6	1.60	19.0	43
3862-000107	TD-353-2-1.7	1.70	19.0	43
3862-000108	TD-353-2-1.8	1.80	21.0	46
3862-000109	TD-353-2-1.9	1.90	21.0	46
3862-000110	TD-353-2-2	2.00	22.0	49
3862-000111	TD-353-2-2.1	2.10	22.0	49
3862-000112	TD-353-2-2.2	2.20	25.0	53
3862-000113	TD-353-2-2.3	2.30	25.0	53
3862-000114	TD-353-2-2.4	2.40	28.0	57
3862-000115	TD-353-2-2.5	2.50	28.0	57
3862-000116	TD-353-2-2.6	2.60	28.0	57
3862-000117	TD-353-2-2.7	2.70	31.0	61
3862-000118	TD-353-2-2.8	2.80	31.0	61
3862-000119	TD-353-2-2.9	2.90	31.0	61
3862-000120	TD-353-2-3	3.00	31.0	61
3862-000121	TD-353-2-3.1	3.10	34.0	65
3862-000122	TD-353-2-3.2	3.20	34.0	65
3862-000123	TD-353-2-3.3	3.30	34.0	65
3862-000124	TD-353-2-3.4	3.40	37.0	70
3862-000125	TD-353-2-3.5	3.50	37.0	70
3862-000126	TD-353-2-3.6	3.60	37.0	70
3862-000127	TD-353-2-3.7	3.70	37.0	70
3862-000128	TD-353-2-3.8	3.80	41.0	75
3862-000129	TD-353-2-3.9	3.90	41.0	75
3862-000130	TD-353-2-4	4.00	41.0	75
3862-000131	TD-353-2-4.1	4.10	41.0	75
3862-000132	TD-353-2-4.2	4.20	41.0	75
3862-000133	TD-353-2-4.3	4.30	45.0	80
3862-000134	TD-353-2-4.4	4.40	45.0	80
3862-000135	TD-353-2-4.5	4.50	45.0	80
3862-000136	TD-353-2-4.6	4.60	45.0	80
3862-000137	TD-353-2-4.7	4.70	45.0	80
3862-000138	TD-353-2-4.8	4.80	50.0	86
3862-000139	TD-353-2-4.9	4.90	50.0	86
3862-000140	TD-353-2-5	5.00	50.0	86
3862-000141	TD-353-2-5.1	5.10	50.0	86
3862-000142	TD-353-2-5.2	5.20	50.0	86

Item No.	Description	D_1	L_1	OAL
3862-000143	TD-353-2-5.3	5.30	50.0	86
3862-000144	TD-353-2-5.4	5.40	55.0	93
3862-000145	TD-353-2-5.5	5.50	55.0	93
3862-000146	TD-353-2-5.6	5.60	55.0	93
3862-000147	TD-353-2-5.7	5.70	55.0	93
3862-000148	TD-353-2-5.8	5.80	55.0	93
3862-000149	TD-353-2-5.9	5.90	55.0	93
3862-000150	TD-353-2-6	6.00	55.0	93
3862-000151	TD-353-2-6.1	6.10	60.0	101
3862-000152	TD-353-2-6.2	6.20	60.0	101
3862-000153	TD-353-2-6.3	6.30	60.0	101
3862-000154	TD-353-2-6.4	6.40	60.0	101
3862-000155	TD-353-2-6.5	6.50	60.0	101
3862-000156	TD-353-2-6.6	6.60	60.0	101
3862-000157	TD-353-2-6.7	6.70	60.0	101
3862-000158	TD-353-2-6.8	6.80	66.0	109
3862-000159	TD-353-2-6.9	6.90	66.0	109
3862-000160	TD-353-2-7	7.00	66.0	109
3862-000161	TD-353-2-7.1	7.10	66.0	109
3862-000162	TD-353-2-7.2	7.20	66.0	109
3862-000163	TD-353-2-7.3	7.30	66.0	109
3862-000164	TD-353-2-7.4	7.40	66.0	109
3862-000165	TD-353-2-7.5	7.50	66.0	109
3862-000166	TD-353-2-7.6	7.60	72.0	117
3862-000167	TD-353-2-7.7	7.70	72.0	117
3862-000168	TD-353-2-7.8	7.80	72.0	117
3862-000169	TD-353-2-7.9	7.90	72.0	117
3862-000170	TD-353-2-8	8.00	72.0	117
3862-000171	TD-353-2-8.1	8.10	72.0	117
3862-000172	TD-353-2-8.2	8.20	72.0	117
3862-000173	TD-353-2-8.3	8.30	72.0	117
3862-000174	TD-353-2-8.4	8.40	72.0	117
3862-000175	TD-353-2-8.5	8.50	72.0	117
3862-000176	TD-353-2-8.6	8.60	78.0	125
3862-000177	TD-353-2-8.7	8.70	78.0	125
3862-000178	TD-353-2-8.8	8.80	78.0	125
3862-000179	TD-353-2-8.9	8.90	78.0	125
3862-000180	TD-353-2-9	9.00	78.0	125
3862-000181	TD-353-2-9.1	9.10	78.0	125
3862-000182	TD-353-2-9.2	9.20	78.0	125
3862-000183	TD-353-2-9.3	9.30	78.0	125
3862-000184	TD-353-2-9.4	9.40	78.0	125
3862-000185	TD-353-2-9.5	9.50	78.0	125

Item No.	Description	D_1	L_1	OAL
3862-000186	TD-353-2-9.6	9.60	84.0	133
3862-000187	TD-353-2-9.7	9.70	84.0	133
3862-000188	TD-353-2-9.8	9.80	84.0	133
3862-000189	TD-353-2-9.9	9.90	84.0	133
3862-000190	TD-353-2-10	10.00	84.0	133
3862-000191	TD-353-2-10.2	10.20	84.0	133
3862-000192	TD-353-2-10.5	10.50	84.0	133
3862-000193	TD-353-2-11	11.00	91.0	142
3862-000194	TD-353-2-11.5	11.50	91.0	142
3862-000195	TD-353-2-12	12.00	98.0	151
3862-000196	TD-353-2-12.5	12.50	98.0	151
3862-000197	TD-353-2-13	13.00	98.0	151
3862-000198	TD-353-2-13.5	13.50	105.0	160
3862-000199	TD-353-2-14	14.00	105.0	160

370 Series: Drills For Stainless Steels - 2 Flute


GEOMETRY:	
Flutes:	2
Helix:	Variable
Drill Point:	135˚

TOLERANCE:	
D1:	-0.002mm / -0.004mm
D Shank:	h5

OPTIONAL COATINGS:

PROPRIETARY COATING OPTIMIZED FOR STAINLESS



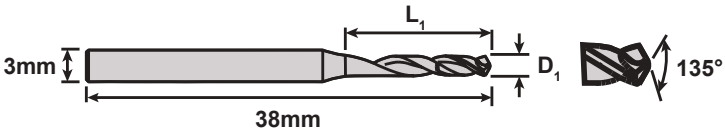



370 Series: Drills For Stainless Steels - 2 Flute

Item No.	Description	D_1	L_1
3816-050370	TD-370-0.5	0.50mm	4mm
3816-051370	TD-370-0.51	0.51mm	4mm
3816-052370	TD-370-0.52	0.52mm	4mm
3816-053370	TD-370-0.53	0.53mm	4mm
3816-054370	TD-370-0.54	0.54mm	4mm
3816-055370	TD-370-0.55	0.55mm	4mm
3816-056370	TD-370-0.56	0.56mm	4mm
3816-057370	TD-370-0.57	0.57mm	4mm
3816-058370	TD-370-0.58	0.58mm	4mm
3816-059370	TD-370-0.59	0.59mm	4mm
3816-060370	TD-370-0.60	0.60mm	5mm
3816-061370	TD-370-0.61	0.61mm	5mm
3816-062370	TD-370-0.62	0.62mm	5mm
3816-063370	TD-370-0.63	0.63mm	5mm
3816-064370	TD-370-0.64	0.64mm	5mm
3816-065370	TD-370-0.65	0.65mm	5mm
3816-066370	TD-370-0.66	0.66mm	5mm
3816-067370	TD-370-0.67	0.67mm	5mm
3816-068370	TD-370-0.68	0.68mm	5mm
3816-069370	TD-370-0.69	0.69mm	5mm
3816-070370	TD-370-0.70	0.70mm	5mm
3816-071370	TD-370-0.71	0.71mm	5mm
3816-072370	TD-370-0.72	0.72mm	5mm
3816-073370	TD-370-0.73	0.73mm	5mm
3816-074370	TD-370-0.74	0.74mm	5mm
3816-075370	TD-370-0.75	0.75mm	5mm
3816-076370	TD-370-0.76	0.76mm	5mm
3816-077370	TD-370-0.77	0.77mm	5mm
3816-078370	TD-370-0.78	0.78mm	5mm
3816-079370	TD-370-0.79	0.79mm	5mm
3816-080370	TD-370-0.80	0.80mm	6mm
3816-081370	TD-370-0.81	0.80mm	6mm
3816-082370	TD-370-0.82	0.80mm	6mm
3816-083370	TD-370-0.83	0.80mm	6mm
3816-084370	TD-370-0.84	0.80mm	6mm
3816-085370	TD-370-0.85	0.80mm	6mm
3816-086370	TD-370-0.86	0.80mm	6mm
3816-087370	TD-370-0.87	0.80mm	6mm
3816-088370	TD-370-0.88	0.80mm	6mm
3816-089370	TD-370-0.89	0.80mm	6mm
3816-090370	TD-370-0.90	0.80mm	6mm
3816-091370	TD-370-0.91	0.80mm	8mm

Item No.	Description	D_1	L_1
3816-092370	TD-370-0.92	0.92mm	8mm
3916-093370	TD-370-0.93	0.93mm	8mm
3816-094370	TD-370-0.94	0.94mm	8mm
3816-095370	TD-370-0.95	0.95mm	8mm
3816-096370	TD-370-0.96	0.96mm	8mm
3816-097370	TD-370-0.97	0.97mm	8mm
3816-098370	TD-370-0.98	0.98mm	8mm
3816-099370	TD-370-0.99	0.99mm	8mm
3816-100370	TD-370-1.00	1.00mm	8mm
3816-101370	TD-370-1.01	1.01mm	8mm
3816-102370	TD-370-1.02	1.02mm	8mm
3816-103370	TD-370-1.03	1.03mm	8mm
3816-104370	TD-370-1.04	1.04mm	8mm
3816-105370	TD-370-1.05	1.05mm	8mm
3816-106370	TD-370-1.06	1.06mm	8mm
3816-107370	TD-370-1.07	1.07mm	8mm
3816-108370	TD-370-1.08	1.08mm	8mm
3816-109370	TD-370-1.09	1.09mm	8mm
3816-110370	TD-370-1.10	1.10mm	8mm
3816-111370	TD-370-1.11	1.11mm	8mm
3816-112370	TD-370-1.12	1.12mm	8mm
3816-113370	TD-370-1.13	1.13mm	8mm
3816-114370	TD-370-1.14	1.14mm	8mm
3816-115370	TD-370-1.15	1.15mm	8mm
3816-116370	TD-370-1.16	1.16mm	8mm
3816-117370	TD-370-1.17	1.17mm	8mm
3816-118370	TD-370-1.18	1.18mm	8mm
3816-119370	TD-370-1.19	1.19mm	8mm
3816-120370	TD-370-1.20	1.20mm	8mm
3816-121370	TD-370-1.21	1.21mm	8mm
3816-122370	TD-370-1.22	1.22mm	8mm
3816-123370	TD-370-1.23	1.23mm	8mm
3816-124370	TD-370-1.24	1.24mm	8mm
3816-125370	TD-370-1.25	1.25mm	8mm
3816-126370	TD-370-1.26	1.26mm	8mm
3816-127370	TD-370-1.27	1.27mm	8mm
3816-128370	TD-370-1.28	1.28mm	8mm
3816-129370	TD-370-1.29	1.29mm	8mm
3816-130370	TD-370-1.30	1.30mm	8mm
3816-131370	TD-370-1.31	1.31mm	8mm
3816-132370	TD-370-1.32	1.32mm	8mm
3816-133370	TD-370-1.33	1.33mm	8mm

Item No.	Description	D_1	L_1
3816-134370	TD-370-1.34	1.34mm	8mm
3816-135370	TD-370-1.35	1.35mm	8mm
3816-136370	TD-370-1.36	1.36mm	8mm
3816-137370	TD-370-1.37	1.37mm	8mm
3816-138370	TD-370-1.38	1.38mm	8mm
3816-139370	TD-370-1.39	1.39mm	8mm
3816-140370	TD-370-1.40	1.40mm	8mm
3816-141370	TD-370-1.41	1.41mm	8mm
3816-142370	TD-370-1.42	1.42mm	8mm
3816-143370	TD-370-1.43	1.43mm	8mm
3816-144370	TD-370-1.44	1.44mm	8mm
3816-145370	TD-370-1.45	1.45mm	8mm
3816-146370	TD-370-1.46	1.46mm	8mm
3816-147370	TD-370-1.47	1.47mm	8mm
3816-148370	TD-370-1.48	1.48mm	8mm
3816-149370	TD-370-1.49	1.49mm	8mm
3816-150370	TD-370-1.50	1.50mm	12mm
3816-155370	TD-370-1.55	1.55mm	12mm
3816-160370	TD-370-1.60	1.60mm	12mm
3816-165370	TD-370-1.65	1.65mm	12mm
3816-170370	TD-370-1.70	1.70mm	12mm
3816-175370	TD-370-1.75	1.75mm	12mm
3816-180370	TD-370-1.80	1.80mm	12mm
3816-185370	TD-370-1.85	1.85mm	12mm
3816-190370	TD-370-1.90	1.90mm	12mm
3816-195370	TD-370-1.95	1.95mm	12mm
3816-200370	TD-370-2.00	2.00mm	12mm
3816-205370	TD-370-2.05	2.05mm	12mm
3816-210370	TD-370-2.10	2.10mm	12mm
3816-215370	TD-370-2.15	2.15mm	12mm
3816-220370	TD-370-2.20	2.20mm	12mm
3816-225370	TD-370-2.25	2.25mm	12mm
3816-230370	TD-370-2.30	2.30mm	12mm
3816-235370	TD-370-2.35	2.35mm	12mm
3816-240370	TD-370-2.40	2.40mm	12mm
3816-245370	TD-370-2.45	2.45mm	12mm
3816-250370	TD-370-2.50	2.50mm	12mm
3816-260370	TD-370-2.60	2.60mm	12mm
3816-270370	TD-370-2.70	2.70mm	12mm
3816-280370	TD-370-2.80	2.80mm	12mm
3816-290370	TD-370-2.90	2.90mm	12mm
3816-300370	TD-370-3.00	3.00mm	12mm

374 Series: Drills For Stainless Steels - 2 Flute - Coolant-Thru


GEOMETRY:	
Flutes:	2
Helix:	Variable
Drill Point:	135˚

TOLERANCE:	
D1:	-0.002mm / -0.004mm
D Shank:	h5

OPTIONAL COATINGS:

PROPRIETARY COATING OPTIMIZED FOR STAINLESS



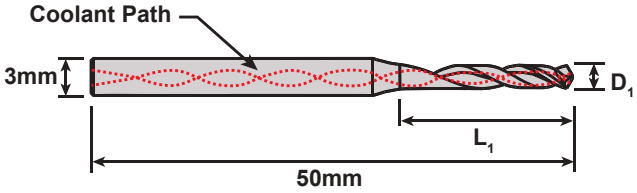

Coolant-Thru



374 Series: Drills For Stainless Steels - 2 Flute - Coolant-Thru

Item No.	Description	D_1	L_1
Call For Details	TD-374-0.70	0.70mm	8mm
Call For Details	TD-374-0.71	0.71mm	8mm
Call For Details	TD-374-0.72	0.72mm	8mm
Call For Details	TD-374-0.73	0.73mm	8mm
Call For Details	TD-374-0.74	0.74mm	8mm
Call For Details	TD-374-0.75	0.75mm	8mm
Call For Details	TD-374-0.76	0.76mm	8mm
Call For Details	TD-374-0.77	0.77mm	8mm
Call For Details	TD-374-0.78	0.78mm	8mm
Call For Details	TD-374-0.79	0.79mm	8mm
Call For Details	TD-374-0.80	0.80mm	8mm
Call For Details	TD-374-0.81	0.80mm	8mm
Call For Details	TD-374-0.82	0.80mm	8mm
Call For Details	TD-374-0.83	0.80mm	8mm
Call For Details	TD-374-0.84	0.80mm	8mm
Call For Details	TD-374-0.85	0.80mm	8mm
Call For Details	TD-374-0.86	0.80mm	8mm
Call For Details	TD-374-0.87	0.80mm	8mm
Call For Details	TD-374-0.88	0.80mm	8mm
Call For Details	TD-374-0.89	0.80mm	8mm
Call For Details	TD-374-0.90	0.80mm	10mm
Call For Details	TD-374-0.91	0.80mm	10mm
Call For Details	TD-374-0.92	0.92mm	10mm
Call For Details	TD-374-0.93	0.93mm	10mm
Call For Details	TD-374-0.94	0.94mm	10mm

Item No.	Description	D_1	L_1
Call For Details	TD-374-0.95	0.95mm	10mm
Call For Details	TD-374-0.96	0.96mm	10mm
Call For Details	TD-374-0.97	0.97mm	10mm
Call For Details	TD-374-0.98	0.98mm	10mm
Call For Details	TD-374-0.99	0.99mm	10mm
Call For Details	TD-374-1.00	1.00mm	12mm
Call For Details	TD-374-1.01	1.01mm	12mm
Call For Details	TD-374-1.02	1.02mm	12mm
Call For Details	TD-374-1.03	1.03mm	12mm
Call For Details	TD-374-1.04	1.04mm	12mm
Call For Details	TD-374-1.05	1.05mm	12mm
Call For Details	TD-374-1.06	1.06mm	12mm
Call For Details	TD-374-1.07	1.07mm	12mm
Call For Details	TD-374-1.08	1.08mm	12mm
Call For Details	TD-374-1.09	1.09mm	12mm
Call For Details	TD-374-1.10	1.10mm	12mm
Call For Details	TD-374-1.11	1.11mm	12mm
Call For Details	TD-374-1.12	1.12mm	12mm
Call For Details	TD-374-1.13	1.13mm	12mm
Call For Details	TD-374-1.14	1.14mm	12mm
Call For Details	TD-374-1.15	1.15mm	12mm
Call For Details	TD-374-1.16	1.16mm	12mm
Call For Details	TD-374-1.17	1.17mm	12mm
Call For Details	TD-374-1.18	1.18mm	12mm
Call For Details	TD-374-1.19	1.19mm	12mm

Item No.	Description	D_1	L_1
Call For Details	TD-374-1.20	1.20mm	14mm
Call For Details	TD-374-1.21	1.21mm	14mm
Call For Details	TD-374-1.22	1.22mm	14mm
Call For Details	TD-374-1.23	1.23mm	14mm
Call For Details	TD-374-1.24	1.24mm	14mm
Call For Details	TD-374-1.25	1.25mm	14mm
Call For Details	TD-374-1.26	1.26mm	14mm
Call For Details	TD-374-1.27	1.27mm	14mm
Call For Details	TD-374-1.28	1.28mm	14mm
Call For Details	TD-374-1.29	1.29mm	14mm
Call For Details	TD-374-1.30	1.30mm	14mm
Call For Details	TD-374-1.31	1.31mm	14mm
Call For Details	TD-374-1.32	1.32mm	14mm
Call For Details	TD-374-1.33	1.33mm	14mm
Call For Details	TD-374-1.34	1.34mm	14mm
Call For Details	TD-374-1.35	1.35mm	14mm
Call For Details	TD-374-1.36	1.36mm	14mm
Call For Details	TD-374-1.37	1.37mm	14mm
Call For Details	TD-374-1.38	1.38mm	14mm
Call For Details	TD-374-1.39	1.39mm	14mm
Call For Details	TD-374-1.40	1.40mm	14mm
Call For Details	TD-374-1.41	1.41mm	14mm
Call For Details	TD-374-1.42	1.42mm	14mm
Call For Details	TD-374-1.43	1.43mm	14mm
Call For Details	TD-374-1.44	1.44mm	14mm

374 Series: Drills For Stainless Steels - 2 Flute - Coolant-Thru (continued)


GEOMETRY:	
Flutes:	2
Helix:	Variable
Drill Point:	135˚

TOLERANCE:	
D1:	-0.002mm / -0.004mm
D Shank:	h5

OPTIONAL COATINGS:

PROPRIETARY COATING OPTIMIZED FOR STAINLESS



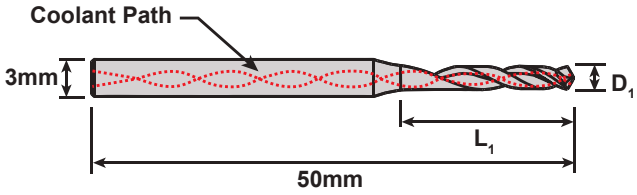



374 Series: Drills For Stainless Steels - 2 Flute - Coolant-Thru (continued)

Item No.	Description	D_1	L_1
Call For Details	TD-374-1.45	1.45mm	14mm
Call For Details	TD-374-1.46	1.46mm	14mm
Call For Details	TD-374-1.47	1.47mm	14mm
Call For Details	TD-374-1.48	1.48mm	14mm
Call For Details	TD-374-1.49	1.49mm	14mm
Call For Details	TD-374-1.50	1.50mm	14mm
Call For Details	TD-374-1.51	1.51mm	14mm
Call For Details	TD-374-1.52	1.52mm	14mm
Call For Details	TD-374-1.53	1.53mm	14mm
Call For Details	TD-374-1.54	1.54mm	14mm
Call For Details	TD-374-1.55	1.55mm	14mm
Call For Details	TD-374-1.56	1.56mm	14mm
Call For Details	TD-374-1.57	1.57mm	14mm
Call For Details	TD-374-1.58	1.58mm	14mm
Call For Details	TD-374-1.59	1.59mm	14mm
Call For Details	TD-374-1.60	1.60mm	14mm
Call For Details	TD-374-1.61	1.61mm	14mm
Call For Details	TD-374-1.62	1.62mm	14mm
Call For Details	TD-374-1.63	1.63mm	14mm
Call For Details	TD-374-1.64	1.64mm	14mm
Call For Details	TD-374-1.65	1.65mm	14mm
Call For Details	TD-374-1.66	1.66mm	14mm
Call For Details	TD-374-1.67	1.67mm	14mm
Call For Details	TD-374-1.68	1.68mm	14mm
Call For Details	TD-374-1.69	1.69mm	14mm

Item No.	Description	D_1	L_1
Call For Details	TD-374-1.70	1.70mm	18mm
Call For Details	TD-374-1.71	1.71mm	18mm
Call For Details	TD-374-1.72	1.72mm	18mm
Call For Details	TD-374-1.73	1.73mm	18mm
Call For Details	TD-374-1.74	1.74mm	18mm
Call For Details	TD-374-1.75	1.75mm	18mm
Call For Details	TD-374-1.76	1.76mm	18mm
Call For Details	TD-374-1.77	1.77mm	18mm
Call For Details	TD-374-1.78	1.78mm	18mm
Call For Details	TD-374-1.79	1.79mm	18mm
Call For Details	TD-374-1.80	1.80mm	18mm
Call For Details	TD-374-1.81	1.81mm	18mm
Call For Details	TD-374-1.82	1.82mm	18mm
Call For Details	TD-374-1.83	1.83mm	18mm
Call For Details	TD-374-1.84	1.84mm	18mm
Call For Details	TD-374-1.85	1.85mm	18mm
Call For Details	TD-374-1.86	1.86mm	18mm
Call For Details	TD-374-1.87	1.87mm	18mm
Call For Details	TD-374-1.88	1.88mm	18mm
Call For Details	TD-374-1.89	1.89mm	18mm
Call For Details	TD-374-1.90	1.90mm	18mm
Call For Details	TD-374-1.91	1.91mm	18mm
Call For Details	TD-374-1.92	1.92mm	18mm
Call For Details	TD-374-1.93	1.93mm	18mm
Call For Details	TD-374-1.94	1.94mm	18mm

Item No.	Description	D_1	L_1
Call For Details	TD-374-1.95	1.95mm	18mm
Call For Details	TD-374-1.96	1.96mm	18mm
Call For Details	TD-374-1.97	1.97mm	18mm
Call For Details	TD-374-1.98	1.98mm	18mm
Call For Details	TD-374-1.99	1.99mm	18mm
Call For Details	TD-374-2.00	2.00mm	18mm
Call For Details	TD-374-2.05	2.05mm	18mm
Call For Details	TD-374-2.10	2.10mm	20mm
Call For Details	TD-374-2.15	2.15mm	20mm
Call For Details	TD-374-2.20	2.20mm	20mm
Call For Details	TD-374-2.25	2.25mm	20mm
Call For Details	TD-374-2.30	2.30mm	20mm
Call For Details	TD-374-2.35	2.35mm	20mm
Call For Details	TD-374-2.40	2.40mm	20mm
Call For Details	TD-374-2.45	2.45mm	20mm
Call For Details	TD-374-2.50	2.50mm	20mm
Call For Details	TD-374-2.60	2.60mm	20mm
Call For Details	TD-374-2.70	2.70mm	20mm
Call For Details	TD-374-2.80	2.80mm	20mm
Call For Details	TD-374-2.90	2.90mm	20mm
Call For Details	TD-374-3.00	3.00mm	20mm
Call For Details	TD-374-3.50	3.50mm	20mm
Call For Details	TD-374-4.00	4.00mm	20mm


1430/1450 Series: End Mill for Torx Features

GEOMETRY:	
Flutes:	3-4
Helix:	45˚
Rake:	14˚

TOLERANCE:	
D1:	0/-0.01mm
L1:	+0.05mm/0
OAL:	+/-0.5mm
D Shank:	h5

OPTIONAL COATINGS:	
TRIO:	Cobalt-Chrome
TISI:	Stainless Steel
NEMO:	Titanium



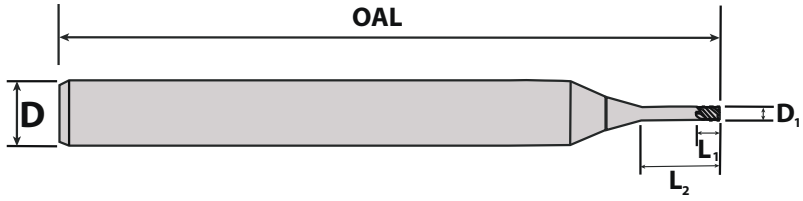

Item No.	Description	D_1	L_1	L_2	D	OAL
3822-000159	TE-1430-0.20	0.2	0.3	0.6	3	38
Call For Details	TE-1430-0.25	0.25	0.38	0.75	3	38
3822-000174	TE-1430-0.30	0.3	0.45	0.9	3	38
Call For Details	TE-1430-0.35	0.35	0.52	1.05	3	38
3822-000176	TE-1430-0.40	0.4	0.6	1.2	3	38
3822-000155	TE-1430-0.45	0.45	0.68	1.35	3	38
3822-000161	TE-1430-0.50	0.5	0.75	1.5	3	38
3822-000177	TE-1430-0.60	0.6	0.9	1.8	3	38
3822-000178	TE-1430-0.70	0.7	1.05	2.1	3	38
Call For Details	TE-1430-0.8	0.8	1.2	2.4	3	38
3822-000179	TE-1430-0.90	0.9	1.35	2.7	3	38
3822-000158	TE-1430-1.00	1	1.5	3	3	38


Item No.	Description	D_1	L_1	L_2	D	OAL
3822-000164	TE-1450-0.20	0.2	0.3	1	3	38
3822-000171	TE-1450-0.25	0.25	0.38	1.25	3	38
3822-000165	TE-1450-0.30	0.3	0.45	1.5	3	38
3822-000166	TE-1450-0.40	0.4	0.6	1.75	3	38
3822-000180	TE-1450-0.45	0.45	0.68	2.25	3	38
3822-000160	TE-1450-0.50	0.5	0.75	2.5	3	38
3822-000172	TE-1450-0.60	0.6	0.9	3	3	38
3822-000181	TE-1450-0.70	0.7	1.05	3.5	3	38
3822-000167	TE-1450-0.80	0.8	1.2	4	3	38
3822-000182	TE-1450-0.90	0.9	1.35	4.5	3	38
3822-000162	TE-1450-1.00	1	1.5	5	3	38

1510 Series: Precision Micro End Mills

GEOMETRY:	
Flutes:	3
Helix:	30˚
Rake:	8-10˚

TOLERANCE:	
D1 under 1mm:	+/-.01mm
D1 over 1mm:	+/-.02mm
OAL:	-0.02mm / -0.00mm
D Shank:	h5

OPTIONAL COATINGS:	
TRIO:	Steel & Stainless
SOLO:	Brass & Bronze
RICO:	Titanium & Aluminum

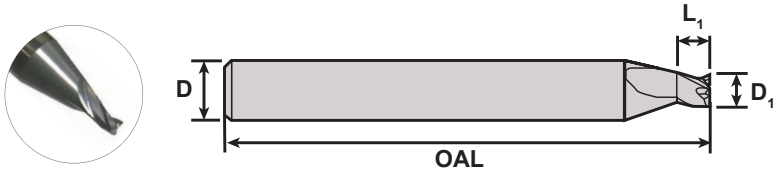


Item No.	Description	D_1	D	L_1	OAL
3894-000100	TE-1510-0.3	0.30	3.0	0.30	38
3894-000101	TE-1510-0.35	0.35	3.0	0.35	38
3894-000102	TE-1510-0.4	0.40	3.0	0.40	38
3894-000103	TE-1510-0.45	0.45	3.0	0.45	38
3894-000104	TE-1510-0.5	0.50	3.0	0.50	38
3894-000105	TE-1510-0.55	0.55	3.0	0.55	38
3894-000106	TE-1510-0.6	0.60	3.0	0.60	38
3894-000107	TE-1510-0.65	0.65	3.0	0.65	38
3894-000108	TE-1510-0.7	0.70	3.0	0.70	38
3894-000109	TE-1510-0.75	0.75	3.0	0.75	38
3894-000110	TE-1510-0.8	0.80	3.0	0.80	38
3894-000111	TE-1510-0.85	0.85	3.0	0.85	38
3894-000112	TE-1510-0.9	0.90	3.0	0.90	38
3894-000113	TE-1510-0.95	0.95	3.0	0.95	38
3894-000114	TE-1510-1	1.00	3.0	1.00	38
3894-000115	TE-1510-1.05	1.05	3.0	1.05	38
3894-000116	TE-1510-1.1	1.10	3.0	1.10	38
3894-000117	TE-1510-1.15	1.15	3.0	1.15	38
3894-000118	TE-1510-1.2	1.20	3.0	1.20	38
3894-000119	TE-1510-1.25	1.25	3.0	1.25	38
3894-000120	TE-1510-1.3	1.30	3.0	1.30	38
3894-000121	TE-1510-1.35	1.35	3.0	1.35	38
3894-000122	TE-1510-1.4	1.40	3.0	1.40	38
3894-000123	TE-1510-1.45	1.45	3.0	1.45	38
3894-000124	TE-1510-1.5	1.50	3.0	1.50	38
3894-000125	TE-1510-1.55	1.55	3.0	1.55	38
3894-000126	TE-1510-1.6	1.60	3.0	1.60	38
3894-000127	TE-1510-1.65	1.65	3.0	1.65	38
3894-000128	TE-1510-1.7	1.70	3.0	1.70	38
3894-000129	TE-1510-1.75	1.75	3.0	1.75	38
3894-000130	TE-1510-1.8	1.80	3.0	1.80	38
3894-000131	TE-1510-1.85	1.85	3.0	1.85	38
3894-000132	TE-1510-1.9	1.90	3.0	1.90	38
3894-000133	TE-1510-1.95	1.95	3.0	1.95	38

Item No.	Description	D_1	D	L_1	OAL
3894-000134	TE-1510-2	2.00	3.0	2.00	38
3894-000135	TE-1510-2.05	2.05	3.0	2.05	38
3894-000136	TE-1510-2.1	2.10	3.0	2.10	38
3894-000137	TE-1510-2.15	2.15	3.0	2.15	38
3894-000138	TE-1510-2.2	2.20	3.0	2.20	38
3894-000139	TE-1510-2.25	2.25	3.0	2.25	38
3894-000140	TE-1510-2.3	2.30	3.0	2.30	38
3894-000141	TE-1510-2.35	2.35	3.0	2.35	38
3894-000142	TE-1510-2.4	2.40	3.0	2.40	38
3894-000143	TE-1510-2.45	2.45	3.0	2.45	38
3894-000144	TE-1510-2.5	2.50	3.0	2.50	38
3894-000145	TE-1510-2.55	2.55	3.0	2.55	38
3894-000146	TE-1510-2.6	2.60	3.0	2.60	38
3894-000147	TE-1510-2.65	2.65	3.0	2.65	38
3894-000148	TE-1510-2.7	2.70	3.0	2.70	38
3894-000149	TE-1510-2.75	2.75	3.0	2.75	38
3894-000150	TE-1510-2.8	2.80	3.0	2.80	38
3894-000151	TE-1510-2.85	2.85	3.0	2.85	38
3894-000152	TE-1510-2.9	2.90	3.0	2.90	38
3894-000153	TE-1510-2.95	2.95	3.0	2.95	38
3894-000154	TE-1510-3	3.00	6.0	3.00	51
3894-000155	TE-1510-3.1	3.10	6.0	3.10	51
3894-000156	TE-1510-3.2	3.20	6.0	3.20	51
3894-000157	TE-1510-3.3	3.30	6.0	3.30	51
3894-000158	TE-1510-3.4	3.40	6.0	3.40	51
3894-000159	TE-1510-3.5	3.50	6.0	3.50	51
3894-000160	TE-1510-3.6	3.60	6.0	3.60	51
3894-000161	TE-1510-3.7	3.70	6.0	3.70	51
3894-000162	TE-1510-3.8	3.80	6.0	3.80	51
3894-000163	TE-1510-3.9	3.90	6.0	3.90	51
3894-000164	TE-1510-4	4.00	6.0	4.00	51
3894-000165	TE-1510-4.1	4.10	6.0	4.10	51
3894-000166	TE-1510-4.2	4.20	6.0	4.20	51
3894-000167	TE-1510-4.3	4.30	6.0	4.30	51


Item No.	Description	D_1	D	L_1	OAL
3894-000168	TE-1510-4.4	4.40	6.0	4.40	51
3894-000169	TE-1510-4.5	4.50	6.0	4.50	51
3894-000170	TE-1510-4.6	4.60	6.0	4.60	51
3894-000171	TE-1510-4.7	4.70	6.0	4.70	51
3894-000172	TE-1510-4.8	4.80	6.0	4.80	51
3894-000173	TE-1510-4.9	4.90	6.0	4.90	51
3894-000174	TE-1510-5	5.00	6.0	5.00	51
3894-000175	TE-1510-5.1	5.10	6.0	5.10	51
3894-000176	TE-1510-5.2	5.20	6.0	5.20	51
3894-000177	TE-1510-5.3	5.30	6.0	5.30	51
3894-000178	TE-1510-5.4	5.40	6.0	5.40	51
3894-000179	TE-1510-5.5	5.50	6.0	5.50	51
3894-000180	TE-1510-5.6	5.60	6.0	5.60	51
3894-000181	TE-1510-5.7	5.70	6.0	5.70	51
3894-000182	TE-1510-5.8	5.80	6.0	5.80	51
3894-000183	TE-1510-5.9	5.90	6.0	5.90	51
3894-000184	TE-1510-6	6.00	6.0	6.00	51
3894-000185	TE-1510-6.5	6.50	8.0	6.50	51
3894-000186	TE-1510-7	7.00	8.0	7.00	61
3894-000187	TE-1510-7.5	7.50	8.0	7.50	61
3894-000188	TE-1510-8	8.00	10.0	8.00	61
3894-000189	TE-1510-8.5	8.50	10.0	8.50	72
3894-000190	TE-1510-9	9.00	10.0	9.00	72
3894-000191	TE-1510-9.5	9.50	10.00	9.50	72
3894-000192	TE-1510-10	10.00	10.00	10.00	72
3894-000193	TE-1510-11	11.00	11.00	11.00	83
3894-000194	TE-1510-12	12.00	12.00	12.00	83
3894-000195	TE-1510-13	13.00	13.00	13.00	83
3894-000196	TE-1510-14	14.00	14.00	14.00	83
3894-000197	TE-1510-15	15.00	15.00	15.00	83
3894-000198	TE-1510-16	16.00	16.00	16.00	92

Also Available...

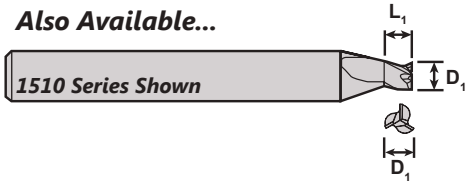


1510 Series Shown

1520 Series: $L_1 = 2xD_1$
Two Times the Length



1530 Series: $L_1 = 3xD_1$
Three Times the Length



1540 Series: $L_1 = 4xD_1$
FourTimes the Length




1210 Series: Precision Micro End Mills

GEOMETRY:	
Flutes:	2
Helix:	30˚
Rake:	8-10˚

TOLERANCE:	
D1 under 1mm:	+/-.01mm
D1 over 1mm:	+/-.02mm
OAL:	-0.02mm / -0.00mm
D Shank:	h5

OPTIONAL COATINGS:	
TRIO:	Steel & Stainless
SOLO:	Brass & Bronze
RICO:	Titanium & Aluminum



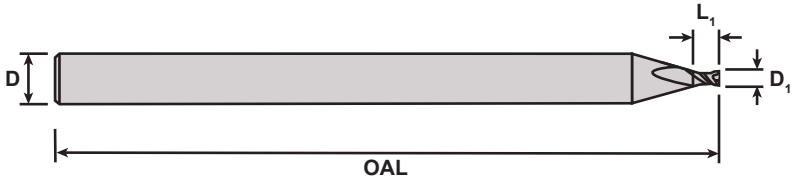

Item No.	Description	D_1	D	L_1	OAL
3822-000100	TE-1210-0.04	0.04	3.0	0.04	38
3822-000101	TE-1210-0.05	0.05	3.0	0.05	38
3822-000102	TE-1210-0.06	0.06	3.0	0.06	38
3822-000103	TE-1210-0.07	0.07	3.0	0.07	38
3822-000104	TE-1210-0.08	0.08	3.0	0.08	38
3822-000105	TE-1210-0.09	0.09	3.0	0.09	38
3822-000106	TE-1210-0.1	0.10	3.0	0.10	38
3822-000107	TE-1210-0.12	0.12	3.0	0.12	38
3822-000108	TE-1210-0.15	0.15	3.0	0.15	38
3822-000109	TE-1210-0.2	0.20	3.0	0.20	38
3822-000110	TE-1210-0.25	0.25	3.0	0.25	38
3822-000111	TE-1210-0.3	0.30	3.0	0.30	38
3822-000112	TE-1210-0.35	0.35	3.0	0.35	38
3822-000113	TE-1210-0.4	0.40	3.0	0.40	38
3822-000114	TE-1210-0.45	0.45	3.0	0.45	38
3822-000115	TE-1210-0.5	0.50	3.0	0.50	38
3822-000116	TE-1210-0.55	0.55	3.0	0.55	38
3822-000117	TE-1210-0.6	0.60	3.0	0.60	38

Item No.	Description	D_1	D	L_1	OAL
3822-000118	TE-1210-0.65	0.65	3.0	0.65	38
3822-000119	TE-1210-0.7	0.70	3.0	0.70	38
3822-000120	TE-1210-0.75	0.75	3.0	0.75	38
3822-000121	TE-1210-0.8	0.80	3.0	0.80	38
3822-000123	TE-1210-0.9	0.90	3.0	0.90	38
3822-000124	TE-1210-0.95	0.95	3.0	0.95	38
3822-000125	TE-1210-1	1.00	3.0	1.00	38
3822-000126	TE-1210-1.05	1.05	3.0	1.05	38
3822-000127	TE-1210-1.1	1.10	3.0	1.10	38
3822-000128	TE-1210-1.15	1.15	3.0	1.15	38
3822-000129	TE-1210-1.2	1.20	3.0	1.20	38
3822-000130	TE-1210-1.25	1.25	3.0	1.25	38
3822-000131	TE-1210-1.3	1.30	3.0	1.30	38
3822-000132	TE-1210-1.35	1.35	3.0	1.35	38
3822-000133	TE-1210-1.4	1.40	3.0	1.40	38
3822-000134	TE-1210-1.45	1.45	3.0	1.45	38
3822-000135	TE-1210-1.5	1.50	3.0	1.50	38
3822-000136	TE-1210-1.55	1.55	3.0	1.55	38

Item No.	Description	D_1	D	L_1	OAL
3822-000137	TE-1210-1.6	1.60	3.0	1.60	38
3822-000138	TE-1210-1.65	1.65	3.0	1.65	38
3822-000139	TE-1210-1.7	1.70	3.0	1.70	38
3822-000140	TE-1210-1.75	1.75	3.0	1.75	38
3822-000141	TE-1210-1.8	1.80	3.0	1.80	38
3822-000142	TE-1210-1.85	1.85	3.0	1.85	38
3822-000143	TE-1210-1.9	1.90	3.0	1.90	38
3822-000144	TE-1210-1.95	1.95	3.0	1.95	38
3822-000145	TE-1210-2	2.00	3.0	2.00	38
3822-000146	TE-1210-2.1	2.10	3.0	2.10	38
3822-000147	TE-1210-2.2	2.20	3.0	2.20	38
3822-000148	TE-1210-2.3	2.30	3.0	2.30	38
3822-000149	TE-1210-2.4	2.40	3.0	2.40	38
3822-000150	TE-1210-2.5	2.50	3.0	2.50	38
3822-000151	TE-1210-2.6	2.60	3.0	2.60	38
3822-000152	TE-1210-2.7	2.70	3.0	2.70	38
3822-000153	TE-1210-2.8	2.80	3.0	2.80	38
3822-000154	TE-1210-2.9	2.90	3.0	2.90	38


1620 Series End Mills: Variable Pitch & Helix

GEOMETRY:	
Flutes:	4
Helix:	35-45˚ (Variable)
Rake:	8˚

TOLERANCE:	
D1 under 1mm:	+/-.01mm
D1 over 1mm:	+/-.02mm
OAL:	-0.02mm / -0.00mm
D Shank:	h5

OPTIONAL COATINGS:	
TRIO:	Steel & Stainless
SOLO:	Brass & Bronze
RICO:	Titanium & Aluminum



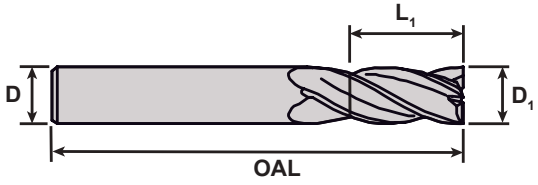

Item No.	Description	D_1	L_1	D	OAL
3904-000100	TE-1620-1	1.00	2.0	6.0	51
3904-000101	TE-1620-1.5	1.50	3.0	6.0	51
3904-000102	TE-1620-2	2.00	4.0	6.0	51
3904-000103	TE-1620-2.5	2.50	5.0	6.0	51
3904-000104	TE-1620-3	3.00	6.0	6.0	51
3904-000105	TE-1620-3.5	3.50	7.0	6.0	51
3904-000106	TE-1620-4	4.00	8.0	6.0	51

Item No.	Description	D_1	L_1	D	OAL
3904-000107	TE-1620-5	5.00	10.0	6.0	51
3904-000108	TE-1620-6	6.00	12.0	6.0	51
3904-000109	TE-1620-8	8.00	16.0	8.0	61
3904-000110	TE-1620-10	10.00	20.0	10.0	72
3904-000111	TE-1620-12	12.00	24.0	12.0	83
3904-000112	TE-1620-14	14.00	28.0	14.0	83
3904-000113	TE-1620-16	16.00	32.0	16.0	92


1621 Series End Mills: Variable Pitch & Helix

GEOMETRY:	
Flutes:	3
Helix:	35-45˚ (Variable)
Rake:	8˚

TOLERANCE:	
D1 under 1mm:	+/-.01mm
D1 over 1mm:	+/-.02mm
OAL:	-0.02mm / -0.00mm
D Shank:	h5

OPTIONAL COATINGS:	
TRIO:	Steel & Stainless
SOLO:	Brass & Bronze
RICO:	Titanium & Aluminum



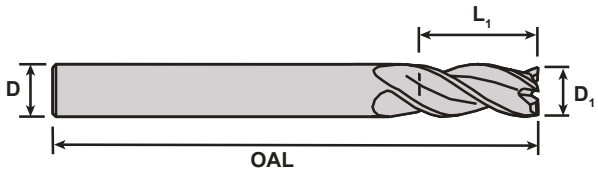

Item No.	Description	D_1	L_1	D	OAL
3848-000100	TE-1621-1	1.00	2.0	6.0	51
3848-000101	TE-1621-1.5	1.50	3.0	6.0	51
3848-000102	TE-1621-2	2.00	4.0	6.0	51
3848-000103	TE-1621-2.5	2.50	5.0	6.0	51
3848-000104	TE-1621-3	3.00	6.0	6.0	51
3848-000105	TE-1621-3.5	3.50	7.0	6.0	51
3848-000106	TE-1621-4	4.00	8.0	6.0	51

Item No.	Description	D_1	L_1	D	OAL
3848-000107	TE-1621-5	5.00	10.0	6.0	51
3848-000108	TE-1621-6	6.00	12.0	6.0	51
3848-000109	TE-1621-8	8.00	16.0	8.0	61
3848-000110	TE-1621-10	10.00	20.0	10.0	72
3848-000111	TE-1621-12	12.00	24.0	12.0	83
3848-000112	TE-1621-14	14.00	28.0	14.0	83
3848-000113	TE-1621-16	16.00	32.0	16.0	92


1820 Series End Mills: Advanced Performance & Finish For Brass

GEOMETRY:	
Flutes:	3
Helix:	30˚
Rake:	8-10˚

TOLERANCE:	
D1 under 1mm:	+/-.01mm
D1 over 1mm:	+/-.02mm
OAL:	-0.02mm / -0.00mm
D Shank:	h5

OPTIONAL COATINGS:	
DLC:	Brass & Bronze



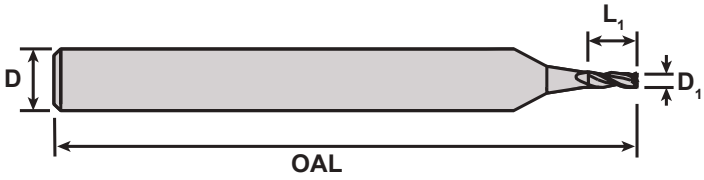

Item No.	Description	D_1	D	L_1	OAL
3823-000100	TE-1820-0.5	0.50	4.0	1.00	38
3823-000101	TE-1820-0.8	0.80	4.0	1.60	38
3823-000102	TE-1820-1	1.00	4.0	2.00	38
3823-000103	TE-1820-1.5	1.50	4.0	3.00	38
3823-000104	TE-1820-2	2.00	4.0	4.00	38
3823-000105	TE-1820-3	3.00	4.0	5.00	38

3000 Series HSC End Mills: For Stainless Steels


GEOMETRY:	
Flutes(Z):	2-3
Helix:	42˚
Rake:	14˚

TOLERANCE:	
D1 under 1mm:	+/-.01mm
D1 over 1mm:	+/-.02mm
OAL:	-0.02mm / -0.00mm
D Shank:	h5

OPTIONAL COATINGS:	
TRIO:	Steel & Stainless



Sharp Corners

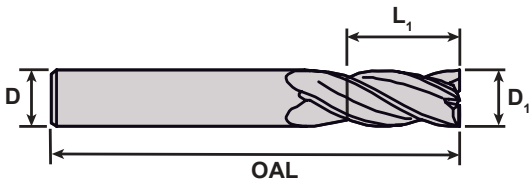

Item No.	Description	D_1	L_1	D	OAL	Z
3940-000100	TE-3000-0.3	0.30	0.6	6.0	57	2
3940-000101	TE-3000-0.4	0.40	0.8	6.0	57	2
3940-000102	TE-3000-0.5	0.50	1.0	6.0	57	2
3940-000103	TE-3000-0.6	0.60	1.2	6.0	57	2
3940-000104	TE-3000-0.7	0.70	1.4	6.0	57	2
3940-000105	TE-3000-0.8	0.80	1.6	6.0	57	2
3940-000106	TE-3000-0.9	0.90	1.8	6.0	57	2
3940-000107	TE-3000-1	1.00	2.0	6.0	57	2
3940-000108	TE-3000-1.1	1.10	2.2	6.0	57	2
3940-000109	TE-3000-1.2	1.20	2.4	6.0	57	2
3940-000110	TE-3000-1.3	1.30	2.6	6.0	57	3
3940-000111	TE-3000-1.4	1.40	2.8	6.0	57	3
3940-000112	TE-3000-1.5	1.50	3.0	6.0	57	3
3940-000113	TE-3000-1.6	1.60	3.2	6.0	57	3
3940-000114	TE-3000-1.7	1.70	3.4	6.0	57	3

Item No.	Description	D_1	L_1	D	OAL	Z
3940-000115	TE-3000-1.8	1.80	3.6	6.0	57	3
3940-000116	TE-3000-1.9	1.90	3.8	6.0	57	3
3940-000117	TE-3000-2	2.00	4.0	6.0	57	3
3940-000118	TE-3000-2.1	2.10	2.2	6.0	57	3
3940-000119	TE-3000-2.2	2.20	2.4	6.0	57	3
3940-000120	TE-3000-2.3	2.30	4.6	6.0	57	3
3940-000121	TE-3000-2.4	2.40	4.8	6.0	57	3
3940-000122	TE-3000-2.5	2.50	5.0	6.0	57	3
3940-000127	TE-3000-3	3.00	6.0	6.0	57	3
3940-000128	TE-3000-3.5	3.50	7.0	6.0	57	3
3940-000129	TE-3000-4	4.00	8.0	6.0	57	3
3940-000131	TE-3000-5	5.00	10.0	6.0	57	3
3940-000132	TE-3000-6	6.00	12.0	8.0	63	3
3940-000133	TE-3000-8	8.00	16.0	10.0	72	3
3940-000134	TE-3000-10	10.00	20.0	10.0	72	3


3100 Series HSC End Mills: For Titanium

GEOMETRY:	
Flutes(Z):	3-4
Helix:	42˚
Rake:	14˚

TOLERANCE:	
D1 under 1mm:	+/-.01mm
D1 over 1mm:	+/-.02mm
OAL:	-0.02mm / -0.00mm
D Shank:	h5

OPTIONAL COATINGS:	
TRIO:	Steel & Stainless
RICO:	for Titanium



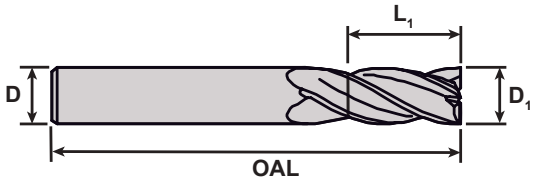


Item No.	Description	D_1	L_1	D	OAL	Z
3946-000100	TE-3100-0.5	0.50	1.0	6.0	57	3
3946-000101	TE-3100-0.6	0.60	1.2	6.0	57	3
3946-000102	TE-3100-0.7	0.70	1.4	6.0	57	3
3946-000103	TE-3100-0.8	0.80	1.6	6.0	57	3
3946-000104	TE-3100-0.9	0.90	1.8	6.0	57	3
3946-000105	TE-3100-1	1.00	2.0	6.0	57	3
3946-000106	TE-3100-1.1	1.10	2.2	6.0	57	3
3946-000107	TE-3100-1.2	1.20	2.4	6.0	57	3
3946-000108	TE-3100-1.3	1.30	2.6	6.0	57	3
3946-000109	TE-3100-1.4	1.40	2.8	6.0	57	3
3946-000110	TE-3100-1.5	1.50	3.0	6.0	57	3
3946-000111	TE-3100-1.6	1.60	3.2	6.0	57	3
3946-000112	TE-3100-1.7	1.70	3.4	6.0	57	3
3946-000113	TE-3100-1.8	1.80	3.6	6.0	57	3
3946-000114	TE-3100-1.9	1.90	3.8	6.0	57	3

Item No.	Description	D_1	L_1	D	OAL	Z
3946-000115	TE-3100-2	2.00	4.0	6.0	57	3
3946-000116	TE-3100-2.1	2.10	2.2	6.0	57	3
3946-000117	TE-3100-2.2	2.20	2.4	6.0	57	3
3946-000118	TE-3100-2.3	2.30	4.6	6.0	57	3
3946-000119	TE-3100-2.4	2.40	4.8	6.0	57	3
3946-000120	TE-3100-2.5	2.50	5.0	6.0	57	3
3946-000125	TE-3100-3	3.00	6.0	6.0	57	3
3946-000126	TE-3100-3.5	3.50	7.0	6.0	57	3
3946-000127	TE-3100-4	4.00	8.0	6.0	57	3
3946-000128	TE-3100-4.5	4.50	9.0	6.0	57	3
3946-000129	TE-3100-5	5.00	10.0	6.0	57	3
3946-000130	TE-3100-6	6.00	12.0	8.0	63	3
3946-000131	TE-3100-8	8.00	16.0	10.0	72	3
3946-000132	TE-3100-10	10.00	20.0	10.0	72	4
3946-000133	TE-3100-12	12.00	24.0	12.0	83	4


UTILIS®
Tooling for High Technology

MULTIDEC® -THREAD MILL

multidec® thread mill tools are a versatile way for creating metric or UNC/UNF spec threaded forms. Since thread milling uses helical-interpolation tool paths, the same thread mill can be used to create left or right handed threads. multidec® thread mill tools come standard with 3 flutes and have the options for 1 or 2 teeth with long or short shanks. Strengthened shank mill tools are available for increased rigidity and decreased deflection.

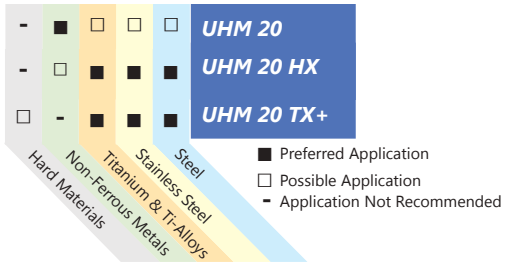






WHS (Short Version) 3 Flutes and 2 Teeth Thread Mill

Item No.	Description	ISO DIN13	P	L_1	D_1	D_2	a	D0	L0	α	D3	
7005-126415	WHS 338 010 025 UHM20 HX	M1	0.25	2.3	0.64	0.24	0.155	3	38	60°	0.75	0/+0.03
7005-126418	WHS 338 012 025 UHM20 HX	M1.2	0.25	2.8	0.84	0.44	0.155	3	38	60°	0.95	0/+0.03
7005-126421	WHS 338 014 030 UHM20 HX	M1.4	0.3	3.2	0.98	0.53	0.18	3	38	60°	1.1	0/+0.04
7005-126424	WHS 338 016 035 UHM20 HX	M1.6	0.35	3.7	1.12	0.61	0.205	3	38	60°	1.25	0/+0.04
7005-126427	WHS 338 018 035 UHM20 HX	M1.8	0.35	4.1	1.32	0.81	0.205	3	38	60°	1.45	0/+0.04
7005-126405	WHS 338 020 040 UHM20 HX	M2	0.4	4.6	1.46	0.9	0.23	3	38	60°	1.6	0/+0.05
7005-126430	WHS 338 022 045 UHM20 HX	M2.2	0.45	5.1	1.6	0.98	0.255	3	38	60°	1.75	0/+0.05
7005-112144	WHS 338 023 040 UHM20 HX	M2.3	0.4	5.2	1.76	1.2	0.23	3	38	60°	1.9	0/+0.05
7005-126433	WHS 338 025 045 UHM20 HX	M2.5	0.45	5.8	1.9	1.28	0.255	3	38	60°	2.05	0/+0.05
7005-126436	WHS 338 030 050 UHM20 HX	M3	0.5	6.9	2.34	1.67	0.28	3	38	60°	2.5	0/+0.05
7005-126439	WHS 338 035 060 UHM20 HX	M3.5	0.6	8.1	2.71	1.93	0.33	3	38	60°	2.9	0/+0.06
7005-126442	WHS 442 040 070 UHM20 HX	M4	0.7	9.2	3.09	2.2	0.38	4	42	60°	3.3	0/+0.06
7005-126527	WHS 442 045 075 UHM20 HX	M4.5	0.75	10.4	3.53	2.56	0.405	4	42	60°	3.75	0/+0.07
7005-126408	WHS 442 050 080 UHM20 HX	M5	0.8	11.5	3.97	2.95	0.43	4	42	60°	4.2	0/+0.07

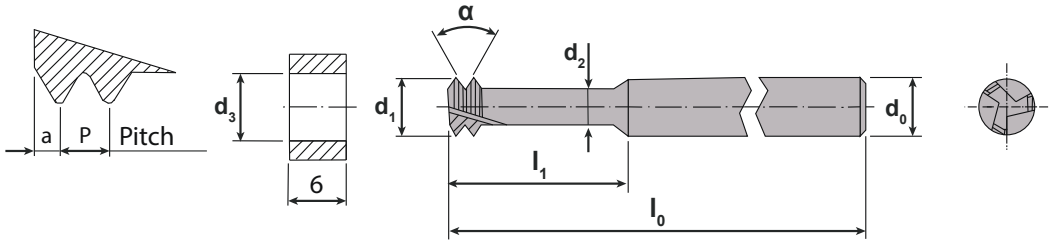





WHA (Short Version) 3 Flutes and 2 Teeth Thread Mill

Strengthened Version


Item No.	Description	ISO DIN13	P	L_1	D_1	D_2	a	D0	L0	α	D3	
7005-112094	WHA 338 010 025 UHM20 HX	M1.0	0.25	2.3	0.83	0.41	0.155	3	38	60°	0.75	0/+0.03
7005-112096	WHA 338 012 025 UHM20 HX	M1.2	0.25	2.8	1.03	0.61	0.155	3	38	60°	0.95	0/+0.03
7005-112098	WHA 338 014 030 UHM20 HX	M1.4	0.3	3.2	1.21	0.74	0.18	3	38	60°	1.1	0/+0.04
7005-112100	WHA 338 016 035 UHM20 HX	M1.6	0.35	3.7	1.39	0.88	0.205	3	38	60°	1.25	0/+0.04
7005-112102	WHA 338 018 035 UHM20 HX	M1.8	0.35	4.1	1.59	1.08	0.205	3	38	60°	1.45	0/+0.04
7005-112104	WHA 338 020 040 UHM20 HX	M2.0	0.4	4.6	1.76	1.19	0.23	3	38	60°	1.6	0/+0.05
7005-112106	WHA 338 022 045 UHM20 HX	M2.2	0.45	5.1	1.94	1.31	0.255	3	38	60°	1.75	0/+0.05
7005-112108	WHA 338 023 040 UHM20 HX	M2.3	0.4	5.2	2.06	1.49	0.23	3	38	60°	1.9	0/+0.05

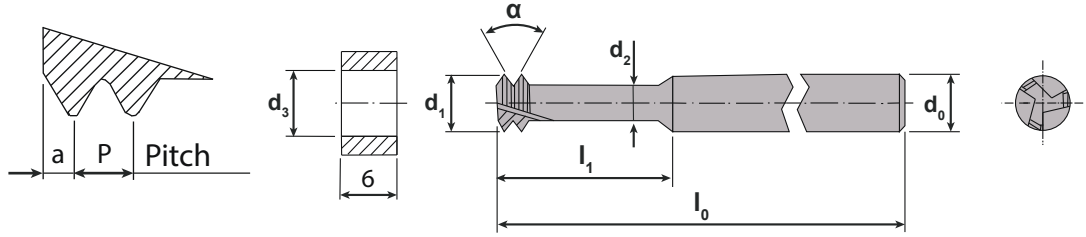




WHL (Long Version) 3 Flutes and 2 Teeth Thread Mill


Item No.	Description	ISO DIN13	P	L_1	D_1	D_2	a	D0	L0	α	D3	
7005-126451	WHL 338 010 025 UHM20 HX	M1	0.25	4.6	0.64	0.24	0.155	3	38	60°	0.75	0/+0.03
7005-126454	WHL 338 012 025 UHM20 HX	M1.2	0.25	5.5	0.84	0.44	0.155	3	38	60°	0.95	0/+0.03
7005-126457	WHL 338 014 030 UHM20 HX	M1.4	0.3	6.4	0.98	0.53	0.18	3	38	60°	1.1	0/+0.04
7005-126460	WHL 338 016 035 UHM20 HX	M1.6	0.35	7.4	1.12	0.61	0.205	3	38	60°	1.25	0/+0.04
7005-126463	WHL 338 018 035 UHM20 HX	M1.8	0.35	8.3	1.32	0.81	0.205	3	38	60°	1.45	0/+0.04
7005-126411	WHL 338 020 040 UHM20 HX	M2	0.4	9.2	1.46	0.9	0.23	3	38	60°	1.6	0/+0.05
7005-126466	WHL 338 022 045 UHM20 HX	M2.2	0.45	10.1	1.6	0.98	0.255	3	38	60°	1.75	0/+0.05
7005-112142	WHL 338 023 040 UHM20 HX	M2.3	0.4	10.4	1.76	1.2	0.23	3	38	60°	1.9	0/+0.05
7005-126468	WHL 338 025 045 UHM20 HX	M2.5	0.45	11.5	1.9	1.28	0.255	3	38	60°	2.05	0/+0.05
7005-126471	WHL 338 030 050 UHM20 HX	M3	0.5	13.8	2.34	1.67	0.28	3	38	60°	2.5	0/+0.05
7005-126474	WHL 338 035 060 UHM20 HX	M3.5	0.6	16.1	2.71	1.93	0.33	3	38	60°	2.9	0/+0.06
7005-126477	WHL 442 040 070 UHM20 HX	M4	0.7	18.4	3.09	2.2	0.38	4	42	60°	3.3	0/+0.06
7005-126530	WHL 442 045 075 UHM20 HX	M4.5	0.75	20.7	3.53	2.56	0.405	4	42	60°	3.75	0/+0.07
7005-126480	WHL 442 050 080 UHM20 HX	M5	0.8	23	3.97	2.95	0.43	4	42	60°	4.2	0/+0.07

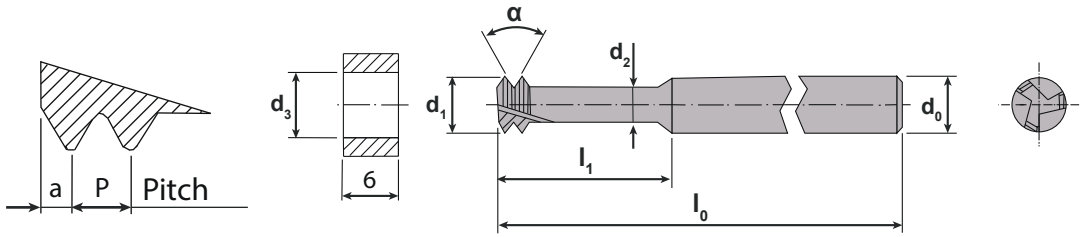




WHB (Long Version) 3 Flutes and 2 Teeth Thread Mill — Strengthened Version


Item No.	Description	ISO DIN13	P	L_1	D_1	D_2	a	D0	L0	α	D3	
7005-112118	WHB 338 010 025 UHM20 HX	M1.0	0.25	4.6	0.83	0.41	0.155	3	38	60°	0.75	0/+0.03
7005-112120	WHB 338 012 025 UHM20 HX	M1.2	0.25	5.6	1.03	0.61	0.155	3	38	60°	0.95	0/+0.03
7005-112122	WHB 338 014 030 UHM20 HX	M1.4	0.3	6.4	1.21	0.74	0.18	3	38	60°	1.1	0/+0.04
7005-112124	WHB 338 016 035 UHM20 HX	M1.6	0.35	7.4	1.39	0.88	0.205	3	38	60°	1.25	0/+0.04
7005-112126	WHB 338 018 035 UHM20 HX	M1.8	0.35	8.2	1.59	1.08	0.205	3	38	60°	1.45	0/+0.04
7005-112128	WHB 338 020 040 UHM20 HX	M2.0	0.4	9.2	1.76	1.19	0.23	3	38	60°	1.6	0/+0.05
7005-112130	WHB 338 022 045 UHM20 HX	M2.2	0.45	10.2	1.94	1.31	0.255	3	38	60°	1.75	0/+0.05
7005-112132	WHB 338 023 040 UHM20 HX	M2.3	0.4	10.4	2.06	1.49	0.23	3	38	60°	1.9	0/+0.05

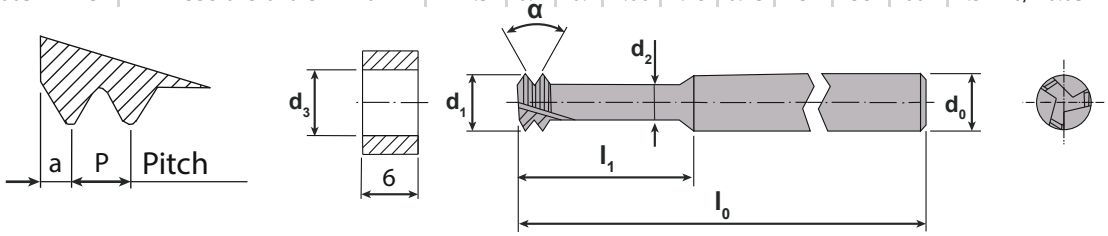




WHC (Short Version) 3 Flutes and 1 Tooth Thread Mill


Item No.	Description	ISO DIN13	P	L_1	D_1	D_2	a	D0	L0	α	D3	
7005-114048	WHC 338 010 025 UHM20 HX	M1.0	0.25	2.5	0.68	0.3	0.155	3	38	60°	0.75	0/+0.03
7005-114051	WHC 338 012 025 UHM20 HX	M1.2	0.25	2.7	0.88	0.5	0.155	3	38	60°	0.95	0/+0.03
7005-114054	WHC 338 014 025 UHM20 HX	M1.4	0.25	2.9	1.08	0.7	0.155	3	38	60°	1.15	0/+0.03
7005-114057	WHC 338 016 025 UHM20 HX	M1.6	0.25	3.1	1.28	0.9	0.155	3	38	60°	1.35	0/+0.03
7005-114060	WHC 338 018 025 UHM20 HX	M1.8	0.25	3.3	1.48	1.1	0.155	3	38	60°	1.55	0/+0.03
7005-114063	WHC 338 020 025 UHM20 HX	M2.0	0.25	3.5	1.68	1.3	0.155	3	38	60°	1.75	0/+0.03
7005-114066	WHC 338 014 030 UHM20 HX	M1.4	0.3	3.2	1.02	0.58	0.18	3	38	60°	1.1	0/+0.04
7005-114069	WHC 338 016 030 UHM20 HX	M1.6	0.3	3.4	1.22	0.78	0.18	3	38	60°	1.3	0/+0.04
7005-114072	WHC 338 018 030 UHM20 HX	M1.8	0.3	3.6	1.42	0.98	0.18	3	38	60°	1.5	0/+0.04
7005-114075	WHC 338 020 030 UHM20 HX	M2.0	0.3	3.8	1.62	1.18	0.18	3	38	60°	1.7	0/+0.04
7005-114078	WHC 338 022 030 UHM20 HX	M2.2	0.3	4	1.82	1.38	0.18	3	38	60°	1.9	0/+0.04
7005-114081	WHC 338 016 035 UHM20 HX	M1.6	0.35	3.7	1.16	0.65	0.205	3	38	60°	1.25	0/+0.04
7005-114084	WHC 338 018 035 UHM20 HX	M1.8	0.35	3.9	1.36	0.85	0.205	3	38	60°	1.45	0/+0.04
7005-114087	WHC 338 020 035 UHM20 HX	M2.0	0.35	4.1	1.56	1.05	0.205	3	38	60°	1.65	0/+0.04
7005-114090	WHC 338 022 035 UHM20 HX	M2.2	0.35	4.3	1.76	1.25	0.205	3	38	60°	1.85	0/+0.04
7005-114093	WHC 338 025 035 UHM20 HX	M2.5	0.35	4.6	2.06	1.55	0.205	3	38	60°	2.15	0/+0.04
7005-114096	WHC 338 030 035 UHM20 HX	M3.0	0.35	5.1	2.56	2.05	0.205	3	38	60°	2.65	0/+0.04
7005-114099	WHC 338 035 035 UHM20 HX	M3.5	0.35	5.6	3.06	2.55	0.205	3	38	60°	3.15	0/+0.04
7005-114102	WHC 338 020 040 UHM20 HX	M2.0	0.4	4.4	1.5	0.92	0.23	3	38	60°	1.6	0/+0.05
7005-114105	WHC 338 022 040 UHM20 HX	M2.2	0.4	4.6	1.7	1.12	0.23	3	38	60°	1.8	0/+0.05
7005-114108	WHC 338 025 040 UHM20 HX	M2.5	0.4	4.9	2	1.42	0.23	3	38	60°	2.1	0/+0.05
7005-114111	WHC 338 030 040 UHM20 HX	M3	0.4	5.4	2.5	1.92	0.23	3	38	60°	2.6	0/+0.05
7005-114114	WHC 338 035 040 UHM20 HX	M3.5	0.4	5.9	2.98	2.4	0.23	3	38	60°	3.1	0/+0.05
7005-114117	WHC 338 022 045 UHM20 HX	M2.2	0.45	4.9	1.64	1	0.255	3	38	60°	1.75	0/+0.05
7005-114120	WHC 338 025 045 UHM20 HX	M2.5	0.45	5.2	1.94	1.3	0.255	3	38	60°	2.05	0/+0.05
7005-114123	WHC 338 030 045 UHM20 HX	M3	0.45	5.7	2.44	1.8	0.255	3	38	60°	2.55	0/+0.05
7005-114130	WHC 338 035 045 UHM20 HX	M3.5	0.45	6.2	2.94	2.3	0.255	3	38	60°	3.05	0/+0.05
7005-114133	WHC 442 040 045 UHM20 HX	M4	0.45	6.7	3.44	2.8	0.255	3	38	60°	3.55	0/+0.05
7005-114136	WHC 338 030 050 UHM20 HX	M3	0.5	6	2.38	1.68	0.28	3	38	60°	2.5	0/+0.05
7005-114139	WHC 338 035 050 UHM20 HX	M3.5	0.5	6.5	2.88	2.18	0.28	3	38	60°	3	0/+0.05
7005-114142	WHC 442 040 050 UHM20 HX	M4	0.5	7	3.38	2.68	0.28	4	42	60°	3.5	0/+0.05
7005-114145	WHC 442 045 050 UHM20 HX	M4.5	0.5	7.5	3.88	3.18	0.28	4	42	60°	4	0/+0.05
7005-114148	WHC 442 035 060 UHM20 HX	M3.5	0.6	7.1	2.75	1.95	0.33	4	42	60°	2.9	0/+0.06
7005-114151	WHC 442 040 060 UHM20 HX	M4	0.6	7.6	3.25	2.45	0.33	4	42	60°	3.4	0/+0.06
7005-114154	WHC 442 045 060 UHM20 HX	M4.5	0.6	8.1	3.75	2.95	0.33	4	42	60°	3.9	0/+0.06
7005-114157	WHC 442 040 070 UHM20 HX	M4	0.7	8.2	3.13	2.19	0.38	4	42	60°	3.3	0/+0.06
7005-114160	WHC 442 045 070 UHM20 HX	M4.5	0.7	8.7	3.63	2.71	0.38	4	42	60°	3.8	0/+0.06
7005-114163	WHC 442 045 075 UHM20 HX	M4.5	0.75	9	3.57	2.57	0.405	4	42	60°	3.75	0/+0.07
7005-114166	WHC 442 050 075 UHM20 HX	M5	0.75	9.5	3.98	2.98	0.405	4	42	60°	4.25	0/+0.07
7005-114169	WHC 442 050 080 UHM20 HX	M5	0.8	9.8	3.98	2.92	0.43	4	42	60°	4.2	0/+0.07

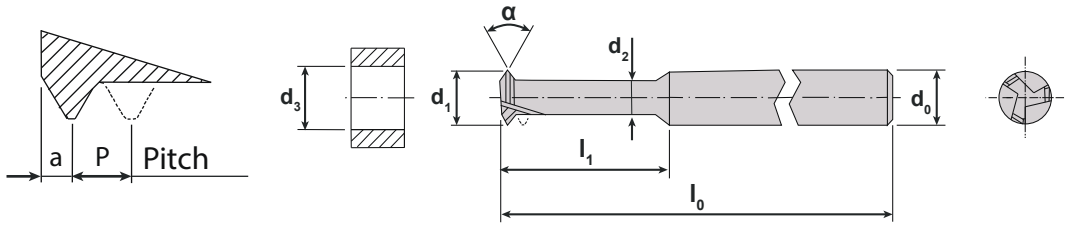




WHC UNC INCH (Short Version) 3 Flutes and 1 Tooth Thread Mill


Item No.	Description	ANSI B1.1	P	P	I1	D_1	D2	a	D0	L0	D3	
7005-113364	WHC 338-01-64 UNC UHM20 HX	1-64	64	0.397	4.2	1.36	0.81	0.228	3	38	1.5	0/+0.04
7005-113366	WHC 338-02-56 UNC UHM20 HX	2-56	56	0.454	4.9	1.62	1	0.257	3	38	1.78	0/+0.05
7005-113368	WHC 338-03-48 UNC UHM20 HX	3-48	48	0.529	5.7	1.86	1.15	0.294	3	38	2.05	0/+0.05
7005-113370	WHC 442-04-40 UNC UHM20 HX	4-40	40	0.635	6.7	2.06	1.22	0.347	4	42	2.27	0/+0.06
7005-113372	WHC 442-05-40 UNC UHM20 HX	5-40	40	0.635	7	2.39	1.55	0.347	4	42	2.59	0/+0.06
7005-113374	WHC 442-06-32 UNC UHM20 HX	6-32	32	0.794	8.3	2.52	1.49	0.427	4	42	2.77	0/+0.07
7005-113376	WHC 442-08-32 UNC UHM20 HX	8-32	32	0.794	8.9	3.18	2.16	0.427	4	42	3.42	0/+0.07

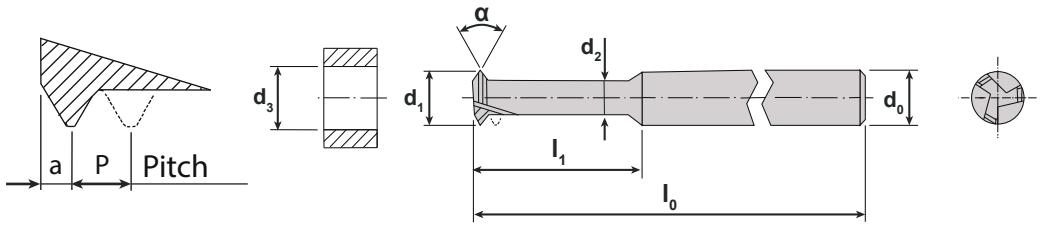


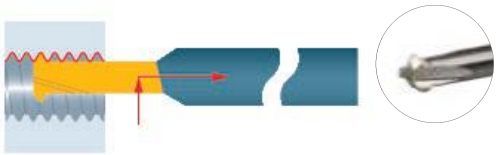

WHC UNF INCH (Short Version) 3 Flutes and 1 Tooth Thread Mill


Item No.	Description	ANSI B1.1	P	P	I1	D_1	D2	a	D0	L0	D3	
7005-113378	WHC 338-00-80 UNF UHM20 HX	0-80	80	0.317	3.4	1.12	0.67	0.188	3	38	1.25	0/+0.04
7005-113380	WHC 338-01-72 UNF UHM20 HX	1-72	72	0.353	4	1.41	0.91	0.206	3	38	1.55	0/+0.04
7005-113382	WHC 338-02-64 UNF UHM20 HX	2-64	64	0.396	4.1	1.69	1.14	0.228	3	38	1.9	0/+0.04
7005-113384	WHC 338-03-56 UNF UHM20 HX	3-56	56	0.453	5.2	1.95	1.32	0.257	3	38	2.15	0/+0.05
7005-113386	WHC 338-04-48 UNF UHM20 HX	4-48	48	0.529	6	2.19	1.46	0.294	3	38	2.4	0/+0.05
7005-113388	WHC 338-05-44 UNF UHM20 HX	5-44	44	0.577	6.6	2.46	1.68	0.318	3	38	2.7	0/+0.05
7005-113390	WHC 442-06-40 UNF UHM20 HX	6-40	40	0.635	7.3	2.72	1.87	0.347	4	42	2.95	0/+0.06
7005-113392	WHC 442-08-36 UNF UHM20 HX	8-36	36	0.705	8.4	3.29	2.37	0.382	4	42	3.5	0/+0.06
7005-113394	WHC 442-10-32 UNF UHM20 HX	10-32	32	0.794	9.6	3.84	2.82	0.427	4	42	4.1	0/+0.07

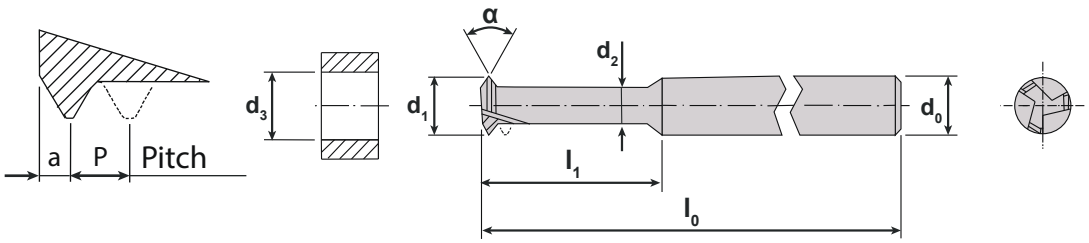


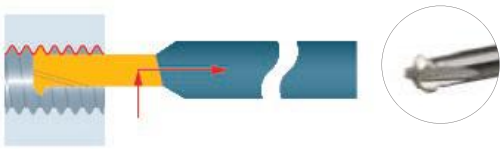

WHD (Long Version) 3 Flutes and 1 Tooth Thread Mill


Item No.	Description	ISO DIN13	P	L_1	D_1	D_2	a	D0	L0	α	D3	
7005-114172	WHD 338 010 025 UHM20 HX	M1.0	0.25	3.5	0.68	0.3	0.155	3	38	60°	0.75	0/+0.03
7005-114175	WHD 338 012 025 UHM20 HX	M1.2	0.25	3.9	0.88	0.5	0.155	3	38	60°	0.95	0/+0.03
7005-114178	WHD 338 014 025 UHM20 HX	M1.4	0.25	4.3	1.08	0.7	0.155	3	38	60°	1.15	0/+0.03
7005-114181	WHD 338 016 025 UHM20 HX	M1.6	0.25	4.7	1.28	0.9	0.155	3	38	60°	1.35	0/+0.03
7005-114184	WHD 338 018 025 UHM20 HX	M1.8	0.25	5.1	1.48	1.1	0.155	3	38	60°	1.55	0/+0.03
7005-114187	WHD 338 020 025 UHM20 HX	M2.0	0.25	5.5	1.68	1.3	0.155	3	38	60°	1.75	0/+0.03
7005-114190	WHD 338 014 030 UHM20 HX	M1.4	0.3	4.6	1.02	0.58	0.18	3	38	60°	1.1	0/+0.04
7005-114193	WHD 338 016 030 UHM20 HX	M1.6	0.3	5	1.22	0.78	0.18	3	38	60°	1.3	0/+0.04
7005-114196	WHD 338 018 030 UHM20 HX	M1.8	0.3	5.4	1.42	0.98	0.18	3	38	60°	1.5	0/+0.04
7005-114199	WHD 338 020 030 UHM20 HX	M2.0	0.3	5.8	1.62	1.18	0.18	3	38	60°	1.7	0/+0.04
7005-114429	WHD 338 022 030 UHM20 HX	M2.2	0.3	6.2	1.82	1.38	0.18	3	38	60°	1.9	0/+0.04
7005-114432	WHD 338 016 035 UHM20 HX	M1.6	0.35	5.3	1.16	0.65	0.205	3	38	60°	1.25	0/+0.04
7005-114435	WHD 338 018 035 UHM20 HX	M1.8	0.35	5.7	1.36	0.85	0.205	3	38	60°	1.45	0/+0.04
7005-114438	WHD 338 020 035 UHM20 HX	M2.0	0.35	6.1	1.56	1.05	0.205	3	38	60°	1.65	0/+0.04
7005-114441	WHD 338 022 035 UHM20 HX	M2.2	0.35	6.5	1.76	1.25	0.205	3	38	60°	1.85	0/+0.04
7005-114444	WHD 338 025 035 UHM20 HX	M2.5	0.35	7.1	2.06	1.55	0.205	3	38	60°	2.15	0/+0.04
7005-114447	WHD 338 030 035 UHM20 HX	M3.0	0.35	8.1	2.56	2.05	0.205	3	38	60°	2.65	0/+0.04
7005-114450	WHD 338 035 035 UHM20 HX	M3.5	0.35	9.1	3.06	2.55	0.205	3	38	60°	3.15	0/+0.04
7005-114453	WHD 338 020 040 UHM20 HX	M2.0	0.4	6.4	1.5	0.93	0.23	3	38	60°	1.6	0/+0.05
7005-114456	WHD 338 022 040 UHM20 HX	M2.2	0.4	6.8	1.7	1.13	0.23	3	38	60°	1.8	0/+0.05
7005-114459	WHD 338 025 040 UHM20 HX	M2.5	0.4	7.4	2	1.43	0.23	3	38	60°	2.1	0/+0.05
7005-114462	WHD 338 030 040 UHM20 HX	M3	0.4	8.4	2.5	1.93	0.23	3	38	60°	2.6	0/+0.05
7005-114465	WHD 338 035 040 UHM20 HX	M3.5	0.4	9.4	2.98	2.41	0.23	3	38	60°	3.1	0/+0.05
7005-114468	WHD 338 022 045 UHM20 HX	M2.2	0.45	7.1	1.64	1.01	0.255	3	38	60°	1.75	0/+0.05
7005-114471	WHD 338 025 045 UHM20 HX	M2.5	0.45	7.7	1.94	1.31	0.255	3	38	60°	2.05	0/+0.05
7005-114474	WHD 338 030 045 UHM20 HX	M3	0.45	8.7	2.44	1.81	0.255	3	38	60°	2.55	0/+0.05
7005-114477	WHD 338 035 045 UHM20 HX	M3.5	0.45	9.7	2.94	2.31	0.255	3	38	60°	3.05	0/+0.05
7005-114480	WHD 442 040 045 UHM20 HX	M4	0.45	10.7	3.44	2.81	0.255	3	38	60°	3.55	0/+0.05
7005-114483	WHD 338 030 050 UHM20 HX	M3	0.5	9	2.38	1.69	0.28	3	38	60°	2.5	0/+0.05
7005-114486	WHD 338 035 050 UHM20 HX	M3.5	0.5	10	2.88	2.19	0.28	3	38	60°	3	0/+0.05
7005-114489	WHD 442 040 050 UHM20 HX	M4	0.5	11	3.38	2.69	0.28	4	42	60°	3.5	0/+0.05
7005-114492	WHD 442 045 050 UHM20 HX	M4.5	0.5	12	3.88	3.19	0.28	4	42	60°	4	0/+0.05
7005-114495	WHD 442 035 060 UHM20 HX	M3.5	0.6	10.6	2.75	1.95	0.33	4	42	60°	2.9	0/+0.06
7005-114497	WHD 442 040 060 UHM20 HX	M4	0.6	11.6	3.25	2.45	0.33	4	42	60°	3.4	0/+0.06
7005-114501	WHD 442 045 060 UHM20 HX	M4.5	0.6	12.6	3.75	2.95	0.33	4	42	60°	3.9	0/+0.06
7005-114504	WHD 442 040 070 UHM20 HX	M4	0.7	12.2	3.13	2.21	0.38	4	42	60°	3.3	0/+0.06
7005-114507	WHD 442 045 070 UHM20 HX	M4.5	0.7	13.2	3.63	2.71	0.38	4	42	60°	3.8	0/+0.06
7005-114510	WHD 442 045 075 UHM20 HX	M4.5	0.75	13.5	3.57	2.59	0.405	4	42	60°	3.75	0/+0.07
7005-114513	WHD 442 050 075 UHM20 HX	M5	0.75	14.5	3.98	3	0.405	4	42	60°	4.25	0/+0.07
7005-114516	WHD 442 050 080 UHM20 HX	M5	0.8	14.8	3.98	2.94	0.43	4	42	60°	4.2	0/+0.07

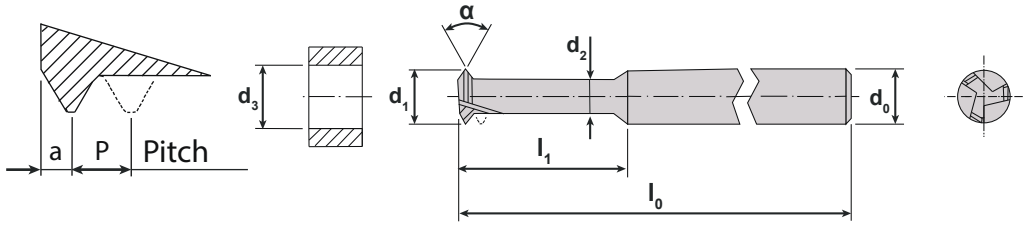


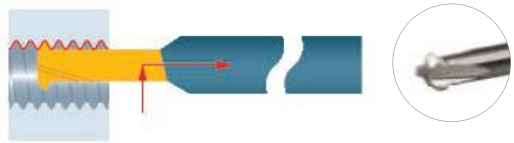

WHD UNC INCH (Long Version) 3 Flutes and 1 Tooth Thread Mill


Item No.	Description	ANSI B1.1	P	P	I1	D_1	D2	a	D0	L0	D3	
7005-113413	WHD 338-01-64 UNC UHM20 HX	1-64	64	0.397	6.1	1.36	0.81	0.228	3	38	1.5	0/+0.04
7005-113414	WHD 338-02-56 UNC UHM20 HX	2-56	56	0.454	7.1	1.62	1	0.257	3	38	1.78	0/+0.05
7005-113422	WHD 338-03-48 UNC UHM20 HX	3-48	48	0.529	8.2	1.86	1.15	0.294	3	38	2.05	0/+0.05
7005-113416	WHD 442-04-40 UNC UHM20 HX	4-40	40	0.635	9.5	2.06	1.22	0.347	4	42	2.27	0/+0.06
7005-113417	WHD 442-05-40 UNC UHM20 HX	5-40	40	0.635	10.2	2.39	1.55	0.347	4	42	2.59	0/+0.06
7005-113418	WHD 442-06-32 UNC UHM20 HX	6-32	32	0.794	11.8	2.52	1.49	0.427	4	42	2.77	0/+0.07
7005-113402	WHD 442-08-32 UNC UHM20 HX	8-32	32	0.794	13.1	3.18	2.16	0.427	4	42	3.42	0/+0.07

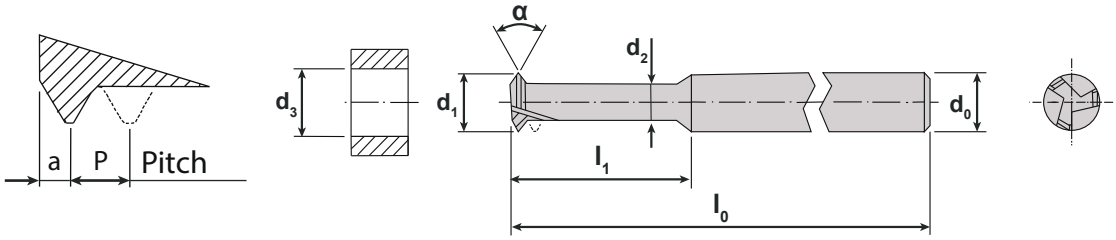

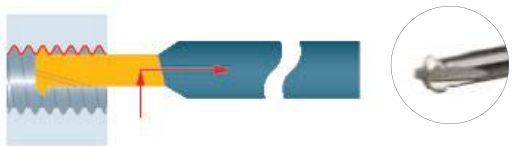



WHD UNF INCH (Long Version) 3 Flutes and 1 Tooth Thread Mill

Item No.	Description	ANSI B1.1	P	P	I1	D_1	D2	a	D0	L0	D3	
7005-113419	WHD 338-00-80 UNF UHM20 HX	0-80	80	0.317	5	1.12	0.67	0.188	3	38	1.25	0/+0.04
7005-113420	WHD 338-01-72 UNF UHM20 HX	1-72	72	0.353	5.8	1.41	0.91	0.206	3	38	1.55	0/+0.04
7005-113421	WHD 338-02-64 UNF UHM20 HX	2-64	64	0.396	6.8	1.69	1.14	0.228	3	38	1.9	0/+0.04
7005-113422	WHD 338-03-56 UNF UHM20 HX	3-56	56	0.453	7.8	1.95	1.32	0.257	3	38	2.15	0/+0.05
7005-113423	WHD 338-04-48 UNF UHM20 HX	4-48	48	0.529	8.9	2.19	1.46	0.294	3	38	2.4	0/+0.05
7005-113424	WHD 338-05-44 UNF UHM20 HX	5-44	44	0.577	9.8	2.46	1.68	0.318	3	38	2.7	0/+0.05
7005-113425	WHD 442-06-40 UNF UHM20 HX	6-40	40	0.635	10.8	2.72	1.87	0.347	4	42	2.95	0/+0.06
7005-113426	WHD 442-08-36 UNF UHM20 HX	8-36	36	0.705	12.6	3.29	2.37	0.382	4	42	3.5	0/+0.06
7005-113427	WHD 442-10-32 UNF UHM20 HX	10-32	32	0.794	14.4	3.84	2.82	0.427	4	42	4.1	0/+0.07

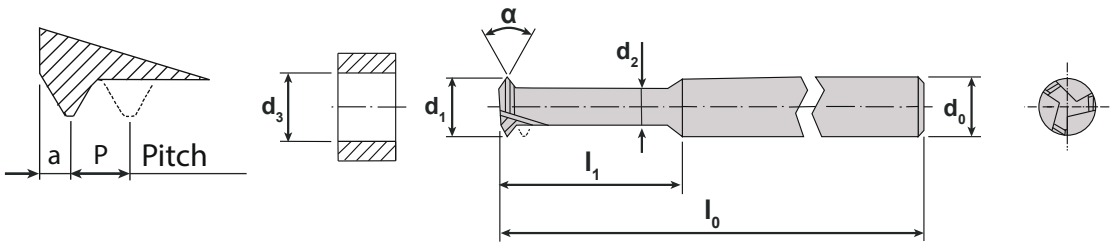

The GenBore®-mini

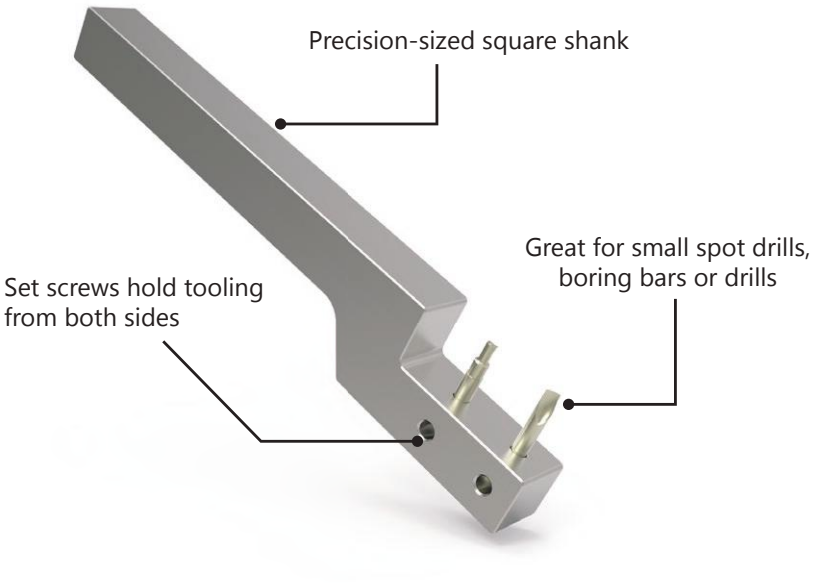

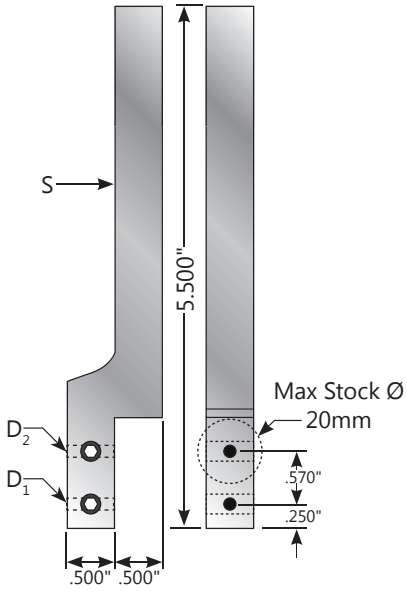

The GenBore-mini is an excellent solution for when you need to incorporate additional small ID tools into your setup. Low profile and interference-free in most Swiss machines, the GenBore-mini is ideal for small ID spotting, drilling, and boring.

- Effective solution for increasing ID tools capacity
- Interference-free design for smaller machines
- Accurately locates small shank ID tooling
- Custom options available - call for details

Item No.	Description	S	D_1	D_2
6011-000200	GenBore-mini blank 1/2" shank	.500"	---	---
6011-000201	(2) .125" Tool Bores	.500"	.125"	.125"
6011-000202	(1) .125" Tool Bore (1) .1875" Tool bore	.500"	.125"	.187"





SIGNATURE SERIES
COLLET SLEEVES

ER-style collets are the tool holding system of choice for use in CNC machine applications. Swiss precision collet sleeves provide rigid and accurate holding for ID tooling. These collet sleeves feature ground shanks and tapers. Mini-nuts are used to reduce interference and to make setup and tool changing easier than other collet sleeves with hexagonal clamping nuts.

Our Single Ended Swiss Precision Sleeves Feature:


- Locking flats prevent damage to sleeve shank and provide orientation for tools
- Machined from medium carbon alloy steel
- Precision ground and thru-hardened for accuracy and precision
- Coolant-thru internal stop screw prevents tool pushback

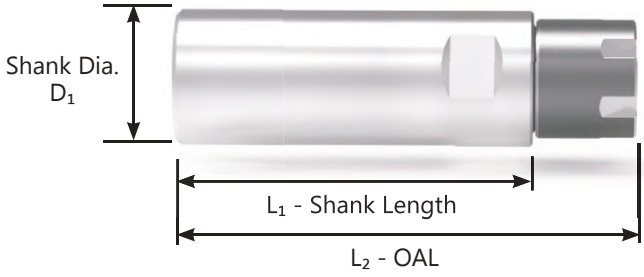



Precision ER Collet Sleeves - Inch Shanks

Collet	Item No.	Description	Shank Dia. (D_1)	Shank Length (L_1)	OAL (L_2)	With Locking Flat	Stop Screw	Nut Type
ER08	1025-000101	CS-08-095-070	0.375in	70mm	93mm	No	No	Mini-Nut
ER11	1025-000201	CS-11-127-023	0.500in	23mm	30mm	Yes	No	No Mini-Nut
	1025-000181	CS-11-158-022	0.625in	22mm	30mm	Yes	No	No Mini-Nut
	1025-000107	CS-11-158-050	0.625in	50mm	62mm	Yes	Yes	Mini-Nut
	1025-000108	CS-11-158-100	0.625in	100mm	112mm	Yes	Yes	Mini-Nut
	1025-000110	CS-11-190-070	0.750in	70mm	82mm	Yes	Yes	Mini-Nut
	1025-000177	CS-11-190-115	0.750in	115mm	135mm	Yes	Yes	Mini-Nut
ER16	1025-000131	CS-16-158-075	0.625in	75mm	90mm	Yes	Yes	Mini-Nut
	1025-000132A	CS-16-190-035	0.750in	35mm	50mm	Yes	Yes	Mini-Nut
	1025-000133	CS-16-190-050	0.750in	50mm	65mm	Yes	Yes	Mini-Nut
	1025-000134	CS-16-190-070	0.750in	70mm	85mm	Yes	Yes	Mini-Nut
	1025-000135	CS-16-190-100	0.750in	100mm	115mm	Yes	Yes	Mini-Nut
	1025-000224	CS-16-190-120	0.750in	120mm	148mm	Yes	Yes	Mini-Nut
	1025-000216	CS-16-254-022	1.00in	22mm	37mm	Yes	Yes	Mini-Nut
	1025-000272	CS-16-254-033	1.00in	33mm	49mm	Yes	Yes	Mini-Nut
	1025-000174	CS-16-254-038	1.00in	38mm	53mm	Yes	Yes	Mini-Nut
	1025-000130	CS-16-254-065	1.00in	65mm	80mm	Yes	No	Mini-Nut
	1025-000183	CS-16-254-075	1.00in	75mm	90mm	Yes	No	Mini-Nut
	1025-000138	CS-16-254-080	1.00in	80mm	95mm	Yes	Yes	Mini-Nut
	1025-000140	CS-16-254-100	1.00in	100mm	115mm	Yes	Yes	Mini-Nut
	1025-000142	CS-16-254-130	1.00in	130mm	145mm	Yes	Yes	Mini-Nut
ER20	1025-000151	CS-20-254-100	1.00in	100mm	117mm	Yes	No	Mini-Nut
	1025-000152	CS-20-254-140	1.00in	140mm	157mm	Yes	No	Mini-Nut

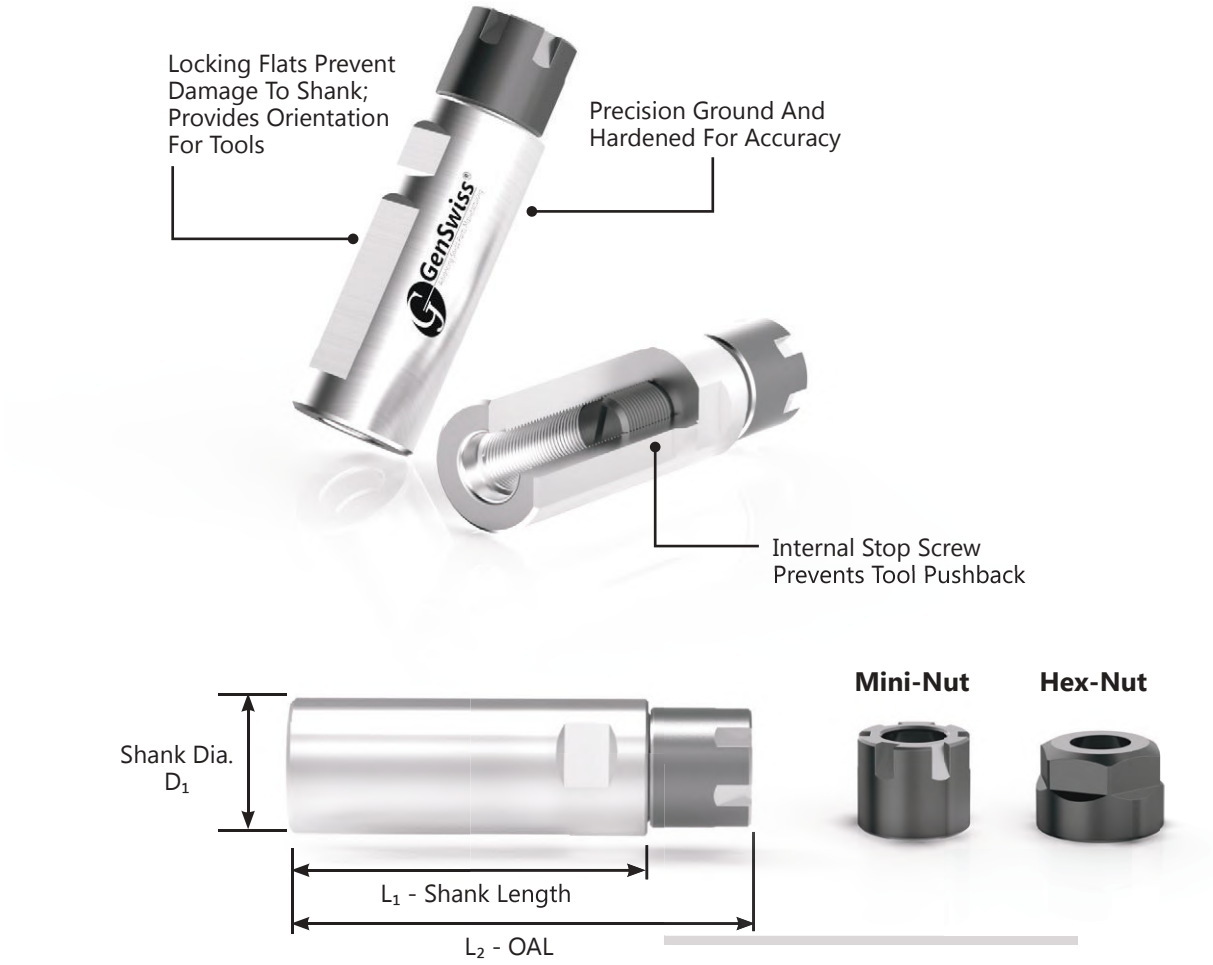

Precision ER Collet Sleeves - Metric Shanks

Collet	Item No.	Description	Shank Dia. (D_1)	Shank Length (L_1)	OAL (L_2)	With Locking Flat	Stop Screw	Nut Type
ER08	1025-000100	CS-08-080-080	8mm	80mm	106mm	No	No	Mini-Nut
ER11	1025-000200	CS-11-080-056	8mm	56mm	78mm	No	Yes	Mini-Nut
	1025-000109	CS-11-160-038	16mm	38mm	51mm	Yes	Yes	Mini-Nut
	1025-000164	CS-11-200-070	20mm	70mm	82mm	Yes	Yes	Mini-Nut
ER16	1025-000234	CS-16-200-035	20mm	35mm	50mm	Yes	Yes	Mini-Nut
	1025-000199	CS-16-200-070	20mm	70mm	85mm	Yes	Yes	Mini-Nut
	1025-000184	CS-16-200-100	20mm	100mm	115mm	Yes	Yes	Mini-Nut
	1025-000286	CS-16-200-140	20mm	140mm	168mm	Yes	Yes	Mini-Nut
	1025-000169	CS-16-220-070	22mm	70mm	86mm	Yes	Yes	Mini-Nut
	1025-000209	CS-16-220-100	22mm	100mm	116mm	Yes	Yes	Mini-Nut
	1025-000176	CS-16-250-065	25mm	65mm	81mm	Yes	Yes	Mini-Nut
	1025-000197	CS-16-250-100	25mm	100mm	115mm	Yes	No	Hex-Nut
	1025-000232	CS-16-250-160	25mm	160mm	175mm	Yes	No	Hex-Nut
ER20	1025-000150	CS-20-220-080	22mm	80mm	97mm	Yes	No	Mini-Nut
	1025-000211	CS-20-250-154	25mm	154mm	170mm	Yes	Yes	Mini-Nut
ER25	1025-000178	CS-25-220-070	22mm	70mm	117mm	Yes	Yes	Mini-Nut
	1025-000220	CS-25-250-145	25mm	145mm	181mm	Yes	Yes	Mini-Nut
	1025-000293	CS-25-320-070	32mm	70mm	100mm	Yes	Yes	Mini-Nut

SIGNATURE SERIES
DOUBLE ENDED COLLET SLEEVES



Double Ended Swiss Precision Sleeves Features:

- Adds additional ID tool positions
- Enables simultaneous main and subspindle operations
- Precision ground and thru-hardened to ensure high accuracy



Double Ended Precision ER Collet Sleeves - Inch Shanks

Collet Size	Item No.	Description	Shank Dia. (D_1)	Shank Length (L_1)	OAL (L_2)	With Locking Flat	Stop Screw	Nut Type
ER08	1025-000233	CS-08-158-015D	0.625in	15mm	45mm	Yes	No	Mini-Nut
ER11	1025-000114	CS-11-190-035D	0.750in	35mm	51mm	Yes	No	Mini-Nut
	1025-000115	CS-11-190-057D	0.750in	57mm	73mm	Yes	No	Mini-Nut
	1025-000116	CS-11-190-069D	0.750in	69mm	85mm	Yes	No	Mini-Nut
	1025-000117	CS-11-190-096D	0.750in	96mm	112mm	Yes	No	Mini-Nut
ER16	1025-000124	CS-16-190-056D	0.750in	56mm	87mm	Yes	No	Mini-Nut
	1025-000139	CS-16-254-045D	1.00in	45mm	75mm	Yes	No	Mini-Nut
	1025-000141	CS-16-254-075D	1.00in	75mm	105mm	Yes	No	Mini-Nut


Double Ended Precision ER Collet Sleeves - Metric Shanks

Collet Size	Item No.	Description	Shank Dia. (D_1)	Shank Length (L_1)	OAL (L_2)	With Locking Flat	Stop Screw	Nut Type
ER11	1025-000103	CS-11-160-050D	16mm	50mm	77mm	Yes	No	Mini-Nut
	1025-000167	CS-11-200-030D	20mm	30mm	57mm	Yes	No	Mini-Nut
	1025-000203	CS-11-200-050D	20mm	50mm	90mm	Yes	No	Mini-Nut
ER16	1025-000213	CS-16-200-055D	20mm	55mm	107mm	Yes	No	Mini-Nut
	1025-000127	CS-16-220-055D	22mm	55mm	91mm	Yes	No	Mini-Nut
	1025-000128	CS-16-220-075D	22mm	75mm	111mm	Yes	No	Mini-Nut
	1025-000129	CS-16-250-062D	25mm	62mm	118mm	Yes	No	Mini-Nut
ER20	1025-000206	CS-20-320-075D	32mm	75mm	107mm	Yes	No	Mini-Nut
	1025-000180	CS-20-320-110D	32mm	110mm	142mm	Yes	No	Mini-Nut

SIGNATURE SERIES
COOLANT-FED COLLET SLEEVES

Coolant-Fed Collet Sleeves Features:

- Designed for high-pressure coolant delivery systems
- Single and dual coolant port versions available
- Use with sealed coolant-style ER collets or standard collets

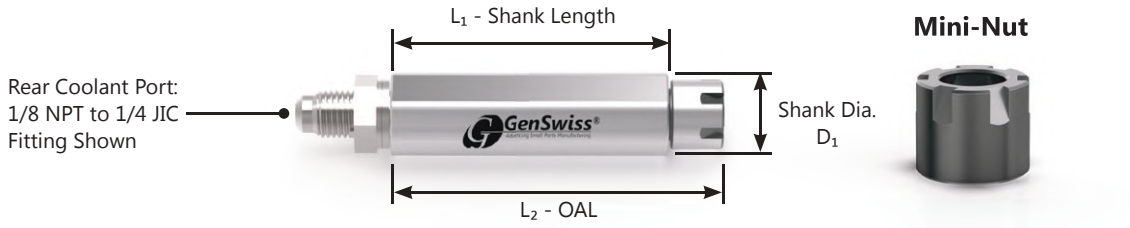


Coolant-Fed ER Collet Sleeves - Inch Shanks — Single Coolant Port

Collet Size	Item No.	Description	Shank Dia. (D_1)	Shank Length (L_1)	OAL (L_2)	With Locking Flat	Stop Screw	Nut Type	Rear Coolant Port	Fitting PN
ER11	1025-000188	CS-11-190-035C	0.75in	35mm	44.5mm	Yes	Yes	Mini-Nut	1/8 NPT	4005-000109
	1025-000190	CS-11-190-062C	0.75in	62mm	71.5mm	Yes	Yes	Mini-Nut	1/8 NPT	4005-000109
ER16	1025-000119	CS-16-190-042C	0.75in	42mm	55mm	Yes	Yes	Mini-Nut	1/4 NPT	4005-000101
	1025-000121	CS-16-190-062C	0.75in	62mm	75mm	Yes	Yes	Mini-Nut	1/4 NPT	4005-000101
	1025-000123	CS-16-190-086C	0.75in	86mm	100mm	Yes	Yes	Mini-Nut	1/4 NPT	4005-000101
	1025-000228	CS-16-254-049C	1in	49mm	65mm	Yes	Yes	Mini-Nut	3/8 NPT	4005-000102
ER20	1025-000147	CS-20-254-050C	1in	50mm	67mm	Yes	Yes	Mini-Nut	3/8 NPT	4005-000102
	1025-000149	CS-20-254-085C	1in	83mm	100mm	Yes	Yes	Mini-Nut	3/8 NPT	4005-000102

NOTE: Fitting is included with all collet sleeves
PN 4005-000101: 1/4JIC to 1/4 NPT
PN 4005-000102: 1/4JIC to 3/8 NPT
PN 4005-000109: 1/4JIC to 1/8 NPT

NOTE: Stop screws included with all shanks

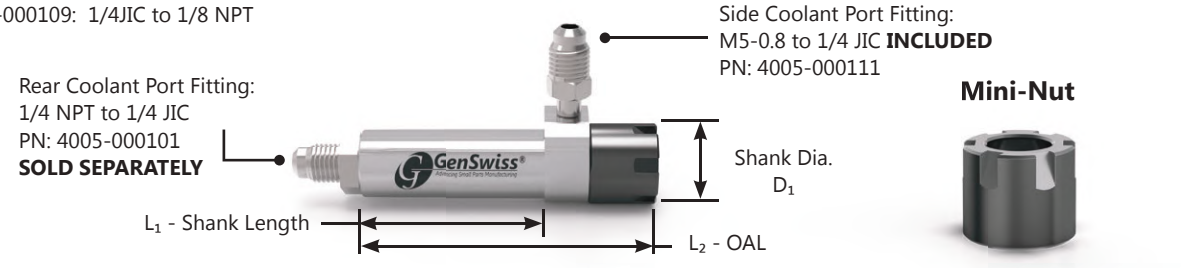

Coolant-Fed ER Collet Sleeves - Inch Shanks — Double Coolant Ports

Collet Size	Item No.	Description	Shank Dia. (D_1)	Shank Length (L_1)	OAL (L_2)	With Locking Flat	Stop Screw	Nut Type	Side Coolant Port	Rear Coolant Port
ER16	1025-000245A	CS-16-190-050GC	0.75in	50mm	77mm	Yes	No	Mini-Nut	M5	1/4 NPT
	1025-000251A	CS-16-190-060GC	0.75in	60mm	87mm	Yes	No	Mini-Nut	M5	1/4 NPT
	1025-000252A	CS-16-190-070GC	0.75in	70mm	97mm	Yes	No	Mini-Nut	M5	1/4 NPT
	1025-000258A	CS-16-254-050GC	1.0in	50mm	77mm	Yes	No	Mini-Nut	M5	1/4 NPT

Coolant-Fed ER Collet Sleeves - Metric Shanks — Double Coolant Ports

Collet Size	Item No.	Description	Shank Dia. (D_1)	Shank Length (L_1)	OAL (L_2)	With Locking Flat	Stop Screw	Nut Type	Side Coolant Port	Rear Coolant Port
ER16	1025-000253A	CS-16-200-050GC	20mm	50mm	77mm	Yes	No	Mini-Nut	M5	1/4 NPT
	1025-000254A	CS-16-200-070GC	20mm	70mm	97mm	Yes	No	Mini-Nut	M5	1/4 NPT
	1025-000250A	CS-16-220-050GC	22mm	50mm	77mm	Yes	No	Mini-Nut	M5	1/4 NPT
	1025-000255A	CS-16-220-070GC	22mm	70mm	97mm	Yes	No	Mini-Nut	M5	1/4 NPT
	1025-000256A	CS-16-250-050GC	25mm	50mm	77mm	Yes	No	Mini-Nut	M5	1/4 NPT
	1025-000257A	CS-16-250-070GC	25mm	70mm	97mm	Yes	No	Mini-Nut	M5	1/4 NPT

GENQUICK


QUICK-CHANGE TOOL HOLDING SOLUTIONS

The newly redesigned GenQuick tooling system helps new users as well as seasoned veterans achieve faster setups and tool changes through the use of tool holder adaptors and quick-change modules that can be preset and are based on the ER standard tool holding system.

These collet sleeves are cost effective solutions to tool holding and are available in a variety of both inch and metric sized shank diameters, and feature a solid shank for rigidity and a side coolant port for connection to a high-pressure coolant delivery system. Every unit has a notched collet taper for easy tool orientation when combined with quick-change boring bar adapters.



Single Ended Shank Used With The Quick-Change Boring Bar Adapt-

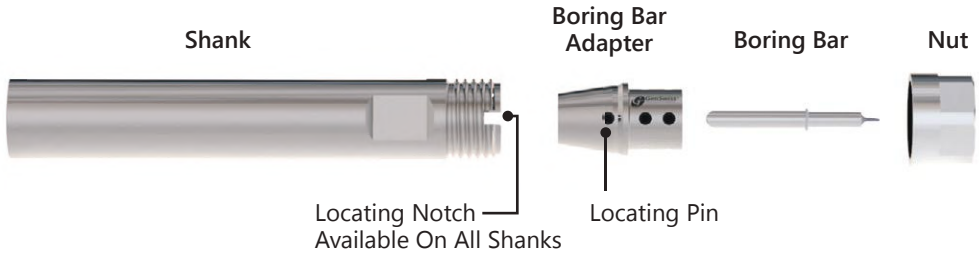

Single Ended Shank Used With The Quick-Change Collet Adapter



SINGLE ENDED SHANKS






Shank w/ Nut - Inch


Item No.	Description	Collet	D_1	L_1	OAL
1045-000257	CQS-S16-0500-CSE	ER16	.500"	1.1"	4.5"
1045-000195	CQS-S16-0625-CSE	ER16	.625"	1.1"	4.5"
1045-000129	CQS-S16-0750-CSE	ER16	.750"	1.1"	4.5"
1045-000133	CQS-S16-1000-CSE	ER16	1.00"	1.1"	4.5"
1045-000134	CQS-S20-0750-CSE	ER20	.750"	1.2"	4.5"
1045-000136	CQS-S20-1000-CSE	ER20	1.00"	1.2"	4.5"
1045-000291	CQS-S20-1250-CSE	ER20	1.25"	1.2"	4.5"

Shank w/ Nut - Metric

Item No.	Description	Collet	D_1	L_1	OAL
1045-000225	CQS-S16-0787-CSE	ER16	20mm	28mm	114mm
1045-000206	CQS-S16-0866-CSE	ER16	22mm	28mm	118mm
1045-000220	CQS-S16-0984-CSE	ER16	25mm	28mm	95mm
1045-000135	CQS-S20-0866-CSE	ER20	22mm	30mm	114mm
1045-000243	CQS-S20-1260-CSE	ER20	32mm	30mm	118mm

DOUBLE ENDED SHANKS

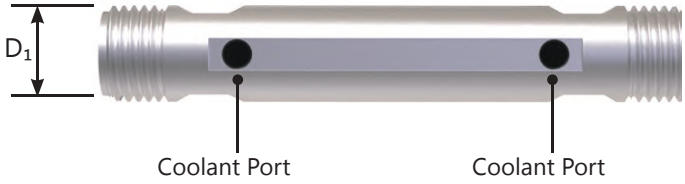

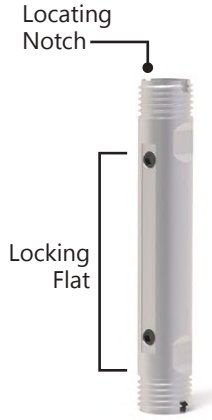

Inch

Item No.	Description	Collet	D_1	OAL
1045-000127	CQS-S16-0750-CDE	ER16	.750"	4.5"
1045-000131	CQS-S16-1000-CDE	ER16	1.00"	4.5"
1045-000170	CQS-S20-1000-CDE	ER20	1.00"	4.5"

Metric

Item No.	Description	Collet	D_1	OAL
1045-000130	CQS-S16-0866-CDE	ER16	22mm	114mm
1045-000200	CQS-S16-0984-CDE	ER16	25mm	95mm
1045-000275A	CQS-S20-1260-CDE	ER20	32mm	118mm

NOTE: Each double ended shank is sold with two nuts

SPARE CLAMPING NUTS

For holding the collet and bore adapters to the single or double ended shanks.



Item No.	Description	ER Size	Nut Thread
1045-000305	CQS-NT-11A	ER11	M13 x .75
1045-000244	CQS-NT-11B	ER11	M14 x .75
1045-000205	CQS-NT-16A	ER16	M19 x 1.0
1045-000124	CQS-NT-16B	ER16	M22 x 1.5
1045-000197	CQS-NT-20A	ER20	M24 x 1.0
1045-000125	CQS-NT-20B	ER20	M25 x 1.5

QUICK-CHANGE COLLET ADAPTERS

Quick-Change collet adapters make it easier to control quality in your shop. These adapters make it simple to have preset tooling available, eliminating the need to touch off the tool after a routine change. This also enables less experienced machine operators to be more productive.

- Simplifies setup
- Decreases downtime



Preset Spare Tooling
Quick-Change
Can Be Used As An Extension



Shank Sold Separately

Shank
ER 16 Collet Size
Sold Separately

Collet Adapter
Included
ER 16 to 11 Shown

ER11 Collet
Sold Separately

ER11 Nut
Included



Coolant Port
Available On All Shanks

ER16 Clamping Nut
For Adapter
Included

Micro Drill
Sold Separately



Quick-Change Collet Adapter Assembly

Item No.	Description	Adapter	Collet	Clamping Nut Thread	Collet Nut Thread
1045-000242	CQS-AS11-0803A	ER11 to ER8	ER8	M13 x .75	M10 x .75
1045-000226	CQS-AS11-0804B	ER11 to ER8	ER8	M14 x .75	M10 x .75
1045-000111	CQS-AS16-1103A	ER16 to ER11	ER11	M19 x 1	M13 x .75
1045-000112	CQS-AS16-1104B	ER16 to ER11	ER11	M22 x 1.5	M13 x .75
1045-000114	CQS-AS20-1603A	ER20 to ER16	ER16	M24 x 1	M19 x .75
1045-000115	CQS-AS20-1603B	ER20 to ER16	ER16	M25 x 1.5	M19 x .75

NOTE: Shank and collets sold separately




Spare Collet Nuts

Item No.	Description	ER Size	Nut Thread
1045-000242	CN-ER08-MNSH	ER08	M10 x .75
1045-000111	CN-ER11-MNSG	ER11	M13 x .75
1045-000114	CN-ER16-MNSG	ER16	M19 x 1.0

QUICK-CHANGE BORING ADAPTERS

Quick-Change Boring adaptors make it fast and simple to locate center position for boring bars when combined with notched ER holders. A simple locating pin rests within the notched holder ensuring accurate centering. These solid bushings utilize the ER collet system to securely hold a boring bar in a rigid fashion. Axial length can be easily set using any form of presetting device.

- Easily locates boring bar axial & radial position

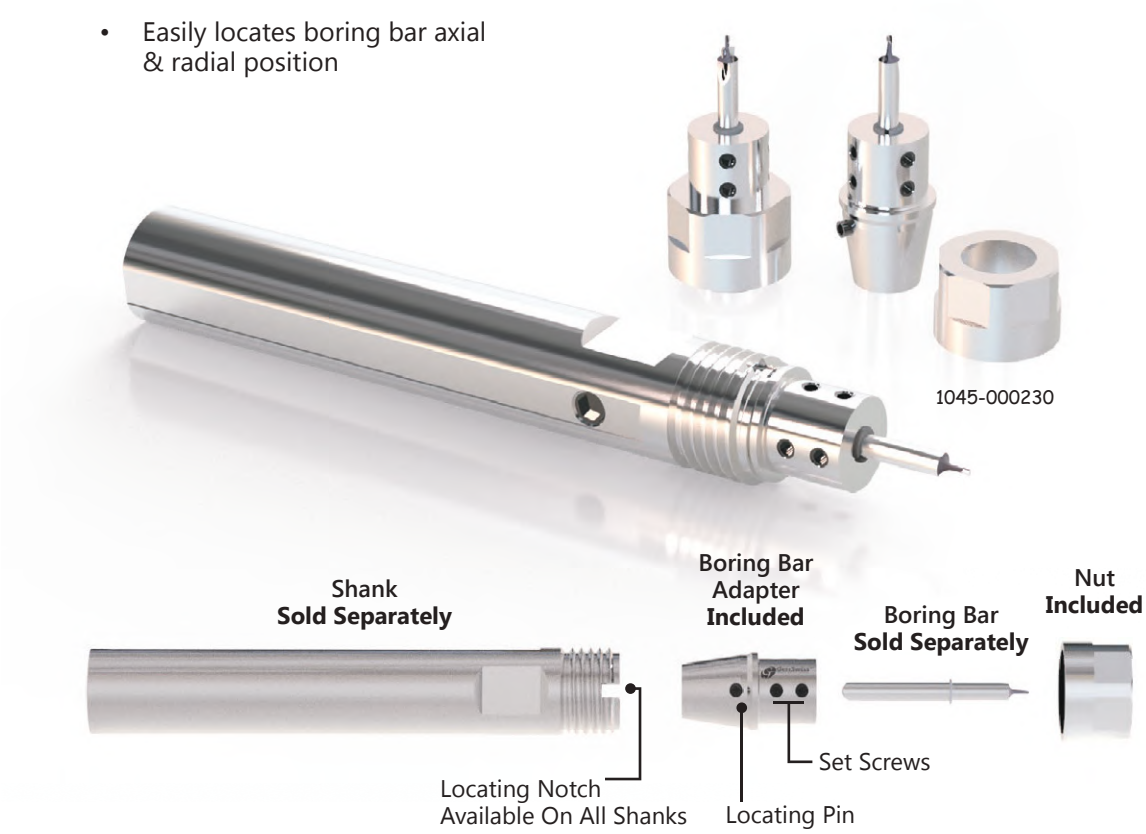

Inch

Item No.	Description	ER Size	Bore	Nut Thread
1045-000137	CQS-SH16-12501		1/8 in	M19 x 1
1045-000139	CQS-SH16-15601		5/32 in	M19 x 1
1045-000140	CQS-SH16-18701		3/16 in	M19 x 1
1045-000230	CQS-SH16-21801	ER16	7/32 in	M19 x 1
1045-000142	CQS-SH16-25001		1/4 in	M19 x 1
1045-000145	CQS-SH16-31201		5/16 in	M19 x 1
1045-000147	CQS-SH16-37501		3/8 in	M19 x 1
1045-000149	CQS-SH20-12501		1/8 in	M24 x 1
1045-000193	CQS-SH20-18701		3/16 in	M24 x 1
1045-000153	CQS-SH20-25001	ER20	1/4 in	M24 x 1
1045-000280	CQS-SH20-31201		5/16 in	M24 x 1
1045-000156	CQS-SH20-37501		3/8 in	M24 x 1
1045-000157	CQS-SH20-5001		1/2 in	M24 x 1

Metric

Item No.	Description	ER Size	Bore	Nut Thread
1045-000260	CQS-SH16-15701	ER16	4mm	M19 x 1
1045-000201	CQS-SH16-19701		5mm	M19 x 1
1045-000202	CQS-SH16-23601		6mm	M19 x 1
1045-000146	CQS-SH16-31501		8mm	M19 x 1

Additional size options available! Please call!

EZR Swiss Clamp System

Upgrade your current tool holders with "EzR Swiss Clamp" ER Collet clamping nuts from GenSwiss.

- Eliminates wrench slippage
- Prevents accidental tool breakage
- Prevents injury to machine operator
- Eliminates the loss of clamping nuts



Clamping Nut


Wrench Adapter
The EzR wrench adapter engages and locks to the EzR clamping nut using a specialized cam system.

Extended Wrench Adapter



Specialized cam system delivers positive torque to the nut while eliminating slipping of the wrench.

EzR extended wrench adapter clears sharp tooling, keeping your hands safe from injury while enabling accurate tightening of ER Tooling.

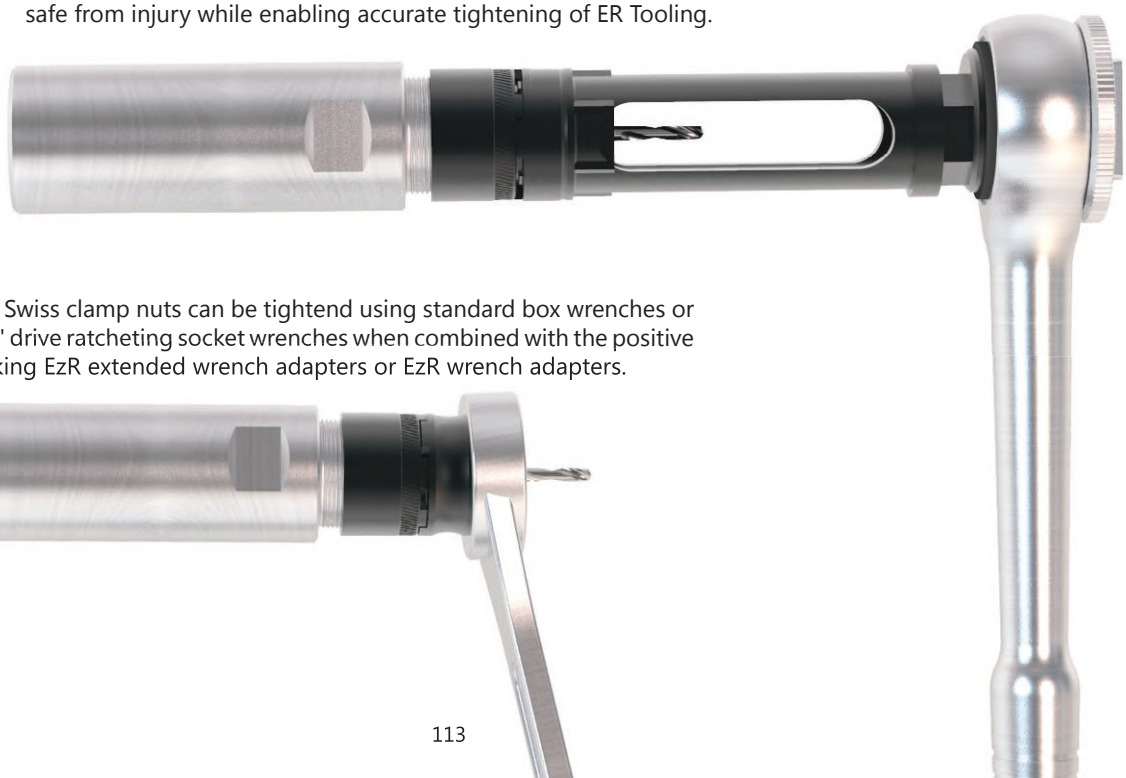


EzR Swiss clamp nuts can be tightend using standard box wrenches or 3/8" drive ratcheting socket wrenches when combined with the positive locking EzR extended wrench adapters or EzR wrench adapters.

NEVER drop an ER clamping nut
in your machine sump again!

EzR Swiss Clamp Nuts

Replaces standard Mini-Nuts.


Item No.	Description	Size	A	Thread
1016-000100	EZR08-NUT	ER8	11.3mm	M10 x .75
1016-000101	EZR11-NUT	ER11	11.3mm	M13 x .75
1016-000103	EZR16-NUT	ER16	17mm	M19 x 1.00
1016-000104	EZR20-NUT	ER20	19mm	M24 x 1.00
1016-000105	EZR25-NUT	ER25	20mm	M30 x 1.00
1016-000106	EZR32-NUT	ER32	23mm	M38 x 1.00

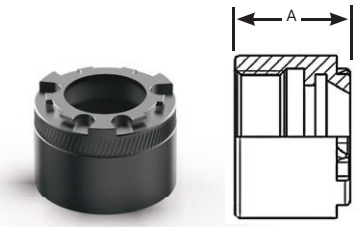

EzR Wrench Adapter

Hex-Driver for use with standard box wrenches or sockets.


Item No.	Description	Size	H
1016-000123	EZR08-ADP	ER08	10mm
1016-000124	EZR11-ADP	ER11	13mm
1016-000125	EZR16-ADP	ER16	19mm
1016-000126	EZR20-ADP	ER20	22mm
1016-000127	EZR25-ADP	ER25	27mm
1016-000128	EZR32-ADP	ER32	30mm

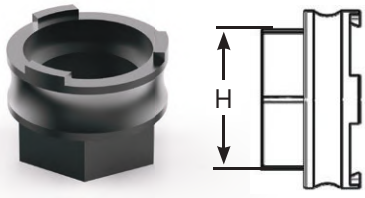

EzR Extended Wrench Adapter

Driver for clamping EzR nuts using standard box wrenches or 3/8" drive ratchets.

Item No.	Description	Size	L	H
1016-000111	EZR08-TQN	ER08	75mm	12mm
1016-000112	EZR11-TQN	ER11	75mm	13mm
1016-000113	EZR16-TQN	ER16	85mm	17mm
1016-000114	EZR20-TQN	ER20	90mm	19mm
1016-000115	EZR25-TQN	ER25	96mm	22mm
1016-000116	EZR32-TQN	ER32	96mm	27mm

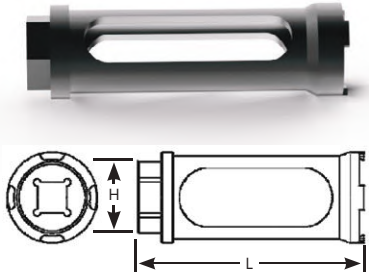

EzR Swiss Clamp Kits

Retro-fit your existing ER collet tool holders with the EzR Swiss clamp system. Kits include (6) EzR nuts, (1) wrench adapter, (1) torque nut and (1) EzR spanner.

Item No.	Description	Size
1016-000136	EZR08-KIT	ER08
1016-000137	EZR11-KIT	ER11
1016-000139	EZR16-KIT	ER16
1016-000140	EZR20-KIT	ER20
1016-000141	EZR25-KIT	ER25
1016-000142	EZR32-KIT	ER32




Ti-Loc® Mill Extensions


Patented



The BEST Method For Running Micro End Mills In Your CNC Swiss

- **Enables micro tools to clear the guide bushing**
- **Maintains exceptional TIR at extended length**
- **Solves deflection and chatter issues**
- **Coolant-thru versions for ER16 sizes now available**
- **TIR <.0002in at full extension**

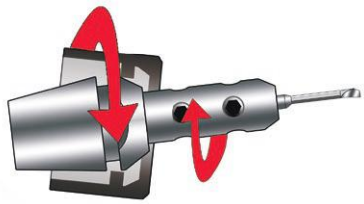

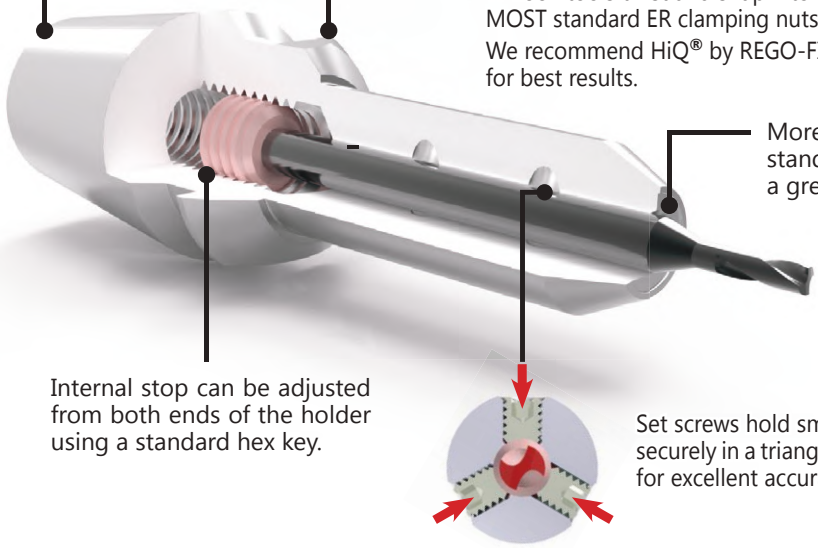

Precision ground ER taper now in ER8, ER11, ER16, ER20 & ER25 sizes.

Ti-Loc® tools twist and snap into MOST standard ER clamping nuts. We recommend HiQ® by REGO-FIX for best results.

More accurate than standard collets over a greater set length.

Internal stop can be adjusted from both ends of the holder using a standard hex key.

Set screws hold small shank tooling securely in a triangular arrangement for excellent accuracy.

Replacement Stop Screws


Item No.	Size	Fits
8999-000021	M6	ER11
8999-000206	M8	ER16 & 20
8999-000210	M10	ER25



Replacement Set Screws

Item No.	Size
8999-000011	M3
8999-000007	M4
8999-000214	M5



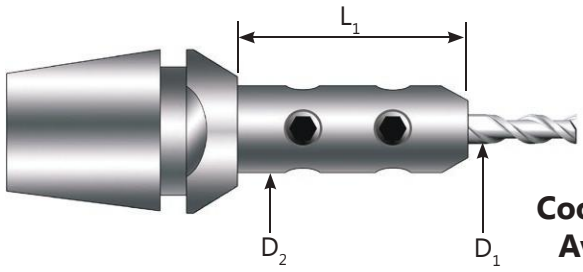

Coolant-Thru Versions Available For ER16!

ER8

Item No.	Description	L_1	D_1	D_2
4900-110100	CTE-08-1.00-064100	10	1	6.4
4900-110150	CTE-08-1.50-064100		1.5	6.4
4900-110159	CTE-08-1.59-064100		.062"	6.4
4900-110200	CTE-08-2.00-064100		2	6.4
4900-110300	CTE-08-3.00-070100		3	7
4900-110318	CTE-08-3.18-070100		.125"	7
4900-115100	CTE-08-1.00-064150	15	1	6.4
4900-115150	CTE-08-1.50-064150		1.5	6.4
Call For Details	CTE-08-1.59-064150		.062"	6.4
Call For Details	CTE-08-2.00-064150		2	6.4
4900-115300	CTE-08-3.00-070150		3	7
4900-115318	CTE-08-3.18-070150		.125"	7

NOTE: ER8 Holders Include a special M10x.75 clamping nut.

ER11

Item No.	Description	L_1	D_1	D_2
4900-210100	CTE-11-1.00-064100	10	1	6.4
4900-210150	CTE-11-1.50-064100		1.5	6.4
4900-210159	CTE-11-1.59-064100		.062"	6.4
4900-210200	CTE-11-2.00-064100		2	6.4
4900-210300	CTE-11-3.00-080100		3	8
4900-210318	CTE-11-3.18-080100		.125"	8
4900-215300	CTE-11-3.00-080150	15	3	8
4900-215318	CTE-11-3.18-080150		.125"	8
4900-215400	CTE-11-4.00-080150		4	8
4900-220300	CTE-11-3.00-080200	20	3	8
4900-220318	CTE-11-3.18-080200		.125"	8
4900-220400	CTE-11-4.00-080200		4	8

ER16

Item No.	Description	L_1	D_1	D_2
4900-316100	CTE-16-1.00-064160	16	1	6.4
4900-316150	CTE-16-1.50-064160		1.5	6.4
4900-316159	CTE-16-1.59-064160		.062"	6.4
4900-316200	CTE-16-2.00-064160		2	6.4
4900-316300	CTE-16-3.00-095160		3	9.5
4900-316318	CTE-16-3.18-095160		.125"	9.5
4900-316400	CTE-16-4.00-095160		4	9.5
4900-316476	CTE-16-4.76-095160		.187"	9.5
4900-316500	CTE-16-5.00-095160		5	9.5
4900-325300	CTE-16-3.00-095250	25	3	9.5
* 4900-325300C	CTE-16-3.00-095250C		3	9.5
4900-325318	CTE-16-3.18-095250		.125"	9.5
* 4900-325318C	CTE-16-3.18-095250C		.125"	9.5
4900-325400	CTE-16-4.00-095250		4	9.5
4900-325476	CTE-16-4.76-095250		.187"	9.5
4900-325500	CTE-16-5.00-095250		5	9.5

* Coolant-Thru Version

ER20

Item No.	Description	L_1	D_1	D_2
4900-414300	CTE-20-3.00-095140	14	3	9.5
4900-414476	CTE-20-4.76-114140		.187"	11.4
4900-414500	CTE-20-5.00-114140		5	11.4
4900-414600	CTE-20-6.00-125140		6	12.5
4900-414635	CTE-20-6.35-125140		.250"	12.5
4900-416318	CTE-20-3.18-095160	16	.125"	9.5
4900-416400	CTE-20-4.00-095160		4	9.5
4900-416476	CTE-20-4.76-114160		.187"	11.4
4900-425300	CTE-20-3.00-095250	25	3	9.5
4900-425318	CTE-20-3.18-095250		.125"	9.5
4900-425400	CTE-20-4.00-095250		4	9.5
4900-425476	CTE-20-4.76-114250		.187"	11.4
4900-425500	CTE-20-5.00-114250		5	11.4
4900-425600	CTE-20-6.00-125250		6	12.5
4900-425635	CTE-20-6.35-125250		.250"	12.5

ER25

Item No.	Description	L_1	D_1	D_2
4900-525300	CTE-25-3.00-100250	25	3	10
4900-525318	CTE-25-3.18-100250		.125"	10
4900-525400	CTE-25-4.00-100250		4	10
4900-525476	CTE-25-4.76-125250		.187"	12.5
4900-525500	CTE-25-5.00-125250		5	12.5
4900-525600	CTE-25-6.00-125250		6	12.5
4900-525635	CTE-25-6.35-125250		.250"	12.5
4900-525700	CTE-25-7.00-160250		7	16
4900-525794	CTE-25-7.94-160250		.312"	16
4900-525800	CTE-25-8.00-160250		8	16

Collet Reduction NOW AVAILABLE!

Item No.	Description	Shank Size	Collet Size	Extension Length
4910-000100	RTE-16-08-100254	ER16	ER8	1.0 in



- **Extend the reach of your tools with superior TIR**

REGO-FIX®



Standard ER Collets

- T.I.R < .0004" standard
- T.I.R < .0002" ultra precision
- The best ER collet on the market
- **Add "UP" to part description for ultra preci-**

Example:

Standard ER16 Collet:	Ultra Precision ER16 Collet:
CC-ER16i-1/16	**CC-ER16i-1/16UP**

Inch

		ER08		ER11		ER16		ER20	
Size	Range	Item No.	Description	Item No.	Description	Item No.	Description	Item No.	Description
1/16"	.0425" - .0625"	1005-000319	CC-ER08i-1/16	1005-000126	CC-ER11i-1/16	1005-000143	CC-ER16i-1/16		
3/32"	.0738" - .0938"			1005-000132	CC-ER11i-3/32	1005-000153	CC-ER16i-3/32		
1/8"	.1050" - .1250"	1005-000217	CC-ER08i-1/8	1005-000128	CC-ER11i-1/8	1005-000146	CC-ER16i-1/8	1005-000247	CC-ER20i-1/8
5/32"	.1363" - .1563"			1005-000269	CC-ER11i-5/32	1005-000157	CC-ER16i-5/32		
3/16"	.1675" - .1875"	1005-000310	CC-ER08i-3/16	1005-000130	CC-ER11i-3/16	1005-000151	CC-ER16i-3/16	1005-000292	CC-ER20i-3/16
7/32"	.1988" - .2188"			1005-000133	CC-ER11i-7/32	1005-000261	CC-ER16i-7/32		
1/4"	.2300" - .2500"			1005-000127	CC-ER11i-1/4	1005-000144	CC-ER16i-1/4	1005-000248	CC-ER20i-1/4
9/32"	.2413" - .2813"					1005-000276	CC-ER16i-9/32		
5/16"	.2725" - .3125"					1005-000156	CC-ER16i-5/16	1005-000293	CC-ER20i-5/16
11/32"	.3038" - .3438"					1005-000277	CC-ER16i-11/32		
3/8"	.3350" - .3750"					1005-000154	CC-ER16i-3/8	1005-000294	CC-ER20i-3/8
13/32"	.3663" - .4063"					1005-000150	CC-ER16i-13/32		
7/16"	.3975" - .4375"							1005-000295	CC-ER20i-7/16
1/2"	.4600" - .5000"							1005-000236	CC-ER20i-1/2

Metric

		ER08		ER11		ER16		ER20	
Size	Range	Item No.	Description	Item No.	Description	Item No.	Description	Item No.	Description
1.0mm	0.50 - 1.00	1005-000100	CC-ER08-01.0	1005-000110	CC-ER11-01.0	1005-000134	CC-ER16-01.0	1005-000249	CC-ER20-01.0
1.5mm	1.00 - 1.50	1005-000101	CC-ER08-01.5	1005-000112	CC-ER11-01.5	1005-000260	CC-ER16-01.5	1005-000250	CC-ER20-01.5
2.0mm	1.50 - 2.00	1005-000102	CC-ER08-02.0	1005-000114	CC-ER11-02.0	1005-000136	CC-ER16-02.0	1005-000251	CC-ER20-02.0
2.5mm	2.00 - 2.50	1005-000103	CC-ER08-02.5	1005-000116	CC-ER11-02.5	1005-000270	CC-ER16-02.5	1005-000246	CC-ER20-02.5
3.0mm	2.50 - 3.00	1005-000104	CC-ER08-03.0	1005-000117	CC-ER11-03.0	1005-000137	CC-ER16-03.0	1005-000278	CC-ER20-03.0
3.5mm	3.00 - 3.50	1005-000105	CC-ER08-03.5	1005-000118	CC-ER11-03.5	1005-000243	CC-ER16-03.5	1005-000279	CC-ER20-03.5
4.0mm	3.50 - 4.00	1005-000106	CC-ER08-04.0	1005-000119	CC-ER11-04.0	1005-000139	CC-ER16-04.0	1005-000266	CC-ER20-04.0
4.5mm	4.00 - 4.50	1005-000107	CC-ER08-04.5	1005-000120	CC-ER11-04.5	1005-000264	CC-ER16-04.5	1005-000280	CC-ER20-04.5
5.0mm	4.50 - 5.00	1005-000108	CC-ER08-05.0	1005-000121	CC-ER11-05.0	1005-000140	CC-ER16-05.0	1005-000267	CC-ER20-05.0
5.5mm	5.00 - 5.50			1005-000239	CC-ER11-05.5	1005-000258	CC-ER16-05.5	1005-000281	CC-ER20-05.5
6.0mm	5.50 - 6.00			1005-000182	CC-ER11-06.0	1005-000141	CC-ER16-06.0	1005-000162	CC-ER20-06.0
6.5mm	6.00 - 6.50			1005-000123	CC-ER11-06.5	1005-000271	CC-ER16-06.5	1005-000282	CC-ER20-06.5
7.0mm	6.50 - 7.00			1005-000124	CC-ER11-07.0	1005-000142	CC-ER16-07.0	1005-000283	CC-ER20-07.0
7.5mm	7.00 - 7.50					1005-000272	CC-ER16-07.5	1005-000284	CC-ER20-07.5
8.0mm	7.50 - 8.00					1005-000237	CC-ER16-08.0	1005-000268	CC-ER20-08.0
8.5mm	8.00 - 8.50					1005-000273	CC-ER16-08.5	1005-000285	CC-ER20-08.5
9.0mm	8.50 - 9.00					1005-000274	CC-ER16-09.0	1005-000286	CC-ER20-09.0
9.5mm	9.00 - 9.50					1005-000275	CC-ER16-09.5	1005-000287	CC-ER20-09.5
10.0mm	9.50 - 10.00					1005-000148	CC-ER16-10.0	1005-000288	CC-ER20-10.0
10.5mm	10.00 - 10.50							1005-000240	CC-ER20-10.5
11.0mm	10.50 - 11.00							1005-000289	CC-ER20-11.0
11.5mm	11.00 - 11.50							1005-000263	CC-ER20-11.5
12.0mm	11.50 - 12.00							1005-000170	CC-ER20-12.0
12.5mm	12.00 -12.50							1005-000290	CC-ER20-12.5
13.0mm	12.50 - 13.00							1005-000291	CC-ER20-13.0

Coolant-Thru ER Collets

- For high-pressure coolant applications
- No rubber seals to blow out
- Rated to 2000 PSI of pressure
- Ultra precision T.I.R. < .0002”



rego fix | Swiss Precision Tools

Inch

		ER11		ER16		ER20	
Size	Range	Item No.	Description	Item No.	Description	Item No.	Description
1/8"	.1154” - .1250”	Call For Details	CK-ER11i-1/8	1006-000107	CK-ER16i-1/8	Call For Details	CK-ER20i-1/8
3/16"	.1776” - .1875”	Call For Details	CK-ER11i-3/16	1006-000123	CK-ER16i-3/16	1006-000118	CK-ER20i-3/16
1/4"	.2300” - .2500”	Call For Details	CK-ER11i-1/4	1006-000121	CK-ER16i-1/4	Call For Details	CK-ER20i-1/4
5/16"	.2929” - .3125”			1006-000126	CK-ER16i-5/16	Call For Details	CK-ER20i-5/16
3/8"	.3556” - .3750”			1006-000110	CK-ER16i-3/8	Call For Details	CK-ER20i-3/8
7/16"	.4177" - .4375"					Call For Details	CK-ER20i-7/16
1/2"	.4803" - .5000"					Call For Details	CK-ER20i-1/2

Metric

		ER11		ER16		ER20	
Size	Range	Item No.	Description	Item No.	Description	Item No.	Description
3mm	2.75 - 3.00	1005-000308	CK-ER11-03.0	1006-000103	CK-ER16-03.0	1006-000128	CK-ER20-03.0
4mm	3.75 - 4.00	1006-000141	CK-ER11-04.0	1006-000102	CK-ER16-04.0	1006-000129	CK-ER20-04.0
5mm	4.50 - 5.00	Call For Details	CK-ER11-05.0	1006-000116	CK-ER16-05.0	1006-000117	CK-ER20-05.0
6mm	5.50 - 6.00	1006-000142	CK-ER11-06.0	1006-000106	CK-ER16-06.0	1006-000130	CK-ER20-06.0
7mm	6.50 - 7.00	1006-000143	CK-ER11-07.0	1006-000125	CK-ER16-07.0	1006-000131	CK-ER20-07.0
8mm	7.50 - 8.00			1006-000108	CK-ER16-08.0	1006-000120	CK-ER20-08.0
9mm	8.50 - 9.00			1006-000138	CK-ER16-09.0	1006-000132	CK-ER20-09.0
10mm	9.50 - 10.00			1006-000137	CK-ER16-10.0	1006-000111	CK-ER20-10.0
11mm	10.50 - 11.00					1006-000112	CK-ER20-11.0
12mm	11.50 - 12.00					1006-000113	CK-ER20-12.0
13mm	12.50 - 13.00					1006-000114	CK-ER20-13.0

Micro Bore ER Collets


- Special design enables holding of micro tools
- Clamps nominal diameters with h7 tolerances



	ER08		ER11		ER16	
Size	Item No.	Description	Item No.	Description	Item No.	Description
0.2mm	Call For Details	CM-ER08-0.20	Call For Details	CM-ER11-0.20	Call For Details	CM-ER16-0.20
0.3mm	Call For Details	CM-ER08-0.30	1004-000106	CM-ER11-0.30	1004-000104	CM-ER16-0.30
0.4mm	Call For Details	CM-ER08-0.40	1004-000105	CM-ER11-0.40	1004-000101	CM-ER16-0.40
0.5mm	1004-000102	CM-ER08-0.50	1004-000100	CM-ER11-0.50	Call For Details	CM-ER16-0.50
0.6mm	Call For Details	CM-ER08-0.60	Call For Details	CM-ER11-0.60	1004-000103	CM-ER16-0.60
0.7mm	Call For Details	CM-ER08-0.70	Call For Details	CM-ER11-0.70	1030-000310	CM-ER16-0.70
0.8mm	1004-000108	CM-ER08-0.80	1004-000109	CM-ER11-0.80	1004-000110	CM-ER16-0.80
0.9mm	1004-000107	CM-ER08-0.90	Call For Details	CM-ER11-0.90	Call For Details	CM-ER16-0.90

REGO-FIX®

REGO-FIX® ER Collets are world renown for their precision accuracy, quality and durability. Featuring the industry standard lowest T.I.R. available, REGO-FIX® ER Collets provide superior tool life while delivering the greater accuracy that Swiss-type machinists demand.

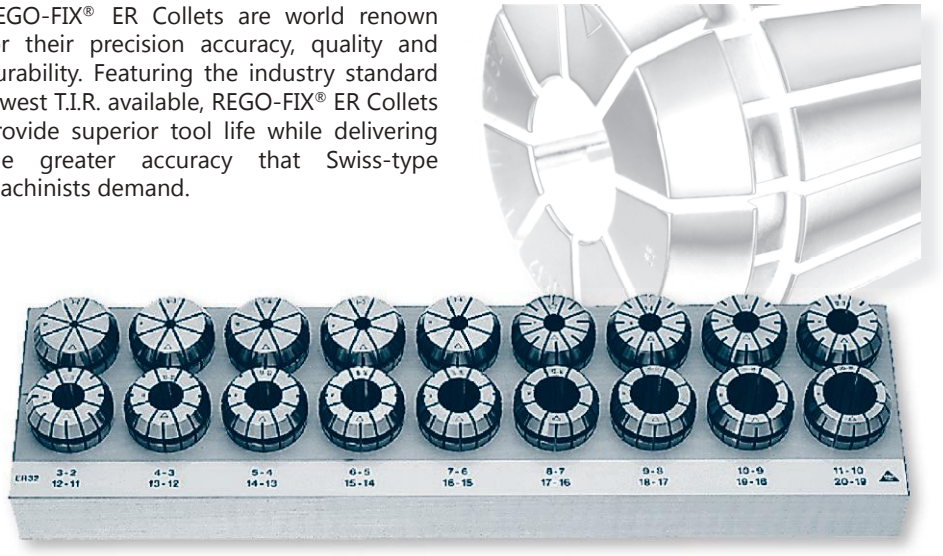

STANDARD PRECISION Collet Sets - T.I.R. < .0004"

Metric

Item No.	Description	Size	Pieces	Size Range
1005-000199	CC-08R-S09-MSP	ER8	9	.5-5mm
1005-000190	CC-11R-S13-MSP	ER11	13	.5-7mm
1005-000192	CC-16R-S10-MSP	ER16	10	.5-10mm
1005-000245	CC-20R-S12-MSP	ER20	12	1-13mm

Inch

Item No.	Description	Size	Pieces	Size Range
1005-000363	CC-08R-S3-ISP	ER08	3	1/16 - 3/16"
1005-000189	CC-11R-S7-ISP	ER11	7	1/16 - 1/4"
1005-000191	CC-16R-S12-	ER16	12	1/16 - 13/32"
1005-000244	CC-20R-S7-ISP	ER20	7	1/8 - 1/2"

ULTRA PRECISION Collet Sets - T.I.R. < .0002"

Metric

Item No.	Description	Size	Pieces	Size Range
1005-000362	CC-08R-S09-MUP	ER8	9	.5-5mm
1005-000235	CC-11R-S13-MUP	ER11	13	.5-7mm
1005-000301	CC-16R-S10-MUP	ER16	10	.5-10mm
1005-000300	CC-20R-S12-MUP	ER20	12	1-13mm

Inch

Item No.	Description	Size	Pieces	Size Range
1005-000364	CC-08R-S3-IUP	ER08	3	1/16 - 3/16"
1045-000224	CC-11R-S7-IUP	ER11	7	1/8 - 1/4"
1005-000234	CC-16R-S12-IUP	ER16	12	1/16 - 13/32"
Call For Details	CC-20R-S7-IUP	ER20	7	1/8 - 1/2"

COOLANT-THRU Collet Sets - T.I.R. < .0002"

Metric

Item No.	Description	Size	Pieces	Size Range
1006-000127	CK-16R-S08-MSP	ER16	8	3-10mm
1006-000115	CK-20R-S11-MSP	ER20	11	3-13mm

Inch

Item No.	Description	Size	Pieces	Size Range
1006-000122	CK-16R-S05-ISP	ER16	5	1/8" - 3/8"
1006-000109	CK-20R-S07-ISP	ER20	7	1/8" - 1/2"

ER25, ER32, ER40, ER50 are also available. Call for details and part numbers!


Swiss Made by PCM be driven.



Tapping Collets

PCM floating tapping collets are an economical solution to replace expensive tapping sleeves and eliminate tapping error. Ideal for use on machines that do not have a rigid tapping function.

The ET1 floating tap collets can also be used with rigid tapping function to compensate for pitch error due to the torsional stress that can occur on small taps eliminating the difference between the tap and the CNC.

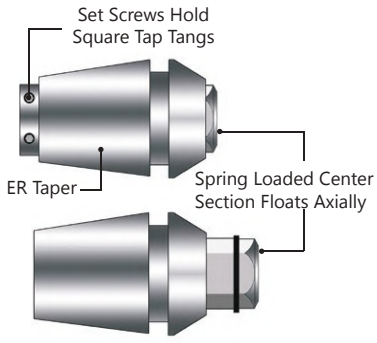

Tapping Collets - Inch

	ER11		ER16		ER20		ER25		ER32	
Shank	Item No.	Description	Item No.	Description	Item No.	Description	Item No.	Description	Item No.	Description
0.141"	1040-000101	ET1-12141	1040-000106	ET1-16141	1040-000117	ET1-20141	1040-000124	ET1-25141		
0.168"			1040-000107	ET1-16168	1040-000118	ET1-20168	1040-000125	ET1-25168	1040-000174	ET1-32168
0.194"			1040-000108	ET1-16194	1040-000119	ET1-20194	1040-000126	ET1-25194	1040-000165	ET1-32194
0.220"			1040-000110	ET1-16220	1040-000120	ET1-20220	1040-000127	ET1-25220	1040-000164	ET1-32220
0.255"					1040-000121	ET1-20255	1040-000128	ET1-25255	1040-000136	ET1-32255
0.318"							1040-000129	ET1-25318	1040-000137	ET1-32318
0.323"							1040-000130	ET1-25323	1040-000138	ET1-32323
0.367"							1040-000131	ET1-25367	1040-000139	ET1-32367
0.381"							1040-000132	ET1-25381	1040-000140	ET1-32381
0.429"									1040-000169	ET1-32429
0.437"									1040-000141	ET1-32437
0.480"									1040-000151	ET1-32480

Tapping Collets - Metric

	ER11		ER16		ER20		ER25	
Shank	Item No.	Description	Item No.	Description	Item No.	Description	Item No.	Description
1.00mm	1040-000100	ET1-12100AL	1040-000105	ET1-16100AL				
1.40mm	Call For Details	ET1-12140	Call For Details	ET1-16140				
1.50mm	1040-000102	ET1-12150AL	1040-000184	ET1-16150AL				
1.60mm	Call For Details	ET1-12160	Call For Details	ET1-16160				
1.80mm	Call For Details	ET1-12180	Call For Details	ET1-16180				
2.00mm	1040-000103	ET1-12200	1040-000109	ET1-16200				
2.20mm	Call For Details	ET1-12221	1040-000166	ET1-16221	Call For Details	ET1-20221		
2.24mm	Call For Details	ET1-12224	Call For Details	ET1-16224	Call For Details	ET1-20224		
2.50mm	1040-000145	ET1-12250	1040-000111	ET1-16250	Call For Details	ET1-20250	Call For Details	ET1-25250
2.80mm	1040-000152	ET1-12280	1040-000112	ET1-16280	Call For Details	ET1-20280	Call For Details	ET1-25280
3.00mm	1040-000104	ET1-12300	1040-000113	ET1-16300	Call For Details	ET1-20300	Call For Details	ET1-25300
3.15mm	Call For Details	ET1-12315	1040-000168	ET1-16315	Call For Details	ET1-20315	Call For Details	ET1-25315
3.50mm	1040-000173	ET1-12350	1040-000148	ET1-16350	Call For Details	ET1-20350	Call For Details	ET1-25350
3.55mm	1040-000160	ET1-12355	1040-000114	ET1-16355	Call For Details	ET1-20355	Call For Details	ET1-25355
4.00mm			1040-000115	ET1-16400	Call For Details	ET1-20400	1040-000133	ET1-25400
4.50mm			1040-000149	ET1-16450	Call For Details	ET1-20450	1040-000134	ET1-25450
5.00mm			1040-000159	ET1-16500	1040-000182	ET1-20500	Call For Details	ET1-25500
5.50mm			Call For Details	ET1-16550	Call For Details	ET1-20550	1040-000158	ET1-25550
5.60mm			1040-000180	ET1-16560	Call For Details	ET1-20560	Call For Details	ET1-25560
6.00mm			1040-000116	ET1-16600	Call For Details	ET1-20600	1040-000135	ET1-25600
6.20mm			1040-000146	ET1-16620	1040-000122	ET1-20620	Call For Details	ET1-25620
6.30mm			1040-000147	ET1-16630	Call For Details	ET1-20630	1040-000162	ET1-25630
7.00mm					1040-000155	ET1-20700	1040-000183	ET1-25700
7.10mm							Call For Details	ET1-25710
8.00mm							1040-000167	ET1-25800
8.50mm							Call For Details	ET1-25850
9.00mm							1040-000181	ET1-25900
10.00mm							1040-000123	ET1-25100

Coolant Ring Seals

When combined with coolant mini nuts, coolant ring seals are ideal for use in high-pressure coolant delivery applications.

Rated To ~2000 PSI

Sealing O-Ring Is Resistant To Aggressive Coolant Chemistries



ER16			ER20		
Tool Shank Ø	Item No.	Description	Item No.	Description	Sealing Capacity
3/32"	1010-000117	CD-ER16-03.0	Call For Details	CD-ER20-03.0	3.0 - 2.5mm
1/8"	1010-000118	CD-ER16-03.5	Call For Details	CD-ER20-03.5	3.5 - 3.0mm
5/32"	1010-000119 Call For Details	CD-ER16-04.0 CD-ER16-04.5	1010-000132 Call For Details	CD-ER20-04.0 CD-ER20-04.5	4.0 - 3.5mm 4.5 - 4.0mm
3/16"	1010-000133	CD-ER16-05.0	Call For Details	CD-ER20-05.0	5.0 - 4.5mm
7/32"	1010-000136 1010-000144	CD-ER16-05.5 CD-ER16-06.0	1010-000148 1010-000121	CD-ER20-05.5 CD-ER20-06.0	5.5 - 5.0mm 6.0 - 5.5mm
1/4"	1010-000135 1010-000149	CD-ER16-06.5 CD-ER16-07.0	1010-000145 Call For Details	CD-ER20-06.5 CD-ER20-07.0	6.5 - 6.0mm 7.0 - 6.5mm
9/32"	1010-000134	CD-ER16-07.5	Call For Details	CD-ER20-07.5	7.5 - 7.0mm
5/16"	1010-000130 1010-000141	CD-ER16-08.0 CD-ER16-08.5	1010-000122 Call For Details	CD-ER20-08.0 CD-ER20-08.5	8.0 - 7.5mm 8.5 - 8.0mm
11/32"	Call For Details	CD-ER16-09.0	Call For Details	CD-ER20-09.0	9.0 - 8.5mm
3/8"	1010-000120 1010-000137	CD-ER16-09.5 CD-ER16-10.0	Call For Details Call For Details	CD-ER20-09.5 CD-ER20-10.0	9.5 - 9.0mm 10.0 - 9.5mm
13/32"			Call For Details Call For Details	CD-ER20-10.5 CD-ER20-11.0	10.5 - 10.0mm 11.0 - 10.5mm
7/16"			1010-000142 Call For Details 1010-000139	CD-ER20-11.5 CD-ER20-12.0 CD-ER20-12.5	11.5 - 11.0mm 12.0 - 11.5mm 12.5- 12.0mm
1/2"			1010-000140	CD-ER20-13.0	13.0 - 12.5mm



Hi-Q® ER Mini Nuts

For use with any ER Collet Chuck or Sleeve.

Item No.	Description	Size	Thread
1015-000100	CN-ER08-MNS	ER08	M10 x .75
1015-000101	CN-ER11-MNS	ER11	M13 x .75
1015-000103	CN-ER16-MNS	ER16	M19 x 1.00
1015-000105	CN-ER20-MNS	ER20	M24 x 1.00
1015-000107	CN-ER25-MNS	ER25	M30 x 1.00

Hi-Q® ERMX Non-Slip Mini Nuts

When paired with an ERMX wrench, these mini nuts provide a slip-proof clamping experience.

Item No.	Size	Thread
Call For Details	ER08	M10 x .75
Call For Details	ER11	M13 x .75
Call For Details	ER16	M19 x 1.00
Call For Details	ER20	M24 x 1.00
Call For Details	ER25	M30 x 1.00



Hi-Q® Coolant Mini Nuts



Coolant mini nuts are to be used in conjunction with coolant ring seals. The nut includes an internal grooved seat for insertion of coolant discs, allowing the use of standard ER Collets in thru-coolant applications.



Item No.	Description	Size	Thread
Call For Details	CN-ER11-MNC	ER11	M13 x 0.75
1015-000102	CN-ER16-MNC	ER16	M19 x 1.00
1015-000104	CN-ER20-MNC	ER20	M24 x 1.00
1015-000108	CN-ER25-MNC	ER25	M30 x 1.00

IMPORTANT!


ER11 Hi-Q® Mini nuts feature built-in coolant seal. Specify tool diameter when ordering - Available Size Range: 3mm - 7mm




Collet Reductions

Enables reduction of collet sizes while also presetting tools. These collet reductions come with REGO-FIX Mini Nuts.

Item No.	Description	Shank / Live Tooling Size	ER Collet Size	Nut Type
Call For Details	CQS-ER11-8M	ER11	ER8	Mini Nut
Call For Details	CQS-ER16-11M	ER16	ER11	Mini Nut
Call For Details	CQS-ER20-16M	ER20	ER16	Mini Nut
1045-000218	CQS-ER25-16M	ER25	ER16	Mini Nut
1045-000295	CQS-ER25-20M	ER25	ER20	Mini Nut

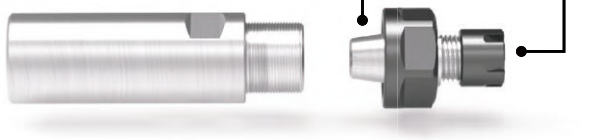



Ti-Loc® Mill Extension Shown

ReCool Nut

Enables coolant-thru capability for non-coolant-thru holders and live tooling. REGO-FIX's ReCool Nut pairs well with GenSwiss' Ti-Loc® endmill extensions. The coolant input requires a G1/8 fitting.

ER11, ER16, ER20, ER25, & ER32 Sizes Available



Collet Sleeve Bushings

Precision Reduction Sleeves are an inexpensive alternative to purchasing additional collet holders & tooling.

Item No.	Description	OD	ID	OAL
1030-000101	CSB-254-160-040	1in	16mm	40mm
1030-000100	CSB-220-190-050K	22mm	3/4in	55mm
1030-000102	CSB-254-190-050J-M	1in	3/4in	50mm
7005-138046	MRH 1600 1230	16mm	12mm	30mm
7005-138047	MRH 1905 1240	.750in	12mm	40mm
7005-138048	MRH 2200 1240	22mm	12mm	40mm
7005-138049	MRH 2540 1240	1.00in	12mm	40mm
7005-138050	MRH 1905 1640	.750in	16mm	40mm
7005-138051	MRH 2200 1640	22mm	16mm	40mm
7005-138052	MRH 2540 1640	1.00in	16mm	40mm

Mini-Nut Spanner Wrenches

Ideal for use in tight tooling zones commonly found in CNC Swiss-type Machines.

Item No.	Description	Size
1035-000101	CW-04620	ER08
1035-000102	CW-04621	ER11
1035-000103	CW-04622	ER16
1035-000104	CW-04623	ER20
1035-000105	CW-04624	ER25






UTILIS
Tooling for High Technology


multidec®-Cut 3000 Series

vSwiss Made UTILIS World Class tools deliver proven production performance and extended tool life. All 3000 series inserts feature a wide variety of chip breaker geometries and will fit the same holder, reducing tooling costs. The unique insert holding design absorbs machining forces providing one of the most rigid Swiss-turning systems available to the industry today.

- For all turning application processes
- Repeatable within .0004"
- All insert styles fit the same holder
- Holder design absorbs cutting forces
- Ideal for tough applications

Series	Operation
3002 Series	Part Cut Off
3003 Series	Front Turning
3004 Series	Back Turning
3005 Series	Groove & Turning
3006 Series	Threading
3007 Series	Full Radius Grooving
3012 Series	Chamfering

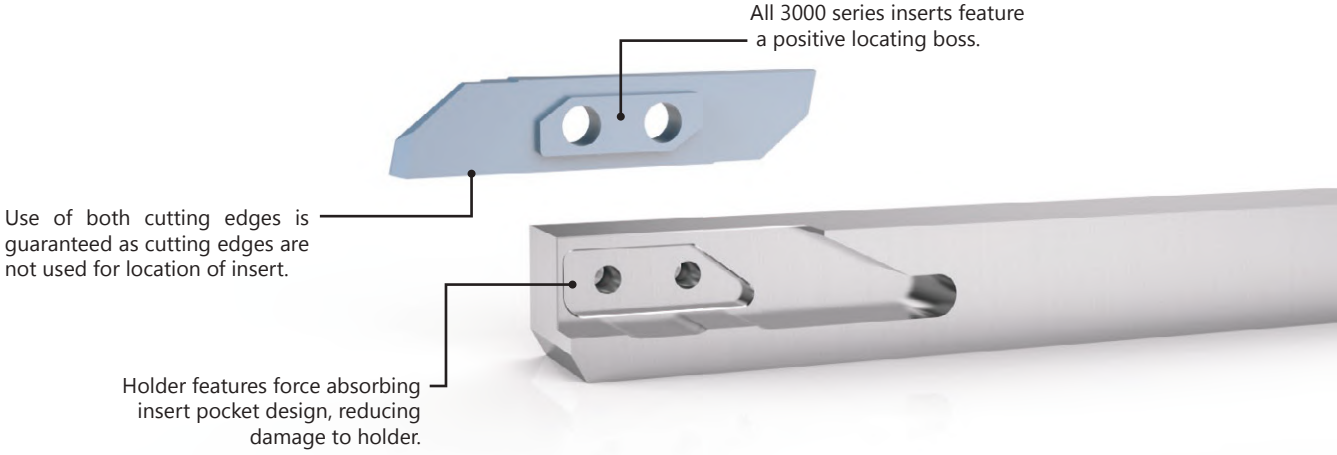

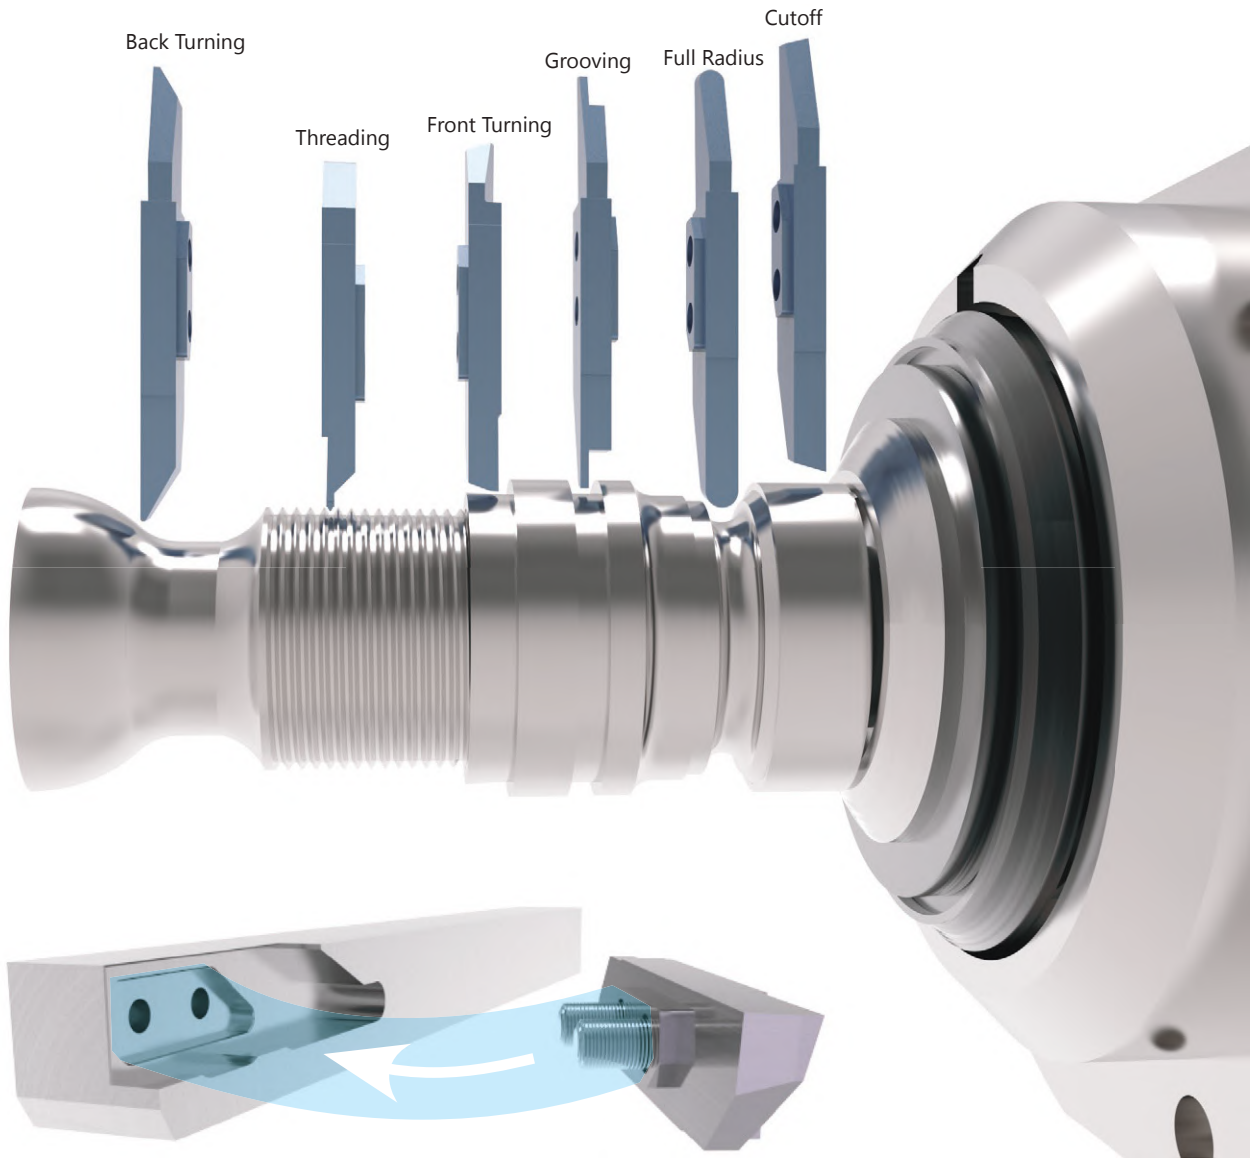

Properties & Application Range of Coatings

Carbide		Uncoated	Standard Coatings				Special Coatings (on request)						
UTILIS-Code			SX	MZ	HX	HPX	HX-A/ HX-A+	TX	HLX	BX	DX-T	DX-HC	DX/DX+
Coating		-	TiN	TiN/ TiAlN	TiAlN/ AlTiN	TiAlN/ AlTiN	AlCrN	AlCrN	TiAlN WC/C	TiCN	DLC	Ta-C	Diamond
Coating Process		-	PVD	CVD	PVD	PVD	PVD	PVD	PVD	PVD	PVD	PVD	CVD
Materials (Category)													
Unalloyed Steel	(I)	■	■	■	■	■	■	□	-	■	-	-	-
Low-Alloy Steel	(II)	□	■	■	■	■	■	□	-	■	-	-	-
High-Alloy Steel	(III)	□	□	■	■	■	■	□	-	□	-	-	-
Titanium	(IV)	□	-	-	■	□	■	■	■	-	-	-	-
Stainless Steel	>60 HRC (V)	□	□	■	■	■	■	□	■	■	-	-	-
Stainless Steel	(VI)	□	□	■	■	■	■	□	■	□	-	-	-
Aluminum	(VII)	■	□	-	■	-	□	-	■	-	■	■	■
Brass	(VIII)	■	□	-	■	□	□	-	■	-	■	■	-
Synthetics Reinforced/Composits	(IX)	-	-	-	□	-	-	-	-	-	□	■	■
Hard Materials		-	-	-	-	-	□	■	-	-	-	-	-


Insert Geometry & Chip Breakers

■ Preferred Application
□ Possible Application
– Application Not Recommended

Series Operation	Chip Breaker	Steel	Stainless Steel	Titanium & Ti-Alloys	Non Ferrous Metals	Hardened	
3002 Series **Cut Off**	3002	■	■	■	–	■	Micro Finishing
		■	■	■	–	■	Finishing
		□	□	□	■	□	Roughing
	3002 GS	–	–	–	–	■	Micro Finishing
		□	□	□	□	□	Finishing
		■	■	■	□	–	Roughing
	3002 GS12	■	■	■	□	–	Micro Finishing
		■	■	■	□	□	Finishing
		■	■	■	□	□	Roughing
	3002 GT20	■	■	■	□	–	Micro Finishing
		■	■	■	■	□	Finishing
		■	■	■	■	■	Roughing
	3002 SC	■	■	■	–	■	Micro Finishing
		■	■	■	□	■	Finishing
		■	■	■	■	■	Roughing
	3002 SPT	–	■	■	■	■	Micro Finishing
		–	■	■	■	□	Finishing
		–	□	□	■	–	Roughing
3003 Series **Front Turning**	3003	■	■	■	–	■	Micro Finishing
		■	■	■	–	■	Finishing
		■	■	□	■	□	Roughing
	3003 GA20	□	□	□	■	–	Micro Finishing
		■	■	■	■	□	Finishing
		■	■	■	■	■	Roughing
	3003 SP TOP	■	■	■	■	■	Micro Finishing
		■	■	■	■	□	Finishing
		□	□	□	■	–	Roughing
3004 Series **Back Turning**	3004	■	□	□	–	■	Micro Finishing
		■	■	■	–	□	Finishing
		■	■	□	■	–	Roughing
	3004 CP	■	■	■	■	■	Micro Finishing
		■	■	■	■	□	Finishing
		□	□	□	■	–	Roughing
	3004 GB20	□	□	□	■	–	Micro Finishing
		■	■	■	■	□	Finishing
		■	■	■	■	■	Roughing
	3004 SP	■	■	■	■	■	Micro Finishing
		■	■	■	■	□	Finishing
		□	□	□	■	–	Roughing
	3004 TOP	■	■	■	■	■	Micro Finishing
		■	■	■	■	□	Finishing
		□	□	□	■	–	Roughing
	3004 SP TOP	■	■	■	■	■	Micro Finishing
		■	■	■	■	□	Finishing
		□	□	□	■	–	Roughing
3005 Series **Groove & Turning**	3005	■	■	□	–	■	Micro Finishing
		■	■	■	□	■	Finishing
		■	■	□	■	□	Roughing
	3005 CP	■	■	■	■	■	Micro Finishing
		■	■	■	■	-	Finishing
		□	□	□	■	–	Roughing
	3005 GC20	■	■	■	■	–	Micro Finishing
		■	■	■	■	□	Finishing
		■	■	■	■	■	Roughing
3006 Series **Threading**	3006	■	■	■	■	■	Micro Finishing
		–	–	–	□	□	Finishing
		–	–	–	–	□	Roughing
	3006 VP	■	■	■	■	■	Micro Finishing
		–	–	–	□	–	Finishing
		–	–	–	–	–	Roughing
3007 Series **Full Radius Grooving**	3007	■	■	■	■	■	Micro Finishing
		■	■	■	■	□	Finishing
		–	–	–	–	–	Roughing


Type-GS Chip Breaker Cut-Off Inserts


The CUT3000 type-GS chip breaker is an evolution of Swiss-type cut off tooling. By using a new carbide forming technology, these inserts require less grinding to be produced while offering a decrease in overall cost of use. 'Type GS EN' grade offers supreme performance in carbon steels while the Type GS FN grade offers excellent performance in Stainless and Titanium applications.



Type-SPT Chip Breaker Cut-Off Inserts

The multidec® CUT3002 cut off inserts with type-SPT chip breaker feature a positive rake intended for use in soft and stringy materials. The SPT chip breaker comes in three different angles described by the product number suffix below.






SPT: 20° rake - Plastics Such As Delrin
SPT06: 6° rake - Good For Stainless
SPT12: 12° rake - Aluminum


Type-SC Chip Breaker Cut-Off Inserts

Cut-off inserts armed with the type-SC chip breaker are ideal for hard materials. This chip breaker is quite universal, used in roughing, finishing, and micro finishing.




Type-SP Chip Breaker
Front & Back Turning Inserts

Front and back turning inserts with the type-SP chip breaker are ideal for finishing and micro finishing on materials such as aluminum, breaking up chips and preventing stringy chips from forming.



Type-CP Chip Breaker
Front & Back Turning, Grooving Inserts


When creating deep features during front turning, back turning, or grooving, the type-CP chip breaker is vital for chip removal. The sharp articulated geometry will peel chips away and keep features clear of material during finishing and micro finishing operations.



Type-GS12 Chip Breaker
Cut-Off Inserts

NEW


A neutral chip control geometry offering wear-resistant sharp cutting edges enabling better chip control. Ideal for high cutting speeds.



Type-GT20 Chip Breaker
Cut-Off Inserts

NEW


Compared to the GS12 chip breaker geometry, the GT20 chip breaker has a sharp and slightly rounded cutting edge. It provides excellent chip flow, creating short chips and resulting in a smooth finish. These results can be experienced at higher feed rates also.



Type-GA20 Chip Breaker
Front Turning Inserts

NEW

Based of the multidec TOP insert technology, this optimised version enables turning in three directions. Perfect chip control is maintained during facing, turning, grooving, and back turning. Inhereted from the TOP insert technology, the GA20 enables up to 100% higher feed rate.



Type-GB20 Chip Breaker
Back Turning Inserts

NEW


Armed with an extremely sharp cutting edge with multi-stage chip breakers, the GB20 chip breaker enhances the creation of back turned profiles with process-reliable chip formation at low and high cutting depths as well as across low and high feed rates.



Type-GC20 Chip Breaker
Grooving & Turning Insert

NEW

Providing good results in almost any material while facing, grooving, or turning, the GC20 chip breaker can turn in three direction with at extremely low and high cutting depths and across low and high feed rates. Excellent chip control results can also be observed in lead-free brass.







3002 Cutoff

Cut: Standard
Chip Breaker: None


Repeatability <20µm

Left Hand		Right Hand		Dimensions & Features				
Item No.	Description	Item No.	Description	a	c	α	r	Coating
7005-148003	3002-0.8-6 L UHM20 HPX	7005-148001	3002-0.8-6 R UHM20 HPX	0.8	6	15°	0	UHM 20 HPX
7005-042081	3002-0.8-6 L UHM20 TX+	Call For Details	3002-0.8-6 R UHM20 TX+	0.8	6	15°	0	UHM 20 TX+
7005-148007	3002-0.8-10 L UHM20 HPX	7005-148005	3002-0.8-10 R UHM20 HPX	0.8	10	15°	0	UHM 20 HPX
7005-042083	3002-0.8-10 L UHM20 TX+	Call For Details	3002-0.8-10 R UHM20 TX+	0.8	10	15°	0	UHM 20 TX+
7005-148011	3002-1.0-6 L UHM20 HPX	7005-148009	3002-1.0-6 R UHM20 HPX	1	6	15°	0	UHM 20 HPX
7005-042108	3002-1.0-6 L UHM20 TX+	Call For Details	3002-1.0-6 R UHM20 TX+	1	6	15°	0	UHM 20 TX+
7005-148015	3002-1.0-13 L UHM20 HPX	7005-148013	3002-1.0-13 R UHM20 HPX	1	13	15°	0	UHM 20 HPX
7005-42110	3002-1.0-13 L UHM20 TX+	Call For Details	3002-1.0-13 R UHM20 TX+	1	13	15°	0	UHM 20 TX+
7005-148019	3002-1.2-6 L UHM20 HPX	7005-148017	3002-1.2-6 R UHM20 HPX	1.2	6	15°	0	UHM 20 HPX
7005-042112	3002-1.2-6 L UHM20 TX+	Call For Details	3002-1.2-6 R UHM20 TX+	1.2	6	15°	0	UHM 20 TX+
7005-148021	3002-1.5-8 L UHM20 HPX	7005-147446	3002-1.5-8 R UHM20 HPX	1.5	8	15°	0	UHM 20 HPX
7005-126884	3002-1.5-8 L UHM20 TX+	Call For Details	3002-1.5-8 R UHM20 TX+	1.5	8	15°	0	UHM 20 TX+
7005-148025	3002-1.5-16 L UHM20 HPX	7005-148023	3002-1.5-16 R UHM20 HPX	1.5	16	15°	0	UHM 20 HPX
7005-042158	3002-1.5-16 L UHM20 TX+	Call For Details	3002-1.5-16 R UHM20 TX+	1.5	16	15°	0	UHM 20 TX+
7005-153028	3002-1.8-8 L UHM20 HPX	7005-153026	3002-1.8-8 R UHM20 HPX	1.8	8	15°	0	UHM 20 HPX
7005-042209	3002-1.8-8 L UHM20 TX+	Call For Details	3002-1.8-8 R UHM20 TX+	1.8	8	15°	0	UHM 20 TX+
7005-148027	3002-2.0-10 L UHM20 HPX	7005-147059	3002-2.0-10 R UHM20 HPX	2	10	15°	0	UHM 20 HPX
Call For Details	3002-2.0-10 L UHM20 TX+	Call For Details	3002-2.0-10 R UHM20 TX+	2	10	15°	0	UHM 20 TX+
7005-148031	3002-2.0-16 L UHM20 HPX	7005-148029	3002-2.0-16 R UHM20 HPX	2	16	15°	0	UHM 20 HPX
7005-042096	3002-2.0-16 L UHM20 TX+	Call For Details	3002-2.0-16 R UHM20 TX+	2	16	15°	0	UHM 20 TX+
7005-148035	3002-2.5-13 L UHM20 HPX	7005-148033	3002-2.5-13 R UHM20 HPX	2.5	13	15°	0	UHM 20 HPX
7005-042098	3002-2.5-13 L UHM20 TX+	Call For Details	3002-2.5-13 R UHM20 TX+	2.5	13	15°	0	UHM 20 TX+
7005-148039	3002-2.5-16 L UHM20 HPX	7005-148037	3002-2.5-16 R UHM20 HPX	2.5	16	15°	0	UHM 20 HPX
7005-042100	3002-2.5-16 L UHM20 TX+	Call For Details	3002-2.5-16 R UHM20 TX+	2.5	16	15°	0	UHM 20 TX+
7005-148043	3002-3.0-16 L UHM20 HPX	7005-148041	3002-3.0-16 R UHM20 HPX	3	16	15°	0	UHM 20 HPX
7005-042102	3002-3.0-16 L UHM20 TX+	Call For Details	3002-3.0-16 R UHM20 TX+	3	16	15°	0	UHM 20 TX+





Ideal Cutting Materials

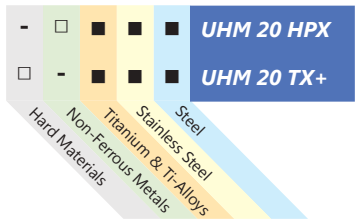

■ Preferred Application
□ Possible Application
- Application Not Recommended





3002 Cutoff

Cut: Inverted
Chip Breaker: None


Repeatability <20µm

Left Hand		Right Hand		Dimensions & Features				
Item No.	Description	Item No.	Description	a	c	α	r	Coating
7005-148047	3002-0.8-6 LV UHM20 HPX	7005-148045	3002-0.8-6 RV UHM20 HPX	0.8	6	15°	0	UHM 20 HPX
Call For Details	3002-0.8-6 LV UHM20 TX+	Call For Details	3002-0.8-6 RV UHM20 TX+	0.8	6	15°	0	UHM 20 TX+
7005-148051	3002-0.8-10 LV UHM20 HPX	7005-148049	3002-0.8-10 RV UHM20 HPX	0.8	10	15°	0	UHM 20 HPX
Call For Details	3002-0.8-10 LV UHM20 TX+	Call For Details	3002-0.8-10 RV UHM20 TX+	0.8	10	15°	0	UHM 20 TX+
7005-148055	3002-1.0-6 LV UHM20 HPX	7005-148053	3002-1.0-6 RV UHM20 HPX	1	6	15°	0	UHM 20 HPX
Call For Details	3002-1.0-6 LV UHM20 TX+	Call For Details	3002-1.0-6 RV UHM20 TX+	1	6	15°	0	UHM 20 TX+
7005-148059	3002-1.0-13 LV UHM20 HPX	7005-148057	3002-1.0-13 RV UHM20 HPX	1	13	15°	0	UHM 20 HPX
Call For Details	3002-1.0-13 LV UHM20 TX+	Call For Details	3002-1.0-13 RV UHM20 TX+	1	13	15°	0	UHM 20 TX+
7005-148063	3002-1.2-6 LV UHM20 HPX	7005-148061	3002-1.2-6 RV UHM20 HPX	1.2	6	15°	0	UHM 20 HPX
Call For Details	3002-1.2-6 LV UHM20 TX+	Call For Details	3002-1.2-6 RV UHM20 TX+	1.2	6	15°	0	UHM 20 TX+
7005-147444	3002-1.5-8 LV UHM20 HPX	7005-148065	3002-1.5-8 RV UHM20 HPX	1.5	8	15°	0	UHM 20 HPX
Call For Details	3002-1.5-8 LV UHM20 TX+	Call For Details	3002-1.5-8 RV UHM20 TX+	1.5	8	15°	0	UHM 20 TX+
7005-148069	3002-1.5-16 LV UHM20 HPX	7005-148067	3002-1.5-16 RV UHM20 HPX	1.5	16	15°	0	UHM 20 HPX
7005-042158	3002-1.5-16 LV UHM20 TX+	Call For Details	3002-1.5-16 RV UHM20 TX+	1.5	16	15°	0	UHM 20 TX+
7005-148073	3002-1.8-8 LV UHM20 HPX	7005-148071	3002-1.8-8 RV UHM20 HPX	1.8	8	15°	0	UHM 20 HPX
Call For Details	3002-1.8-8 LV UHM20 TX+	Call For Details	3002-1.8-8 RV UHM20 TX+	1.8	8	15°	0	UHM 20 TX+
7005-148077	3002-2.0-10 LV UHM20 HPX	7005-148075	3002-2.0-10 RV UHM20 HPX	2	10	15°	0	UHM 20 HPX
7005-042211	3002-2.0-10 LV UHM20 TX+	Call For Details	3002-2.0-10 RV UHM20 TX+	2	10	15°	0	UHM 20 TX+
7005-148081	3002-2.0-16 LV UHM20 HPX	7005-148079	3002-2.0-16 RV UHM20 HPX	2	16	15°	0	UHM 20 HPX
7005-042213	3002-2.0-16 LV UHM20 TX+	Call For Details	3002-2.0-16 RV UHM20 TX+	2	16	15°	0	UHM 20 TX+
7005-148085	3002-2.5-13 LV UHM20 HPX	7005-148083	3002-2.5-13 RV UHM20 HPX	2.5	13	15°	0	UHM 20 HPX
7005-042215	3002-2.5-13 LV UHM20 TX+	Call For Details	3002-2.5-13 RV UHM20 TX+	2.5	13	15°	0	UHM 20 TX+
7005-148089	3002-2.5-16 LV UHM20 HPX	7005-148087	3002-2.5-16 RV UHM20 HPX	2.5	16	15°	0	UHM 20 HPX
7005-042217	3002-2.5-16 LV UHM20 TX+	Call For Details	3002-2.5-16 RV UHM20 TX+	2.5	16	15°	0	UHM 20 TX+
7005-148093	3002-3.0-16 LV UHM20 HPX	7005-148091	3002-3.0-16 RV UHM20 HPX	3	16	15°	0	UHM 20 HPX
7005-042219	3002-3.0-16 LV UHM20 TX+	Call For Details	3002-3.0-16 RV UHM20 TX+	3	16	15°	0	UHM 20 TX+





Ideal Cutting Materials

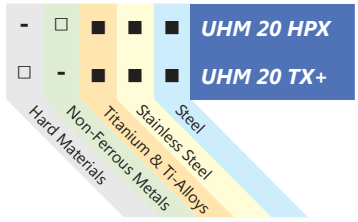


■ Preferred Application
□ Possible Application
- Application Not Recommended




3002 Cutoff
Cut: Standard
Chip Breaker: SC

Repeatability <20µm


Left Hand		Right Hand		Dimensions & Features				
Item No.	Description	Item No.	Description	a	c	α	r	Coating
7005-148111	3002-1.5-8 L SC UHM20 HPX	7005-146503	3002-1.5-8 R SC UHM20 HPX	1.5	8	15°	0	UHM 20 HPX
7005-042242	3002-1.5-8 L SC UHM20 TX+	Call For Details	3002-1.5-8 R SC UHM20 TX+	1.5	8	15°	0	UHM 20 TX+
7005-148115	3002-1.5-16 L SC UHM20 HPX	7005-148113	3002-1.5-16 R SC UHM20 HPX	1.5	16	15°	0	UHM 20 HPX
Call For Details	3002-1.5-16 L SC UHM20 TX+	7005-154880	3002-1.5-16 R SC UHM20 TX+	1.5	16	15°	0	UHM 20 TX+
7005-148117	3002-2.0-10 L SC UHM20 HPX	7005-116958	3002-2.0-10 R SC UHM20 HPX	2	10	15°	0	UHM 20 HPX
Call For Details	3002-2.0-10 L SC UHM20 TX+	Call For Details	3002-2.0-10 R SC UHM20 TX+	2	10	15°	0	UHM 20 TX+
7005-148121	3002-2.0-16 L SC UHM20 HPX	7005-148119	3002-2.0-16 R SC UHM20 HPX	2	16	15°	0	UHM 20 HPX
Call For Details	3002-2.0-16 L SC UHM20 TX+	Call For Details	3002-2.0-16 R SC UHM20 TX+	2	16	15°	0	UHM 20 TX+
7005-148125	3002-2.5-13 L SC UHM20 HPX	7005-148123	3002-2.5-13 R SC UHM20 HPX	2.5	13	15°	0	UHM 20 HPX
Call For Details	3002-2.5-13 L SC UHM20 TX+	7005-042427	3002-2.5-13 R SC UHM20 TX+	2.5	13	15°	0	UHM 20 TX+
7005-148127	3002-2.5-16 L SC UHM20 HPX	7005-147637	3002-2.5-16 R SC UHM20 HPX	2.5	16	15°	0	UHM 20 HPX
Call For Details	3002-2.5-16 L SC UHM20 TX+	Call For Details	3002-2.5-16 R SC UHM20 TX+	2.5	16	15°	0	UHM 20 TX+
7005-148129	3002-3.0-16 L SC UHM20 HPX	7005-147639	3002-3.0-16 R SC UHM20 HPX	3	16	15°	0	UHM 20 HPX
Call For Details	3002-3.0-16 L SC UHM20 TX+	Call For Details	3002-3.0-16 R SC UHM20 TX+	3	16	15°	0	UHM 20 TX+



Type-SC Chip Breaker



Ideal Cutting Materials

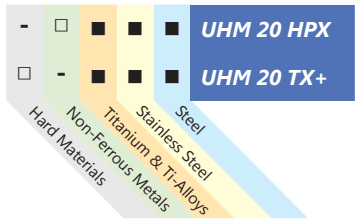


■ Preferred Application
□ Possible Application
- Application Not Recommended




3002 Cutoff
Cut: Inverted
Chip Breaker: SC

Repeatability <20µm


Left Hand		Right Hand		Dimensions & Features				
Item No.	Description	Item No.	Description	a	c	α	r	Coating
7005-147256	3002-1.5-8 LV SC UHM20 HPX	7005-147631	3002-1.5-8 RV SC UHM20 HPX	1.5	8	15°	0	UHM 20 HPX
Call For Details	3002-1.5-8 LV SC UHM20 TX+	Call For Details	3002-1.5-8 RV SC UHM20 TX+	1.5	8	15°	0	UHM 20 TX+
7005-148133	3002-1.5-16 LV SC UHM20 HPX	7005-148131	3002-1.5-16 RV SC UHM20 HPX	1.5	16	15°	0	UHM 20 HPX
Call For Details	3002-1.5-16 LV SC UHM20 TX+	Call For Details	3002-1.5-16 RV SC UHM20 TX+	1.5	16	15°	0	UHM 20 TX+
7005-147258	3002-2.0-10 LV SC UHM20 HPX	7005-147633	3002-2.0-10 RV SC UHM20 HPX	2	10	15°	0	UHM 20 HPX
Call For Details	3002-2.0-10 LV SC UHM20 TX+	Call For Details	3002-2.0-10 RV SC UHM20 TX+	2	10	15°	0	UHM 20 TX+
7005-148137	3002-2.0-16 LV SC UHM20 HPX	7005-148135	3002-2.0-16 RV SC UHM20 HPX	2	16	15°	0	UHM 20 HPX
Call For Details	3002-2.0-16 LV SC UHM20 TX+	Call For Details	3002-2.0-16 RV SC UHM20 TX+	2	16	15°	0	UHM 20 TX+
7005-148141	3002-2.5-13 LV SC UHM20 HPX	7005-148139	3002-2.5-13 RV SC UHM20 HPX	2.5	13	15°	0	UHM 20 HPX
Call For Details	3002-2.5-13 LV SC UHM20 TX+	Call For Details	3002-2.5-13 RV SC UHM20 TX+	2.5	13	15°	0	UHM 20 TX+
7005-148143	3002-2.5-16 LV SC UHM20 HPX	7005-147635	3002-2.5-16 RV SC UHM20 HPX	2.5	16	15°	0	UHM 20 HPX
Call For Details	3002-2.5-16 LV SC UHM20 TX+	Call For Details	3002-2.5-16 RV SC UHM20 TX+	2.5	16	15°	0	UHM 20 TX+
7005-147641	3002-3.0-16 LV SC UHM20 HPX	7005-148145	3002-3.0-16 RV SC UHM20 HPX	3	16	15°	0	UHM 20 HPX
Call For Details	3002-3.0-16 LV SC UHM20 TX+	Call For Details	3002-3.0-16 RV SC UHM20 TX+	3	16	15°	0	UHM 20 TX+



Type-SC Chip Breaker



Ideal Cutting Materials

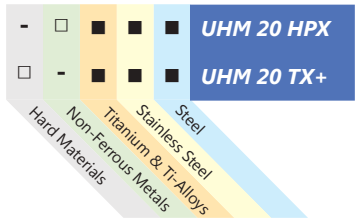

■ Preferred Application
□ Possible Application
- Application Not Recommended




3002 Cutoff

Cut: Neutral


Chip Breaker: SC

Repeatability <20µm


Left Hand		Right Hand		Dimensions & Features			
Item No.	Description	Item No.	Description	a	c	r	Coating
7005-148149	3002-1.5-10 LN SC UHM20 HPX	7005-148147	3002-1.5-10 RN SC UHM20 HPX	1.5	8	0.08	UHM 20 HPX
Call For Details	3002-1.5-10 LN SC UHM20 TX+	Call For Details	3002-1.5-10 RN SC UHM20 TX+	1.5	8	0.08	UHM 20 TX+
7005-148153	3002-1.5-16 LN SC UHM20 HPX	7005-148151	3002-1.5-16 RN SC UHM20 HPX	1.5	16	0.08	UHM 20 HPX
Call For Details	3002-1.5-16 LN SC UHM20 TX+	Call For Details	3002-1.5-16 RN SC UHM20 TX+	1.5	16	0.08	UHM 20 TX+
7005-148157	3002-2.0-10 LN SC UHM20 HPX	7005-148155	3002-2.0-10 RN SC UHM20 HPX	2	10	0.08	UHM 20 HPX
Call For Details	3002-2.0-10 LN SC UHM20 TX+	7005-192792	3002-2.0-10 RN SC UHM20 TX+	2	10	0.08	UHM 20 TX+
7005-148161	3002-2.0-16 LN SC UHM20 HPX	7005-148159	3002-2.0-16 RN SC UHM20 HPX	2	16	0.08	UHM 20 HPX
Call For Details	3002-2.0-16 LN SC UHM20 TX+	Call For Details	3002-2.0-16 RN SC UHM20 TX+	2	16	0.08	UHM 20 TX+
7005-148163	3002-2.5-13 LN SC UHM20 HPX	7005-114993	3002-2.5-13 RN SC UHM20 HPX	2.5	13	0.08	UHM 20 HPX
Call For Details	3002-2.5-13 LN SC UHM20 TX+	Call For Details	3002-2.5-13 RN SC UHM20 TX+	2.5	13	0.08	UHM 20 TX+
7005-148167	3002-2.5-16 LN SC UHM20 HPX	7005-148165	3002-2.5-16 RN SC UHM20 HPX	2.5	16	0.08	UHM 20 HPX
Call For Details	3002-2.5-16 LN SC UHM20 TX+	Call For Details	3002-2.5-16 RN SC UHM20 TX+	2.5	16	0.08	UHM 20 TX+
7005-148171	3002-3.0-16 LN SC UHM20 HPX	7005-148169	3002-3.0-16 RN SC UHM20 HPX	3	16	0.08	UHM 20 HPX
Call For Details	3002-3.0-16 LN SC UHM20 TX+	Call For Details	3002-3.0-16 RN SC UHM20 TX+	3	16	0.08	UHM 20 TX+



Type-SC Chip Breaker



Ideal Cutting Materials

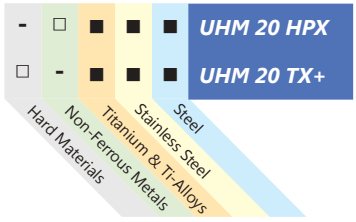

■ Preferred Application
□ Possible Application
- Application Not Recommended




3002 Cutoff

Cut: Standard


Chip Breaker: SPT

Repeatability <20µm


Left Hand		Right Hand		Dimensions & Features					
Item No.	Description	Item No.	Description	a	c	α	β	r	Coating
7005-192474	3002-0.8-10 L SPT UHM20 HPX	7005-192678	3002-0.8-10 R SPT UHM20 HPX	0.8	10	15°	20°	0.00	UHM 20 HPX
7005-042438	3002-0.8-10 L SPT UHM20 TX+	7005-042435	3002-0.8-10 R SPT UHM20 TX+	0.8	10	15°	20°	0.00	UHM 20 TX+
7005-042441	3002-1.0-13 L SPT UHM20 HPX	7005-154332	3002-1.0-13 R SPT UHM20 HPX	1	13	15°	20°	0.00	UHM 20 HPX
7005-042442	3002-1.0-13 L SPT UHM20 TX+	7005-042439	3002-1.0-13 R SPT UHM20 TX+	1	13	15°	20°	0.00	UHM 20 TX+
7005-192446	3002-1.5-8 L SPT UHM20 HPX	7005-042445	3002-1.5-8 R SPT UHM20 HPX	1.5	8	15°	20°	0.00	UHM 20 TX+
7005-042450	3002-1.5-8 L SPT UHM20 TX+	7005-042446	3002-1.5-8 R SPT UHM20 TX+	1.5	8	15°	20°	0.00	UHM 20 TX+
7005-112803	3002-1.5-8 L SPT06 UHM20 HPX	7005-112799	3002-1.5-8 R SPT06 UHM20 HPX	1.5	8	15°	6°	0.05	UHM 20 HPX
7005-154800	3002-1.5-8 L SPT06 UHM20 TX+	7005-154802	3002-1.5-8 R SPT06 UHM20 TX+	1.5	8	15°	6°	0.05	UHM 20 TX+
7005-112805	3002-1.5-8 L SPT12 UHM20 HPX	7005-112801	3002-1.5-8 R SPT12 UHM20 HPX	1.5	8	15°	12°	0.05	UHM 20 HPX
7005-042447	3002-1.5-8 L SPT12 UHM20 TX+	7005-042443	3002-1.5-8 R SPT12 UHM20 TX+	1.5	8	15°	12°	0.05	UHM 20 TX+
7005-042455	3002-1.5-16 L SPT UHM20 HPX	Call For Details	3002-1.5-16 R SPT UHM20 HPX	1.5	16	15°	20°	0.00	UHM 20 HPX
7005-042456	3002-1.5-16 L SPT UHM20 TX+	Call For Details	3002-1.5-16 R SPT UHM20 TX+	1.5	16	15°	20°	0.00	UHM 20 TX+
7005-042464	3002-2.0-10 L SPT UHM20 HPX	7005-112808	3002-2.0-10 R SPT UHM20 HPX	2	10	15°	20°	0.00	UHM 20 HPX
7005-042465	3002-2.0-10 L SPT UHM20 TX+	7005-042461	3002-2.0-10 R SPT UHM20 TX+	2	10	15°	20°	0.00	UHM 20 TX+
7005-112810	3002-2.0-10 L SPT06 UHM20 HPX	7005-112807	3002-2.0-10 R SPT06 UHM20 HPX	2	10	15°	6°	0.05	UHM 20 HPX
7005-154965	3002-2.0-10 L SPT06 UHM20 TX+	7005-042457	3002-2.0-10 R SPT06 UHM20 TX+	2	10	15°	6°	0.05	UHM 20 TX+
7005-147590	3002-2.0-10 L SPT12 UHM20 HPX	7005-147589	3002-2.0-10 R SPT12 UHM20 HPX	2	10	15°	12°	0.05	UHM 20 HPX
7005-042462	3002-2.0-10 L SPT12 UHM20 TX+	Call For Details	3002-2.0-10 R SPT12 UHM20 TX+	2	10	15°	12°	0.05	UHM 20 TX+
7005-042474	3002-2.0-16 L SPT UHM20 HPX	7005-042469	3002-2.0-16 R SPT UHM20 HPX	2	16	15°	20°	0.00	UHM 20 HPX
7005-042475	3002-2.0-16 L SPT UHM20 TX+	7005-042470	3002-2.0-16 R SPT UHM20 TX+	2	16	15°	20°	0.00	UHM 20 TX+
7005-112816	3002-2.0-16 L SPT06 UHM20 HPX	7005-112812	3002-2.0-16 R SPT06 UHM20 HPX	2	16	15°	6°	0.05	UHM 20 HPX
Call For Details	3002-2.0-16 L SPT06 UHM20 TX+	7005-211301	3002-2.0-16 R SPT06 UHM20 TX+	2	16	15°	6°	0.05	UHM 20 TX+
7005-112818	3002-2.0-16 L SPT12 UHM20 HPX	7005-112814	3002-2.0-16 R SPT12 UHM20 HPX	2	16	15°	12°	0.05	UHM 20 HPX
7005-042472	3002-2.0-16 L SPT12 UHM20 TX+	7005-211302	3002-2.0-16 R SPT12 UHM20 TX+	2	16	15°	12°	0.05	UHM 20 TX+
7005-042484	3002-2.5-13 L SPT UHM20 HPX	7005-042479	3002-2.5-13 R SPT UHM20 HPX	2.5	13	15°	20°	0.00	UHM 20 HPX
7005-042485	3002-2.5-13 L SPT UHM20 TX+	7005-042480	3002-2.5-13 R SPT UHM20 TX+	2.5	13	15°	20°	0.00	UHM 20 TX+
7005-112824	3002-2.5-13 L SPT06 UHM20 HPX	7005-112820	3002-2.5-13 R SPT06 UHM20 HPX	2.5	13	15°	6°	0.05	UHM 20 HPX
7005-042481	3002-2.5-13 L SPT06 UHM20 TX+	Call For Details	3002-2.5-13 R SPT06 UHM20 TX+	2.5	13	15°	6°	0.05	UHM 20 TX+
7005-112826	3002-2.5-13 L SPT12 UHM20 HPX	7005-112822	3002-2.5-13 R SPT12 UHM20 HPX	2.5	13	15°	12°	0.05	UHM 20 HPX
Call For Details	3002-2.5-13 L SPT12 UHM20 TX+	Call For Details	3002-2.5-13 R SPT12 UHM20 TX+	2.5	13	15°	12°	0.05	UHM 20 TX+
Call For Details	3002-2.5-16 L SPT UHM20 HPX	Call For Details	3002-2.5-16 R SPT UHM20 HPX	2.5	16	15°	20°	0.00	UHM 20 HPX
Call For Details	3002-2.5-16 L SPT UHM20 TX+	Call For Details	3002-2.5-16 R SPT UHM20 TX+	2.5	16	15°	20°	0.00	UHM 20 TX+
7005-112832	3002-2.5-16 L SPT06 UHM20 HPX	7005-112828	3002-2.5-16 R SPT06 UHM20 HPX	2.5	16	15°	6°	0.05	UHM 20 HPX
7005-042491	3002-2.5-16 L SPT06 UHM20 TX+	Call For Details	3002-2.5-16 R SPT06 UHM20 TX+	2.5	16	15°	6°	0.05	UHM 20 TX+
7005-112834	3002-2.5-16 L SPT12 UHM20 HPX	7005-112830	3002-2.5-16 R SPT12 UHM20 HPX	2.5	16	15°	12°	0.05	UHM 20 HPX
Call For Details	3002-2.5-16 L SPT12 UHM20 TX+	Call For Details	3002-2.5-16 R SPT12 UHM20 TX+	2.5	16	15°	12°	0.05	UHM 20 TX+
Call For Details	3002-3.0-16 L SPT UHM20 HPX	Call For Details	3002-3.0-16 R SPT UHM20 HPX	3	16	15°	20°	0.05	UHM 20 HPX
Call For Details	3002-3.0-16 L SPT UHM20 TX+	Call For Details	3002-3.0-16 R SPT UHM20 TX+	3	16	15°	20°	0.05	UHM 20 TX+
7005-112840	3002-3.0-16 L SPT06 UHM20 HPX	7005-112836	3002-3.0-16 R SPT06 UHM20 HPX	3	16	15°	6°	0.05	UHM 20 HPX
Call For Details	3002-3.0-16 L SPT06 UHM20 TX+	Call For Details	3002-3.0-16 R SPT06 UHM20 TX+	3	16	15°	6°	0.05	UHM 20 TX+
7005-112842	3002-3.0-16 L SPT12 UHM20 HPX	7005-112838	3002-3.0-16 R SPT12 UHM20 HPX	3	16	15°	12°	0.05	UHM 20 HPX
Call For Details	3002-3.0-16 L SPT12 UHM20 TX+	Call For Details	3002-3.0-16 R SPT12 UHM20 TX+	3	16	15°	12°	0.05	UHM 20 TX+




Type-SPT Chip Breaker



Ideal Cutting Materials

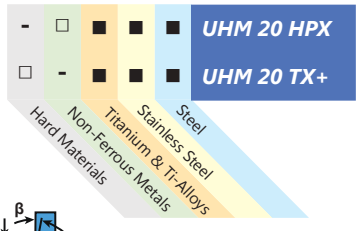

■ Preferred Application
□ Possible Application
- Application Not Recommended




3002 Cutoff

Cut: Inverted


Chip Breaker: SPT

Repeatability <20µm


Left Hand		Right Hand		Dimensions & Features					
Item No.	Description	Item No.	Description	a	c	α	β	r	Coating
7005-042831	3002-0.8-10 LV SPT UHM20 HPX	7005-042828	3002-0.8-10 RV SPT UHM20 HPX	0.8	10	15°	20°	0.00	UHM 20 HPX
7005-042832	3002-0.8-10 LV SPT UHM20 TX+	7005-042829	3002-0.8-10 RV SPT UHM20 TX+	0.8	10	15°	20°	0.00	UHM 20 TX+
7005-042837	3002-1.0-13 LV SPT UHM20 HPX	7005-042834	3002-1.0-13 RV SPT UHM20 HPX	1	13	15°	20°	0.00	UHM 20 HPX
7005-042838	3002-1.0-13 LV SPT UHM20 TX+	7005-042835	3002-1.0-13 RV SPT UHM20 TX+	1	13	15°	20°	0.00	UHM 20 TX+
7005-042970	3002-1.5-8 LV SPT UHM20 HPX	7005-042865	3002-1.5-8 RV SPT UHM20 HPX	1.5	8	15°	20°	0.00	UHM 20 TX+
7005-193239	3002-1.5-8 LV SPT UHM20 TX+	7005-042866	3002-1.5-8 RV SPT UHM20 TX+	1.5	8	15°	20°	0.00	UHM 20 TX+
7005-112848	3002-1.5-8 LV SPT06 UHM20 HPX	7005-112844	3002-1.5-8 RV SPT06 UHM20 HPX	1.5	8	15°	6°	0.05	UHM 20 HPX
Call For Details	3002-1.5-8 LV SPT06 UHM20 TX+	7005-154803	3002-1.5-8 RV SPT06 UHM20 TX+	1.5	8	15°	6°	0.05	UHM 20 TX+
7005-112850	3002-1.5-8 LV SPT12 UHM20 HPX	7005-112846	3002-1.5-8 RV SPT12 UHM20 HPX	1.5	8	15°	12°	0.05	UHM 20 HPX
7005-154801	3002-1.5-8 LV SPT12 UHM20 TX+	Call For Details	3002-1.5-8 RV SPT12 UHM20 TX+	1.5	8	15°	12°	0.05	UHM 20 TX+
Call For Details	3002-1.5-16 LV SPT UHM20 HPX	Call For Details	3002-1.5-16 RV SPT UHM20 HPX	1.5	16	15°	20°	0.00	UHM 20 HPX
7005-127960	3002-1.5-16 LV SPT UHM20 TX+	Call For Details	3002-1.5-16 RV SPT UHM20 TX+	1.5	16	15°	20°	0.00	UHM 20 TX+
7005-043167	3002-2.0-10 LV SPT UHM20 HPX	7005-127957	3002-2.0-10 RV SPT UHM20 HPX	2	10	15°	20°	0.00	UHM 20 HPX
7005-043168	3002-2.0-10 LV SPT UHM20 TX+	Call For Details	3002-2.0-10 RV SPT UHM20 TX+	2	10	15°	20°	0.00	UHM 20 TX+
7005-112856	3002-2.0-10 LV SPT06 UHM20 HPX	7005-112852	3002-2.0-10 RV SPT06 UHM20 HPX	2	10	15°	6°	0.05	UHM 20 HPX
Call For Details	3002-2.0-10 LV SPT06 UHM20 TX+	Call For Details	3002-2.0-10 RV SPT06 UHM20 TX+	2	10	15°	6°	0.05	UHM 20 TX+
7005-112858	3002-2.0-10 LV SPT12 UHM20 HPX	7005-112854	3002-2.0-10 RV SPT12 UHM20 HPX	2	10	15°	12°	0.05	UHM 20 HPX
7005-211300	3002-2.0-10 LV SPT12 UHM20 TX+	Call For Details	3002-2.0-10 RV SPT12 UHM20 TX+	2	10	15°	12°	0.05	UHM 20 TX+
7005-042995	3002-2.0-16 LV SPT UHM20 HPX	Call For Details	3002-2.0-16 RV SPT UHM20 HPX	2	16	15°	20°	0.00	UHM 20 HPX
7005-043160	3002-2.0-16 LV SPT UHM20 TX+	Call For Details	3002-2.0-16 RV SPT UHM20 TX+	2	16	15°	20°	0.00	UHM 20 TX+
7005-112864	3002-2.0-16 LV SPT06 UHM20 HPX	7005-112860	3002-2.0-16 RV SPT06 UHM20 HPX	2	16	15°	6°	0.05	UHM 20 HPX
Call For Details	3002-2.0-16 LV SPT06 UHM20 TX+	Call For Details	3002-2.0-16 RV SPT06 UHM20 TX+	2	16	15°	6°	0.05	UHM 20 TX+
7005-112866	3002-2.0-16 LV SPT12 UHM20 HPX	7005-112862	3002-2.0-16 RV SPT12 UHM20 HPX	2	16	15°	12°	0.05	UHM 20 HPX
Call For Details	3002-2.0-16 LV SPT12 UHM20 TX+	Call For Details	3002-2.0-16 RV SPT12 UHM20 TX+	2	16	15°	12°	0.05	UHM 20 TX+
7005-043656	3002-2.5-13 LV SPT UHM20 HPX	Call For Details	3002-2.5-13 RV SPT UHM20 HPX	2.5	13	15°	20°	0.00	UHM 20 HPX
7005-043657	3002-2.5-13 LV SPT UHM20 TX+	Call For Details	3002-2.5-13 RV SPT UHM20 TX+	2.5	13	15°	20°	0.00	UHM 20 TX+
7005-112872	3002-2.5-13 LV SPT06 UHM20 HPX	7005-112868	3002-2.5-13 RV SPT06 UHM20 HPX	2.5	13	15°	6°	0.05	UHM 20 HPX
7005-043643	3002-2.5-13 LV SPT06 UHM20 TX+	Call For Details	3002-2.5-13 RV SPT06 UHM20 TX+	2.5	13	15°	6°	0.05	UHM 20 TX+
7005-112874	3002-2.5-13 LV SPT12 UHM20 HPX	7005-112870	3002-2.5-13 RV SPT12 UHM20 HPX	2.5	13	15°	12°	0.05	UHM 20 HPX
7005-043654	3002-2.5-13 LV SPT12 UHM20 TX+	Call For Details	3002-2.5-13 RV SPT12 UHM20 TX+	2.5	13	15°	12°	0.05	UHM 20 TX+
7005-043685	3002-2.5-16 LV SPT UHM20 HPX	Call For Details	3002-2.5-16 RV SPT UHM20 HPX	2.5	16	15°	20°	0.00	UHM 20 HPX
7005-043686	3002-2.5-16 LV SPT UHM20 TX+	Call For Details	3002-2.5-16 RV SPT UHM20 TX+	2.5	16	15°	20°	0.00	UHM 20 TX+
7005-112880	3002-2.5-16 LV SPT06 UHM20 HPX	7005-112876	3002-2.5-16 RV SPT06 UHM20 HPX	2.5	16	15°	6°	0.05	UHM 20 HPX
Call For Details	3002-2.5-16 LV SPT06 UHM20 TX+	Call For Details	3002-2.5-16 RV SPT06 UHM20 TX+	2.5	16	15°	6°	0.05	UHM 20 TX+
7005-112882	3002-2.5-16 LV SPT12 UHM20 HPX	7005-112878	3002-2.5-16 RV SPT12 UHM20 HPX	2.5	16	15°	12°	0.05	UHM 20 HPX
7005-043682	3002-2.5-16 LV SPT12 UHM20 TX+	Call For Details	3002-2.5-16 RV SPT12 UHM20 TX+	2.5	16	15°	12°	0.05	UHM 20 TX+
Call For Details	3002-3.0-16 LV SPT UHM20 HPX	Call For Details	3002-3.0-16 RV SPT UHM20 HPX	3	16	15°	20°	0.05	UHM 20 HPX
Call For Details	3002-3.0-16 LV SPT UHM20 TX+	Call For Details	3002-3.0-16 RV SPT UHM20 TX+	3	16	15°	20°	0.05	UHM 20 TX+
7005-112888	3002-3.0-16 LV SPT06 UHM20 HPX	7005-112884	3002-3.0-16 RV SPT06 UHM20 HPX	3	16	15°	6°	0.05	UHM 20 HPX
Call For Details	3002-3.0-16 LV SPT06 UHM20 TX+	Call For Details	3002-3.0-16 RV SPT06 UHM20 TX+	3	16	15°	6°	0.05	UHM 20 TX+
7005-112890	3002-3.0-16 LV SPT12 UHM20 HPX	7005-112886	3002-3.0-16 RV SPT12 UHM20 HPX	3	16	15°	12°	0.05	UHM 20 HPX
Call For Details	3002-3.0-16 LV SPT12 UHM20 TX+	Call For Details	3002-3.0-16 RV SPT12 UHM20 TX+	3	16	15°	12°	0.05	UHM 20 TX+



Type-SPT Chip Breaker



Ideal Cutting Materials

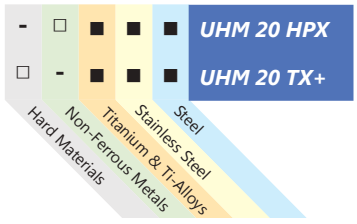

■ Preferred Application
□ Possible Application
- Application Not Recommended



3002 Cutoff

Cut: Neutral


Chip Breaker: SPT

Repeatability <20µm


Left Hand		Right Hand		Dimensions & Features				
Item No.	Description	Item No.	Description	a	c	β	r	Coating
7005-169573	3002-1.0-10 LN SPT UHM20 HPX	7005-043701	3002-1.0-10 RN SPT UHM20 HPX	1	10	20°	0.05	UHM 20 HPX
7005-212109	3002-1.0-10 LN SPT UHM20 TX+	7005-043705	3002-1.0-10 RN SPT UHM20 TX+	1	10	20°	0.05	UHM 20 TX+
7005-043721	3002-1.5-10 LN SPT UHM20 HPX	7005-043712	3002-1.5-10 RN SPT UHM20 HPX	1.5	10	20°	0.05	UHM 20 HPX
7005-043722	3002-1.5-10 LN SPT UHM20 TX+	7005-043713	3002-1.5-10 RN SPT UHM20 TX+	1.5	10	20°	0.05	UHM 20 TX+
7005-112896	3002-1.5-10 LN SPT06 UHM20 HPX	7005-112892	3002-1.5-10 RN SPT06 UHM20 HPX	1.5	10	6°	0.05	UHM 20 HPX
7005-211299	3002-1.5-10 LN SPT06 UHM20 TX+	7005-192810	3002-1.5-10 RN SPT06 UHM20 TX+	1.5	10	6°	0.05	UHM 20 TX+
7005-112898	3002-1.5-10 LN SPT12 UHM20 HPX	7005-112894	3002-1.5-10 RN SPT12 UHM20 HPX	1.5	10	12°	0.05	UHM 20 HPX
7005-112898	3002-1.5-10 LN SPT12 UHM20 TX+	7005-043710	3002-1.5-10 RN SPT12 UHM20 TX+	1.5	10	12°	0.05	UHM 20 TX+
7005-043727	3002-1.5-16 LN SPT UHM20 HPX	7005-043724	3002-1.5-16 RN SPT UHM20 HPX	1.5	16	20°	0.05	UHM 20 HPX
7005-043728	3002-1.5-16 LN SPT UHM20 TX+	7005-043725	3002-1.5-16 RN SPT UHM20 TX+	1.5	16	20°	0.05	UHM 20 TX+
7005-043750	3002-2.0-10 LN SPT UHM20 HPX	7005-043745	3002-2.0-10 RN SPT UHM20 HPX	2	10	20°	0.05	UHM 20 HPX
7005-043751	3002-2.0-10 LN SPT UHM20 TX+	7005-043746	3002-2.0-10 RN SPT UHM20 TX+	2	10	20°	0.05	UHM 20 TX+
7005-112904	3002-2.0-10 LN SPT06 UHM20 HPX	7005-112900	3002-2.0-10 RN SPT06 UHM20 HPX	2	10	6°	0.05	UHM 20 HPX
7005-154969	3002-2.0-10 LN SPT06 UHM20 TX+	7005-154967	3002-2.0-10 RN SPT06 UHM20 TX+	2	10	6°	0.05	UHM 20 TX+
7005-112906	3002-2.0-10 LN SPT12 UHM20 HPX	7005-112902	3002-2.0-10 RN SPT12 UHM20 HPX	2	10	12°	0.05	UHM 20 HPX
7005-043747	3002-2.0-10 LN SPT12 UHM20 TX+	7005-043743	3002-2.0-10 RN SPT12 UHM20 TX+	2	10	12°	0.05	UHM 20 TX+
7005-043763	3002-2.0-16 LN SPT UHM20 HPX	7005-043757	3002-2.0-16 RN SPT UHM20 HPX	2	16	20°	0.05	UHM 20 HPX
7005-043764	3002-2.0-16 LN SPT UHM20 TX+	7005-043759	3002-2.0-16 RN SPT UHM20 TX+	2	16	20°	0.05	UHM 20 TX+
7005-112912	3002-2.0-16 LN SPT06 UHM20 HPX	7005-112908	3002-2.0-16 RN SPT06 UHM20 HPX	2	16	6°	0.05	UHM 20 HPX
7005-194069	3002-2.0-16 LN SPT06 UHM20 TX+	7005-043752	3002-2.0-16 RN SPT06 UHM20 TX+	2	16	6°	0.05	UHM 20 TX+
7005-112914	3002-2.0-16 LN SPT12 UHM20 HPX	7005-112910	3002-2.0-16 RN SPT12 UHM20 HPX	2	16	12°	0.05	UHM 20 HPX
Call For Details	3002-2.0-16 LN SPT12 UHM20 TX+	7005-043753	3002-2.0-16 RN SPT12 UHM20 TX+	2	16	12°	0.05	UHM 20 TX+
7005-044066	3002-2.5-13 LN SPT UHM20 HPX	7005-043768	3002-2.5-13 RN SPT UHM20 HPX	2.5	13	20°	0.05	UHM 20 HPX
7005-044067	3002-2.5-13 LN SPT UHM20 TX+	7005-043769	3002-2.5-13 RN SPT UHM20 TX+	2.5	13	20°	0.05	UHM 20 TX+
7005-112918	3002-2.5-13 LN SPT06 UHM20 HPX	7005-114992	3002-2.5-13 RN SPT06 UHM20 HPX	2.5	13	6°	0.05	UHM 20 HPX
7005-043770	3002-2.5-13 LN SPT06 UHM20 TX+	7005-043765	3002-2.5-13 RN SPT06 UHM20 TX+	2.5	13	6°	0.05	UHM 20 TX+
7005-112920	3002-2.5-13 LN SPT12 UHM20 HPX	7005-112916	3002-2.5-13 RN SPT12 UHM20 HPX	2.5	13	12°	0.05	UHM 20 HPX
7005-043771	3002-2.5-13 LN SPT12 UHM20 TX+	7005-043766	3002-2.5-13 RN SPT12 UHM20 TX+	2.5	13	12°	0.05	UHM 20 TX+
7005-044392	3002-2.5-16 LN SPT UHM20 HPX	7005-044337	3002-2.5-16 RN SPT UHM20 HPX	2.5	16	20°	0.05	UHM 20 HPX
7005-044393	3002-2.5-16 LN SPT UHM20 TX+	7005-044388	3002-2.5-16 RN SPT UHM20 TX+	2.5	16	20°	0.05	UHM 20 TX+
7005-112926	3002-2.5-16 LN SPT06 UHM20 HPX	7005-112922	3002-2.5-16 RN SPT06 UHM20 HPX	2.5	16	6°	0.05	UHM 20 HPX
7005-044389	3002-2.5-16 LN SPT06 UHM20 TX+	7005-044068	3002-2.5-16 RN SPT06 UHM20 TX+	2.5	16	6°	0.05	UHM 20 TX+
7005-112928	3002-2.5-16 LN SPT12 UHM20 HPX	7005-112924	3002-2.5-16 RN SPT12 UHM20 HPX	2.5	16	12°	0.05	UHM 20 HPX
7005-044390	3002-2.5-16 LN SPT12 UHM20 TX+	7005-044069	3002-2.5-16 RN SPT12 UHM20 TX+	2.5	16	12°	0.05	UHM 20 TX+
7005-044401	3002-3.0-16 LN SPT UHM20 HPX	7005-044397	3002-3.0-16 RN SPT UHM20 HPX	3	16	20°	0.05	UHM 20 HPX
7005-044402	3002-3.0-16 LN SPT UHM20 TX+	7005-044398	3002-3.0-16 RN SPT UHM20 TX+	3	16	20°	0.05	UHM 20 TX+
7005-112934	3002-3.0-16 LN SPT06 UHM20 HPX	7005-112930	3002-3.0-16 RN SPT06 UHM20 HPX	3	16	6°	0.05	UHM 20 HPX
7055-194068	3002-3.0-16 LN SPT06 UHM20 TX+	7005-044394	3002-3.0-16 RN SPT06 UHM20 TX+	3	16	6°	0.05	UHM 20 TX+
7005-112936	3002-3.0-16 LN SPT12 UHM20 HPX	7005-112932	3002-3.0-16 RN SPT12 UHM20 HPX	3	16	12°	0.05	UHM 20 HPX
7005-044399	3002-3.0-16 LN SPT12 UHM20 TX+	7005-044395	3002-3.0-16 RN SPT12 UHM20 TX+	3	16	12°	0.05	UHM 20 TX+




Type-SPT Chip Breaker



Ideal Cutting Materials

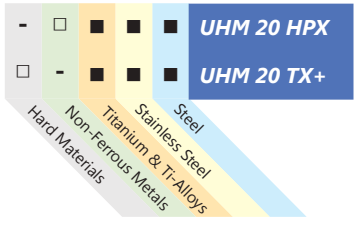


■ Preferred Application
□ Possible Application
- Application Not Recommended



3002 Turn & Cutoff
Cut: Standard
Geometry: TOP Wiper

Repeatability <20µm


Left Hand		Right Hand		Dimensions & Features				
Item No.	Description	Item No.	Description	a	c	b	r	Coating
7005-148175	3002-2.0-10 L TOP 015 UHM20 HPX	7005-148173	3002-2.0-10 R TOP 015 UHM20 HPX	2	10	.3	.15	UHM 20 HPX
7005-044404	3002-2.0-10 L TOP 015 UHM20 TX+	7005-044403	3002-2.0-10 R TOP 015 UHM20 TX+	2	10	.3	.15	UHM 20 TX+



3002 Turn & Cutoff
Cut: Standard
Geometry: TOP Wiper & SC Chip Breaker

Repeatability <20µm


Left Hand		Right Hand		Dimensions & Features				
Item No.	Description	Item No.	Description	a	c	b	r	Coating
7005-148183	3002-2.0-10 L SC TOP 015 UHM20 HPX	7005-148181	3002-2.0-10 R SC TOP 015 UHM20 HPX	2	10	.3	.15	UHM 20 HPX
7005-044408	3002-2.0-10 L SC TOP 015 UHM20 TX+	7005-044407	3002-2.0-10 R SC TOP 015 UHM20 TX+	2	10	.3	.15	UHM 20 TX+



3002 Turn & Cutoff
Cut: Inverted
Geometry: TOP Wiper

Repeatability <20µm


Left Hand		Right Hand		Dimensions & Features				
Item No.	Description	Item No.	Description	a	c	b	r	Coating
7005-148179	3002-2.0-10 LV TOP 015 UHM20 HPX	7005-148177	3002-2.0-10 RV TOP 015 UHM20 HPX	2	10	.3	.15	UHM 20 HPX
7005-044406	3002-2.0-10 LV TOP 015 UHM20 TX+	7005-044405	3002-2.0-10 RV TOP 015 UHM20 TX+	2	10	.3	.15	UHM 20 TX+





3002 Turn & Cutoff
Cut: Inverted
Geometry: TOP Wiper & SC Chip Breaker


Repeatability <20µm

Left Hand		Right Hand		Dimensions & Features				
Item No.	Description	Item No.	Description	a	c	b	r	Coating
7005-148187	3002-2.0-10 LV SC TOP 015 UHM20 HPX	7005-148185	3002-2.0-10 RV SC TOP 015 UHM20 HPX	2	10	.3	.15	UHM 20 HPX
7005-154656	3002-2.0-10 LV SC TOP 015 UHM20 TX+	7005-044409	3002-2.0-10 RV SC TOP 015 UHM20 TX+	2	10	.3	.15	UHM 20 TX+

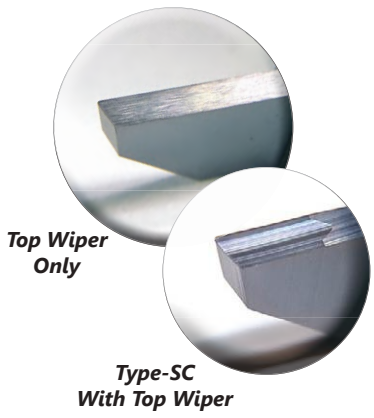

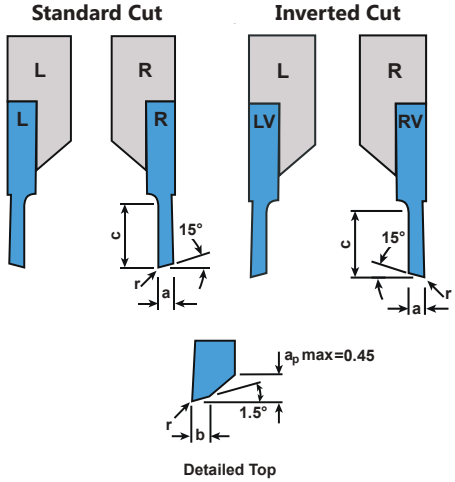

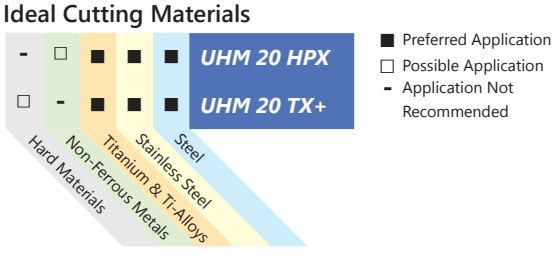




3002 Cutoff
Cut: Standard
Geometry: Slim & Deep

Great for getting super close to the guide bushing to cut off very short parts while reducing deflection.

Repeatability = R : ■<10µm, ■<20µm

Left Hand		Right Hand		Dimensions & Features						
Item No.	Description	Item No.	Description	R	a	a_1	c	α	r	Coating
Call For Details	3002-0.5-2.5-16 L G20 UHM20 HPX	Call For Details	3002-0.5-2.5-16 R G20 UHM20 HPX	■	0.5	1.9	2.5	20°	0	UHM 20 HPX
Call For Details	3002-0.5-2.5-16 L G20 UHM20 TX+	Call For Details	3002-0.5-2.5-16 R G20 UHM20 TX+	■	0.5	1.9	2.5	20°	0	UHM 20 TX+
7005-148097	3002-0.8-6-16 L UHM20 HPX	7005-148095	3002-0.8-6-16 R UHM20 HPX	■	0.8	2.0	6.0	15°	0	UHM 20 HPX
Call For Details	3002-0.8-6-16 L UHM20 TX+	Call For Details	3002-0.8-6-16 R UHM20 TX+	■	0.8	2.0	6.0	15°	0	UHM 20 TX+
Call For Details	3002-1.0-6-16 L UHM20 HPX	Call For Details	3002-1.0-6-16 R UHM20 HPX	■	1.0	2.2	6.0	15°	0	UHM 20 HPX
Call For Details	3002-1.0-6-16 L UHM20 TX+	Call For Details	3002-1.0-6-16 R UHM20 TX+	■	1.0	2.2	6.0	15°	0	UHM 20 TX+
7005-148101	3002-1.2-6-16 L UHM20 HPX	7005-148099	3002-1.2-6-16 R UHM20 HPX	■	1.2	2.4	6.0	15°	0	UHM 20 HPX
Call For Details	3002-1.2-6-16 L UHM20 TX+	Call For Details	3002-1.2-6-16 R UHM20 TX+	■	1.2	2.4	6.0	15°	0	UHM 20 TX+




3002 Cutoff
Cut: Inverted
Geometry: Slim & Deep

Repeatability = R : ■<10µm, ■<20µm


Left Hand		Right Hand		Dimensions & Features						
Item No.	Description	Item No.	Description	R	a	a_1	c	α	r	Coating
Call For Details	3002-0.5-2.5-16 LV G20 UHM20 HPX	Call For Details	3002-0.5-2.5-16 RV G20 UHM20 HPX	■	0.5	1.9	2.5	20°	0	UHM 20 HPX
Call For Details	3002-0.5-2.5-16 LV G20 UHM20 TX+	Call For Details	3002-0.5-2.5-16 RV G20 UHM20 TX+	■	0.5	1.9	2.5	20°	0	UHM 20 TX+
7005-148104	3002-0.8-6-16 LV UHM20 HPX	7005-148103	3002-0.8-6-16 RV UHM20 HPX	■	0.8	2.0	6.0	15°	0	UHM 20 HPX
Call For Details	3002-0.8-6-16 LV UHM20 TX+	Call For Details	3002-0.8-6-16 RV UHM20 TX+	■	0.8	2.0	6.0	15°	0	UHM 20 TX+
Call For Details	3002-1.0-6-16 LV UHM20 HPX	Call For Details	3002-1.0-6-16 RV UHM20 HPX	■	1.0	2.2	6.0	15°	0	UHM 20 HPX
Call For Details	3002-1.0-6-16 LV UHM20 TX+	Call For Details	3002-1.0-6-16 RV UHM20 TX+	■	1.0	2.2	6.0	15°	0	UHM 20 TX+
7005-148108	3002-1.2-6-16 LV UHM20 HPX	7005-148107	3002-1.2-6-16 RV UHM20 HPX	■	1.2	2.4	6.0	15°	0	UHM 20 HPX
Call For Details	3002-1.2-6-16 LV UHM20 TX+	Call For Details	3002-1.2-6-16 RV UHM20 TX+	■	1.2	2.4	6.0	15°	0	UHM 20 TX+

No Chip Breaker



Type-SPT Chip Breaker


Type-SC Chip Breaker

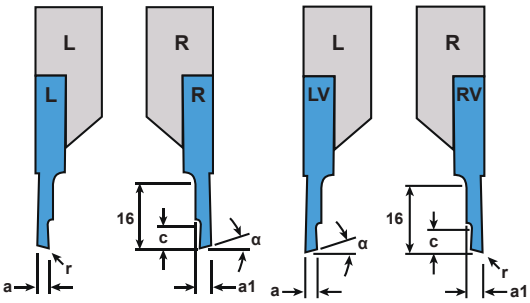

Standard Cut **Inverted Cut**

Available in Type-SC and Type-SPT geometry as well. Contact us or visit www.genswiss.com for additional details.

Ideal Cutting Materials

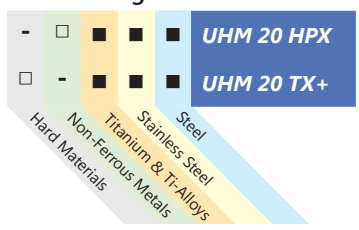

■ Preferred Application
□ Possible Application
- Application Not Recommended



3002 Cutoff
Cut: Standard
Chip Breaker: GS

Repeatability <50µm

Left Hand		Right Hand		Dimensions & Features					
Item No.	Description	Item No.	Description	a	c	α	r	Edge	Coating
7005-113135	3002-2.0-10 EL GS UHM20 HPX	7005-113132	3002-2.0-10 ER GS UHM20 HPX	2.0	10	15°	0.2	Honed (E)	UHM 20 HPX
Call For Details	3002-2.0-10 EL GS UHM20 TX+	Call For Details	3002-2.0-10 ER GS UHM20 TX+	2.0	10	15°	0.2	Honed (E)	UHM 20 TX+
7005-153047	3002-2.0-10 FL GS UHM20 HPX	7005-153045	3002-2.0-10 FR GS UHM20 HPX	2.0	10	15°	0.2	Sharp (F)	UHM 20 HPX
Call For Details	3002-2.0-10 FL GS UHM20 TX+	Call For Details	3002-2.0-10 FR GS UHM20 TX+	2.0	10	15°	0.2	Sharp (F)	UHM 20 TX+



3002 Cutoff
Cut: Inverted
Chip Breaker: GS

Repeatability <50µm

Left Hand		Right Hand		Dimensions & Features					
Item No.	Description	Item No.	Description	a	c	α	r	Edge	Coating
7005-113904	3002-2.0-10 ELV GS UHM20 HPX	7005-113902	3002-2.0-10 ERV GS UHM20 HPX	2.0	10	15°	0.2	Honed (E)	UHM 20 HPX
Call For Details	3002-2.0-10 ELV GS UHM20 TX+	Call For Details	3002-2.0-10 ERV GS UHM20 TX+	2.0	10	15°	0.2	Honed (E)	UHM 20 TX+
7005-153051	3002-2.0-10 FLV GS UHM20 HPX	7005-153049	3002-2.0-10 FRV GS UHM20 HPX	2.0	10	15°	0.2	Sharp (F)	UHM 20 HPX
Call For Details	3002-2.0-10 FLV GS UHM20 TX+	Call For Details	3002-2.0-10 FRV GS UHM20 TX+	2.0	10	15°	0.2	Sharp (F)	UHM 20 TX+



3002 Cutoff
Cut: Neutral
Chip Breaker: GS

Repeatability <50µm

Left Hand		Right Hand		Dimensions & Features				
Item No.	Description	Item No.	Description	a	c	r	Edge	Coating
7005-116977	3002-2.0-10 ELN GS UHM20 HPX	7005-116978	3002-2.0-10 ERN GS UHM20 HPX	2.0	10	0.2	Honed (E)	UHM 20 HPX
Call For Details	3002-2.0-10 ELN GS UHM20 TX+	Call For Details	3002-2.0-10 ERN GS UHM20 TX+	2.0	10	0.2	Honed (E)	UHM 20 TX+
7005-153057	3002-2.0-10 FLN GS UHM20 HPX	7005-153055	3002-2.0-10 FRN GS UHM20 HPX	2.0	10	0.2	Sharp (F)	UHM 20 HPX
Call For Details	3002-2.0-10 FLN GS UHM20 TX+	Call For Details	3002-2.0-10 FRN GS UHM20 TX+	2.0	10	0.2	Sharp (F)	UHM 20 TX+



Type-GS Chip Breaker




E Edge
Round Cutting Edge




F Edge
Sharp Cutting Edge

Ideal Cutting Materials

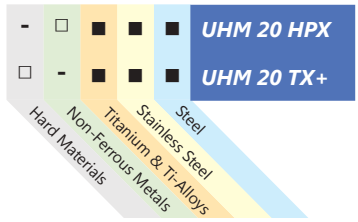


■ Preferred Application
□ Possible Application
- Application Not Recommended


Standard Cut



Inverted Cut



Neutral Cut






3002 Cutoff
Cut: Standard
Chip Breaker: GS12

Repeatability <10µm

Left Hand		Right Hand		Dimensions & Features				
Item No.	Description	Item No.	Description	a	c	α	r	Coating
7005-152211	3002-1.5-10 FL GS12 UHM20 HPX	7005-191975	3002-1.5-10 FR GS12 UHM20 HPX	1.5	10	7°	0.15	UHM 20 HPX
7005-152872	3002-1.5-10 FL GS12 UHM20 TX+	7005-152871	3002-1.5-10 FR GS12 UHM20 TX+	1.5	10	7°	0.15	UHM 20 TX+
7005-152217	3002-1.5-16 FL GS12 UHM20 HPX	7005-152214	3002-1.5-16 FR GS12 UHM20 HPX	1.5	16	7°	0.15	UHM 20 HPX
7005-152874	3002-1.5-16 FL GS12 UHM20 TX+	7005-152873	3002-1.5-16 FR GS12 UHM20 TX+	1.5	16	7°	0.15	UHM 20 TX+
7005-152220	3002-2.0-10 FL GS12 UHM20 HPX	7005-191976	3002-2.0-10 FR GS12 UHM20 HPX	2.0	10	7°	0.2	UHM 20 HPX
7005-152876	3002-2.0-10 FL GS12 UHM20 TX+	7005-152875	3002-2.0-10 FR GS12 UHM20 TX+	2.0	10	7°	0.2	UHM 20 TX+
7005-152226	3002-2.0-16 FL GS12 UHM20 HPX	7005-152223	3002-2.0-16 FR GS12 UHM20 HPX	2.0	16	7°	0.2	UHM 20 HPX
7005-152879	3002-2.0-16 FL GS12 UHM20 TX+	7005-152878	3002-2.0-16 FR GS12 UHM20 TX+	2.0	16	7°	0.2	UHM 20 TX+
7005-152229	3002-2.5-13 FL GS12 UHM20 HPX	7005-191977	3002-2.5-13 FR GS12 UHM20 HPX	2.5	13	7°	0.2	UHM 20 HPX
7005-152881	3002-2.5-13 FL GS12 UHM20 TX+	7005-152880	3002-2.5-13 FR GS12 UHM20 TX+	2.5	13	7°	0.2	UHM 20 TX+
7005-152235	3002-2.5-16 FL GS12 UHM20 HPX	7005-152232	3002-2.5-16 FR GS12 UHM20 HPX	2.5	16	7°	0.2	UHM 20 HPX
7005-152883	3002-2.5-16 FL GS12 UHM20 TX+	7005-152882	3002-2.5-16 FR GS12 UHM20 TX+	2.5	16	7°	0.2	UHM 20 TX+
7005-152238	3002-3.0-16 FL GS12 UHM20 HPX	7005-191978	3002-3.0-16 FR GS12 UHM20 HPX	3.0	16	7°	0.2	UHM 20 HPX
7005-152885	3002-3.0-16 FL GS12 UHM20 TX+	7005-152884	3002-3.0-16 FR GS12 UHM20 TX+	3.0	16	7°	0.2	UHM 20 TX+




Type-GS12
Chip Breaker






F Edge
Sharp Cutting Edge

Ideal Cutting Materials

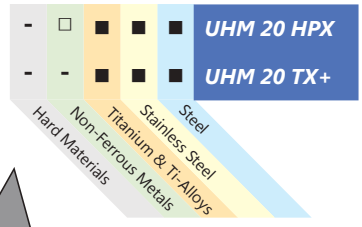

■ Preferred Application
□ Possible Application
- Application Not Recommended




3002 Cutoff
Cut: Inverted
Chip Breaker: GS12

Repeatability <10µm

Left Hand		Right Hand		Dimensions & Features				
Item No.	Description	Item No.	Description	a	c	α	r	Coating
7005-152241	3002-1.5-10 FLV GS12 UHM20 HPX	7005-191979	3002-1.5-10 FRV GS12 UHM20 HPX	1.5	10	7°	0.15	UHM 20 HPX
7005-152887	3002-1.5-10 FLV GS12 UHM20 TX+	7005-152886	3002-1.5-10 FRV GS12 UHM20 TX+	1.5	10	7°	0.15	UHM 20 TX+
7005-152247	3002-1.5-16 FLV GS12 UHM20 HPX	7005-152244	3002-1.5-16 FRV GS12 UHM20 HPX	1.5	16	7°	0.15	UHM 20 HPX
7005-152889	3002-1.5-16 FLV GS12 UHM20 TX+	7005-152888	3002-1.5-16 FRV GS12 UHM20 TX+	1.5	16	7°	0.15	UHM 20 TX+
7005-152250	3002-2.0-10 FLV GS12 UHM20 HPX	7005-191980	3002-2.0-10 FRV GS12 UHM20 HPX	2.0	10	7°	0.2	UHM 20 HPX
7005-152891	3002-2.0-10 FLV GS12 UHM20 TX+	7005-152890	3002-2.0-10 FRV GS12 UHM20 TX+	2.0	10	7°	0.2	UHM 20 TX+
7005-152256	3002-2.0-16 FLV GS12 UHM20 HPX	7005-152253	3002-2.0-16 FRV GS12 UHM20 HPX	2.0	16	7°	0.2	UHM 20 HPX
7005-152893	3002-2.0-16 FLV GS12 UHM20 TX+	7005-152892	3002-2.0-16 FRV GS12 UHM20 TX+	2.0	16	7°	0.2	UHM 20 TX+
7005-152259	3002-2.5-13 FLV GS12 UHM20 HPX	7005-191981	3002-2.5-13 FRV GS12 UHM20 HPX	2.5	13	7°	0.2	UHM 20 HPX
7005-152895	3002-2.5-13 FLV GS12 UHM20 TX+	7005-152894	3002-2.5-13 FRV GS12 UHM20 TX+	2.5	13	7°	0.2	UHM 20 TX+
7005-152265	3002-2.5-16 FLV GS12 UHM20 HPX	7005-152262	3002-2.5-16 FRV GS12 UHM20 HPX	2.5	16	7°	0.2	UHM 20 HPX
7005-152897	3002-2.5-16 FLV GS12 UHM20 TX+	7005-152896	3002-2.5-16 FRV GS12 UHM20 TX+	2.5	16	7°	0.2	UHM 20 TX+
7005-152268	3002-3.0-16 FLV GS12 UHM20 HPX	7005-191982	3002-3.0-16 FRV GS12 UHM20 HPX	3.0	16	7°	0.2	UHM 20 HPX
7005-152899	3002-3.0-16 FLV GS12 UHM20 TX+	7005-152898	3002-3.0-16 FRV GS12 UHM20 TX+	3.0	16	7°	0.2	UHM 20 TX+




Type-GS12
Chip Breaker





F Edge
Sharp Cutting Edge

Ideal Cutting Materials

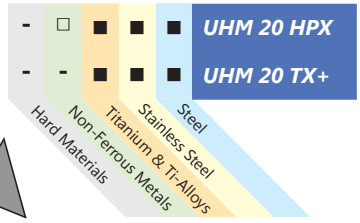

■ Preferred Application
□ Possible Application
- Application Not Recommended




3002 Cutoff
Cut: Neutral
Chip Breaker: GS12


Repeatability <10µm

Left Hand		Right Hand		Dimensions & Features				
Item No.	Description	Item No.	Description	a	c	r	α	Coating
7005-211207	3002-1.0-10 FLN GS12 UHM20 HPX	7005-211203	3002-1.0-10 FRN GS12 UHM20 HPX	1.0	10	0.05		UHM 20 HPX
7005-211208	3002-1.0-10 FLN GS12 UHM20 TX+	7005-211204	3002-1.0-10 FRN GS12 UHM20 TX+	1.0	10	0.05		UHM 20 TX+
7005-211236	3002-1.0-16 FLN GS12 UHM20 HPX	7005-211210	3002-1.0-16 FRN GS12 UHM20 HPX	1.0	16	0.05		UHM 20 HPX
7005-211237	3002-1.0-16 FLN GS12 UHM20 TX+	7005-211211	3002-1.0-16 FRN GS12 UHM20 TX+	1.0	16	0.05		UHM 20 TX+
7005-152807	3002-1.5-10 FLN GS12 UHM20 HPX	7005-152803	3002-1.5-10 FRN GS12 UHM20 HPX	1.5	10	0.15		UHM 20 HPX
7005-152808	3002-1.5-10 FLN GS12 UHM20 TX+	7005-152804	3002-1.5-10 FRN GS12 UHM20 TX+	1.5	10	0.15		UHM 20 TX+
7005-191992	3002-1.5-16 FLN GS12 UHM20 HPX	7005-191989	3002-1.5-16 FRN GS12 UHM20 HPX	1.5	16	0.15		UHM 20 HPX
7005-193326	3002-1.5-16 FLN GS12 UHM20 TX+	7005-193325	3002-1.5-16 FRN GS12 UHM20 TX+	1.5	16	0.15		UHM 20 TX+
7005-191995	3002-2.0-10 FLN GS12 UHM20 HPX	7005-191972	3002-2.0-10 FRN GS12 UHM20 HPX	2.0	10	0.2		UHM 20 HPX
7005-193303	3002-2.0-10 FLN GS12 UHM20 TX+	7005-193302	3002-2.0-10 FRN GS12 UHM20 TX+	2.0	10	0.2		UHM 20 TX+
7005-152196	3002-2.0-16 FLN GS12 UHM20 HPX	7005-152193	3002-2.0-16 FRN GS12 UHM20 HPX	2.0	16	0.2		UHM 20 HPX
7005-193328	3002-2.0-16 FLN GS12 UHM20 TX+	7005-193327	3002-2.0-16 FRN GS12 UHM20 TX+	2.0	16	0.2		UHM 20 TX+
7005-152199	3002-2.5-13 FLN GS12 UHM20 HPX	7005-191973	3002-2.5-13 FRN GS12 UHM20 HPX	2.5	13	0.2		UHM 20 HPX
7005-193330	3002-2.5-13 FLN GS12 UHM20 TX+	7005-193329	3002-2.5-13 FRN GS12 UHM20 TX+	2.5	13	0.2		UHM 20 TX+
7005-152205	3002-2.5-16 FLN GS12 UHM20 HPX	7005-152202	3002-2.5-16 FRN GS12 UHM20 HPX	2.5	16	0.2		UHM 20 HPX
7005-193332	3002-2.5-16 FLN GS12 UHM20 TX+	7005-193331	3002-2.5-16 FRN GS12 UHM20 TX+	2.5	16	0.2		UHM 20 TX+
7005-152208	3002-3.0-16 FLN GS12 UHM20 HPX	7005-191974	3002-3.0-16 FRN GS12 UHM20 HPX	3.0	16	0.2		UHM 20 HPX
7005-193334	3002-3.0-16 FLN GS12 UHM20 TX+	7005-193333	3002-3.0-16 FRN GS12 UHM20 TX+	3.0	16	0.2		UHM 20 TX+



Type-GS12
Chip Breaker








F Edge
Sharp Cutting Edge

Ideal Cutting Materials

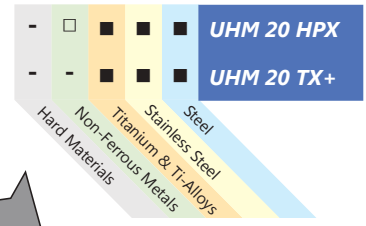

■ Preferred Application
□ Possible Application
- Application Not Recommended




3002 Cutoff
Cut: Standard
Chip Breaker: GT20


Repeatability <10µm

Left Hand		Right Hand		Dimensions & Features				
Item No.	Description	Item No.	Description	a	c	r	α	Coating
7005-211087	3002-1.5-10 EL GT20 UHM20 HPX	7005-211083	3002-1.5-10 ER GT20 UHM20 HPX	1.5	10	0.15	7°	UHM 20 HPX
7005-211088	3002-1.5-10 EL GT20 UHM20 TX+	7005-211084	3002-1.5-10 ER GT20 UHM20 TX+	1.5	10	0.15	7°	UHM 20 TX+
7005-211095	3002-2.0-16 EL GT20 UHM20 HPX	7005-211091	3002-2.0-16 ER GT20 UHM20 HPX	2.0	16	0.2	7°	UHM 20 HPX
7005-211096	3002-2.0-16 EL GT20 UHM20 TX+	7005-211092	3002-2.0-16 ER GT20 UHM20 TX+	2.0	16	0.2	7°	UHM 20 TX+



Type-GT20
Chip Breaker








E Edge
Round Cutting Edge

Ideal Cutting Materials

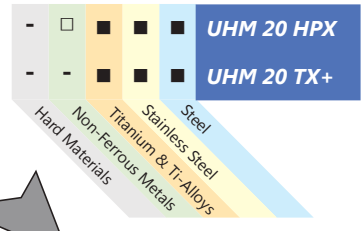

■ Preferred Application
□ Possible Application
- Application Not Recommended



3002 Cutoff


Cut: Inverted
Chip Breaker: GT20

Repeatability <10µm


Left Hand		Right Hand		Dimensions & Features				
Item No.	Description	Item No.	Description	a	c	r	α	Coating
7005-211103	3002-1.5-10 ELV GT20 UHM20 HPX	7005-211099	3002-1.5-10 ERV GT20 UHM20 HPX	1.5	10	0.15	7°	UHM 20 HPX
7005-211104	3002-1.5-10 ELV GT20 UHM20 TX+	7005-211100	3002-1.5-10 ERV GT20 UHM20 TX+	1.5	10	0.15	7°	UHM 20 TX+
7005-211111	3002-2.0-16 ELV GT20 UHM20 HPX	7005-211107	3002-2.0-16 ERV GT20 UHM20 HPX	2.0	16	0.2	7°	UHM 20 HPX
7005-211112	3002-2.0-16 ELV GT20 UHM20 TX+	7005-211108	3002-2.0-16 ERV GT20 UHM20 TX+	2.0	16	0.2	7°	UHM 20 TX+



Type-GT20
Chip Breaker



Ideal Cutting Materials

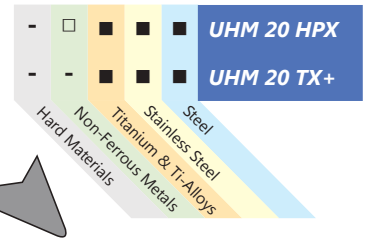

■ Preferred Application
□ Possible Application
- Application Not Recommended

E Edge
Round Cutting Edge



3002 Cutoff


Cut: Neutral
Chip Breaker: GT20

Repeatability <10µm


Left Hand		Right Hand		Dimensions & Features				
Item No.	Description	Item No.	Description	a	c	r	α	Coating
7005-211242	3002-1.0-10 ELN GT20 UHM20 HPX	7005-211239	3002-1.0-10 ERN GT20 UHM20 HPX	1.0	10	0.05		UHM 20 HPX
7005-211243	3002-1.0-10 ELN GT20 UHM20 TX+	7005-211240	3002-1.0-10 ERN GT20 UHM20 TX+	1.0	10	0.05		UHM 20 TX+
7005-211248	3002-1.0-16 ELN GT20 UHM20 HPX	7005-211245	3002-1.0-16 ERN GT20 UHM20 HPX	1.0	16	0.05		UHM 20 HPX
7005-211249	3002-1.0-16 ELN GT20 UHM20 TX+	7005-211246	3002-1.0-16 ERN GT20 UHM20 TX+	1.0	16	0.05		UHM 20 TX+
7005-152955	3002-1.5-10 ELN GT20 UHM20 HPX	7005-152952	3002-1.5-10 ERN GT20 UHM20 HPX	1.5	10	0.15		UHM 20 HPX
7005-152956	3002-1.5-10 ELN GT20 UHM20 TX+	7005-152953	3002-1.5-10 ERN GT20 UHM20 TX+	1.5	10	0.15		UHM 20 TX+
7005-152961	3002-2.0-16 ELN GT20 UHM20 HPX	7005-152958	3002-2.0-16 ERN GT20 UHM20 HPX	2.0	16	0.2		UHM 20 HPX
7005-152962	3002-2.0-16 ELN GT20 UHM20 TX+	7005-152959	3002-2.0-16 ERN GT20 UHM20 TX+	2.0	16	0.2		UHM 20 TX+



Type-GT20
Chip Breaker

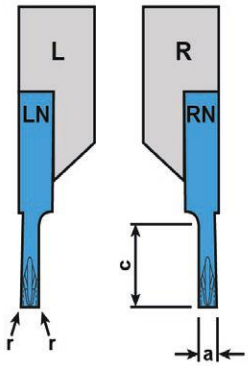


Ideal Cutting Materials

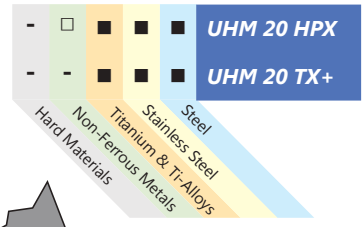

■ Preferred Application
□ Possible Application
- Application Not Recommended




E Edge
Round Cutting Edge




3003 Front Turn
Cut: Standard
Chip Breaker: None


Repeatability <20µm

Left Hand		Right Hand		Dimensions & Features						
Item No.	Description	Item No.	Description	a	b	c	α	β	r	Coating
7005-148191	3003-3.4-8 L UHM20 HPX	7005-148189	3003-3.4-8 R UHM20 HPX	3.4	1.0	8.0	3°	70°	0.00	UHM 20 HPX
Call For Details	3003-3.4-8 L UHM20 TX+	Call For Details	3003-3.4-8 R UHM20 TX+	3.4	1.0	8.0	3°	70°	0.00	UHM 20 TX+





Ideal Cutting Materials

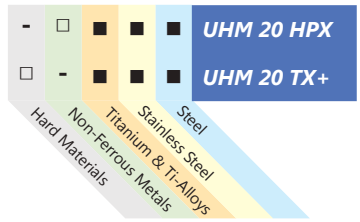


■ Preferred Application
□ Possible Application
- Application Not Recommended




3003 Front Turn
Cut: Standard
Chip Breaker: SP With TOP Wiper


Repeatability <20µm

Left Hand		Right Hand		Dimensions & Features			
Item No.	Description	Item No.	Description	b	β	r	Coating
7005-148195	3003-3.4-8 L SP U TOP ZZ UHM20 HPX	7005-148193	3003-3.4-8 R SP U TOP ZZ UHM20 HPX	0.2	82°	0.00	UHM 20 HPX
Call For Details	3003-3.4-8 L SP U TOP ZZ UHM20 TX+	Call For Details	3003-3.4-8 R SP U TOP ZZ UHM20 TX+	0.2	82°	0.00	UHM 20 TX+
7005-148199	3003-3.4-8 L SP U TOP 45008 UHM20 HPX	7005-148197	3003-3.4-8 R SP U TOP 45008 UHM20 HPX	1.2	45°	0.08	UHM 20 HPX
Call For Details	3003-3.4-8 L SP U TOP 45008 UHM20 TX+	Call For Details	3003-3.4-8 R SP U TOP 45008 UHM20 TX+	1.2	45°	0.08	UHM 20 TX+
7005-148203	3003-3.4-8 L SP U TOP 45015 UHM20 HPX	7005-148201	3003-3.4-8 R SP U TOP 45015 UHM20 HPX	1.2	45°	0.15	UHM 20 HPX
Call For Details	3003-3.4-8 L SP U TOP 45015 UHM20 TX+	Call For Details	3003-3.4-8 R SP U TOP 45015 UHM20 TX+	1.2	45°	0.15	UHM 20 TX+




Type-SP Chip Breaker With TOP Wiper






Ideal Cutting Materials

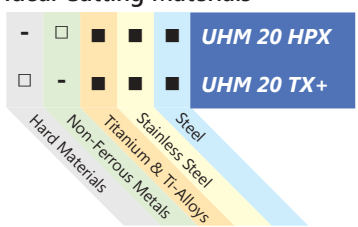


■ Preferred Application
□ Possible Application
- Application Not Recommended




3003 Front Turn
Cut: Standard
Chip Breaker: None


Repeatability <20µm

Left Hand		Right Hand		Dimensions & Features						
Item No.	Description	Item No.	Description	a	b	c	α	β	r	Coating
7005-148191	3003-3.4-8 L UHM20 HPX	7005-148189	3003-3.4-8 R UHM20 HPX	3.4	1.0	8.0	3°	70°	0.00	UHM 20 HPX
Call For Details	3003-3.4-8 L UHM20 TX+	Call For Details	3003-3.4-8 R UHM20 TX+	3.4	1.0	8.0	3°	70°	0.00	UHM 20 TX+





Ideal Cutting Materials

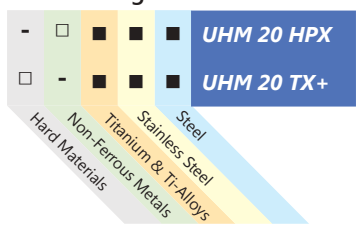

■ Preferred Application
□ Possible Application
- Application Not Recommended




3004 Front Turn, Facing & Back Turning


Cut: Standard
Chip Breaker: GA20

Repeatability <20µm


Left Hand		Right Hand		Dimensions & Features					
Item No.	Description	Item No.	Description	a	b	c	β	r	Coating
Call For Details	3003-3.4-8 EL GA20 Top ZZ UHM20 HPX	Call For Details	3003-3.4-8 ER GA20 Top ZZ UHM20 HPX	3.4	1.6	8	52°	-	UHM 20 HPX
Call For Details	3003-3.4-8 EL GA20 Top ZZ UHM20 TX+	Call For Details	3003-3.4-8 ER GA20 Top ZZ UHM20 TX+	3.4	1.6	8	52°	-	UHM 20 TX+
Call For Details	3003-3.4-8 EL GA20 Top RO8 UHM20 HPX	Call For Details	3003-3.4-8 ER GA20 Top RO8 UHM20 HPX	3.4	1.6	8	52°	0.08	UHM 20 HPX
Call For Details	3003-3.4-8 EL GA20 Top RO8 UHM20 TX+	Call For Details	3003-3.4-8 ER GA20 Top RO8 UHM20 TX+	3.4	1.6	8	52°	0.08	UHM 20 TX+
Call For Details	3003-3.4-8 EL GA20 Top R15 UHM20 HPX	Call For Details	3003-3.4-8 ER GA20 Top R15 UHM20 HPX	3.4	1.6	8	52°	0.15	UHM 20 HPX
Call For Details	3003-3.4-8 EL GA20 Top R15 UHM20 TX+	Call For Details	3003-3.4-8 ER GA20 Top R15 UHM20 TX+	3.4	1.6	8	52°	0.15	UHM 20 TX+



Type-GA20 Chip Breaker

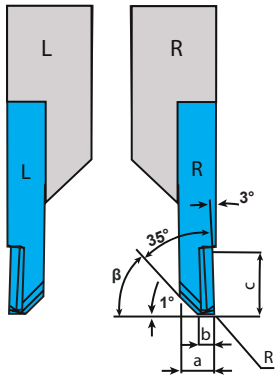

Ideal Cutting Materials

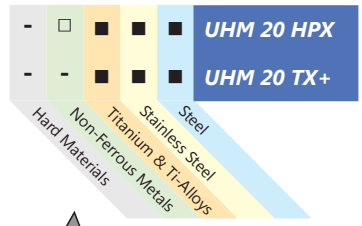

■ Preferred Application
□ Possible Application
- Application Not Recommended



E Edge
Round Cutting Edge




3004 Back Turn


Cut: Standard
Geometry: TOP Wiper

Repeatability <20µm


Left Hand		Right Hand		Dimensions & Features					
Item No.	Description	Item No.	Description	a	b	c	d	r	Coating
7005-148207	3004-0.8-6 L TOP ZZ UHM20 HPX	7005-148205	3004-0.8-6 R TOP ZZ UHM20 HPX	0.8	0.5	6	2	0.00	UHM 20 HPX
Call For Details	3004-0.8-6 L TOP ZZ UHM20 TX+	Call For Details	3004-0.8-6 R TOP ZZ UHM20 TX+	0.8	0.5	6	2	0.00	UHM 20 TX+
7005-148209	3004-1.0-6 L TOP ZZ UHM20 HPX	7005-147061	3004-1.0-6 R TOP ZZ UHM20 HPX	1.0	0.5	6	2.2	0.00	UHM 20 HPX
Call For Details	3004-1.0-6 L TOP ZZ UHM20 TX+	Call For Details	3004-1.0-6 R TOP ZZ UHM20 TX+	1.0	0.5	6	2.2	0.00	UHM 20 TX+
7005-148213	3004-1.2-8 L TOP ZZ UHM20 HPX	7005-148211	3004-1.2-8 R TOP ZZ UHM20 HPX	1.2	0.5	8	2.4	0.00	UHM 20 HPX
Call For Details	3004-1.2-8 L TOP ZZ UHM20 TX+	Call For Details	3004-1.2-8 R TOP ZZ UHM20 TX+	1.2	0.5	8	2.4	0.00	UHM 20 TX+
7005-148217	3004-1.5-8 L TOP ZZ UHM20 HPX	7005-148215	3004-1.5-8 R TOP ZZ UHM20 HPX	1.5	0.5	8	2.7	0.00	UHM 20 HPX
Call For Details	3004-1.5-8 L TOP ZZ UHM20 TX+	Call For Details	3004-1.5-8 R TOP ZZ UHM20 TX+	1.5	0.5	8	2.7	0.00	UHM 20 TX+
7005-148221	3004-1.8-8 L TOP ZZ UHM20 HPX	7005-148219	3004-1.8-8 R TOP ZZ UHM20 HPX	1.8	0.5	8	3	0.00	UHM 20 HPX
Call For Details	3004-1.8-8 L TOP ZZ UHM20 TX+	Call For Details	3004-1.8-8 R TOP ZZ UHM20 TX+	1.8	0.5	8	3	0.00	UHM 20 TX+



TOP Wiper

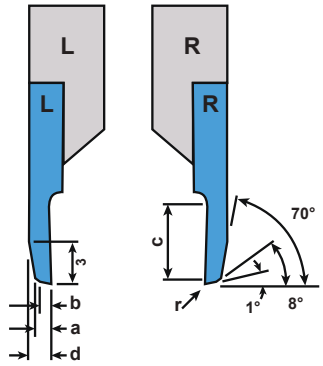

Ideal Cutting Materials

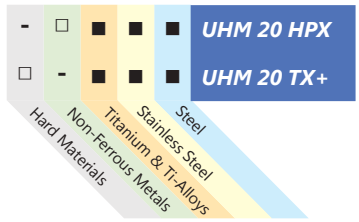


■ Preferred Application
□ Possible Application
- Application Not Recommended




3004 Back Turn
Cut: Standard
Chip Breaker: CP

Repeatability <20µm


Left Hand		Right Hand		Dimensions & Features					
Item No.	Description	Item No.	Description	a	c	α	r	δ	Coating
7005-148235	3004-0.8-4 L CP UHM20 HPX	7005-148233	3004-0.8-4 R CP UHM20 HPX	0.8	11	20°	0	8°	UHM 20 HPX
Call For Details	3004-0.8-4 L CP UHM20 TX+	Call For Details	3004-0.8-4 R CP UHM20 TX+	0.8	11	20°	0	8°	UHM 20 TX+



Type-CP
Chip Breaker

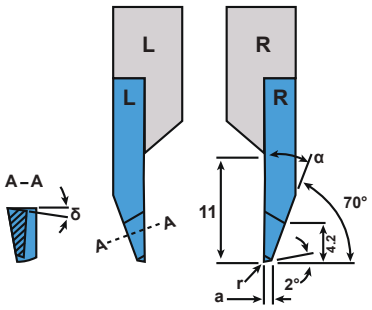

Ideal Cutting Materials

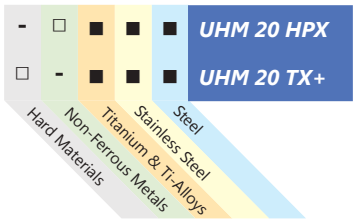


■ Preferred Application
□ Possible Application
- Application Not Recommended


3004 Back Turn
Cut: Inverted
Chip Breaker: CP

Repeatability <20µm


Left Hand		Right Hand		Dimensions & Features					
Item No.	Description	Item No.	Description	a	c	α	r	δ	Coating
Call For Details	3004-0.8-4 LV CP UHM20 HPX	Call For Details	3004-0.8-4 RV CP UHM20 HPX	0.8	11	20°	0	8°	UHM 20 HPX
7005-129594	3004-0.8-4 LV CP UHM20 TX+	7005-129592	3004-0.8-4 RV CP UHM20 TX+	0.8	11	20°	0	8°	UHM 20 TX+



Type-CP
Chip Breaker



Ideal Cutting Materials

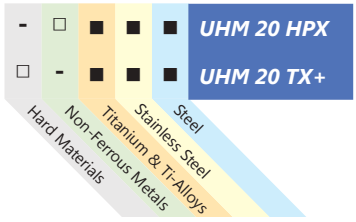


■ Preferred Application
□ Possible Application
- Application Not Recommended




3004 Back Turn
Cut: Standard
Chip Breaker: SP With TOP Wiper

Repeatability <20µm


Left Hand		Right Hand		Dimensions & Features					
Item No.	Description	Item No.	Description	a	b	α	r	δ	Coating
7005-148223	3004-2.4-6 L SP TOP 20ZZ UHM20 HPX	7005-147063	3004-2.4-6 R SP TOP 20ZZ UHM20 HPX	0.5	2.4	20°	0.00	15°	UHM 20 HPX
Call For Details	3004-2.4-6 L SP TOP 20ZZ UHM20 TX+	Call For Details	3004-2.4-6 R SP TOP 20ZZ UHM20 TX+	0.5	2.4	20°	0.00	15°	UHM 20 TX+
7005-148227	3004-2.4-6 L SP TOP 20008 UHM20 HPX	7005-148225	3004-2.4-6 R SP TOP 20008 UHM20 HPX	0.5	2.4	20°	0.08	15°	UHM 20 HPX
Call For Details	3004-2.4-6 L SP TOP 20008 UHM20 TX+	Call For Details	3004-2.4-6 R SP TOP 20008 UHM20 TX+	0.5	2.4	20°	0.08	15°	UHM 20 TX+
7005-148231	3004-2.4-6 L SP TOP 20015 UHM20 HPX	7005-148229	3004-2.4-6 R SP TOP 20015 UHM20 HPX	0.5	2.4	20°	0.15	15°	UHM 20 HPX
Call For Details	3004-2.4-6 L SP TOP 20015 UHM20 TX+	Call For Details	3004-2.4-6 R SP TOP 20015 UHM20 TX+	0.5	2.4	20°	0.15	15°	UHM 20 TX+




SP Chip Breaker
TOP Wiper

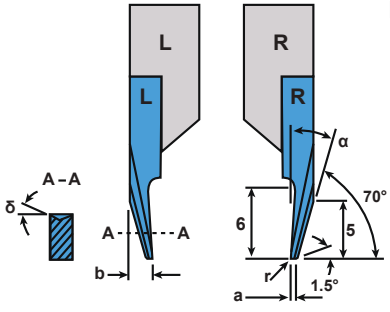

Ideal Cutting Materials

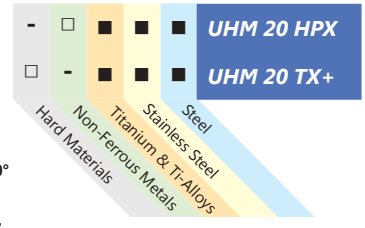

■ Preferred Application
□ Possible Application
- Application Not Recommended




3004 Copy Turn


Cut: Standard
Chip Breaker: SP

Repeatability <20µm


Left Hand		Right Hand		Dimensions & Features					
Item No.	Description	Item No.	Description	a	α	β	t	r	Coating
7005-147599	3004-3.2-6 L SP29008 UHM20 HPX	7005-147065	3004-3.2-6 R SP29008 UHM20 HPX	3.2	29°	61°	5	0.08	UHM 20 HPX
Call For Details	3004-3.2-6 L SP29008 UHM20 TX+	Call For Details	3004-3.2-6 R SP29008 UHM20 TX+	3.2	29°	61°	5	0.08	UHM 20 TX+
7005-147607	3004-3.2-6 L SP29015 UHM20 HPX	7005-147605	3004-3.2-6 R SP29015 UHM20 HPX	3.2	29°	61°	5	0.15	UHM 20 HPX
Call For Details	3004-3.2-6 L SP29015 UHM20 TX+	Call For Details	3004-3.2-6 R SP29015 UHM20 TX+	3.2	29°	61°	5	0.15	UHM 20 TX+
7005-147615	3004-3.2-6 L SP29035 UHM20 HPX	7005-147613	3004-3.2-6 R SP29035 UHM20 HPX	3.2	29°	61°	5	0.35	UHM 20 HPX
Call For Details	3004-3.2-6 L SP29035 UHM20 TX+	Call For Details	3004-3.2-6 R SP29035 UHM20 TX+	3.2	29°	61°	5	0.35	UHM 20 TX+
7005-148239	3004-3.2-6 L SP29075 UHM20 HPX	7005-148237	3004-3.2-6 R SP29075 UHM20 HPX	3.2	29°	61°	5	0.75	UHM 20 HPX
Call For Details	3004-3.2-6 L SP29075 UHM20 TX+	Call For Details	3004-3.2-6 R SP29075 UHM20 TX+	3.2	29°	61°	5	0.75	UHM 20 TX+
7005-148243	3004-3.2-5 L SP35015 UHM20 HPX	7005-148241	3004-3.2-5 R SP35015 UHM20 HPX	3.2	35°	55°	4	0.15	UHM 20 HPX
Call For Details	3004-3.2-5 L SP35015 UHM20 TX+	Call For Details	3004-3.2-5 R SP35015 UHM20 TX+	3.2	35°	55°	4	0.15	UHM 20 TX+
7005-148247	3004-3.2-5 L SP35035 UHM20 HPX	7005-148245	3004-3.2-5 R SP35035 UHM20 HPX	3.2	35°	55°	4	0.35	UHM 20 HPX
Call For Details	3004-3.2-5 L SP35035 UHM20 TX+	Call For Details	3004-3.2-5 R SP35035 UHM20 TX+	3.2	35°	55°	4	0.35	UHM 20 TX+




Type-SP
Chip Breaker



Ideal Cutting Materials

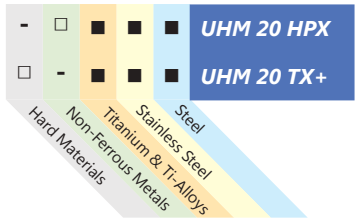

■ Preferred Application
□ Possible Application
- Application Not Recommended




3004 Copy/Profile Turn


Cut: Inverted
Chip Breaker: SP

Repeatability <20µm


Left Hand		Right Hand		Dimensions & Features					
Item No.	Description	Item No.	Description	a	α	β	t	r	Coating
7005-147603	3004-3.2-6 LV SP29008 UHM20 HPX	7005-147401	3004-3.2-6 RV SP29008 UHM20 HPX	3.2	29°	61°	5	0.08	UHM 20 HPX
Call For Details	3004-3.2-6 LV SP29008 UHM20 TX+	Call For Details	3004-3.2-6 RV SP29008 UHM20 TX+	3.2	29°	61°	5	0.08	UHM 20 TX+
7005-147611	3004-3.2-6 LV SP29015 UHM20 HPX	7005-147609	3004-3.2-6 RV SP29015 UHM20 HPX	3.2	29°	61°	5	0.15	UHM 20 HPX
Call For Details	3004-3.2-6 LV SP29015 UHM20 TX+	Call For Details	3004-3.2-6 RV SP29015 UHM20 TX+	3.2	29°	61°	5	0.15	UHM 20 TX+
7005-147619	3004-3.2-6 LV SP29035 UHM20 HPX	7005-147617	3004-3.2-6 RV SP29035 UHM20 HPX	3.2	29°	61°	5	0.35	UHM 20 HPX
Call For Details	3004-3.2-6 LV SP29035 UHM20 TX+	Call For Details	3004-3.2-6 RV SP29035 UHM20 TX+	3.2	29°	61°	5	0.35	UHM 20 TX+
7005-148251	3004-3.2-6 LV SP29075 UHM20 HPX	7005-148249	3004-3.2-6 RV SP29075 UHM20 HPX	3.2	29°	61°	5	0.75	UHM 20 HPX
Call For Details	3004-3.2-6 LV SP29075 UHM20 TX+	Call For Details	3004-3.2-6 RV SP29075 UHM20 TX+	3.2	29°	61°	5	0.75	UHM 20 TX+




Type-SP
Chip Breaker



Ideal Cutting Materials

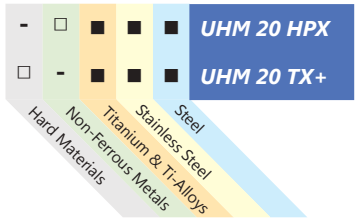

■ Preferred Application
□ Possible Application
- Application Not Recommended




3004 Cutoff
Cut: Standard
Chip Breaker: GB20

Repeatability <10µm


Left Hand		Right Hand		Dimensions & Features						
Item No.	Description	Item No.	Description	a	c	α	β	t	r	Coating
7005-152904	3004-3.2-6 FL 29015 GB20 UHM20 HPX	7005-152901	3004-3.2-6 FR 29015 GB20 UHM20 HPX	3.2	11	29°	59°	5.3	0.15	UHM 20 HPX
7005-152905	3004-3.2-6 FL 29015 GB20 UHM20 TX+	7005-152902	3004-3.2-6 FR 29015 GB20 UHM20 TX+	3.2	11	29°	59°	5.3	0.15	UHM 20 TX+
7005-152911	3004-3.2-6 FL 29035 GB20 UHM20 HPX	7005-152907	3004-3.2-6 FR 29035 GB20 UHM20 HPX	3.2	11	29°	59°	4.7	0.35	UHM 20 HPX
7005-152912	3004-3.2-6 FL 29035 GB20 UHM20 TX+	7005-152908	3004-3.2-6 FR 29035 GB20 UHM20 TX+	3.2	11	29°	59°	4.7	0.35	UHM 20 TX+



Type-GB20
Chip Breaker




Ideal Cutting Materials

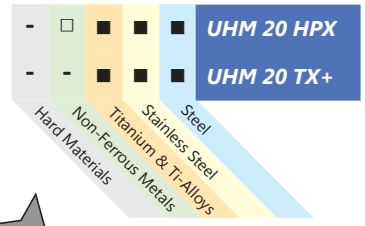

■ Preferred Application
□ Possible Application
- Application Not Recommended



F Edge
Sharp Cutting Edge




3004 Cutoff
Cut: Inverted
Chip Breaker: GB20

Repeatability <10µm


Left Hand		Right Hand		Dimensions & Features						
Item No.	Description	Item No.	Description	a	c	α	β	t	r	Coating
7005-152919	3004-3.2-6 FLV 29015 GB20 UHM20 HPX	7005-152915	3004-3.2-6 FRV 29015 GB20 UHM20 HPX	3.2	11	29°	59°	5.3	0.15	UHM 20 HPX
7005-152920	3004-3.2-6 FLV 29015 GB20 UHM20 TX+	7005-152916	3004-3.2-6 FRV 29015 GB20 UHM20 TX+	3.2	11	29°	59°	5.3	0.15	UHM 20 TX+
7005-152925	3004-3.2-6 FLV 29035 GB20 UHM20 HPX	7005-152922	3004-3.2-6 FRV 29035 GB20 UHM20 HPX	3.2	11	29°	59°	4.7	0.35	UHM 20 HPX
7005-152926	3004-3.2-6 FLV 29035 GB20 UHM20 TX+	7005-152923	3004-3.2-6 FRV 29035 GB20 UHM20 TX+	3.2	11	29°	59°	4.7	0.35	UHM 20 TX+



Type-GB20
Chip Breaker




Ideal Cutting Materials

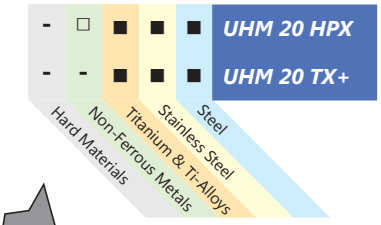

■ Preferred Application
□ Possible Application
- Application Not Recommended



F Edge
Sharp Cutting Edge



3005 Groove & Turn

Cut: Standard


Chip Breaker: GC20

Repeatability <10µm

Left Hand		Right Hand		Dimensions & Features				
Item No.	Description	Item No.	Description	a	c	d	r	Coating
7005-211120	3005-1.0-8 FL GC20 ZZ UHM20 HPX	7005-211115	3005-1.0-8 FR GC20 ZZ UHM20 HPX	1.0	8	3.5	0	UHM 20 HPX
7005-211121	3005-1.0-8 FL GC20 ZZ UHM20 TX+	7005-211116	3005-1.0-8 FR GC20 ZZ UHM20 TX+	1.0	8	3.5	0	UHM 20 TX+
7005-211218	3005-1.0-8 FL GC20 R02 UHM20 HPX	7005-211214	3005-1.0-8 FR GC20 R02 UHM20 HPX	1.0	8	3.5	0.02	UHM 20 HPX
7005-211219	3005-1.0-8 FL GC20 R02 UHM20 TX+	7005-211215	3005-1.0-8 FR GC20 R02 UHM20 TX+	1.0	8	3.5	0.02	UHM 20 TX+
7005-152933	3005-1.0-8 FL GC20 R05 UHM20 HPX	7005-152929	3005-1.0-8 FR GC20 R05 UHM20 HPX	1.0	8	3.5	0.05	UHM 20 HPX
7005-152934	3005-1.0-8 FL GC20 R05 UHM20 TX+	7005-152930	3005-1.0-8 FR GC20 R05 UHM20 TX+	1.0	8	3.5	0.05	UHM 20 TX+
7005-211226	3005-1.5-8 FL GC20 ZZ UHM20 HPX	7005-211222	3005-1.5-8 FR GC20 ZZ UHM20 HPX	1.5	8	4.0	0	UHM 20 HPX
7005-211227	3005-1.5-8 FL GC20 ZZ UHM20 TX+	7005-211223	3005-1.5-8 FR GC20 ZZ UHM20 TX+	1.5	8	4.0	0	UHM 20 TX+
7005-211234	3005-1.5-8 FL GC20 R02 UHM20 HPX	7005-211230	3005-1.5-8 FR GC20 R02 UHM20 HPX	1.5	8	4.0	0.02	UHM 20 HPX
7005-211235	3005-1.5-8 FL GC20 R02 UHM20 TX+	7005-211231	3005-1.5-8 FR GC20 R02 UHM20 TX+	1.5	8	4.0	0.02	UHM 20 TX+
7005-152941	3005-1.5-8 FL GC20 R05 UHM20 HPX	7005-152937	3005-1.5-8 FR GC20 R05 UHM20 HPX	1.5	8	4.0	0.05	UHM 20 HPX
7005-152942	3005-1.5-8 FL GC20 R05 UHM20 TX+	7005-152938	3005-1.5-8 FR GC20 R05 UHM20 TX+	1.5	8	4.0	0.05	UHM 20 TX+
7005-152946	3005-2.0-8 EL GC20 R05 UHM20 HPX	7005-193377	3005-2.0-8 ER GC20 R05 UHM20 HPX	2.0	8	5.0	0.05	UHM 20 HPX
7005-152947	3005-2.0-8 EL GC20 R05 UHM20 TX+	7005-193429	3005-2.0-8 ER GC20 R05 UHM20 TX+	2.0	8	5.0	0.05	UHM 20 TX+
7005-211049	3005-2.0-8 EL GC20 R15 UHM20 HPX	7005-211045	3005-2.0-8 ER GC20 R15 UHM20 HPX	2.0	8	5.0	0.15	UHM 20 HPX
7005-211050	3005-2.0-8 EL GC20 R15 UHM20 TX+	7005-211046	3005-2.0-8 ER GC20 R15 UHM20 TX+	2.0	8	5.0	0.15	UHM 20 TX+




Type-GC20
Chip Breaker



*c: maximal turning capacity
*d: maximal grooving capacity

Ideal Cutting Materials

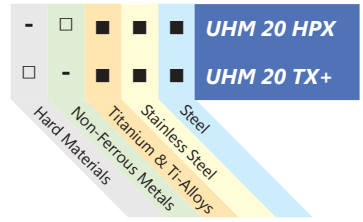


■ Preferred Application
□ Possible Application
- Application Not Recommended



E Edge
Round Cutting Edge



F Edge
Sharp Cutting Edge




3005 Groove & Turn


Cut: Standard
Chip Breaker: None

Repeatability <20µm


Left Hand		Right Hand		Dimensions & Features				
Item No.	Description	Item No.	Description	a	c	d	r	Coating
7005-148253	3005-1.0-8 L UHM20 HPX	7005-146721	3005-1.0-8 R UHM20 HPX	1	8	2.5	0.05	UHM 20 HPX
Call For Details	3005-1.0-8 L UHM20 TX+	Call For Details	3005-1.0-8 R UHM20 TX+	1	8	2.5	0.05	UHM 20 TX+
7005-148255	3005-1.5-8 L UHM20 HPX	7005-146699	3005-1.5-8 R UHM20 HPX	1.5	8	3	0.05	UHM 20 HPX
Call For Details	3005-1.5-8 L UHM20 TX+	Call For Details	3005-1.5-8 R UHM20 TX+	1.5	8	3	0.05	UHM 20 TX+
7005-148257	3005-2.0-8 L UHM20 HPX	7005-146696	3005-2.0-8 R UHM20 HPX	2	8	4	0.05	UHM 20 HPX
Call For Details	3005-2.0-8 L UHM20 TX+	Call For Details	3005-2.0-8 R UHM20 TX+	2	8	4	0.05	UHM 20 TX+
7005-148261	3005-2.5-8 L UHM20 HPX	7005-148259	3005-2.5-8 R UHM20 HPX	2.5	8	5	0.05	UHM 20 HPX
Call For Details	3005-2.5-8 L UHM20 TX+	Call For Details	3005-2.5-8 R UHM20 TX+	2.5	8	5	0.05	UHM 20 TX+
7005-148265	3005-3.0-8 L UHM20 HPX	7005-148263	3005-3.0-8 R UHM20 HPX	3	8	6	0.05	UHM 20 HPX
Call For Details	3005-3.0-8 L UHM20 TX+	Call For Details	3005-3.0-8 R UHM20 TX+	3	8	6	0.05	UHM 20 TX+



*c: maximal turning capacity
*d: maximal grooving capacity



Ideal Cutting Materials

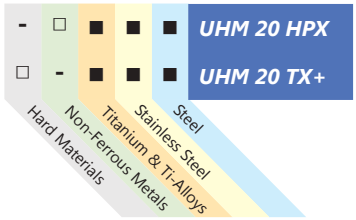

■ Preferred Application
□ Possible Application
- Application Not Recommended




3007 Full Radius Groove


Cut: Standard
Chip Breaker: None

Repeatability = R : ■<10µm, ■<20µm


Left Hand		Right Hand		Dimensions & Features					
Item No.	Description	Item No.	Description	R	a	c	d	r	Coating
7005-148388	3007-R0.25-2-10 L UHM20 HPX	7005-148390	3007-R0.25-2-10 R UHM20 HPX	■	0.5	12	2	0.25	UHM 20 HPX
Call For Details	3007-R0.25-2-10 L UHM20 TX+	Call For Details	3007-R0.25-2-10 R UHM20 TX+	■	0.5	12	2	0.25	UHM 20 TX+
7005-148392	3007-R0.5-2.5-10 L UHM20 HPX	7005-148394	3007-R0.5-2.5-10 R UHM20 HPX	■	1	12	2.5	0.50	UHM 20 HPX
Call For Details	3007-R0.5-2.5-10 L UHM20 TX+	Call For Details	3007-R0.5-2.5-10 R UHM20 TX+	■	1	12	2.5	0.50	UHM 20 TX+
7005-148396	3007-R0.6-2.5-10 L UHM20 HPX	7005-148398	3007-R0.6-2.5-10 R UHM20 HPX	■	1.2	12	2.5	0.60	UHM 20 HPX
Call For Details	3007-R0.6-2.5-10 L UHM20 TX+	Call For Details	3007-R0.6-2.5-10 R UHM20 TX+	■	1.2	12	2.5	0.60	UHM 20 TX+
7005-148400	3007-R0.75-3-10 L UHM20 HPX	7005-148402	3007-R0.75-3-10 R UHM20 HPX	■	1.5	12	3	0.75	UHM 20 HPX
Call For Details	3007-R0.75-3-10 L UHM20 TX+	Call For Details	3007-R0.75-3-10 R UHM20 TX+	■	1.5	12	3	0.75	UHM 20 TX+
7005-148404	3007-R0.8-3-10 L UHM20 HPX	7005-148406	3007-R0.8-3-10 R UHM20 HPX	■	1.6	12	3	0.80	UHM 20 HPX
Call For Details	3007-R0.8-3-10 L UHM20 TX+	Call For Details	3007-R0.8-3-10 R UHM20 TX+	■	1.6	12	3	0.80	UHM 20 TX+
7005-148408	3007-R1.0-10 L UHM20 HPX	7005-148410	3007-R1.0-10 R UHM20 HPX	■	2	12	10	1.00	UHM 20 HPX
Call For Details	3007-R1.0-10 L UHM20 TX+	Call For Details	3007-R1.0-10 R UHM20 TX+	■	2	12	10	1.00	UHM 20 TX+
7005-148412	3007-R1.5-10 L UHM20 HPX	7005-148414	3007-R1.5-10 R UHM20 HPX	■	3	12	10	1.50	UHM 20 HPX
Call For Details	3007-R1.5-10 L UHM20 TX+	Call For Details	3007-R1.5-10 R UHM20 TX+	■	3	12	10	1.50	UHM 20 TX+
7005-148416	3007-R1.5-16 L UHM20 HPX	7005-148418	3007-R1.5-16 R UHM20 HPX	■	3	17	16	1.50	UHM 20 HPX
Call For Details	3007-R1.5-16 L UHM20 TX+	Call For Details	3007-R1.5-16 R UHM20 TX+	■	3	17	16	1.50	UHM 20 TX+




Full Radius

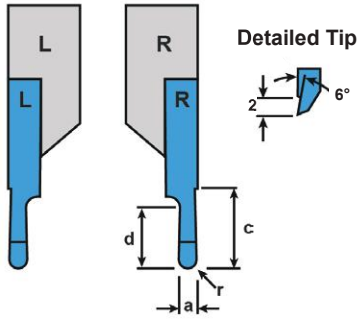

Ideal Cutting Materials

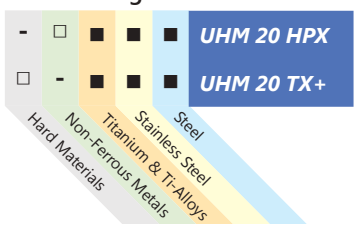

■ Preferred Application
□ Possible Application
- Application Not Recommended




3005 Groove & Turn

Cut: Standard

Chip Breaker: CP


Repeatability <20µm

Left Hand		Right Hand		Dimensions & Features				
Item No.	Description	Item No.	Description	a	c	d	r	Coating
7005-148269	3005-0.8-8 L CP UHM20 HPX	7005-148267	3005-0.8-8 R CP UHM20 HPX	0.8	8	2.5	0.00	UHM 20 HPX
Call For Details	3005-0.8-8 L CP UHM20 TX+	Call For Details	3005-0.8-8 R CP UHM20 TX+	0.8	8	2.5	0.00	UHM 20 TX+
7005-148274	3005-1.0-8 L CP UHM20 HPX	7005-148271	3005-1.0-8 R CP UHM20 HPX	1	8	3.5	0.00	UHM 20 HPX
Call For Details	3005-1.0-8 L CP UHM20 TX+	Call For Details	3005-1.0-8 R CP UHM20 TX+	1	8	3.5	0.00	UHM 20 TX+
7005-148278	3005-1.5-8 L CP UHM20 HPX	7005-148276	3005-1.5-8 R CP UHM20 HPX	1.5	8	4	0.00	UHM 20 HPX
Call For Details	3005-1.5-8 L CP UHM20 TX+	Call For Details	3005-1.5-8 R CP UHM20 TX+	1.5	8	4	0.00	UHM 20 TX+
7005-148280	3005-1.5-8 L CP R08 UHM20 HPX	7005-147055	3005-1.5-8 R CP R08 UHM20 HPX	1.5	8	4	0.08	UHM 20 HPX
Call For Details	3005-1.5-8 L CP R08 UHM20 TX+	Call For Details	3005-1.5-8 R CP R08 UHM20 TX+	1.5	8	4	0.08	UHM 20 TX+
7005-148284	3005-2.0-8 L CP UHM20 HPX	7005-148282	3005-2.0-8 R CP UHM20 HPX	2	8	5	0.00	UHM 20 HPX
Call For Details	3005-2.0-8 L CP UHM20 TX+	Call For Details	3005-2.0-8 R CP UHM20 TX+	2	8	5	0.00	UHM 20 TX+
7005-148286	3005-2.0-8 L CP R08 UHM20 HPX	7005-147057	3005-2.0-8 R CP R08 UHM20 HPX	2	8	5	0.08	UHM 20 HPX
Call For Details	3005-2.0-8 L CP R08 UHM20 TX+	Call For Details	3005-2.0-8 R CP R08 UHM20 TX+	2	8	5	0.08	UHM 20 TX+
7005-148288	3005-2.0-8 L CP R15 UHM20 HPX	7005-146955	3005-2.0-8 R CP R15 UHM20 HPX	2	8	5	0.15	UHM 20 HPX
Call For Details	3005-2.0-8 L CP R15 UHM20 TX+	Call For Details	3005-2.0-8 R CP R15 UHM20 TX+	2	8	5	0.15	UHM 20 TX+
7005-148292	3005-2.5-8 L CP UHM20 HPX	7005-148290	3005-2.5-8 R CP UHM20 HPX	2.5	8	6	0.00	UHM 20 HPX
Call For Details	3005-2.5-8 L CP UHM20 TX+	Call For Details	3005-2.5-8 R CP UHM20 TX+	2.5	8	6	0.00	UHM 20 TX+
7005-148296	3005-2.5-8 L CP R08 UHM20 HPX	7005-148294	3005-2.5-8 R CP R08 UHM20 HPX	2.5	8	6	0.08	UHM 20 HPX
Call For Details	3005-2.5-8 L CP R08 UHM20 TX+	Call For Details	3005-2.5-8 R CP R08 UHM20 TX+	2.5	8	6	0.08	UHM 20 TX+
7005-148300	3005-2.5-8 L CP R15 UHM20 HPX	7005-148298	3005-2.5-8 R CP R15 UHM20 HPX	2.5	8	6	0.15	UHM 20 HPX
Call For Details	3005-2.5-8 L CP R15 UHM20 TX+	Call For Details	3005-2.5-8 R CP R15 UHM20 TX+	2.5	8	6	0.15	UHM 20 TX+
7005-148304	3005-3.0-8 L CP UHM20 HPX	7005-148302	3005-3.0-8 R CP UHM20 HPX	3	8	6	0.00	UHM 20 HPX
Call For Details	3005-3.0-8 L CP UHM20 TX+	Call For Details	3005-3.0-8 R CP UHM20 TX+	3	8	6	0.00	UHM 20 TX+
7005-148308	3005-3.0-8 L CP R08 UHM20 HPX	7005-148306	3005-3.0-8 R CP R08 UHM20 HPX	3	8	6	0.08	UHM 20 HPX
Call For Details	3005-3.0-8 L CP R08 UHM20 TX+	Call For Details	3005-3.0-8 R CP R08 UHM20 TX+	3	8	6	0.08	UHM 20 TX+
7005-148312	3005-3.0-8 L CP R15 UHM20 HPX	7005-148310	3005-3.0-8 R CP R15 UHM20 HPX	3	8	6	0.15	UHM 20 HPX
Call For Details	3005-3.0-8 L CP R15 UHM20 TX+	Call For Details	3005-3.0-8 R CP R15 UHM20 TX+	3	8	6	0.15	UHM 20 TX+




Type-CP Chip Breaker


*c: maximal turning capacity
*d: maximal grooving capacity

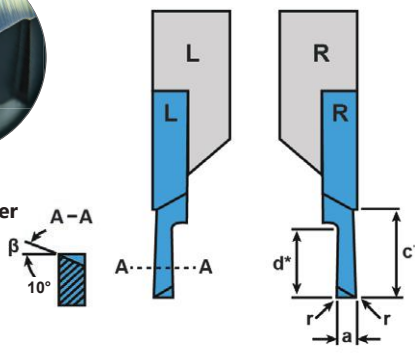

Ideal Cutting Materials

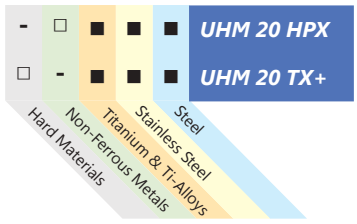


■ Preferred Application
□ Possible Application
- Application Not Recommended




3006 Threading

Profile: Full (Metric)


Left Hand		Right Hand		Dimensions & Features							
Item No.	Description	Item No.	Description	ISO DIN13	NIHS 06-03	NIHS 06-02	p	a_1	a_2	c	Coating
Call For Details	3006-0.15-10-60 VP L UHM20 HPX	Call For Details	3006-0.15-10-60 VP R UHM20 HPX	-	-	S 0.6	0.15	0.08	0.08	---	UHM 20 HPX
Call For Details	3006-0.15-10-60 VP L UHM20 TX+	Call For Details	3006-0.15-10-60 VP R UHM20 TX+	-	-	S 0.6	0.15	0.08	0.08	---	UHM 20 TX+
Call For Details	3006-0.175-10-60 VP L UHM20 HPX	Call For Details	3006-0.175-10-60 VP R UHM20 HPX	-	-	S 0.7	0.175	0.10	0.1	---	UHM 20 HPX
Call For Details	3006-0.175-10-60 VP L UHM20 TX+	Call For Details	3006-0.175-10-60 VP R UHM20 TX+	-	-	S 0.7	0.175	0.10	0.1	---	UHM 20 TX+
Call For Details	3006-0.2-10-60 VP L UHM20 HPX	Call For Details	3006-0.2-10-60 VP R UHM20 HPX	-	-	S0.8	0.2	0.11	0.11	---	UHM 20 HPX
Call For Details	3006-0.2-10-60 VP L UHM20 TX+	Call For Details	3006-0.2-10-60 VP R UHM20 TX+	-	-	S0.8	0.2	0.11	0.11	---	UHM 20 TX+
Call For Details	3006-0.225-10-60 VP L UHM20 HPX	Call For Details	3006-0.225-10-60 VP R UHM20 HPX	-	-	S 0.9	0.225	0.13	0.13	---	UHM 20 HPX
Call For Details	3006-0.225-10-60 VP L UHM20 TX+	Call For Details	3006-0.225-10-60 VP R UHM20 TX+	-	-	S 0.9	0.225	0.13	0.13	---	UHM 20 TX+
7005-148324	3006-0.25-10-60 VP L UHM20 HPX	7005-148322	3006-0.25-10-60 VP R UHM20 HPX	M 1/1.2	M 1/1.2	S 1/S1.2	0.25	0.14	0.14	---	UHM 20 HPX
Call For Details	3006-0.25-10-60 VP L UHM20 TX+	Call For Details	3006-0.25-10-60 VP R UHM20 TX+	M 1/1.2	M 1/1.2	S 1/S1.2	0.25	0.14	0.14	---	UHM 20 TX+
7005-148328	3006-0.3-10-60 VP L UHM20 HPX	7005-148326	3006-0.3-10-60 VP R UHM20 HPX	-	M 1.4	S 1.4	0.3	0.17	0.17	---	UHM 20 HPX
Call For Details	3006-0.3-10-60 VP L UHM20 TX+	Call For Details	3006-0.3-10-60 VP R UHM20 TX+	-	M 1.4	S 1.4	0.3	0.17	0.17	---	UHM 20 TX+
7005-148332	3006-0.35-10-60 VP L UHM20 HPX	7005-148330	3006-0.35-10-60 VP R UHM20 HPX	M 1.6	M 1.6/1.8	-	0.35	0.19	0.19	---	UHM 20 HPX
Call For Details	3006-0.35-10-60 VP L UHM20 TX+	Call For Details	3006-0.35-10-60 VP R UHM20 TX+	M 1.6	M 1.6/1.8	-	0.35	0.19	0.19	---	UHM 20 TX+
7005-148336	3006-0.4-10-60 VP L UHM20 HPX	7005-148334	3006-0.4-10-60 VP R UHM20 HPX	M 2	M 2	-	0.4	0.22	0.22	---	UHM 20 HPX
Call For Details	3006-0.4-10-60 VP L UHM20 TX+	Call For Details	3006-0.4-10-60 VP R UHM20 TX+	M 2	M 2	-	0.4	0.22	0.22	---	UHM 20 TX+
7005-148340	3006-0.45-10-60 VP L UHM20 HPX	7005-148338	3006-0.45-10-60 VP R UHM20 HPX	M 2.5	M 2.2/2.5	-	0.45	0.25	0.25	---	UHM 20 HPX
Call For Details	3006-0.45-10-60 VP L UHM20 TX+	Call For Details	3006-0.45-10-60 VP R UHM20 TX+	M 2.5	M 2.2/2.5	-	0.45	0.25	0.25	---	UHM 20 TX+
7005-148344	3006-0.5-10-60 VP L UHM20 HPX	7005-148342	3006-0.5-10-60 VP R UHM20 HPX	M 3	M 3	-	0.5	0.35	0.35	1.4	UHM 20 HPX
Call For Details	3006-0.5-10-60 VP L UHM20 TX+	Call For Details	3006-0.5-10-60 VP R UHM20 TX+	M 3	M 3	-	0.5	0.35	0.35	1.4	UHM 20 TX+
7005-148348	3006-0.6-10-60 VP L UHM20 HPX	7005-148346	3006-0.6-10-60 VP R UHM20 HPX	-	M 3.5	-	0.6	0.40	0.4	1.4	UHM 20 HPX
Call For Details	3006-0.6-10-60 VP L UHM20 TX+	Call For Details	3006-0.6-10-60 VP R UHM20 TX+	-	M 3.5	-	0.6	0.40	0.4	1.4	UHM 20 TX+
7005-148352	3006-0.7-10-60 VP L UHM20 HPX	7005-148350	3006-0.7-10-60 VP R UHM20 HPX	M 4	M 4	-	0.7	0.45	0.45	1.8	UHM 20 HPX
Call For Details	3006-0.7-10-60 VP L UHM20 TX+	Call For Details	3006-0.7-10-60 VP R UHM20 TX+	M 4	M 4	-	0.7	0.45	0.45	1.8	UHM 20 TX+
7005-148356	3006-0.75-10-60 VP L UHM20 HPX	7005-148354	3006-0.75-10-60 VP R UHM20 HPX	-	M 4.5	-	0.75	0.45	0.45	1.9	UHM 20 HPX
Call For Details	3006-0.75-10-60 VP L UHM20 TX+	Call For Details	3006-0.75-10-60 VP R UHM20 TX+	-	M 4.5	-	0.75	0.45	0.45	1.9	UHM 20 TX+
7005-148360	3006-0.8-10-60 VP L UHM20 HPX	7005-148358	3006-0.8-10-60 VP R UHM20 HPX	M 5	M 5	-	0.8	0.50	0.5	2	UHM 20 HPX
Call For Details	3006-0.8-10-60 VP L UHM20 TX+	Call For Details	3006-0.8-10-60 VP R UHM20 TX+	M 5	M 5	-	0.8	0.50	0.5	2	UHM 20 TX+
7005-148364	3006-1.0-10-60 VP L UHM20 HPX	7005-148362	3006-1.0-10-60 VP R UHM20 HPX	M 6/7	-	-	1	0.55	0.55	2.4	UHM 20 HPX
Call For Details	3006-1.0-10-60 VP L UHM20 TX+	Call For Details	3006-1.0-10-60 VP R UHM20 TX+	M 6/7	-	-	1	0.55	0.55	2.4	UHM 20 TX+
7005-148368	3006-1.25-10-60 VP L UHM20 HPX	7005-148366	3006-1.25-10-60 VP R UHM20 HPX	M 8/9	-	-	1.25	0.73	0.73	2.9	UHM 20 HPX
Call For Details	3006-1.25-10-60 VP L UHM20 TX+	Call For Details	3006-1.25-10-60 VP R UHM20 TX+	M 8/9	-	-	1.25	0.73	0.73	2.9	UHM 20 TX+
7005-148372	3006-1.5-10-60 VP L UHM20 HPX	7005-148370	3006-1.5-10-60 VP R UHM20 HPX	M 10/11	-	-	1.5	0.87	0.87	3.4	UHM 20 HPX
Call For Details	3006-1.5-10-60 VP L UHM20 TX+	Call For Details	3006-1.5-10-60 VP R UHM20 TX+	M 10/11	-	-	1.5	0.87	0.87	3.4	UHM 20 TX+
7005-148376	3006-1.75-10-60 VP L UHM20 HPX	7005-148374	3006-1.75-10-60 VP R UHM20 HPX	M 12	-	-	1.75	0.98	0.98	3.9	UHM 20 HPX
Call For Details	3006-1.75-10-60 VP L UHM20 TX+	Call For Details	3006-1.75-10-60 VP R UHM20 TX+	M 12	-	-	1.75	0.98	0.98	3.9	UHM 20 TX+
Call For Details	3006-2.0-10-60 VP L UHM20 HPX	Call For Details	3006-2.0-10-60 VP R UHM20 HPX	M 14/16	-	-	2	1.10	1.1	4	UHM 20 HPX
Call For Details	3006-2.0-10-60 VP L UHM20 TX+	Call For Details	3006-2.0-10-60 VP R UHM20 TX+	M 14/16	-	-	2	1.10	1.1	4	UHM 20 TX+
Call For Details	3006-2.5-10-60 VP L UHM20 HPX	Call For Details	3006-2.5-10-60 VP R UHM20 HPX	M 18/20/22	-	-	2.5	1.40	1.4	5	UHM20 HPX
Call For Details	3006-2.5-10-60 VP L UHM20 TX+	Call For Details	3006-2.5-10-60 VP R UHM20 TX+	M 18/20/22	-	-	2.5	1.40	1.4	5	UHM20 TX+
Call For Details	3006-3.0-10-60 VP L UHM20 HPX	Call For Details	3006-3.0-10-60 VP R UHM20 HPX	M 24/27	-	-	3	1.65	1.65	5	UHM20 HPX
Call For Details	3006-3.0-10-60 VP L UHM20 TX+	Call For Details	3006-3.0-10-60 VP R UHM20 TX+	M 24/27	-	-	3	1.65	1.65	5	UHM20 TX+




Full Profile

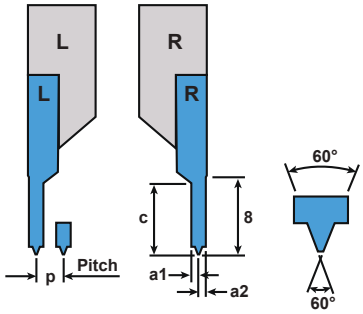

Ideal Cutting Materials

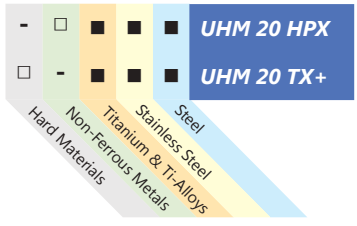

■ Preferred Application
□ Possible Application
- Application Not Recommended




3006 Threading


Profile: Full (Metric)
Geometry: Strengthened

Repeatability <20µm


Left Hand		Right Hand		Dimensions & Features							
Item No.	Description	Item No.	Description	ISO DIN13	NIHS 06-03	NIHS 06-02	P	h_{min}	a_1	b	Coating
Call For Details	3006-0.25-60 VP-S L UHM20 HPX	Call For Details	3006-0.25-60 VP-S R UHM20 HPX	M 1/1.2	M 1/1.2	S 1/S1.2	0.25	0.15	0.16	8	UHM 20 HPX
Call For Details	3006-0.25-60 VP-S L UHM20 TX+	Call For Details	3006-0.25-60 VP-S R UHM20 TX+	M 1/1.2	M 1/1.2	S 1/S1.2	0.25	0.15	0.16	8	UHM 20 TX+
Call For Details	3006-0.3-60 VP-S L UHM20 HPX	Call For Details	3006-0.3-60 VP-S R UHM20 HPX	-	M 1.4	S 1.4	0.3	0.18	0.2	8	UHM 20 HPX
Call For Details	3006-0.3-60 VP-S L UHM20 TX+	Call For Details	3006-0.3-60 VP-S R UHM20 TX+	-	M 1.4	S 1.4	0.3	0.18	0.2	8	UHM 20 TX+
Call For Details	3006-0.35-60 VP-S L UHM20 HPX	Call For Details	3006-0.35-60 VP-S R UHM20 HPX	M 1.6	M 1.6/1.8	-	0.35	0.22	0.23	8	UHM 20 HPX
Call For Details	3006-0.35-60 VP-S L UHM20 TX+	Call For Details	3006-0.35-60 VP-S R UHM20 TX+	M 1.6	M 1.6/1.8	-	0.35	0.22	0.23	8	UHM 20 TX+
Call For Details	3006-0.4-60 VP-S L UHM20 HPX	Call For Details	3006-0.4-60 VP-S R UHM20 HPX	M 2	M 2	-	0.4	0.25	0.26	8	UHM 20 HPX
Call For Details	3006-0.4-60 VP-S L UHM20 TX+	Call For Details	3006-0.4-60 VP-S R UHM20 TX+	M 2	M 2	-	0.4	0.25	0.26	8	UHM 20 TX+
Call For Details	3006-0.45-60 VP-S L UHM20 HPX	Call For Details	3006-0.45-60 VP-S R UHM20 HPX	M 2.5	M 2.2/2.5	-	0.45	0.28	0.29	8	UHM 20 HPX
Call For Details	3006-0.45-60 VP-S L UHM20 TX+	Call For Details	3006-0.45-60 VP-S R UHM20 TX+	M 2.5	M 2.2/2.5	-	0.45	0.28	0.29	8	UHM 20 TX+
Call For Details	3006-0.5-60 VP-S L UHM20 HPX	Call For Details	3006-0.5-60 VP-S R UHM20 HPX	M 3	M 3	-	0.5	0.31	0.33	8	UHM 20 HPX
Call For Details	3006-0.5-60 VP-S L UHM20 TX+	Call For Details	3006-0.5-60 VP-S R UHM20 TX+	M 3	M 3	-	0.5	0.31	0.33	8	UHM 20 TX+
Call For Details	3006-0.6-60 VP-S L UHM20 HPX	Call For Details	3006-0.6-60 VP-S R UHM20 HPX	-	M 3.5	-	0.6	0.37	0.39	8	UHM 20 HPX
Call For Details	3006-0.6-60 VP-S L UHM20 TX+	Call For Details	3006-0.6-60 VP-S R UHM20 TX+	-	M 3.5	-	0.6	0.37	0.39	8	UHM 20 TX+
Call For Details	3006-0.7-60 VP-S L UHM20 HPX	Call For Details	3006-0.7-60 VP-S R UHM20 HPX	M 4	M 4	-	0.7	0.43	0.46	8	UHM 20 HPX
Call For Details	3006-0.7-60 VP-S L UHM20 TX+	Call For Details	3006-0.7-60 VP-S R UHM20 TX+	M 4	M 4	-	0.7	0.43	0.46	8	UHM 20 TX+
Call For Details	3006-0.75-60 VP-S L UHM20 HPX	Call For Details	3006-0.75-60 VP-S R UHM20 HPX	-	M 4.5	-	0.75	0.46	0.49	8	UHM 20HPX
Call For Details	3006-0.75-60 VP-S L UHM20 TX+	Call For Details	3006-0.75-60 VP-S R UHM20 TX+	-	M 4.5	-	0.75	0.46	0.49	8	UHM 20 TX+
Call For Details	3006-0.8-60 VP-S L UHM20 HPX	Call For Details	3006-0.8-60 VP-S R UHM20 HPX	M 5	M 5	-	0.8	0.49	0.52	8	UHM 20 HPX
Call For Details	3006-0.8-60 VP-S L UHM20 TX+	Call For Details	3006-0.8-60 VP-S R UHM20 TX+	M 5	M 5	-	0.8	0.49	0.52	8	UHM 20 TX+
Call For Details	3006-1.0-60 VP-S L UHM20 HPX	Call For Details	3006-1.0-60 VP-S R UHM20 HPX	M 6/7	-	-	1	0.61	0.65	8	UHM 20 HPX
Call For Details	3006-1.0-60 VP-S L UHM20 TX+	Call For Details	3006-1.0-60 VP-S R UHM20 TX+	M 6/7	-	-	1	0.61	0.65	8	UHM 20 TX+
Call For Details	3006-1.25-60 VP-S L UHM20 HPX	Call For Details	3006-1.25-60 VP-S R UHM20 HPX	M 8/9	-	-	1.25	0.77	0.81	8	UHM 20 HPX
Call For Details	3006-1.25-60 VP-S L UHM20 TX+	Call For Details	3006-1.25-60 VP-S R UHM20 TX+	M 8/9	-	-	1.25	0.77	0.81	8	UHM 20 TX+
Call For Details	3006-1.5-60 VP-S L UHM20 HPX	Call For Details	3006-1.5-60 VP-S R UHM20 HPX	M 10/11	-	-	1.5	0.92	0.98	8	UHM 20 HPX
Call For Details	3006-1.5-60 VP-S L UHM20 TX+	Call For Details	3006-1.5-60 VP-S R UHM20 TX+	M 10/11	-	-	1.5	0.92	0.98	8	UHM 20 TX+
Call For Details	3006-1.75-60 VP-S L UHM20 HPX	Call For Details	3006-1.75-60 VP-S R UHM20 HPX	M 12	-	-	1.75	1.07	1.14	8	UHM 20 HPX
Call For Details	3006-1.75-60 VP-S L UHM20 TX+	Call For Details	3006-1.75-60 VP-S R UHM20 TX+	M 12	-	-	1.75	1.07	1.14	8	UHM 20 TX+
Call For Details	3006-2.0-60 VP-S L UHM20 HPX	Call For Details	3006-2.0-60 VP-S R UHM20 HPX	M 14/16	-	-	2	1.23	1.3	8	UHM 20 HPX
Call For Details	3006-2.0-60 VP-S L UHM20 TX+	Call For Details	3006-2.0-60 VP-S R UHM20 TX+	M 14/16	-	-	2	1.23	1.3	8	UHM 20 TX+




Full Profile Strengthened

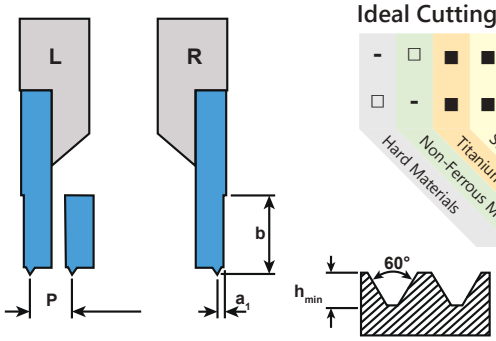

Ideal Cutting Materials

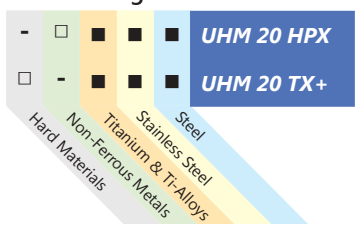


■ Preferred Application
□ Possible Application
- Application Not Recommended




3006 Threading - Pipe Thread

Profile: Full


Left Hand		Right Hand		Dimensions & Features							
Item No.	Description	Item No.	Description	TPI	ANSI B1.1	p	h_{min}	a_1	a_2	c	Coating
Call For Details	3006-G 28 10-55 VP L UHM30 HX	Call For Details	3006-G 28 10-55 VP R UHM30 HX	28	1/8-1/16	0.907	.581	.5	.5	2.3	UHM 30 HX
7005-113928	3006-G 19 10-55 VP L UHM30 HX	7005-113906	3006-G 19 10-55 VP R UHM30 HX	19	1/4-3/8	1.337	.856	.74	.74	3.3	UHM 30 HX
Call For Details	3006-G 14 10-55 VP L UHM30 HX	Call For Details	3006-G 14 10-55 VP R UHM30 HX	14	1/2-7/8	1.814	1.162	1	1	4.5	UHM 30 HX
7005-113932	3006-G 11 10-55 VP L UHM30 HX	7005-113911	3006-G 11 10-55 VP R UHM30 HX	11	1-6	2.309	1.479	1.27	1.27	5	UHM 30 HX




Full Profile Pipe Thread

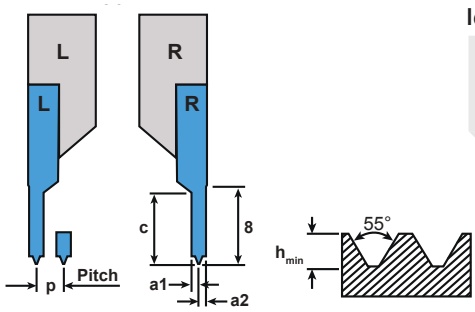

Ideal Cutting Materials



■ Preferred Application
□ Possible Application
- Application Not Recommended




3006 Threading - UNC & UNF


Profile: Full

Repeatability = R : ■<10µm, ■<20µm


Left Hand		Dimensions & Features													
Item No.	Description	R	TPI	p	a_1	a_2	c	Coating	UN	UNC	UNF	UNEF	UNS	UNR
Call For Details	3006-80 UN 10-60 VP L UHM20 TX+	■	80	0.317	0.19	0.17	-	UHM 20 TX+			■			
Call For Details	3006-80 UN 10-60 VP L UHM20 HPX	■	80	0.317	0.19	0.17	-	UHM 20 HPX			■			
Call For Details	3006-72 UN 10-60 VP L UHM20 TX+	■	72	0.353	0.21	0.19	-	UHM 20 TX+			■			
Call For Details	3006-72 UN 10-60 VP L UHM20 HPX	■	72	0.353	0.21	0.19	-	UHM 20 HPX			■			
Call For Details	3006-64 UN 10-60 VP L UHM20 TX+	■	64	0.397	0.24	0.22	-	UHM 20 TX+		■	■			
Call For Details	3006-64 UN 10-60 VP L UHM20 HPX	■	64	0.397	0.24	0.22	-	UHM 20 HPX		■	■			
Call For Details	3006-56 UN 10-60 VP L UHM20 TX+	■	56	0.453	0.27	0.25	-	UHM 20 TX+		■	■		■	
Call For Details	3006-56 UN 10-60 VP L UHM20 HPX	■	56	0.453	0.27	0.25	-	UHM 20 HPX		■	■		■	
Call For Details	3006-48 UN 10-60 VP L UHM20 TX+	■	48	0.529	0.29	0.29	1.4	UHM 20 TX+		■	■		■	
Call For Details	3006-48 UN 10-60 VP L UHM20 HPX	■	48	0.529	0.29	0.29	1.4	UHM 20 HPX		■	■		■	
Call For Details	3006-44 UN 10-60 VP L UHM20 TX+	■	44	0.577	0.32	0.32	1.4	UHM 20 TX+			■			
Call For Details	3006-44 UN 10-60 VP L UHM20 HPX	■	44	0.577	0.32	0.32	1.4	UHM 20 HPX			■			
Call For Details	3006-40 UN 10-60 VP L UHM20 TX+	■	40	0.635	0.35	0.35	1.8	UHM 20 TX+		■	■		■	
Call For Details	3006-40 UN 10-60 VP L UHM20 HPX	■	40	0.635	0.35	0.35	1.8	UHM 20 HPX		■	■		■	
Call For Details	3006-36 UN 10-60 VP L UHM20 TX+	■	36	0.705	0.39	0.39	1.8	UHM 20 TX+			■		■	
Call For Details	3006-36 UN 10-60 VP L UHM20 HPX	■	36	0.705	0.39	0.39	1.8	UHM 20 TX+			■		■	
Call For Details	3006-32 UN 10-60 VP L UHM20 TX+	■	32	0.794	0.44	0.44	2	UHM 20 HPX		■	■	■		■
Call For Details	3006-32 UN 10-60 VP L UHM20 HPX	■	32	0.794	0.44	0.44	2	UHM 20 TX+		■	■	■		■
Call For Details	3006-28 UN 10-60 VP L UHM20 TX+	■	28	0.907	0.5	0.5	2.2	UHM 20 HPX		■	■		■	■
Call For Details	3006-28 UN 10-60 VP L UHM20 HPX	■	28	0.907	0.5	0.5	2.2	UHM 20 TX+		■	■		■	■
Call For Details	3006-24 UN 10-60 VP L UHM20 TX+	■	24	1.058	0.58	0.58	2.4	UHM 20 HPX		■	■	■	■	
Call For Details	3006-24 UN 10-60 VP L UHM20 HPX	■	24	1.058	0.58	0.58	2.4	UHM 20 TX+		■	■	■	■	
Call For Details	3006-20 UN 10-60 VP L UHM20 TX+	■	20	1.27	0.7	0.7	2.9	UHM 20 TX+	■	■	■	■		■
Call For Details	3006-20 UN 10-60 VP L UHM20 HPX	■	20	1.27	0.7	0.7	2.9	UHM 20 HPX	■	■	■	■		■
Call For Details	3006-18 UN 10-60 VP L UHM20 TX+	■	18	1.411	0.78	0.78	3.4	UHM 20 TX+		■	■	■	■	
Call For Details	3006-18 UN 10-60 VP L UHM20 HPX	■	18	1.411	0.78	0.78	3.4	UHM 20 HPX		■	■	■	■	
Call For Details	3006-16 UN 10-60 VP L UHM20 TX+	■	16	1.588	0.87	0.87	3.6	UHM 20 TX+	■	■	■	■	■	■
Call For Details	3006-16 UN 10-60 VP L UHM20 HPX	■	16	1.588	0.87	0.87	3.6	UHM 20 HPX	■	■	■	■	■	■
Call For Details	3006-14 UN 10-60 VP L UHM20 TX+	■	14	1.814	1	1	3.9	UHM 20 TX+		■	■		■	
Call For Details	3006-14 UN 10-60 VP L UHM20 HPX	■	14	1.814	1	1	3.9	UHM 20 HPX		■	■		■	
Call For Details	3006-13 UN 10-60 VP L UHM20 TX+	■	13	1.954	1.07	1.07	4.2	UHM 20 TX+		■				
Call For Details	3006-13 UN 10-60 VP L UHM20 HPX	■	13	1.954	1.07	1.07	4.2	UHM 20 HPX		■				



Full Profile
UNC UNF

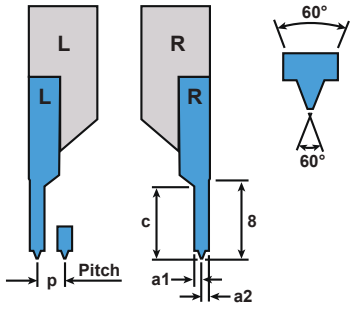


Ideal Cutting Materials

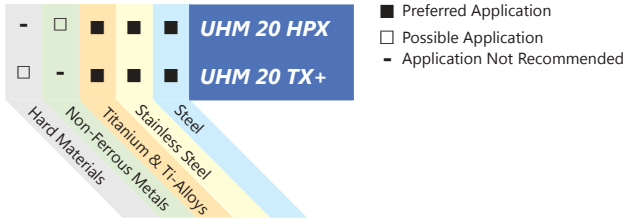

■ Preferred Application
□ Possible Application
- Application Not Recommended

Continued On Next Page




3006 Threading - UNC & UNF


Profile: Full

Repeatability = R : ■<10µm, ■<20µm


Right Hand		Dimensions & Features												
Item No.	Description	R	TPI	p	a_1	a_2	c	Coating	UN	UNC	UNF	UNEF	UNS	UNR
Call For Details	3006-80 UN 10-60 VP R UHM20 TX+	■	80	0.317	0.19	0.17	-	UHM 20 TX+			■			
Call For Details	3006-80 UN 10-60 VP R UHM20 HPX	■	80	0.317	0.19	0.17	-	UHM 20 HPX			■			
Call For Details	3006-72 UN 10-60 VP R UHM20 TX+	■	72	0.353	0.21	0.19	-	UHM 20 TX+			■			
Call For Details	3006-72 UN 10-60 VP R UHM20 HPX	■	72	0.353	0.21	0.19	-	UHM 20 HPX			■			
Call For Details	3006-64 UN 10-60 VP R UHM20 TX+	■	64	0.397	0.24	0.22	-	UHM 20 TX+		■	■			
Call For Details	3006-64 UN 10-60 VP R UHM20 HPX	■	64	0.397	0.24	0.22	-	UHM 20 HPX		■	■			
Call For Details	3006-56 UN 10-60 VP R UHM20 TX+	■	56	0.453	0.27	0.25	-	UHM 20 TX+		■	■		■	
Call For Details	3006-56 UN 10-60 VP R UHM20 HPX	■	56	0.453	0.27	0.25	-	UHM 20 HPX		■	■		■	
Call For Details	3006-48 UN 10-60 VP R UHM20 TX+	■	48	0.529	0.29	0.29	1.4	UHM 20 TX+		■	■		■	
Call For Details	3006-48 UN 10-60 VP R UHM20 HPX	■	48	0.529	0.29	0.29	1.4	UHM 20 HPX		■	■		■	
Call For Details	3006-44 UN 10-60 VP R UHM20 TX+	■	44	0.577	0.32	0.32	1.4	UHM 20 TX+			■			
Call For Details	3006-44 UN 10-60 VP R UHM20 HPX	■	44	0.577	0.32	0.32	1.4	UHM 20 HPX			■			
Call For Details	3006-40 UN 10-60 VP R UHM20 TX+	■	40	0.635	0.35	0.35	1.8	UHM 20 TX+		■	■		■	
Call For Details	3006-40 UN 10-60 VP R UHM20 HPX	■	40	0.635	0.35	0.35	1.8	UHM 20 HPX		■	■		■	
Call For Details	3006-36 UN 10-60 VP R UHM20 TX+	■	36	0.705	0.39	0.39	1.8	UHM 20 TX+			■		■	
Call For Details	3006-36 UN 10-60 VP R UHM20 HPX	■	36	0.705	0.39	0.39	1.8	UHM 20 TX+			■		■	
Call For Details	3006-32 UN 10-60 VP R UHM20 TX+	■	32	0.794	0.44	0.44	2	UHM 20 HPX		■	■	■		■
Call For Details	3006-32 UN 10-60 VP R UHM20 HPX	■	32	0.794	0.44	0.44	2	UHM 20 TX+		■	■	■		■
Call For Details	3006-28 UN 10-60 VP R UHM20 TX+	■	28	0.907	0.5	0.5	2.2	UHM 20 HPX		■	■		■	■
Call For Details	3006-28 UN 10-60 VP R UHM20 HPX	■	28	0.907	0.5	0.5	2.2	UHM 20 TX+		■	■		■	■
Call For Details	3006-24 UN 10-60 VP R UHM20 TX+	■	24	1.058	0.58	0.58	2.4	UHM 20 HPX		■	■	■	■	
Call For Details	3006-24 UN 10-60 VP R UHM20 HPX	■	24	1.058	0.58	0.58	2.4	UHM 20 TX+		■	■	■	■	
Call For Details	3006-20 UN 10-60 VP R UHM20 TX+	■	20	1.27	0.7	0.7	2.9	UHM 20 TX+	■	■	■	■		■
Call For Details	3006-20 UN 10-60 VP R UHM20 HPX	■	20	1.27	0.7	0.7	2.9	UHM 20 HPX	■	■	■	■		■
Call For Details	3006-18 UN 10-60 VP R UHM20 TX+	■	18	1.411	0.78	0.78	3.4	UHM 20 TX+		■	■	■	■	
Call For Details	3006-18 UN 10-60 VP R UHM20 HPX	■	18	1.411	0.78	0.78	3.4	UHM 20 HPX		■	■	■	■	
Call For Details	3006-16 UN 10-60 VP R UHM20 TX+	■	16	1.588	0.87	0.87	3.6	UHM 20 TX+	■	■	■	■	■	■
Call For Details	3006-16 UN 10-60 VP R UHM20 HPX	■	16	1.588	0.87	0.87	3.6	UHM 20 HPX	■	■	■	■	■	■
Call For Details	3006-14 UN 10-60 VP R UHM20 TX+	■	14	1.814	1	1	3.9	UHM 20 TX+		■	■		■	
Call For Details	3006-14 UN 10-60 VP R UHM20 HPX	■	14	1.814	1	1	3.9	UHM 20 HPX		■	■		■	
Call For Details	3006-13 UN 10-60 VP R UHM20 TX+	■	13	1.954	1.07	1.07	4.2	UHM 20 TX+		■				
Call For Details	3006-13 UN 10-60 VP R UHM20 HPX	■	13	1.954	1.07	1.07	4.2	UHM 20 HPX		■				




Full Profile
UNC UNF

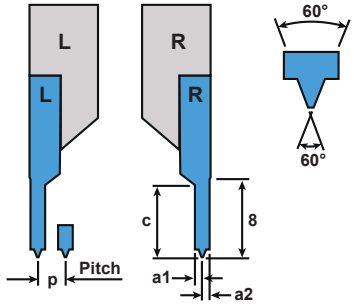

Ideal Cutting Materials

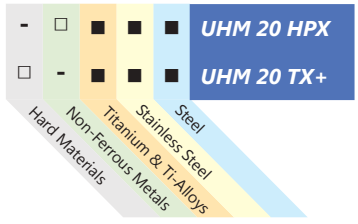


■ Preferred Application
□ Possible Application
- Application Not Recommended




3006 Threading

Profile: Partial


Left Hand		Right Hand		Dimensions & Features					
Item No.	Description	Item No.	Description	a	c	α	p	e	Coating
7005-148316	3006-2-6-60 L UHM20 HPX	7005-148314	3006-2-6-60 R UHM20 HPX	2	6	60	0.25-2.0	0.04	UHM 20 HPX
Call For Details	3006-2-6-60 L UHM20 TX+	Call For Details	3006-2-6-60 R UHM20 TX+	2	6	60	0.25-2.0	0.04	UHM 20 TX+
Call For Details	3006-2-6-55 L UHM20 HPX	Call For Details	3006-2-6-55 R UHM20 HPX	2	6	55	0.25-2.0	0.04	UHM 20 HPX
Call For Details	3006-2-6-55 L UHM20 TX+	Call For Details	3006-2-6-55 R UHM20 TX+	2	6	55	0.25-2.0	0.04	UHM 20 TX+
7005-148320	3006-3-10-60 L UHM20 HPX	7005-148318	3006-3-10-60 R UHM20 HPX	3	10	60	0.25-2.0	0.04	UHM 20 HPX
Call For Details	3006-3-10-60 L UHM20 TX+	Call For Details	3006-3-10-60 R UHM20 TX+	3	10	60	0.25-2.0	0.04	UHM 20 TX+
Call For Details	3006-3-10-55 L UHM20 HPX	Call For Details	3006-3-10-55 R UHM20 HPX	3	10	55	0.25-2.0	0.04	UHM 20 HPX
Call For Details	3006-3-10-55 L UHM20 TX+	Call For Details	3006-3-10-55 R UHM20 TX+	3	10	55	0.25-2.0	0.04	UHM 20 TX+



Partial Profile



Ideal Cutting Materials

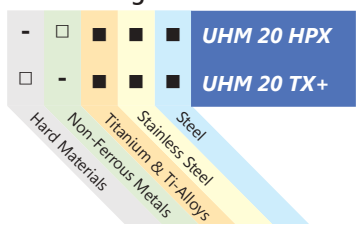


■ Preferred Application
□ Possible Application
- Application Not Recommended




3012 Chamfering


Repeatability <20µm

Left Hand		Right Hand		Dimensions & Features					
Item No.	Description	Item No.	Description	a	c	e	α	β	Coating
Call For Details	3012-2-6-60 L UHM20 HPX	Call For Details	3012-2-6-60 R UHM20 HPX	2	2	0.035	60°	60°	UHM 20 HPX
Call For Details	3012-2-6-60 L UHM20 TX+	Call For Details	3012-2-6-60 R UHM20 TX+	2	2	0.035	60°	60°	UHM 20 TX+
Call For Details	3012-2-10-45 L UHM20 HPX	Call For Details	3012-2-10-45 R UHM20 HPX	2	10	-	45°	90°	UHM 20 HPX
Call For Details	3012-2-10-45 L UHM20 TX+	Call For Details	3012-2-10-45 R UHM20 TX+	2	10	-	45°	90°	UHM 20 TX+




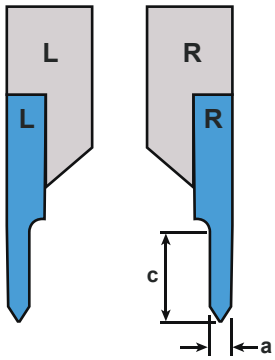


Ideal Cutting Materials

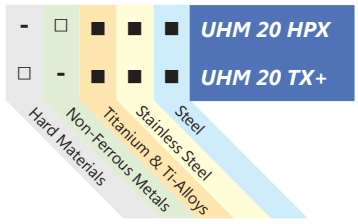

■ Preferred Application
□ Possible Application
- Application Not Recommended






3000 Holder


Type: Standard
Coolant-Thru: None

Repeatability = R : ■<20µm, ■<50µm

Left Hand		Right Hand		Dimensions & Features				
Item No.	Description	Item No.	Description	R	b	h	l	a
7005-112738	3000-08x80 L	7005-112736	3000-08x80 R	■	8	8	80	3.5
7005-126600	3000-08x100 L	7005-125767	3000-08x100 R	■	8	8	100	3.5
7005-112739	3000-10x80 L	7005-112737	3000-10x80 R	■	10	10	80	3.5
7005-126601	3000-10x100 L	7005-125989	3000-10x100 R	■	10	10	100	3.5
7005-126602	3000-12x100 L	7005-125240	3000-12x100 R	■	12	12	100	3.5
7005-126603	3000-16x125 L	7005-125990	3000-16x125 R	■	16	16	125	3.5
7005-126604	3000-20x125 L	7005-125991	3000-20x125 R	■	20	20	125	3.5
7005-137150	3000-20x150 L	7005-137151	3000-20x150 R	■	20	20	150	3.5
7005-112741	3000-3/8"x80 L	7005-112740	3000-3/8"x80 R	■	.375"	.375"	80	3.5
7005-127392	3000-3/8"x100 L	7005-127393	3000-3/8"x100 R	■	.375"	.375"	100	3.5
7005-127390	3000-1/2"x100 L	7005-127391	3000-1/2"x100 R	■	.500"	.500"	100	3.5
7005-139761	3000-5/8"x125 L	7005-139760	3000-5/8"x125 R	■	.625"	.625"	125	3.5
7005-146545	3000-3/4"x125 L	7005-146544	3000-3/4"x125 R	■	.750"	.750"	125	3.5
Call For Details	3000 B-10x100 L	7005-125989	3000 B-10x100 R	■	10	10	100	3
Call For Details	3000 B-12x100 L	7005-125240	3000 B-12x100 R	■	12	12	100	3
Call For Details	3000 B-16x125 L	7005-125990	3000 B-16x125 R	■	16	16	125	3



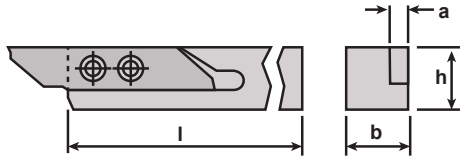




3000 Holder Coolant-Thru

Type: Standard
Coolant-Thru: Rear & Side Ports

Repeatability <10µm

Left Hand		Right Hand		Dimensions & Features					Coolant Fittings	
Item No.	Description	Item No.	Description	h	b	l	x	(d)	Side	Rear
7005-146053A	3000-08x100 L IC	7005-146039A	3000-08x100 R IC	8	12	100	12.2	M5	4005-000111	4005-000111
7005-146054A	3000-10x100 L IC	7005-146052A	3000-10x100 R IC	10	12	100	14	M5	4005-000111	4005-000111
7005-146055A	3000-12x100 L IC	7005-129797A	3000-12x100 R IC	12	12	100	16	M5	4005-000111	4005-000111
7005-146056A	3000-16x125 L IC	7005-146046A	3000-16x125 R IC	16	16	125	20	G 1/8"	4005-000111	4005-000104
7005-146058A	3000-20x125 L IC	7005-146057A	3000-20x125 R IC	20	20	125	24	G 1/8"	4005-000111	4005-000104
7005-146060A	3000-25x125 L IC	7005-146059A	3000-25x125 R IC	25	25	125	29	G 1/8"	4005-000111	4005-000104
7005-146061A	3000-3/8"x100 L IC	7005-146062A	3000-3/8"x100 R IC	.375"	.375"	100	13.5	M5	4005-000111	4005-000111
7005-129805A	3000-1/2"x100 L IC	7005-129802A	3000-1/2"x100 R IC	.500"	.500"	100	16.7	M5	4005-000111	4005-000111
7005-129806A	3000-5/8"x125 L IC	7005-129803A	3000-5/8"x125 R IC	.625"	.625"	125	19.9	G 1/8"	4005-000111	4005-000104
7005-129807A	3000-3/4"x125 L IC	7005-129804A	3000-3/4"x125 R IC	.750"	.750"	125	23	G 1/8"	4005-000111	4005-000104

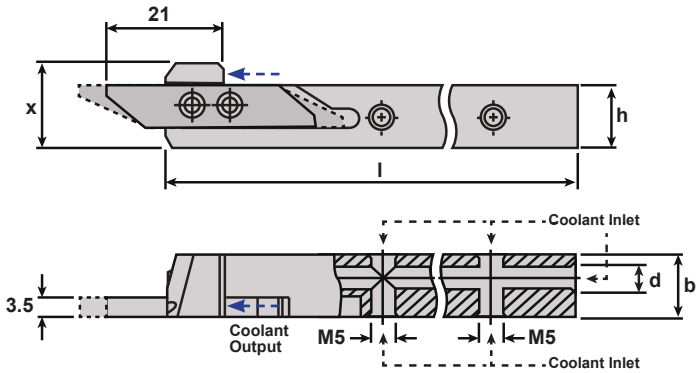



4005-000111
Connects to side ports on ALL shank sizes
0° Male Union - M5-0.8 to 1/4 JIC Flare Fitting
Included With All Coolant-Thru Shanks





4005-000104
Connects to end port on 5/8" and larger shanks
0° Male Union - 1/8 BSPP to 1/4 JIC Flare Fitting
Fits Position (d) On Tool Holders Sold Separately

Features (5) connection ports for simple connection to your oil delivery system: (4) Side ports and (1) one end port making connection possible on most machine tool positions.

multidec® CUT 3000 Offset Shank & Insert Holders

Shifted holders enable the cutting of short parts by enabling the cutting edge to move closer to the guide bushing thus reducing the chance for deflection.

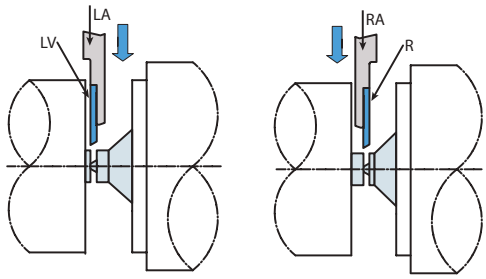




3000 Holder


Type: Offset Shank & Insert
Coolant-Thru: None

Repeatability <20µm

Left Hand		Right Hand		Dimensions		
Item No.	Description	Item No.	Description	b	h	l
7005-112743	3000-10x80 LA	7005-112742	3000-10x80 RA	10	10	80
7005-138860	3000-10x100 LA	7005-138858	3000-10x100 RA	10	10	100
7005-127929	3000-12x100 LA	7005-127927	3000-12x100 RA	12	12	100
7005-127930	3000-16x125 LA	7005-127928	3000-16x125 RA	16	16	125
7005-112745	3000-3/8"x80 LA	7005-112744	3000-3/8"x80 RA	.375"	.375"	80
7005-138411	3000-3/8"x100 LA	7005-138410	3000-3/8"x100 RA	.375"	.375"	100
7005-138413	3000-1/2"x100 LA	7005-138412	3000-1/2"x100 RA	.500"	.500"	100
7005-139763	3000-5/8"x125 LA	7005-139762	3000-5/8"x125 RA	.625"	.625"	125

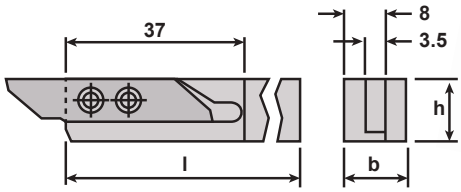






3000 Holder Coolant-Thru

Type: Offset Shank & Insert
Coolant-Thru: Rear & Side Ports

Repeatability <10µm

Left Hand		Right Hand		Dimensions			Rear Port	Side Ports	Included
Item No.	Description	Item No.	Description	b	h	l	G1/8in	M5	Fitting
7005-150276A	3000-16x125 LA IC	7005-150275	3000-16x125 RA IC	16	16	125	4005-000104	4005-000111	
7005-150277A	3000-5/8"x125 LA IC	7005-150278	3000-5/8"x125 RA IC	.625"	.625"	125	4005-000104	4005-000111	
7005-150276	3000-16x125 LA IC	Call for details	3000-16x125 RA IC	16	16	125	4005-000104		4005-000111
7005-150277	3000-5/8"x125 LA IC	Call for details	3000-5/8"x125 RA IC	.625"	.625"	125	4005-000104		4005-000111

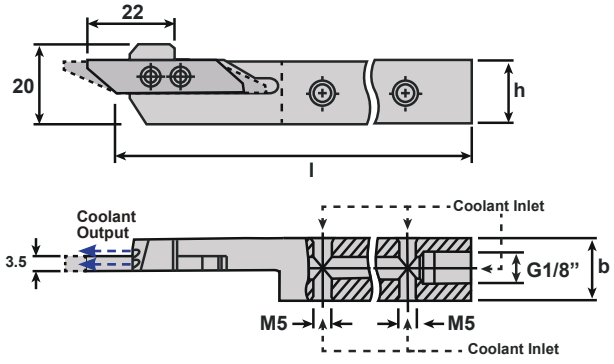



4005-000111
Connects to side ports on ALL shank sizes
0° Male Union - M5-0.8 to 1/4 JIC Flare Fitting
Included With Some Coolant-Thru Shanks





4005-000104
Connects to end port on 5/8" and larger shanks
0° Male Union - 1/8 BSPP to 1/4 JIC Flare Fitting
Fits Position (d) On Tool Holders Sold Separately

Features (5) connection ports for simple connection to your oil delivery system: (4) Side ports and (1) one end port making connection possible on most machine tool positions.

multidec®-CUT 3000 Offset Shank Holders

Offset holders include clearances for extended nose guide bushings or for subspindle/pickoff clearance thus providing an ideal cutoff situation in tough applications.

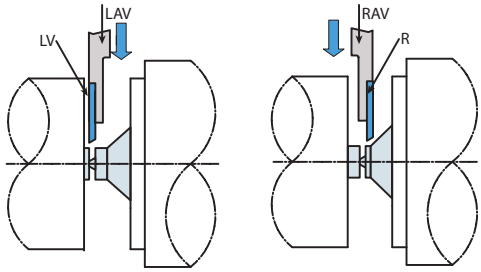




3000 Holder


Type: Offset Shank
Coolant-Thru: None

Repeatability <20µm

Left Hand		Right Hand		Dimensions		
Item No.	Description	Item No.	Description	b	h	l
7005-112747	3000-10x80 LAV	7005-112746	3000-10x80 RAV	10	10	80
7005-138842	3000-10x100 LAV	7005-138848	3000-10x100 RAV	10	10	100
7005-138843	3000-12x100 LAV	7005-138849	3000-12x100 RAV	12	12	100
7005-138844	3000-16x125 LAV	7005-138850	3000-16x125 RAV	16	16	125
7005-112749	3000-3/8"x80 LAV	7005-112748	3000-3/8"x80 RAV	.375"	.375"	80
7005-138869	3000-3/8"x100 LAV	7005-138868	3000-3/8"x100 RAV	.375"	.375"	100
7005-138871	3000-1/2"x100 LAV	7005-138870	3000-1/2"x100 RAV	.500"	.500"	100
7005-139768	3000-5/8"x125 LAV	7005-139764	3000-5/8"x125 RAV	.625"	.625"	125



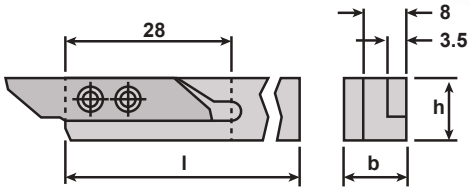




3000 Holder Coolant-Thru

Type: Offset Shank
Coolant-Thru: Rear & Side Ports

Repeatability <10µm

Left Hand		Right Hand		Dimensions			Rear Port	Side Ports
Item No.	Description	Item No.	Description	b	h	l	G1/8in	M5
7005-150279A	3000-16x125 LAV IC	7005-150281A	3000-16x125 RAV IC	16	16	125	4005-000104	4005-000111
7005-150282	3000-5/8"x125 LAV IC	7005-150283	3000-5/8"x125 RAV IC	.625"	.625"	125	4005-000104	4005-000111
7005-150279	3000-16x125 LAV IC	7005-150281	3000-16x125 RAV IC	16	16	125	4005-000104	4005-000111

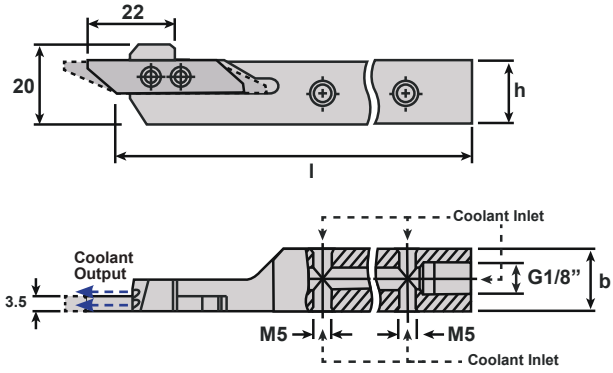




4005-000111
Connects to side ports on ALL Shank sizes
0° Male Union - M5-0.8 to 1/4 JIC Flare Fitting
Included With All Coolant-Thru Shanks



4005-000104
Connects to end port on 5/8" and larger shanks
0° Male Union - 1/8 BSPP to 1/4 JIC Flare Fitting
Fits Position (d) On Tool Holders
Sold Separately.

Features (5) connection ports for simple connection to your oil delivery system: (4) Side ports and (1) one end port making connection possible on most machine tool positions.



3000 Holder Combi

Type: Standard
Coolant-Thru: None

Repeatability <20µm

Mount Inserts From The Opposite Side




Left Hand		Right Hand		Dimensions			
Item No.	Description	Item No.	Description	b	h	l	a
7005-126605	3000-08x100 L C	7005-126195	3000-08x100 R C	8	8	100	3.5
7005-126606	3000-10x100 L C	7005-126155	3000-10x100 R C	10	10	100	3.5
7005-126607	3000-12x100 L C	7005-126156	3000-12x100 R C	12	12	100	3.5
7005-126608	3000-16x125 L C	7005-126157	3000-16x125 R C	16	16	125	3.5
7005-126609	3000-20x125 L C	7005-126158	3000-20x125 R C	20	20	125	3.5
7005-113088	3000-3/8"x100 L C	7005-113085	3000-3/8"x100 R C	.375"	.375"	100	3.5
7005-113089	3000-1/2"x100 L C	7005-113086	3000-1/2"x100 R C	.500"	.500"	100	3.5
7005-113090	3000-5/8"x125 L C	7005-113087	3000-5/8"x125 R C	.625"	.625"	125	3.5
7005-113892	3000-3/4"x125 L C	7005-113891	3000-3/4"x125 R C	.750"	.750"	125	3.5


multidec®-CUT 3000...C Combi Holders


3000 Series Combi holders allow the insert fixing screws to be mounted from the opposite side of the holder using tapped bushings, making it easier to change inserts.


3000 Series Standard



3000 Series Combi



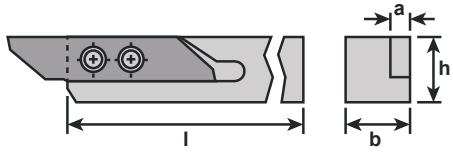




3000 Holder Coolant-Thru


Type: Standard
Coolant-Thru: Sides



Coolant-Thru For Lathe Tooling

Left Hand		Right Hand		Dimensions				Coolant Fittings	
Item No.	Description	Item No.	Description	b	h	l	f	G1/8in	M5
7005-153668	3000 AK-16x125 L IC	7005-153605	3000 AK-16x125 R IC	16	16	125	20	4005-000104	4005-000111
7005-153609	3000 AK-20x125 L IC	7005-153606	3000 AK-20x125 R IC	20	20	125	25	4005-000104	4005-000111
7005-153610	3000 AK-25x125 L IC	7005-153607	3000 AK-25x125 R IC	25	25	125	32	4005-000104	4005-000111
7005-153614	3000 AK-5/8"x125 L IC	7005-153611	3000 AK-5/8"x125 R IC	5/8"	5/8"	125	20	4005-000104	4005-000111
7005-153615	3000 AK-3/4"x125 L IC	7005-153612	3000 AK-3/4"x125 R IC	3/4"	3/4"	125	25	4005-000104	4005-000111
7005-153616	3000 AK-1"x125 L IC	7005-153613	3000 AK-1"x125 R IC	1"	1"	125	32	4005-000104	4005-000111

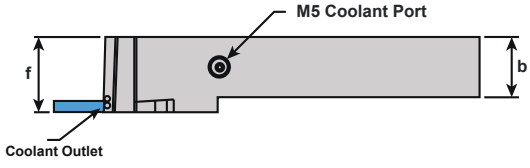

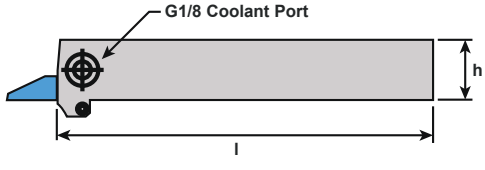

multidec® SHORT

multidec® SHORT coolant-thru holders enable the use of multidec® turning inserts on commonly available quick change tooling systems. **multidec® 1600, 3000, ISO VC, & ISO VP** series inserts are currently available.

See Pg. 302 For Full Details



3000 Series Insert Shown


multidec® CUT 1600 Series


UTILIS
Tooling for High Technology



UTILIS multidec® 1600 Series Swiss Tools are designed for micro turning and grooving operations in Swiss-type CNC machines. Perfectly designed for the smallest of Swiss machines the 1600 series excels at work under .125" in diameter. Tough UHM30 grade carbide combined with a variety of coatings enhances tool life in tough materials typically machined in Swiss-type applications.

- Highly repeatable cutting edge
- .05mm to 2.75mm (.0019" - .1082") insert widths
- Micro grooving, front turning, back turning, micro threading, & cut off operations

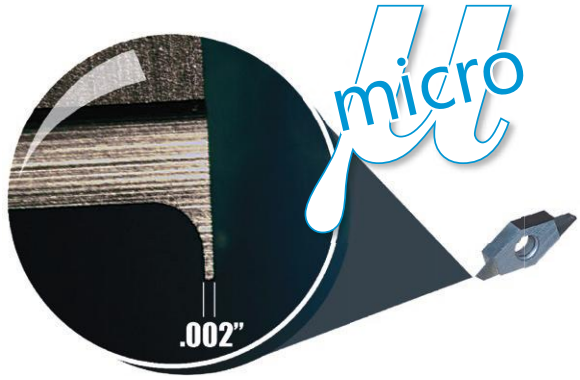

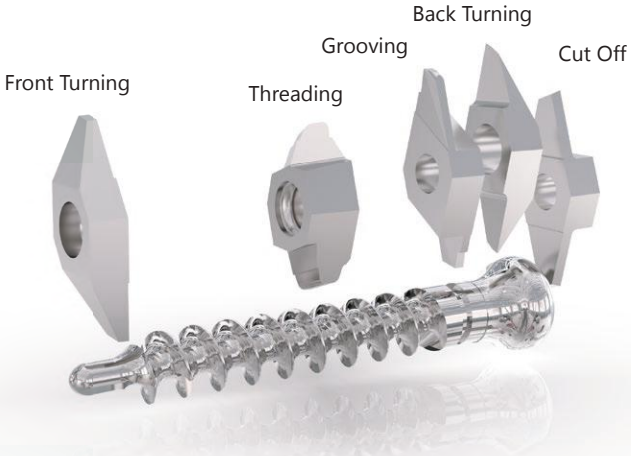

Series	Operation
1602	Part Cut Off
1603	Front Turning
1604	Back Turning
1605	Groove & Turning
1606	Threading
1607	Full Radius Grooving
1610	Micro Grooving
1611	Axial Grooving
1612	Chamfering

Properties & Application Range of Coatings

Carbide		Uncoated	Standard Coatings				Special Coatings (on request)						
UTILIS-Code			SX	MZ	HX	HPX	HX-A/ HX-A+	TX	HLX	BX	DX-T	DX-HC	DX/DX+
Coating		-	TiN	TiN/ TiAlN	TiAlN/ AlTiN	TiAlN/ AlTiN	AlCrN	AlCrN	TiAlN WC/C	TiCN	DLC	Ta-C	Diamond
Coating Process		-	PVD	CVD	PVD	PVD	PVD	PVD	PVD	PVD	PVD	PVD	CVD
Materials (Category)													
Unalloyed Steel	(I)	■	■	■	■	■	■	□	-	■	-	-	-
Low-Alloy Steel	(II)	□	■	■	■	■	■	□	-	■	-	-	-
High-Alloy Steel	(III)	□	□	■	■	■	■	□	-	□	-	-	-
Titanium	(IV)	□	-	-	■	□	■	■	■	-	-	-	-
Stainless Steel	(V)	□	□	■	■	■	■	□	■	■	-	-	-
Stainless Steel	(VI)	□	□	■	■	■	■	□	■	□	-	-	-
Aluminum	(VII)	■	□	-	■	-	□	-	■	-	■	■	■
Brass	(VIII)	■	□	-	■	□	□	-	■	-	■	■	-
Synthetics Reinforced/Composits	(IX)	-	-	-	□	-	-	-	-	-	□	■	■
Hard Materials	>60 HRC	-	-	-	-	-	□	■	-	-	-	-	-

Coatings vs Material Type

Carbide												Cermet		Diamond			Materials
-	-	■	■	■	■	■	□	□	■	■	□	■	■	-	-	-	**Steel**
-	■	■	-	■	■	□	□	■	■	■	■	□	■	-	-	-	Stainless Steel
□	■	■	-	□	■	-	□	■	■	-	-	-	-	-	-	-	Titanium & Ti-Alloys
■	□	-	-	-	-	-	□	□	-	-	□	-	-	■	■	■	Non-Ferrous Metals
-	-	■	-	-	-	-	-	-	-	-	-	-	-	-	-	-	Mard Materials
UHM 10	UHM 10 HX	UHM 10 TX+	UHM 10 MZ	UHM 20 HPX	UHM 20 TX+	UHM 20 MZ	UHM 30	UHM 30 HX	UHM 30 TX+	UHM 30 MZ	UHM 30 SX	UCM 10	UCM 10 HX	UCVD 08	UPCD 15	UPCD 20	

■ Preferred Application
□ Possible Application
- Application Not Recommended



Insert Geometry & Chip Breakers

UTILIS
Tooling for High Technology

■ Preferred Application
□ Possible Application
– Application Not Recommended

Series Operation	Chip Breaker	Steel	Stainless Steel	Titanium & Ti-Alloys	Non Ferrous Metals	Hardened	
1602 Series **Cut Off**	1602	■	■	■	–	■	Micro Finishing
		■	■	■	–	■	Finishing
		□	□	□	■	□	Roughing
	1602 GT20	■	■	■	□	–	Micro Finishing
		■	■	■	■	□	Finishing
		■	■	■	■	■	Roughing
	1602 SC	■	■	■	–	■	Micro Finishing
		■	■	■	–	■	Finishing
		■	■	■	–	■	Roughing
	1602 SPT	–	■	■	■	■	Micro Finishing
		–	■	■	■	□	Finishing
		–	□	□	■	–	Roughing
	1602 TOP	■	■	■	■	■	Micro Finishing
		■	■	■	■	□	Finishing
		□	□	□	■	–	Roughing
	1602 SC TOP	■	■	■	–	■	Micro Finishing
		■	■	■	□	□	Finishing
		■	■	■	■	–	Roughing
1603 Series **Front Turning**	1603	■	■	■	–	■	Micro Finishing
		■	■	■	–	■	Finishing
		■	■	□	■	□	Roughing
	1603 GA20	□	□	□	■	–	Micro Finishing
		■	■	■	■	□	Finishing
		■	■	■	■	■	Roughing
	1603 SP	■	■	■	■	■	Micro Finishing
		■	■	■	■	□	Finishing
		□	□	□	■	–	Roughing
	1603 CP TOP	■	■	■	■	■	Micro Finishing
		■	■	■	■	□	Finishing
		□	□	□	■	–	Roughing
1604 Series **Back Turning**	1604 GB20	□	□	□	■	–	Micro Finishing
		■	■	■	■	□	Finishing
		■	■	■	■	■	Roughing
	1604 SP	■	■	■	■	■	Micro Finishing
		■	■	■	■	□	Finishing
		□	□	□	■	–	Roughing
	1604 TOP	■	■	■	■	■	Micro Finishing
		■	■	■	■	□	Finishing
		□	□	□	■	–	Roughing
	1604 SP TOP	■	■	■	■	■	Micro Finishing
		■	■	■	■	□	Finishing
		□	□	□	■	–	Roughing
1605 Series **Groove & Turning**	1605	■	■	□	–	■	Micro Finishing
		■	■	■	□	■	Finishing
		■	■	□	■	□	Roughing
	1605 CP	■	■	■	■	■	Micro Finishing
		■	■	■	■	–	Finishing
		□	□	□	■	–	Roughing
	1605 GC20	■	■	■	■	–	Micro Finishing
		■	■	■	■	□	Finishing
		■	■	■	■	■	Roughing
1606 Series **Threading**	1606	■	■	■	■	■	Micro Finishing
		–	–	–	□	□	Finishing
		–	–	–	–	□	Roughing
	1606 VP	■	■	■	■	■	Micro Finishing
		–	–	–	□	–	Finishing
		–	–	–	–	–	Roughing
1607 Series **Full Radius Grooving**	1607	■	■	■	■	■	Micro Finishing
		■	■	■	■	□	Finishing
		–	–	–	–	–	Roughing

■ Preferred Application
□ Possible Application
– Application Not Recommended


Series Operation	Chip Breaker	Steel	Stainless Steel	Titanium & Ti-Alloys	Non Ferrous Metals	Hardened	
1610 Series	1610	■	■	■	■	■	Micro Finishing
		■	■	■	■	□	Finishing
		–	–	–	–	–	Roughing
1611 Series	1611	■	■	■	■	■	Micro Finishing
		■	■	■	■	□	Finishing
		–	–	–	–	–	Roughing
1612 Series	1612	■	■	■	■	■	Micro Finishing
		■	■	■	■	–	Finishing
		–	–	–	–	–	Roughing

Classic multidec®
Precision Ground Chip Breakers



Type-SPT Chip Breaker
Cut-Off Inserts

The multidec® CUT3002 cut off inserts with type-SPT chip breaker feature a positive rake intended for use in soft and stringy materials. The SPT chip breaker comes in three different angles described by the product number suffix below.




SPT: 20° rake - Plastics Such As Delrin
SPT06: 6° rake - Good For Stainless
SPT12: 12° rake - Aluminum




Type-SC Chip Breaker
Cut-Off Inserts

Cut-off inserts armed with the type-SC chip breaker are ideal for hard materials. This chip breaker is quite universal, used in roughing, finishing, and micro finishing.



Type-SP Chip Breaker
Front & Back Turning Inserts

Front and back turning inserts with the type-SP chip breaker are ideal for finishing and micro finishing on may material types, breaking up chips and preventing stringy chips from forming.



Type-CP Chip Breaker
Front & Back Turning, Grooving Inserts

When creating deep features during front turning, back turning, or grooving, the type-CP chip breaker is vital for chip removal. The sharp articulated geometry will peel chips away and keep features clear of material during finishing and micro finishing operations.

UTILIS®
Tooling for High Technology

G-Line multidec®
Free Form Chip Breakers

NEW

- Improved Chip Control
- Longer Tool Life
- Better Cutting Values
- Better Process Relability




Type-GT20 Chip Breaker Cut-Off Inserts

NEW

Compared to the GS12 chip breaker geometry, the GT20 chip breaker has a sharp and slightly rounded cutting edge. It provides excellent chip flow, creating short chips and resulting in a smooth finish. These results can be experienced at higher feed rates also.

See pages 169-170 for sizes



Type-GA20 Chip Breaker Front Turning Inserts

NEW

Based of the multidec TOP insert technology, this optimised version enables turning in three directions. Perfect chip control is maintained during facing, turning, grooving, and back turning. Inhereted from the TOP insert technology, the GA20 enables up to 100% higher feed rate.

See page 172 for sizes



Type-GC20 Chip Breaker Grooving & Turning Insert

NEW

Providing good results in almost any material while facing, grooving, or turning, the GC20 chip breaker can turn in three direction with at extremely low and high cutting depths and across low and high feed rates. Excellent chip control results can also be observed in lead-free brass.

See page 175 for sizes




1602 Cutoff
Cut: Standard
Chip Breaker: None


Repeatability = R : ■<10µm, ■<20µm, ■<50µm

Left Hand		Right Hand		Dimensions & Features					
Item No.	Description	Item No.	Description	R	a	c	α	r	Coating
7005-148423	1602-0.5-2.5 L G20 UHM20 HPX	7005-148425	1602-0.5-2.5 R G20 UHM20 HPX	■	0.5	2.5	20°	0	UHM 20 HPX
Call For Details	1602-0.5-2.5 L G20 UHM20 TX+	Call For Details	1602-0.5-2.5 R G20 UHM20 TX+	■	0.5	2.5	20°	0	UHM 20 TX+
7005-148427	1602-0.8-5 L UHM20 HPX	7005-148429	1602-0.8-5 R UHM20 HPX	■	0.8	5	15°	0	UHM 20 HPX
Call For Details	1602-0.8-5 L UHM20 TX+	Call For Details	1602-0.8-5 R UHM20 TX+	■	0.8	5	15°	0	UHM 20 TX+
7005-148431	1602-1.0-5 L UHM20 HPX	7005-148433	1602-1.0-5 R UHM20 HPX	■	1	5	15°	0	UHM 20 HPX
Call For Details	1602-1.0-5 L UHM20 TX+	Call For Details	1602-1.0-5 R UHM20 TX+	■	1	5	15°	0	UHM 20 TX+
7005-148435	1602-1.2-5 L UHM20 HPX	7005-148437	1602-1.2-5 R UHM20 HPX	■	1.2	5	15°	0	UHM 20 HPX
Call For Details	1602-1.2-5 L UHM20 TX+	Call For Details	1602-1.2-5 R UHM20 TX+	■	1.2	5	15°	0	UHM 20 TX+
7005-148439	1602-1.5-5 L UHM20 HPX	7005-148441	1602-1.5-5 R UHM20 HPX	■	1.5	5	15°	0	UHM 20 HPX
Call For Details	1602-1.5-5 L UHM20 TX+	Call For Details	1602-1.5-5 R UHM20 TX+	■	1.5	5	15°	0	UHM 20 TX+
Call For Details	1602 B-1.0-5 L UHM20 HPX	Call For Details	1602 B-1.0-5 R UHM20 HPX	■	1	5	15°	0	UHM 20 HPX
Call For Details	1602 B-1.5-5 L UHM20 HPX	Call For Details	1602 B-1.5-5 R UHM20 HPX	■	1.5	5	15°	0	UHM 20 HPX





Ideal Cutting Materials

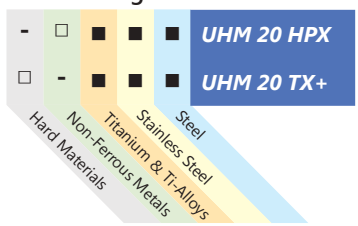

■ Preferred Application
□ Possible Application
- Application Not Recommended




1602 Cutoff
Cut: Inverted
Chip Breaker: None


Repeatability = R : ■<10µm, ■<20µm, ■<50µm

Left Hand		Right Hand		Dimensions & Features					
Item No.	Description	Item No.	Description	R	a	c	α	r	Coating
7005-148443	1602-0.5-2.5 LV G20 UHM20 HPX	7005-148445	1602-0.5-2.5 RV G20 UHM20 HPX	■	0.5	2.5	20°	0	UHM 20 HPX
Call For Details	1602-0.5-2.5 LV G20 UHM20 TX+	Call For Details	1602-0.5-2.5 RV G20 UHM20 TX+	■	0.5	2.5	20°	0	UHM 20 TX+
7005-148447	1602-0.8-5 LV UHM20 HPX	7005-148449	1602-0.8-5 RV UHM20 HPX	■	0.8	5	15°	0	UHM 20 HPX
Call For Details	1602-0.8-5 LV UHM20 TX+	Call For Details	1602-0.8-5 RV UHM20 TX+	■	0.8	5	15°	0	UHM 20 TX+
7005-148451	1602-1.0-5 LV UHM20 HPX	7005-148453	1602-1.0-5 RV UHM20 HPX	■	1	5	15°	0	UHM 20 HPX
Call For Details	1602-1.0-5 LV UHM20 TX+	Call For Details	1602-1.0-5 RV UHM20 TX+	■	1	5	15°	0	UHM 20 TX+
7005-148455	1602-1.2-5 LV UHM20 HPX	7005-148457	1602-1.2-5 RV UHM20 HPX	■	1.2	5	15°	0	UHM 20 HPX
Call For Details	1602-1.2-5 LV UHM20 TX+	Call For Details	1602-1.2-5 RV UHM20 TX+	■	1.2	5	15°	0	UHM 20 TX+
7005-148459	1602-1.5-5 LV UHM20 HPX	7005-148461	1602-1.5-5 RV UHM20 HPX	■	1.5	5	15°	0	UHM 20 HPX
Call For Details	1602-1.5-5 LV UHM20 TX+	Call For Details	1602-1.5-5 RV UHM20 TX+	■	1.5	5	15°	0	UHM 20 TX+
Call For Details	1602 B-1.0-5 LV UHM20 HPX	Call For Details	1602 B-1.0-5 RV UHM20 HPX	■	1	5	15°	0	UHM 20 HPX
Call For Details	1602 B-1.5-5 LV UHM20 HPX	Call For Details	1602 B-1.5-5 RV UHM20 HPX	■	1.5	5	15°	0	UHM 20 HPX





Ideal Cutting Materials

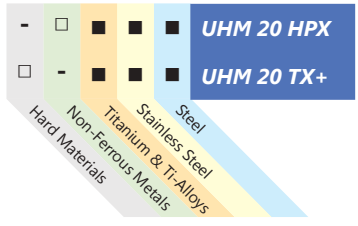

■ Preferred Application
□ Possible Application
- Application Not Recommended




1602 Cutoff
Cut: Standard
Chip Breaker: SC

Repeatability <20µm


Left Hand		Right Hand		Dimensions & Features				
Item No.	Description	Item No.	Description	a	c	α	r	Coating
7005-148463	1602-1.5-5 L SC UHM20 HPX	7005-116964	1602-1.5-5 R SC UHM20 HPX	1.5	5	15°	0	UHM 20 HPX
Call For Details	1602-1.5-5 L SC UHM20 TX+	Call For Details	1602-1.5-5 R SC UHM20 TX+	1.5	5	15°	0	UHM 20 TX+



Type-SC
Chip Breaker



Ideal Cutting Materials

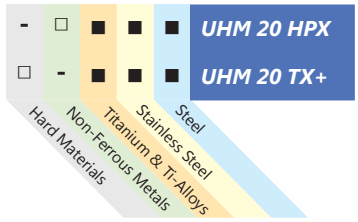

■ Preferred Application
□ Possible Application
– Application Not Recommended




1602 Cutoff
Cut: Inverted
Chip Breaker: SC

Repeatability <20µm


Left Hand		Right Hand		Dimensions & Features				
Item No.	Description	Item No.	Description	a	c	α	r	Coating
7005-148465	1602-1.5-5 LV SC UHM20 HPX	7005-148467	1602-1.5-5 RV SC UHM20 HPX	1.5	5	15°	0	UHM 20 HPX
Call For Details	1602-1.5-5 LV SC UHM20 TX+	Call For Details	1602-1.5-5 RV SC UHM20 TX+	1.5	5	15°	0	UHM 20 TX+



Type-SC
Chip Breaker



Ideal Cutting Materials

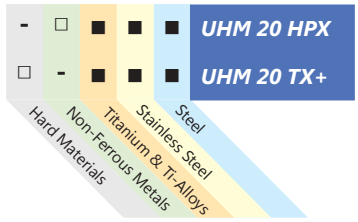

■ Preferred Application
□ Possible Application
– Application Not Recommended




1602 Cutoff
Cut: Neutral
Chip Breaker: SC

Repeatability <20µm


Left Hand		Right Hand		Dimensions & Features			
Item No.	Description	Item No.	Description	a	c	r	Coating
Call For Details	1602-1.5-5 LN SC UHM20 HPX	Call For Details	1602-1.5-5 RN SC UHM20 HPX	1.5	5	0.05mm/.0019in	UHM 20 HPX
Call For Details	1602-1.5-5 LN SC UHM20 TX+	Call For Details	1602-1.5-5 RN SC UHM20 TX+	1.5	5	0.05mm/.0019in	UHM 20 TX+



Type-SC
Chip Breaker



Ideal Cutting Materials

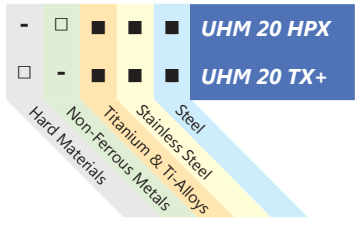

■ Preferred Application
□ Possible Application
– Application Not Recommended




1602 Cutoff

Cut: Standard


Chip Breaker: SPT

Repeatability = R : ■<10µm, ■<20µm, ■<50µm


Left Hand		Right Hand		Dimensions & Features						
Item No.	Description	Item No.	Description	R	a	c	α	β	r	Coating
Call For Details	1602-0.5-2.5 L SPT G20 UHM20 HPX	Call For Details	1602-0.5-2.5 R SPT G20 UHM20 HPX	■	0.5	2.5	20°	20°	0	UHM 20 HPX
Call For Details	1602-0.5-2.5 L SPT G20 UHM20 TX+	Call For Details	1602-0.5-2.5 R SPT G20 UHM20 TX+	■	0.5	2.5	20°	20°	0	UHM 20 TX+
Call For Details	1602-0.8-5 L SPT UHM20 HPX	Call For Details	1602-0.8-5 R SPT UHM20 HPX	■	0.8	5	15°	20°	0	UHM 20 HPX
Call For Details	1602-0.8-5 L SPT UHM20 TX+	Call For Details	1602-0.8-5 R SPT UHM20 TX+	■	0.8	5	15°	20°	0	UHM 20 TX+
Call For Details	1602-1.0-5 L SPT UHM20 HPX	Call For Details	1602-1.0-5 R SPT UHM20 HPX	■	1	5	15°	20°	0	UHM 20 HPX
Call For Details	1602-1.0-5 L SPT UHM20 TX+	Call For Details	1602-1.0-5 R SPT UHM20 TX+	■	1	5	15°	20°	0	UHM 20 TX+
7005-112751	1602-1.0-5 L SPT06 UHM20 HPX	7005-112755	1602-1.0-5 R SPT06 UHM20 HPX	■	1	5	15°	6°	0.05	UHM 20 HPX
Call For Details	1602-1.0-5 L SPT06 UHM20 TX+	Call For Details	1602-1.0-5 R SPT06 UHM20 TX+	■	1	5	15°	6°	0.05	UHM 20 TX+
7005-112753	1602-1.0-5 L SPT12 UHM20 HPX	7005-112757	1602-1.0-5 R SPT12 UHM20 HPX	■	1	5	15°	12°	0.05	UHM 20 HPX
Call For Details	1602-1.0-5 L SPT12 UHM20 TX+	Call For Details	1602-1.0-5 R SPT12 UHM20 TX+	■	1	5	15°	12°	0.05	UHM 20 TX+
Call For Details	1602-1.2-5 L SPT UHM20 HPX	Call For Details	1602-1.2-5 R SPT UHM20 HPX	■	1.2	5	15°	20°	0	UHM 20 HPX
Call For Details	1602-1.2-5 L SPT UHM20 TX+	Call For Details	1602-1.2-5 R SPT UHM20 TX+	■	1.2	5	15°	20°	0	UHM 20 TX+
Call For Details	1602-1.5-5 L SPT UHM20 HPX	Call For Details	1602-1.5-5 R SPT UHM20 HPX	■	1.5	5	15°	20°	0	UHM 20 HPX
Call For Details	1602-1.5-5 L SPT UHM20 TX+	Call For Details	1602-1.5-5 R SPT UHM20 TX+	■	1.5	5	15°	20°	0	UHM 20 TX+
7005-112759	1602-1.5-5 L SPT06 UHM20 HPX	7005-112763	1602-1.5-5 R SPT06 UHM20 HPX	■	1.5	5	15°	6°	0.05	UHM 20 HPX
Call For Details	1602-1.5-5 L SPT06 UHM20 TX+	Call For Details	1602-1.5-5 R SPT06 UHM20 TX+	■	1.5	5	15°	6°	0.05	UHM 20 TX+
7005-112761	1602-1.5-5 L SPT12 UHM20 HPX	7005-112765	1602-1.5-5 R SPT12 UHM20 HPX	■	1.5	5	15°	12°	0.05	UHM 20 HPX
Call For Details	1602-1.5-5 L SPT12 UHM20 TX+	Call For Details	1602-1.5-5 R SPT12 UHM20 TX+	■	1.5	5	15°	12°	0.05	UHM 20 TX+
Call For Details	1602 B-1.0-5 L SPT06 UHM20 HPX	Call For Details	1602 B-1.0-5 R SPT06 UHM20 HPX	■	1	5	15°	6°	0.05	UHM 20 HPX
Call For Details	1602 B-1.5-5 L SPT06 UHM20 HPX	Call For Details	1602 B-1.5-5 R SPT06 UHM20 HPX	■	1.5	5	15°	6°	0.05	UHM 20 HPX




Type-SPT Chip Breaker

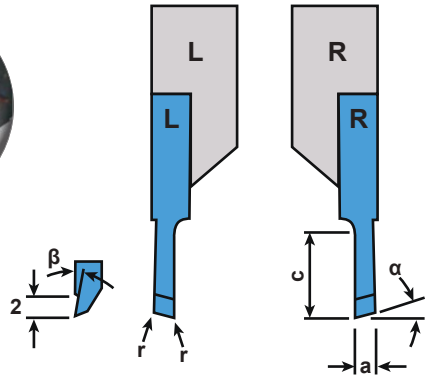

Ideal Cutting Materials

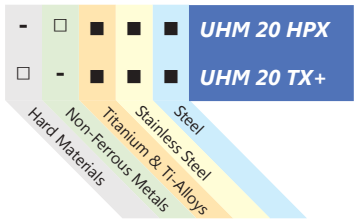

■ Preferred Application
□ Possible Application
- Application Not Recommended



1602 Cutoff

Cut: Inverted


Chip Breaker: SPT

Repeatability = R : ■<10µm, ■<20µm, ■<50µm


Left Hand		Right Hand		Dimensions & Features						
Item No.	Description	Item No.	Description	R	a	c	α	β	r	Coating
Call For Details	1602-0.5-2.5 LV SPT G20 UHM20 HPX	Call For Details	1602-0.5-2.5 RV SPT G20 UHM20 HPX	■	0.5	2.5	20°	20°	0	UHM 20 TX+
Call For Details	1602-0.5-2.5 LV SPT G20 UHM20 TX+	Call For Details	1602-0.5-2.5 RV SPT G20 UHM20 TX+	■	0.5	2.5	20°	20°	0	UHM 20 TX+
Call For Details	1602-0.8-5 LV SPT UHM20 HPX	Call For Details	1602-0.8-5 RV SPT UHM20 HPX	■	0.8	5	15°	20°	0	UHM 20 TX+
Call For Details	1602-0.8-5 LV SPT UHM20 TX+	Call For Details	1602-0.8-5 RV SPT UHM20 TX+	■	0.8	5	15°	20°	0	UHM 20 TX+
Call For Details	1602-1.0-5 LV SPT UHM20 HPX	Call For Details	1602-1.0-5 RV SPT UHM20 HPX	■	1	5	15°	20°	0	UHM 20 TX+
Call For Details	1602-1.0-5 LV SPT UHM20 TX+	Call For Details	1602-1.0-5 RV SPT UHM20 TX+	■	1	5	15°	20°	0	UHM 20 TX+
7005-112767	1602-1.0-5 LV SPT06 UHM20 HPX	7005-112771	1602-1.0-5 RV SPT06 UHM20 HPX	■	1	5	15°	6°	0.05	UHM 20 HPX
Call For Details	1602-1.0-5 LV SPT06 UHM20 TX+	Call For Details	1602-1.0-5 RV SPT06 UHM20 TX+	■	1	5	15°	6°	0.05	UHM 20 HPX
7005-112769	1602-1.0-5 LV SPT12 UHM20 HPX	7005-112773	1602-1.0-5 RV SPT12 UHM20 HPX	■	1	5	15°	12°	0.05	UHM 20 HPX
Call For Details	1602-1.0-5 LV SPT12 UHM20 TX+	Call For Details	1602-1.0-5 RV SPT12 UHM20 TX+	■	1	5	15°	12°	0.05	UHM 20 HPX
Call For Details	1602-1.2-5 LV SPT UHM20 HPX	Call For Details	1602-1.2-5 RV SPT UHM20 HPX	■	1.2	5	15°	20°	0	UHM 20 TX+
Call For Details	1602-1.2-5 LV SPT UHM20 TX+	Call For Details	1602-1.2-5 RV SPT UHM20 TX+	■	1.2	5	15°	20°	0	UHM 20 TX+
Call For Details	1602-1.5-5 LV SPT UHM20 HPX	Call For Details	1602-1.5-5 RV SPT UHM20 HPX	■	1.5	5	15°	20°	0	UHM 20 TX+
Call For Details	1602-1.5-5 LV SPT UHM20 TX+	Call For Details	1602-1.5-5 RV SPT UHM20 TX+	■	1.5	5	15°	20°	0	UHM 20 TX+
7005-112775	1602-1.5-5 LV SPT06 UHM20 HPX	7005-112779	1602-1.5-5 RV SPT06 UHM20 HPX	■	1.5	5	15°	6°	0.05	UHM 20 HPX
Call For Details	1602-1.5-5 LV SPT06 UHM20 TX+	Call For Details	1602-1.5-5 RV SPT06 UHM20 TX+	■	1.5	5	15°	6°	0.05	UHM 20 HPX
7005-112777	1602-1.5-5 LV SPT12 UHM20 HPX	7005-112781	1602-1.5-5 RV SPT12 UHM20 HPX	■	1.5	5	15°	12°	0.05	UHM 20 HPX
Call For Details	1602-1.5-5 LV SPT12 UHM20 TX+	Call For Details	1602-1.5-5 RV SPT12 UHM20 TX+	■	1.5	5	15°	12°	0.05	UHM 20 HPX
Call For Details	1602 B-1.0-5 LV SPT06 UHM20 HPX	Call For Details	1602 B-1.0-5 RV SPT06 UHM20 HPX	■	1	5	15°	6°	0.05	UHM 20 HPX
Call For Details	1602 B-1.5-5 LV SPT06 UHM20 HPX	Call For Details	1602 B-1.5-5 RV SPT06 UHM20 HPX	■	1.5	5	15°	6°	0.05	UHM 20 HPX



Type-SPT Chip Breaker

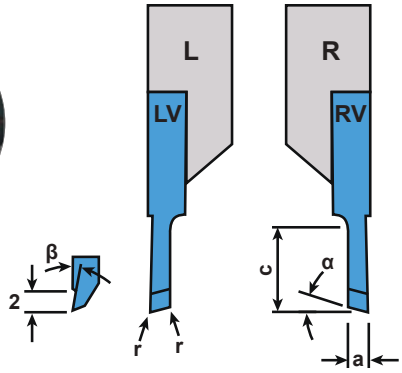

Ideal Cutting Materials

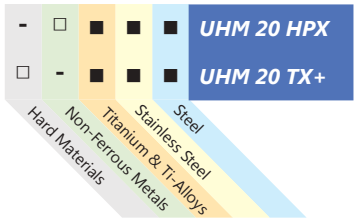

■ Preferred Application
□ Possible Application
- Application Not Recommended



1602 Cutoff

Cut: Neutral


Chip Breaker: SPT

Repeatability = R : ■<10µm, ■<20µm, ■<50µm


Left Hand		Right Hand		Dimensions & Features					
Item No.	Description	Item No.	Description	R	a	c	β	r	Coating
Call For Details	1602-0.5-2.5 LN SPT UHM20 HPX	Call For Details	1602-0.5-2.5 RN SPT UHM20 HPX	■	0.5	2.5	20°	0.05	UHM 20 HPX
7005-139279	1602-0.5-2.5 LN SPT UHM20 TX+	7005-139281	1602-0.5-2.5 RN SPT UHM20 TX+	■	0.5	2.5	20°	0.05	UHM 20 TX+
Call For Details	1602-0.8-5 LN SPT UHM20 HPX	Call For Details	1602-0.8-5 RN SPT UHM20 HPX	■	0.8	5	20°	0.05	UHM 20 HPX
7005-139283	1602-0.8-5 LN SPT UHM20 TX+	7005-139285	1602-0.8-5 RN SPT UHM20 TX+	■	0.8	5	20°	0.05	UHM 20 TX+
Call For Details	1602-1.0-5 LN SPT UHM20 HPX	Call For Details	1602-1.0-5 RN SPT UHM20 HPX	■	1	5	20°	0.05	UHM 20 HPX
7005-139287	1602-1.0-5 LN SPT UHM20 TX+	7005-139289	1602-1.0-5 RN SPT UHM20 TX+	■	1	5	20°	0.05	UHM 20 TX+
7005-112783	1602-1.0-5 LN SPT06 UHM20 HPX	7005-112787	1602-1.0-5 RN SPT06 UHM20 HPX	■	1	5	6°	0.05	UHM 20 HPX
Call For Details	1602-1.0-5 LN SPT06 UHM20 TX+	Call For Details	1602-1.0-5 RN SPT06 UHM20 TX+	■	1	5	6°	0.05	UHM 20 TX+
7005-112785	1602-1.0-5 LN SPT12 UHM20 HPX	7005-112789	1602-1.0-5 RN SPT12 UHM20 HPX	■	1	5	12°	0.05	UHM 20 HPX
Call For Details	1602-1.0-5 LN SPT12 UHM20 TX+	Call For Details	1602-1.0-5 RN SPT12 UHM20 TX+	■	1	5	12°	0.05	UHM 20 TX+
Call For Details	1602-1.2-5 LN SPT UHM20 HPX	Call For Details	1602-1.2-5 RN SPT UHM20 TX+	■	1.2	5	20°	0.05	UHM 20 HPX
7005-139291	1602-1.2-5 LN SPT UHM20 TX+	7005-139293	1602-1.2-5 RN SPT UHM20 TX+	■	1.2	5	20°	0.05	UHM 20 TX+
Call For Details	1602-1.5-5 LN SPT UHM20 HPX	Call For Details	1602-1.5-5 RN SPT UHM20 HPX	■	1.5	5	20°	0.05	UHM 20 HPX
7005-139295	1602-1.5-5 LN SPT UHM20 TX+	7005-139297	1602-1.5-5 RN SPT UHM20 TX+	■	1.5	5	20°	0.05	UHM 20 TX+
7005-112791	1602-1.5-5 LN SPT06 UHM20 HPX	7005-112795	1602-1.5-5 RN SPT06 UHM20 HPX	■	1.5	5	6°	0.05	UHM 20 HPX
Call For Details	1602-1.5-5 LN SPT06 UHM20 TX+	Call For Details	1602-1.5-5 RN SPT06 UHM20 TX+	■	1.5	5	6°	0.05	UHM 20 TX+
7005-112793	1602-1.5-5 LN SPT12 UHM20 HPX	7005-112797	1602-1.5-5 RN SPT12 UHM20 HPX	■	1.5	5	12°	0.05	UHM 20 HPX
Call For Details	1602-1.5-5 LN SPT12 UHM20 TX+	Call For Details	1602-1.5-5 RN SPT12 UHM20 TX+	■	1.5	5	12°	0.05	UHM 20 TX+
Call For Details	1602 B-1.0-5 LN SPT06 UHM20 HPX	Call For Details	1602 B-1.0-5 RN SPT06 UHM20 HPX	■	1	5	6°	0.05	UHM 20 HPX
Call For Details	1602 B-1.0-5 LN SPT06 UHM20 TX+	Call For Details	1602 B-1.0-5 RN SPT06 UHM20 TX+	■	1	5	6°	0.05	UHM 20 TX+
Call For Details	1602 B-1.5-5 LN SPT06 UHM20 HPX	Call For Details	1602 B-1.5-5 RN SPT06 UHM20 HPX	■	1.5	5	6°	0.05	UHM 20 HPX
Call For Details	1602 B-1.5-5 LN SPT06 UHM20 TX+	Call For Details	1602 B-1.5-5 RN SPT06 UHM20 TX+	■	1.5	5	6°	0.05	UHM 20 TX+



Type-SPT Chip Breaker

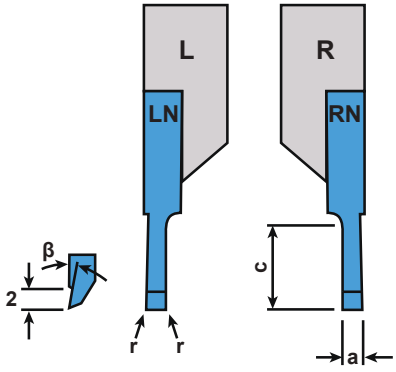

Ideal Cutting Materials

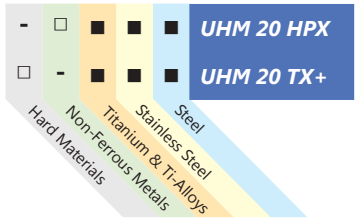


■ Preferred Application
□ Possible Application
- Application Not Recommended




1602 Cutoff
Cut: Standard
Geometry: TOP Wiper

Repeatability <20µm


Left Hand		Right Hand		Dimensions & Features				
Item No.	Description	Item No.	Description	a	c	β	r	Coating
Call For Details	1602-1.5-5 L TOP 008 UHM20 HPX	Call For Details	1602-1.5-5 R TOP 008 UHM20 HPX	1.5	5	1.5°	0	UHM 20 HPX
Call For Details	1602-1.5-5 L TOP 008 UHM20 TX+	Call For Details	1602-1.5-5 R TOP 008 UHM20 TX+	1.5	5	1.5°	0	UHM 20 TX+




TOP Wiper

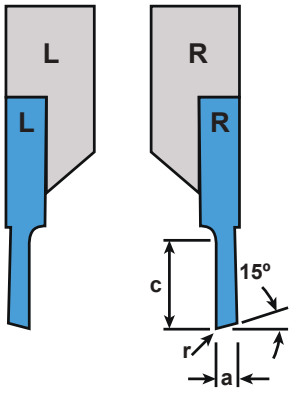

Ideal Cutting Materials

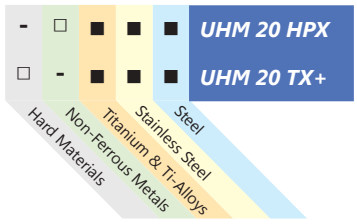

■ Preferred Application
□ Possible Application
- Application Not Recommended







1602 Cutoff
Cut: Inverted
Geometry: TOP Wiper

Repeatability <20µm


Left Hand		Right Hand		Dimensions & Features				
Item No.	Description	Item No.	Description	a	c	β	r	Coating
Call For Details	1602-1.5-5 LV TOP 008 UHM20 HPX	Call For Details	1602-1.5-5 RV TOP 008 UHM20 HPX	1.5	5	1.5°	.08mm/.0031in	UHM 20 HPX
Call For Details	1602-1.5-5 LV TOP 008 UHM20 TX+	Call For Details	1602-1.5-5 RV TOP 008 UHM20 TX+	1.5	5	1.5°	.08mm/.0031in	UHM 20 TX+




TOP Wiper

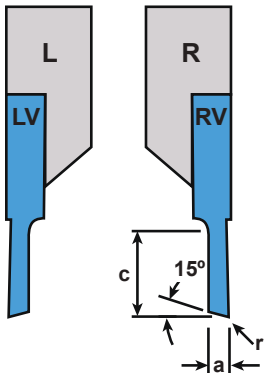


Ideal Cutting Materials

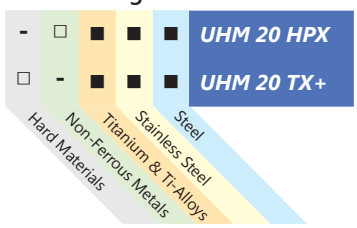

■ Preferred Application
□ Possible Application
- Application Not Recommended



Detailed Top




1602 Cutoff

Cut: Standard


Geometry: TOP Wiper With SC Chip Breaker

Repeatability <20µm


Left Hand		Right Hand		Dimensions & Features				
Item No.	Description	Item No.	Description	a	c	β	r	Coating
Call For Details	1602-1.5-5 L SC TOP 008 UHM20 HPX	Call For Details	1602-1.5-5 R SC TOP 008 UHM20 HPX	1.5	5	1.5°	.08mm/.0031in	UHM 20 HPX
Call For Details	1602-1.5-5 L SC TOP 008 UHM20 TX+	Call For Details	1602-1.5-5 R SC TOP 008 UHM20 TX+	1.5	5	1.5°	.08mm/.0031in	UHM 20 TX+




TOP Wiper
Type-SC Chip Breaker

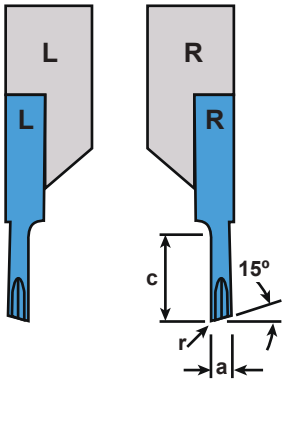


Ideal Cutting Materials

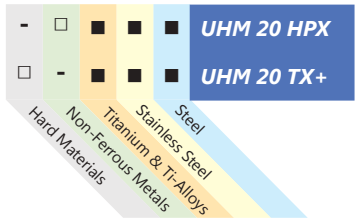

■ Preferred Application
□ Possible Application
- Application Not Recommended






1602 Cutoff

Cut: Inverted


Geometry: TOP Wiper And SC Chip Breaker

Repeatability <20µm


Left Hand		Right Hand		Dimensions & Features				
Item No.	Description	Item No.	Description	a	c	β	r	Coating
Call For Details	1602-1.5-5 LV SC TOP 008 UHM20 HPX	Call For Details	1602-1.5-5 LV SC TOP 008 UHM20 HPX	1.5	5	1.5°	.08mm/.0031in	UHM 20 HPX
Call For Details	1602-1.5-5 LV SC TOP 008 UHM20 TX+	Call For Details	1602-1.5-5 LV SC TOP 008 UHM20 TX+	1.5	5	1.5°	.08mm/.0031in	UHM 20 TX+




TOP Wiper
Type-SC Chip Breaker

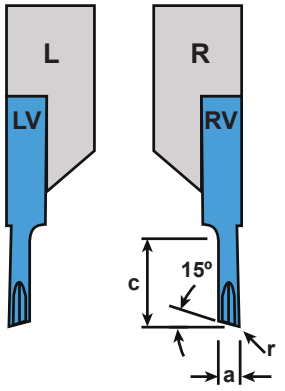


Ideal Cutting Materials

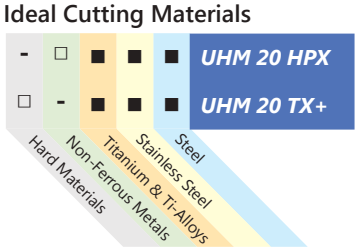

■ Preferred Application
□ Possible Application
- Application Not Recommended







1602 Cutoff
Cut: Standard
Chip Breaker: GT20

Repeatability <10µm


Left Hand		Right Hand		Dimensions & Features				
Item No.	Description	Item No.	Description	a	c	α	r	Coating
7005-211079	1602-0.8-5 FL GT20 UHM20 HPX	7005-211076	1602-0.8-5 FR GT20 UHM20 HPX	0.8	5	7°	0.05mm/.0019in	UHM 20 HPX
7005-211080	1602-0.8-5 FL GT20 UHM20 TX+	7005-211077	1602-0.8-5 FR GT20 UHM20 TX+	0.8	5	7°	0.05mm/.0019in	UHM 20 TX+
7005-211161	1602-1.0-5 FL GT20 UHM20 HPX	7005-211158	1602-1.0-5 FR GT20 UHM20 HPX	1.0	5	7°	0.05mm/.0019in	UHM 20 HPX
7005-211162	1602-1.0-5 FL GT20 UHM20 TX+	7005-211159	1602-1.0-5 FR GT20 UHM20 TX+	1.0	5	7°	0.05mm/.0019in	UHM 20 TX+
7005-211167	1602-1.5-5 FL GT20 UHM20 HPX	7005-211164	1602-1.5-5 FR GT20 UHM20 HPX	1.5	5	7°	0.05mm/.0019in	UHM 20 HPX
7005-211168	1602-1.5-5 FL GT20 UHM20 TX+	7005-211165	1602-1.5-5 FR GT20 UHM20 TX+	1.5	5	7°	0.05mm/.0019in	UHM 20 TX+



Type-GT20
Chip Breaker



Ideal Cutting Materials

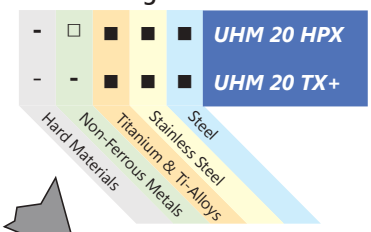

■ Preferred Application
□ Possible Application
- Application Not Recommended


F Edge
Sharp Cutting Edge




1602 Cutoff
Cut: Inverted
Chip Breaker: GT20

Repeatability <10µm


Left Hand		Right Hand		Dimensions & Features				
Item No.	Description	Item No.	Description	a	c	α	r	Coating
7005-211173	1602-0.8-5 FLV GT20 UHM20 HPX	7005-211170	1602-0.8-5 FRV GT20 UHM20 HPX	0.8	5	7°	0.05mm/.0019in	UHM 20 HPX
7005-211174	1602-0.8-5 FLV GT20 UHM20 TX+	7005-211171	1602-0.8-5 FRV GT20 UHM20 TX+	0.8	5	7°	0.05mm/.0019in	UHM 20 TX+
7005-211179	1602-1.0-5 FLV GT20 UHM20 HPX	7005-211176	1602-1.0-5 FRV GT20 UHM20 HPX	1.0	5	7°	0.05mm/.0019in	UHM 20 HPX
7005-211180	1602-1.0-5 FLV GT20 UHM20 TX+	7005-211177	1602-1.0-5 FRV GT20 UHM20 TX+	1.0	5	7°	0.05mm/.0019in	UHM 20 TX+
7005-211185	1602-1.5-5 FLV GT20 UHM20 HPX	7005-211182	1602-1.5-5 FRV GT20 UHM20 HPX	1.5	5	7°	0.05mm/.0019in	UHM 20 HPX
7005-211186	1602-1.5-5 FLV GT20 UHM20 TX+	7005-211183	1602-1.5-5 FRV GT20 UHM20 TX+	1.5	5	7°	0.05mm/.0019in	UHM 20 TX+



Type-GT20
Chip Breaker



Ideal Cutting Materials

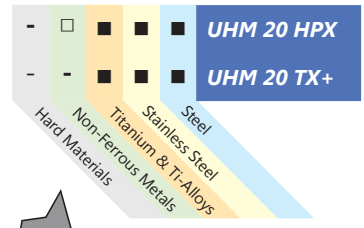

■ Preferred Application
□ Possible Application
- Application Not Recommended



F Edge
Sharp Cutting Edge




1602 Cutoff

Cut: Neutral


Chip Breaker: GT20

Repeatability <10µm

Left Hand		Right Hand		Dimensions & Features				
Item No.	Description	Item No.	Description	a	c	α	r	Coating
7005-211037	1602-0.8-5 FLN GT20 UHM20 HPX	7005-211040	1602-0.8-5 FRN GT20 UHM20 HPX	0.8	5		0.05mm/.0019in	UHM 20 HPX
7005-211038	1602-0.8-5 FLN GT20 UHM20 TX+	7005-211041	1602-0.8-5 FRN GT20 UHM20 TX+	0.8	5		0.05mm/.0019in	UHM 20 TX+
7005-211191	1602-1.0-5 FLN GT20 UHM20 HPX	7005-211188	1602-1.0-5 FRN GT20 UHM20 HPX	1.0	5		0.05mm/.0019in	UHM 20 HPX
7005-211192	1602-1.0-5 FLN GT20 UHM20 TX+	7005-211189	1602-1.0-5 FRN GT20 UHM20 TX+	1.0	5		0.05mm/.0019in	UHM 20 TX+
7005-211197	1602-1.5-5 FLN GT20 UHM20 HPX	7005-211194	1602-1.5-5 FRN GT20 UHM20 HPX	1.5	5		0.05mm/.0019in	UHM 20 HPX
7005-211198	1602-1.5-5 FLN GT20 UHM20 TX+	7005-211195	1602-1.5-5 FRN GT20 UHM20 TX+	1.5	5		0.05mm/.0019in	UHM 20 TX+




Type-GT20 Chip Breakerr

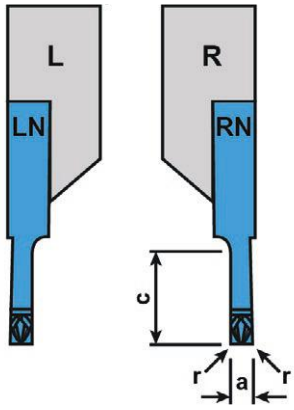




F Edge
Sharp Cutting Material

Ideal Cutting Materials



■ Preferred Application
□ Possible Application
- Application Not Recommended






1603 Front Turn


Cut: Standard

Chip Breaker: None


Repeatability = R : ■<20µm, ■<50µm

Left Hand		Right Hand		Dimensions & Features						
Item No.	Description	Item No.	Description	R	a	b	α	β	r	Coating
7005-147984	1603-3.0-4 L UHM20 HPX	7005-148471	1603-3.0-4 R UHM20 HPX	■	3	1	3°	70°	0	UHM 20 HPX
Call For Details	1603-3.0-4 L UHM20 TX+	Call For Details	1603-3.0-4 R UHM20 TX+	■	3	1	3°	70°	0	UHM 20 TX+
Call For Details	1603-3.0-5 L 55008 UHM20 HPX	7005-153511	1603-3.0-5 R 55008 UHM20 HPX	■	3	-	-	55°	.08	UHM 20 HPX
Call For Details	1603-3.0-5 L 55008 UHM20 TX+	Call For Details	1603-3.0-5 R 55008 UHM20 TX+	■	3	-	-	55°	.08	UHM 20 TX+
Call For Details	1603-3.0-5 L 55015 UHM20 HPX	Call For Details	1603-3.0-5 R 55015 UHM20 HPX	■	3	-	-	55°	.15	UHM 20 HPX
Call For Details	1603-3.0-5 L 55015 UHM20 TX+	Call For Details	1603-3.0-5 R 55015 UHM20 TX+	■	3	-	-	55°	.15	UHM 20 TX+
Call For Details	1603-3.0-5 L 35008 UHM20 HPX	Call For Details	1603-3.0-5 R 35008 UHM20 HPX	■	3	-	-	35°	.08	UHM 20 HPX
Call For Details	1603-3.0-5 L 35008 UHM20 TX+	Call For Details	1603-3.0-5 R 35008 UHM20 TX+	■	3	-	-	35°	.08	UHM 20 TX+
Call For Details	1603-3.0-5 L 35015 UHM20 HPX	Call For Details	1603-3.0-5 R 35015 UHM20 HPX	■	3	-	-	35°	.15	UHM 20 HPX
Call For Details	1603-3.0-5 L 35015 UHM20 TX+	Call For Details	1603-3.0-5 R 35015 UHM20 TX+	■	3	-	-	35°	.15	UHM 20 TX+
Call For Details	1603 B-3.0-4 L UHM20 HPX	Call For Details	1603 B-3.0-4 R UHM20 HPX	■	3	1	3°	70°	0	UHM 20 HPX




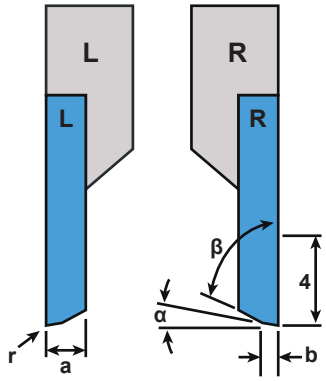

Ideal Cutting Materials

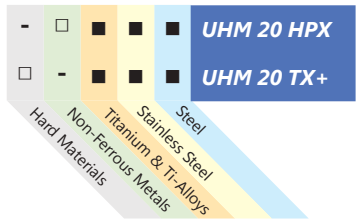

■ Preferred Application
□ Possible Application
- Application Not Recommended


1603 Front Turn

Cut: Standard


Chip Breaker: SP

Repeatability <20µm


Left Hand		Right Hand		Dimensions & Features			
Item No.	Description	Item No.	Description	a	β	r	Coating
7005-148473	1603-3.0-4 L SP U55003 UHM20 HPX	7005-148475	1603-3.0-4 R SP U55003 UHM20 HPX	3	55°	0.03	UHM 20 HPX
Call For Details	1603-3.0-4 L SP U55003 UHM20 TX+	Call For Details	1603-3.0-4 R SP U55003 UHM20 TX+	3	55°	0.03	UHM 20 TX+
Call For Details	1603-3.0-4 L SP U55008 UHM20 HPX	7005-153557	1603-3.0-4 R SP U55008 UHM20 HPX	3	55°	0.08	UHM 20 HPX
Call For Details	1603-3.0-4 L SP U55008 UHM20 TX+	Call For Details	1603-3.0-4 R SP U55008 UHM20 TX+	3	55°	0.08	UHM 20 TX+
Call For Details	1603-3.0-4 L SP U55015 UHM20 HPX	Call For Details	1603-3.0-4 R SP U55015 UHM20 HPX	3	55°	0.15	UHM 20 HPX
Call For Details	1603-3.0-4 L SP U55015 UHM20 TX+	Call For Details	1603-3.0-4 R SP U55015 UHM20 TX+	3	55°	0.15	UHM 20 TX+
Call For Details	1603-3.0-4 L SP U35003 UHM20 HPX	7005-153531	1603-3.0-4 R SP U35003 UHM20 HPX	3	35°	0.03	UHM 20 HPX
Call For Details	1603-3.0-4 L SP U35003 UHM20 TX+	Call For Details	1603-3.0-4 R SP U35003 UHM20 TX+	3	35°	0.03	UHM 20 TX+
Call For Details	1603-3.0-4 L SP U35008 UHM20 HPX	Call For Details	1603-3.0-4 R SP U35008 UHM20 HPX	3	35°	0.08	UHM 20 HPX
Call For Details	1603-3.0-4 L SP U35008 UHM20 TX+	Call For Details	1603-3.0-4 R SP U35008 UHM20 TX+	3	35°	0.08	UHM 20 TX+
Call For Details	1603-3.0-4 L SP U35015 UHM20 HPX	Call For Details	1603-3.0-4 R SP U35015 UHM20 HPX	3	35°	0.15	UHM 20 HPX
Call For Details	1603-3.0-4 L SP U35015 UHM20 TX+	Call For Details	1603-3.0-4 R SP U35015 UHM20 TX+	3	35°	0.15	UHM 20 TX+



Type-SP Chip Breaker

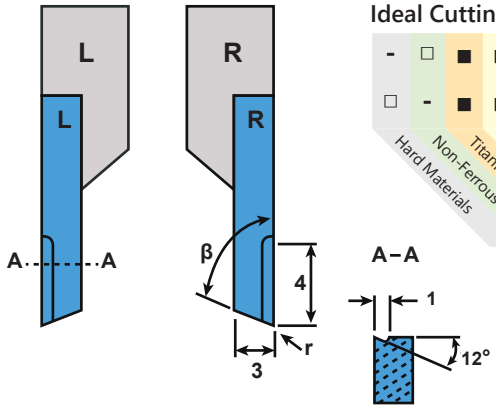

Ideal Cutting Materials

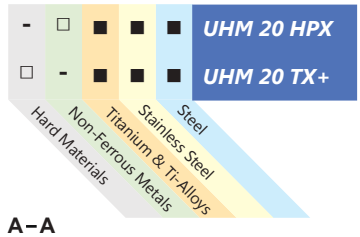

■ Preferred Application
□ Possible Application
– Application Not Recommended




1603 Front Turn

Cut: Standard


Geometry: TOP Wiper And CP Chip Breaker

Repeatability <20µm


Left Hand		Right Hand		Dimensions & Features			
Item No.	Description	Item No.	Description	a	b	r	Coating
Call For Details	1603-3.0-3.5 L CP TOP ZZ UHM20 HPX	Call For Details	1603-3.0-3.5 R CP TOP ZZ UHM20 HPX	0.8	0.2	-	UHM 20 HPX
Call For Details	1603-3.0-3.5 L CP TOP ZZ UHM20 TX+	Call For Details	1603-3.0-3.5 R CP TOP ZZ UHM20 TX+	0.8	0.2	-	UHM 20 TX+
7005-148477	1603-3.0-3.5 L CP TOP 003 UHM20 HPX	7005-148479	1603-3.0-3.5 R CP TOP 003 UHM20 HPX	0.8	0.2	0.03	UHM 20 HPX
Call For Details	1603-3.0-3.5 L CP TOP 003 UHM20 TX+	Call For Details	1603-3.0-3.5 R CP TOP 003 UHM20 TX+	0.8	0.2	0.03	UHM 20 TX+




TOP Wiper CP Chip Breaker

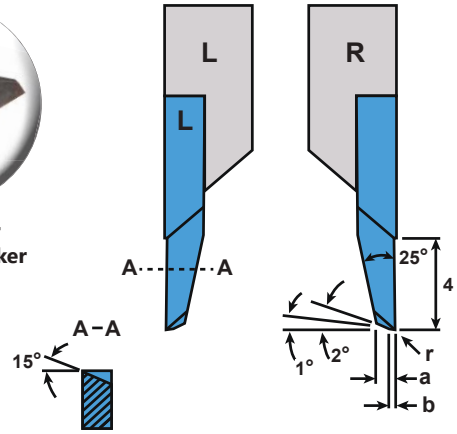

Ideal Cutting Materials

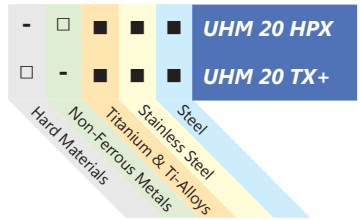

■ Preferred Application
□ Possible Application
– Application Not Recommended




1603 Front Turn, Facing & Back Turning

Cut: Standard


Chip Breaker: GA20

Repeatability <20µm


Left Hand		Right Hand		Dimensions & Features				
Item No.	Description	Item No.	Description	a	b	c	r	Coating
Call For Details	1603-3.0-5 FL GA20 Top ZZ UHM20 HPX	Call For Details	1603-3.0-5 FR GA20 Top ZZ UHM20 HPX	3	1.6	5	-	UHM 20 HPX
Call For Details	1603-3.0-5 FL GA20 Top ZZ UHM20 TX+	Call For Details	1603-3.0-5 FR GA20 Top ZZ UHM20 TX+	3	1.6	5	-	UHM 20 TX+
Call For Details	1603-3.0-5 FL GA20 Top RO3 UHM20 HPX	Call For Details	1603-3.0-5 FR GA20 Top RO3 UHM20 HPX	3	1.6	5	0.03	UHM 20 HPX
Call For Details	1603-3.0-5 FL GA20 Top RO3 UHM20 TX+	Call For Details	1603-3.0-5 FR GA20 Top RO3 UHM20 TX+	3	1.6	5	0.03	UHM 20 TX+
Call For Details	1603-3.0-5 FL GA20 Top RO5 UHM20 HPX	Call For Details	1603-3.0-5 FR GA20 Top RO5 UHM20 HPX	3	1.6	5	0.05	UHM 20 HPX
Call For Details	1603-3.0-5 FL GA20 Top RO5 UHM20 TX+	Call For Details	1603-3.0-5 FR GA20 Top RO5 UHM20 TX+	3	1.6	5	0.05	UHM 20 TX+
Call For Details	1603-3.0-5 FL GA20 Top R15 UHM20 HPX	Call For Details	1603-3.0-5 FR GA20 Top R15 UHM20 HPX	3	1.6	5	0.15	UHM 20 HPX
Call For Details	1603-3.0-5 FL GA20 Top R15 UHM20 TX+	Call For Details	1603-3.0-5 FR GA20 Top R15 UHM20 TX+	3	1.6	5	0.15	UHM 20 TX+



Type-GA20 Chip Breaker

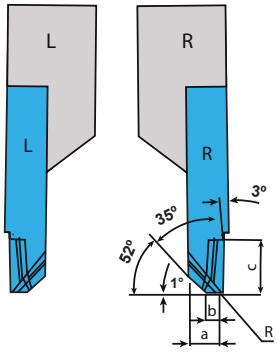


Ideal Cutting Materials

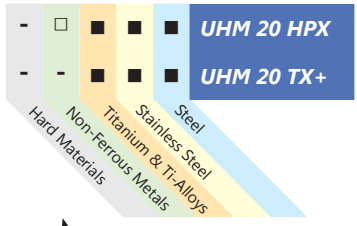

■ Preferred Application
□ Possible Application
- Application Not Recommended



F Edge
Sharp Cutting Edge




1604 Profile Turning

Cut: Inverted


Chip Breaker: SP

Repeatability <20µm


Left Hand		Right Hand		Dimensions & Features			
Item No.	Description	Item No.	Description	a	c	r	Coating
7005-148481	1604-2.5-4-5 LV SP29005 UHM20 HPX	7005-148483	1604-2.5-4-5 RV SP29005 UHM20 HPX	2.5	5	0.05	UHM 20 HPX
Call For Details	1604-2.5-4-5 LV SP29005 UHM20 TX+	Call For Details	1604-2.5-4-5 RV SP29005 UHM20 TX+	2.5	5	0.05	UHM 20 TX+
7005-148485	1604-2.5-4-5 LV SP29015 UHM20 HPX	7005-148487	1604-2.5-4-5 RV SP29015 UHM20 HPX	2.5	5	0.15	UHM 20 HPX
Call For Details	1604-2.5-4-5 LV SP29015 UHM20 TX+	Call For Details	1604-2.5-4-5 RV SP29015 UHM20 TX+	2.5	5	0.15	UHM 20 TX+





Type-SP Chip Breaker

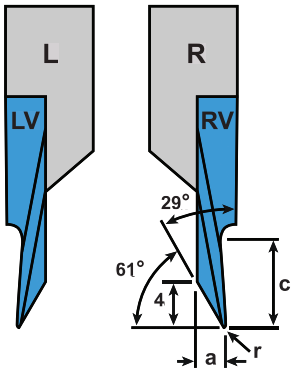

Ideal Cutting Materials

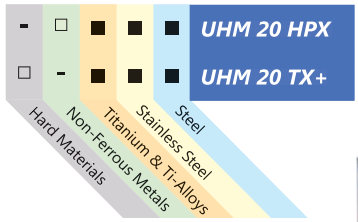

■ Preferred Application
□ Possible Application
- Application Not Recommended

1604 Profile Turning


Cut: Standard
Chip Breaker: SP

Repeatability <20µm


Left Hand		Right Hand		Dimensions & Features				
Item No.	Description	Item No.	Description	a	c	r	t	Coating
7005-148489	1604-1.25-2-3 L SP29005 UHM20 HPX	7005-148491	1604-1.25-2-3 R SP29005 UHM20 HPX	1.25	2.5	0.05	2	UHM 20 HPX
Call For Details	1604-1.25-2-3 L SP29005 UHM20 TX+	Call For Details	1604-1.25-2-3 R SP29005 UHM20 TX+	1.25	2.5	0.05	2	UHM 20 TX+
7005-148493	1604-2.5-4-5 L SP29005 UHM20 HPX	7005-148495	1604-2.5-4-5 R SP29005 UHM20 HPX	2.5	5	0.05	4	UHM 20 HPX
Call For Details	1604-2.5-4-5 L SP29005 UHM20 TX+	Call For Details	1604-2.5-4-5 R SP29005 UHM20 TX+	2.5	5	0.05	4	UHM 20 TX+
7005-148497	1604-2.5-4-5 L SP29015 UHM20 HPX	7005-147067	1604-2.5-4-5 R SP29015 UHM20 HPX	2.5	5	0.15	4	UHM 20 HPX
Call For Details	1604-2.5-4-5 L SP29015 UHM20 TX+	Call For Details	1604-2.5-4-5 R SP29015 UHM20 TX+	2.5	5	0.15	4	UHM 20 TX+



Type-SP Chip Breaker

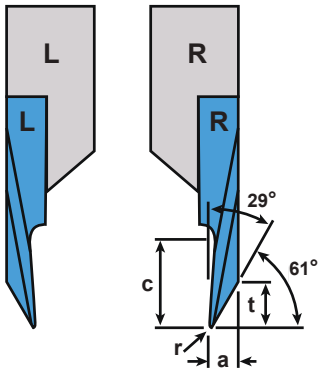

Ideal Cutting Materials

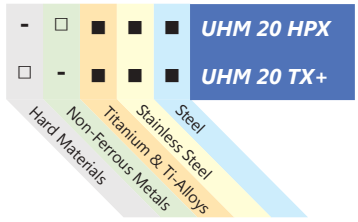

■ Preferred Application
□ Possible Application
- Application Not Recommended




1604 Back Turning


Cut: Standard
Geometry: TOP Wiper

Repeatability = R : ■<20µm, ■<50µm


Left Hand		Right Hand		Dimensions & Features							
Item No.	Description	Item No.	Description	R	a	b	c	d	r	δ	Coating
7005-148499	1604-0.15-2 L TOP ZZ UHM20 HPX	7005-148501	1604-0.15-2 R TOP ZZ UHM20 HPX	■	.15	.05	2	1	0	0	UHM 20 HPX
Call For Details	1604-0.15-2 L TOP ZZ UHM20 TX+	Call For Details	1604-0.15-2 R TOP ZZ UHM20 TX+	■	.15	.05	2	1	0	0	UHM 30 HX
7005-148503	1604-0.2-2 L TOP 008 UHM20 HPX	7005-148505	1604-0.2-2 R TOP 008 UHM20 HPX	■	.25	.15	2	1	.08	0	UHM 20 HPX
Call For Details	1604-0.2-2 L TOP 008 UHM20 TX+	Call For Details	1604-0.2-2 R TOP 008 UHM20 TX+	■	.25	.15	2	1	.08	0	UHM 30 HX
7005-148507	1604-0.4-4 L TOP 008 UHM20 HPX	7005-148509	1604-0.4-4 R TOP 008 UHM20 HPX	■	0.4	.15	4	1.6	.08	0	UHM 20 HPX
Call For Details	1604-0.4-4 L TOP 008 UHM20 TX+	Call For Details	1604-0.4-4 R TOP 008 UHM20 TX+	■	0.4	.15	4	1.6	.08	0	UHM 30 HX
7005-148511	1604-0.8-4 L TOP 008 UHM20 HPX	7005-148513	1604-0.8-4 R TOP 008 UHM20 HPX	■	0.8	.15	4	2	.08	0	UHM 20 HPX
Call For Details	1604-0.8-4 L TOP 008 UHM20 TX+	Call For Details	1604-0.8-4 R TOP 008 UHM20 TX+	■	0.8	.15	4	2	.08	0	UHM 30 HX
7005-148515	1604-1.2-4 L TOP ZZ UHM20 HPX	7005-147161	1604-1.2-4 R TOP ZZ UHM20 HPX	■	1.2	.5	4	2.4	0	1°	UHM 20 HPX
Call For Details	1604-1.2-4 L TOP ZZ UHM20 TX+	Call For Details	1604-1.2-4 R TOP ZZ UHM20 TX+	■	1.2	.5	4	2.4	0	1°	UHM 30 HX
Call For Details	1604 B-0.8-4 L TOP 008 UHM20 HPX	Call For Details	1604 B-0.8-4 R TOP 008 UHM20 HPX	■	0.8	.15	4	2	.08	0	UHM 20 HPX
Call For Details	1604 B-1.2-4 L TOP ZZ UHM20 HPX	Call For Details	1604 B-1.2-4 R TOP ZZ UHM20 HPX	■	1.2	.5	4	2.4	0	1°	UHM 20 HPX




TOP Wiper

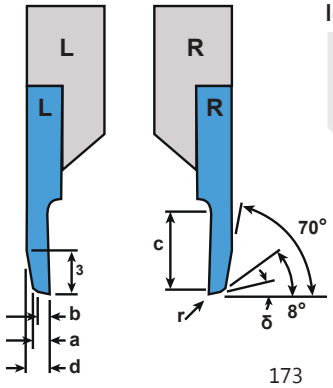

Ideal Cutting Materials

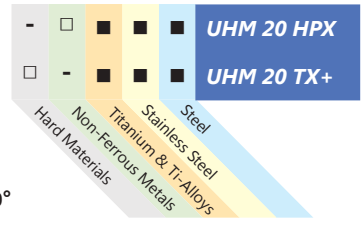

■ Preferred Application
□ Possible Application
- Application Not Recommended




1604 Back Turning

Cut: Standard


Geometry: TOP Wiper And SP Chip Breaker


Repeatability <20µm


Left Hand		Right Hand		Dimensions & Features				
Item No.	Description	Item No.	Description	a	b	c	r	Coating
7005-148517	1604-1.5-3 L SP TOP 20ZZ UHM20 HPX	7005-148519	1604-1.5-3 R SP TOP 20ZZ UHM20 HPX	0.3	1.5	3	0	UHM 20 HPX
Call For Details	1604-1.5-3 L SP TOP 20ZZ UHM20 TX+	Call For Details	1604-1.5-3 R SP TOP 20ZZ UHM20 TX+	0.3	1.5	3	0	UHM 20 TX+
7005-148521	1604-1.5-3 L SP TOP 20005 UHM20 HPX	7005-147163	1604-1.5-3 R SP TOP 20005 UHM20 HPX	0.3	1.5	3	0.05	UHM 20 HPX
Call For Details	1604-1.5-3 L SP TOP 20005 UHM20 TX+	Call For Details	1604-1.5-3 R SP TOP 20005 UHM20 TX+	0.3	1.5	3	0.05	UHM 20 TX+




TOP Wiper
SP Chip Breaker



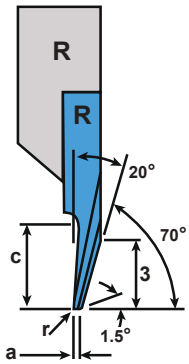




Ideal Cutting Materials

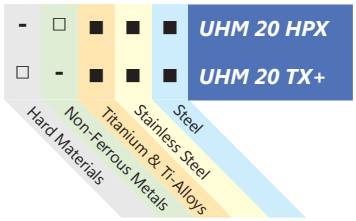

■ Preferred Application
☐ Possible Application
- Application Not Recommended



1605 Groove and Turn


Cut: Standard


Geometry: CP Chip Breaker


Repeatability <20µm

Left Hand		Right Hand		Dimensions & Features				
Item No.	Description	Item No.	Description	a	c	d	r	Coating
7005-148533	1605-0.8-2.5 L CP UHM20 HPX	7005-148535	1605-0.8-2.5 R CP UHM20 HPX	0.8	2.5	2.5	0	UHM 20 HPX
Call For Details	1605-0.8-2.5 L CP UHM20 TX+	Call For Details	1605-0.8-2.5 R CP UHM20 TX+	0.8	2.5	2.5	0	UHM 20 TX+
7005-148537	1605-1.0-3.5 L CP UHM20 HPX	7005-148541	1605-1.0-3.5 R CP UHM20 HPX	1	3.5	3.5	0	UHM 20 HPX
Call For Details	1605-1.0-3.5 L CP UHM20 TX+	Call For Details	1605-1.0-3.5 R CP UHM20 TX+	1	3.5	3.5	0	UHM 20 TX+
7005-148539	1605-1.0-3.5 L CP R05 UHM20 HPX	7005-148543	1605-1.0-3.5 R CP R05 UHM20 HPX	1	3.5	3.5	.05mm/.0019in	UHM 20 HPX
Call For Details	1605-1.0-3.5 L CP R05 UHM20 TX+	Call For Details	1605-1.0-3.5 R CP R05 UHM20 TX+	1	3.5	3.5	.05mm/.0019in	UHM 20 TX+
7005-148545	1605-1.5-3.5 L CP UHM20 HPX	7005-148549	1605-1.5-3.5 R CP UHM20 HPX	1.5	3.5	3.5	0	UHM 20 HPX
Call For Details	1605-1.5-3.5 L CP UHM20 TX+	Call For Details	1605-1.5-3.5 R CP UHM20 TX+	1.5	3.5	3.5	0	UHM 20 TX+
7005-148547	1605-1.5-3.5 L CP R08 UHM20 HPX	7005-148551	1605-1.5-3.5 R CP R08 UHM20 HPX	1.5	3.5	3.5	.08mm/.0031in	UHM 20 HPX
Call For Details	1605-1.5-3.5 L CP R08 UHM20 TX+	Call For Details	1605-1.5-3.5 R CP R08 UHM20 TX+	1.5	3.5	3.5	.08mm/.0031in	UHM 20 TX+
7005-148553	1605-2.0-3.5 L CP UHM20 HPX	7005-148557	1605-2.0-3.5 R CP UHM20 HPX	2	3.5	3.5	0	UHM 20 HPX
Call For Details	1605-2.0-3.5 L CP UHM20 TX+	Call For Details	1605-2.0-3.5 R CP UHM20 TX+	2	3.5	3.5	0	UHM 20 TX+
7005-148555	1605-2.0-3.5 L CP R08 UHM20 HPX	7005-147676	1605-2.0-3.5 R CP R08 UHM20 HPX	2	3.5	3.5	.08mm/.0031in	UHM 20 HPX
Call For Details	1605-2.0-3.5 L CP R08 UHM20 TX+	Call For Details	1605-2.0-3.5 R CP R08 UHM20 TX+	2	3.5	3.5	.08mm/.0031in	UHM 20 TX+






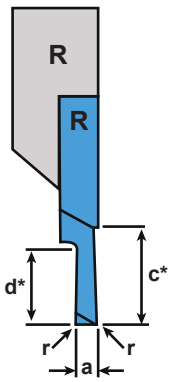




Ideal Cutting Materials

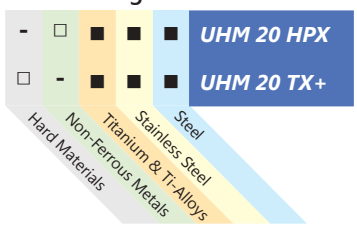

■ Preferred Application
☐ Possible Application
- Application Not Recommended




1605 Cutoff

Cut: Grooving and Turning
Chip Breaker: GC20


Left Hand		Right Hand		Dimensions & Features				
Item No.	Description	Item No.	Description	a	c	d	r	Coating
7005-211129	1605-0.8-1.5 FL GC20 ZZ UHM20 HPX	7005-211125	1605-0.8-1.5 FR GC20 ZZ UHM20 HPX	0.8	1.5	1.5	0	UHM 20 HPX
7005-211130	1605-0.8-1.5 FL GC20 ZZ UHM20 TX+	7005-211127	1605-0.8-1.5 FR GC20 ZZ UHM20 TX+	0.8	1.5	1.5	0	UHM 20 TX+
7005-211135	1605-0.8-1.5 FL GC20 R02 UHM20 HPX	7005-211132	1605-0.8-1.5 FR GC20 R02 UHM20 HPX	0.8	1.5	1.5	0.02mm/.0008in	UHM 20 HPX
7005-211136	1605-0.8-1.5 FL GC20 R02 UHM20 TX+	7005-211133	1605-0.8-1.5 FR GC20 R02 UHM20 TX+	0.8	1.5	1.5	0.02mm/.0008in	UHM 20 TX+
7005-211141	1605-0.8-1.5 FL GC20 R05 UHM20 HPX	7005-211138	1605-0.8-1.5 FR GC20 R05 UHM20 HPX	0.8	1.5	1.5	0.05mm/.0019in	UHM 20 HPX
7005-211142	1605-0.8-1.5 FL GC20 R05 UHM20 TX+	7005-211139	1605-0.8-1.5 FR GC20 R05 UHM20 TX+	0.8	1.5	1.5	0.05mm/.0019in	UHM 20 TX+
7005-211147	1605-1.0-1.5 FL GC20 ZZ UHM20 HPX	7005-211144	1605-1.0-1.5 FR GC20 ZZ UHM20 HPX	1.0	1.5	1.5	0	UHM 20 HPX
7005-211148	1605-1.0-1.5 FL GC20 ZZ UHM20 TX+	7005-211145	1605-1.0-1.5 FR GC20 ZZ UHM20 TX+	1.0	1.5	1.5	0	UHM 20 TX+
7005-211153	1605-1.0-1.5 FL GC20 R02 UHM20 HPX	7005-211150	1605-1.0-1.5 FR GC20 R02 UHM20 HPX	1.0	1.5	1.5	0.02mm/.0008in	UHM 20 HPX
7005-211154	1605-1.0-1.5 FL GC20 R02 UHM20 TX+	7005-211151	1605-1.0-1.5 FR GC20 R02 UHM20 TX+	1.0	1.5	1.5	0.02mm/.0008in	UHM 20 TX+
7005-152815	1605-1.0-1.5 FL GC20 R05 UHM20 HPX	7005-211027	1605-1.0-1.5 FR GC20 R05 UHM20 HPX	1.0	1.5	1.5	0.05mm/.0019in	UHM 20 HPX
7005-152966	1605-1.0-1.5 FL GC20 R05 UHM20 TX+	7005-211028	1605-1.0-1.5 FR GC20 R05 UHM20 TX+	1.0	1.5	1.5	0.05mm/.0019in	UHM 20 TX+
7005-211031	1605-1.0-3.5 FL GC20 R05 UHM20 HPX	7005-211029	1605-1.0-3.5 FR GC20 R05 UHM20 HPX	1.0	5	3.5	0.05mm/.0019in	UHM 20 HPX
7005-211032	1605-1.0-3.5 FL GC20 R05 UHM20 TX+	7005-211030	1605-1.0-3.5 FR GC20 R05 UHM20 TX+	1.0	5	3.5	0.05mm/.0019in	UHM 20 TX+
7005-211035	1605-1.5-4.5 FL GC20 R05 UHM20 HPX	7005-211033	1605-1.5-4.5 FR GC20 R05 UHM20 HPX	1.5	5	4.5	0.05mm/.0019in	UHM 20 HPX
7005-211036	1605-1.5-4.5 FL GC20 R05 UHM20 TX+	7005-211034	1605-1.5-4.5 FR GC20 R05 UHM20 TX+	1.5	5	4.5	0.05mm/.0019in	UHM 20 TX+
7005-211057	1605-2.0-5.0 FL GC20 R05 UHM20 HPX	7005-211054	1605-2.0-5.0 FR GC20 R05 UHM20 HPX	2.0	5	5	0.05mm/.0019in	UHM 20 HPX
7005-211058	1605-2.0-5.0 FL GC20 R05 UHM20 TX+	7005-211055	1605-2.0-5.0 FR GC20 R05 UHM20 TX+	2.0	5	5	0.05mm/.0019in	UHM 20 TX+



Type-GC20 Chip Breaker

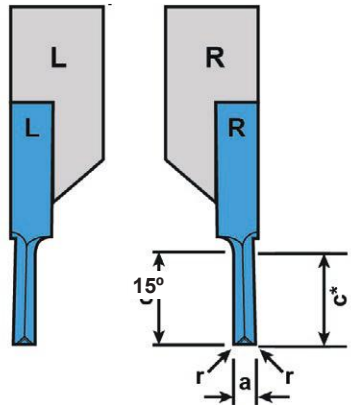


Ideal Cutting Materials

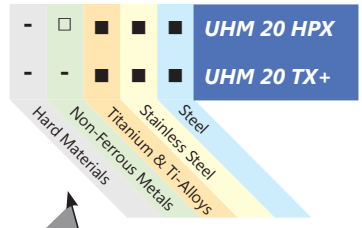

■ Preferred Application
□ Possible Application
- Application Not Recommended



F Edge
Sharp Cutting Edge


1605 Groove and Turn

Cut: Standard
Geometry: None


Repeatability = R : ■ <20µm, ■ <50µm

Left Hand		Right Hand		Dimensions & Features					
Item No.	Description	Item No.	Description	R	a	c	d	r	Coating
7005-148523	1605-0.5-1.5 L UHM20 HPX	7005-148525	1605-0.5-1.5 R UHM20 HPX	■	0.5	1.5	1.5	.05mm/.0019in	UHM 20 HPX
Call For Details	1605-0.5-1.5 L UHM20 TX+	Call For Details	1605-0.5-1.5 R UHM20 TX+	■	0.5	1.5	1.5	.05mm/.0019in	UHM 20 TX+
7005-147597	1605-1.0-2.5 L UHM20 HPX	7005-148527	1605-1.0-2.5 R UHM20 HPX	■	1	2.5	2.5	.05mm/.0019in	UHM 20 HPX
Call For Details	1605-1.0-2.5 L UHM20 TX+	Call For Details	1605-1.0-2.5 R UHM20 TX+	■	1	2.5	2.5	.05mm/.0019in	UHM 20 TX+
7005-148529	1605-1.5-3 L UHM20 HPX	7005-148531	1605-1.5-3 R UHM20 HPX	■	1.5	3	3	.05mm/.0019in	UHM 20 HPX
Call For Details	1605-1.5-3 L UHM20 TX+	Call For Details	1605-1.5-3 R UHM20 TX+	■	1.5	3	3	.05mm/.0019in	UHM 20 TX+
Call For Details	1605 B-1.0-2.5 L UHM20 HPX	Call For Details	1605 B-1.0-2.5 R UHM20 HPX	■	1	2.5	2.5	.05mm/.0019in	UHM 20 HPX
Call For Details	1605 B-1.5-3 L UHM20 HPX	Call For Details	1605 B-1.5-3 R UHM20 HPX	■	1.5	3	3	.05mm/.0019in	UHM 20 HPX



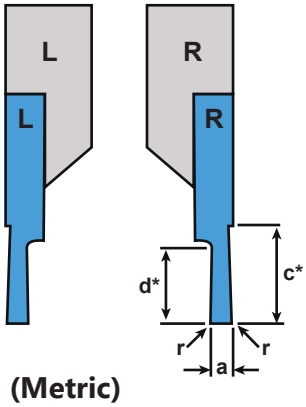


Ideal Cutting Materials

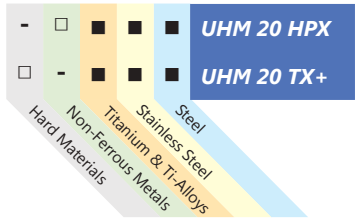

■ Preferred Application
□ Possible Application
- Application Not Recommended

*c: maximal turning capacity
*d: maximal grooving capacity




1606 Threading (Metric)


Profile: Full

Repeatability <20µm


Left Hand		Right Hand		Dimensions & Features					
Item No.	Description	Item No.	Description	a_1	a_2	c	p	Thread	Coating
Call For Details	1606-0.06-60 VP L UHM20 HPX	Call For Details	1606-0.06-60 VP R UHM20 HPX	0.04	0.04	0	0.06	S 0.2	UHM 20 HPX
Call For Details	1606-0.06-60 VP L UHM20 TX+	Call For Details	1606-0.06-60 VP R UHM20 TX+	0.04	0.04	0	0.06	S 0.2	UHM 20 TX+
Call For Details	1606-0.08-60 VP L UHM20 HPX	Call For Details	1606-0.08-60 VP R UHM20 HPX	0.04	0.04	0	0.08	S 0.3	UHM 20 HPX
Call For Details	1606-0.08-60 VP L UHM20 TX+	Call For Details	1606-0.08-60 VP R UHM20 TX+	0.04	0.04	0	0.08	S 0.3	UHM 20 TX+
Call For Details	1606-0.09-60 VP L UHM20 HPX	Call For Details	1606-0.09-60 VP R UHM20 HPX	0.05	0.05	0	0.09	S 0.35	UHM 20 HPX
Call For Details	1606-0.09-60 VP L UHM20 TX+	Call For Details	1606-0.09-60 VP R UHM20 TX+	0.05	0.05	0	0.09	S 0.35	UHM 20 TX+
Call For Details	1606-0.1-60 VP L UHM20 HPX	Call For Details	1606-0.1-60 VP R UHM20 HPX	0.06	0.06	0	0.10	S 0.4	UHM 20 HPX
Call For Details	1606-0.1-60 VP L UHM20 TX+	Call For Details	1606-0.1-60 VP R UHM20 TX+	0.06	0.06	0	0.10	S 0.4	UHM 20 TX+
Call For Details	1606-0.125-60 VP L UHM20 HPX	Call For Details	1606-0.125-60 VP R UHM20 HPX	0.07	0.07	0	0.13	S 0.5	UHM 20 HPX
Call For Details	1606-0.125-60 VP L UHM20 TX+	Call For Details	1606-0.125-60 VP R UHM20 TX+	0.07	0.07	0	0.13	S 0.5	UHM 20 TX+
Call For Details	1606-.15-60 VP L UHM20 HPX	Call For Details	1606-.15-60 VP R UHM20 HPX	0.08	0.08	0	0.15	S 0.6	UHM 20 HPX
Call For Details	1606-.15-60 VP L UHM20 TX+	Call For Details	1606-.15-60 VP R UHM20 TX+	0.08	0.08	0	0.15	S 0.6	UHM 20 TX+
7005-148561	1606-0.175-60 VP L UHM20 HPX	7005-148559	1606-0.175-60 VP R UHM20 HPX	0.1	0.1	0	0.18	S 0.7	UHM 20 HPX
Call For Details	1606-0.175-60 VP L UHM20 TX+	Call For Details	1606-0.175-60 VP R UHM20 TX+	0.1	0.1	0	0.18	S 0.7	UHM 20 TX+



Full Profile

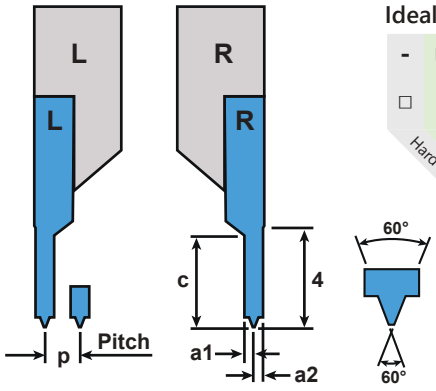

Ideal Cutting Materials

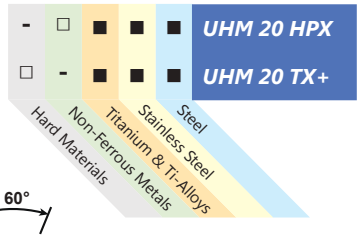

■ Preferred Application
□ Possible Application
- Application Not Recommended


Continued On Next Page

1606 Threading (Metric)


Profile: Full

Repeatability <10µm


Left Hand		Right Hand		Dimensions & Features					
Item No.	Description	Item No.	Description	a_1	a_2	c	p	Thread	Coating
7005-148565	1606-0.2-60 VP L UHM20 HPX	7005-148563	1606-0.2-60 VP R UHM20 HPX	0.11	0.11	0	0.23	S 0.8	UHM 20 HPX
Call For Details	1606-0.2-60 VP L UHM20 TX+	Call For Details	1606-0.2-60 VP R UHM20 TX+	0.11	0.11	0	0.23	S 0.8	UHM 20 TX+
7005-148569	1606-0.225-60 VP L UHM20 HPX	7005-148567	1606-0.225-60 VP R UHM20 HPX	0.13	0.13	0	0.20	S 0.9	UHM 20 HPX
Call For Details	1606-0.225-60 VP L UHM20 TX+	Call For Details	1606-0.225-60 VP R UHM20 TX+	0.13	0.13	0	0.20	S 0.9	UHM 20 TX+
7005-148573	1606-0.25-60 VP L UHM20 HPX	7005-148571	1606-0.25-60 VP R UHM20 HPX	0.14	0.14	0	0.25	M1 /1.2	UHM 20 HPX
Call For Details	1606-0.25-60 VP L UHM20 TX+	Call For Details	1606-0.25-60 VP R UHM20 TX+	0.14	0.14	0	0.25	M1 /1.2	UHM 20 TX+
7005-148577	1606-0.3-60 VP L UHM20 HPX	7005-148575	1606-0.3-60 VP R UHM20 HPX	0.17	0.17	0	0.30	M1.4	UHM 20 HPX
Call For Details	1606-0.3-60 VP L UHM20 TX+	Call For Details	1606-0.3-60 VP R UHM20 TX+	0.17	0.17	0	0.30	M1.4	UHM 20 TX+
7005-148581	1606-0.35-60 VP L UHM20 HPX	7005-148579	1606-0.35-60 VP R UHM20 HPX	0.19	0.19	0	0.35	M1.6/1.8	UHM 20 HPX
Call For Details	1606-0.35-60 VP L UHM20 TX+	Call For Details	1606-0.35-60 VP R UHM20 TX+	0.19	0.19	0	0.35	M1.6/1.8	UHM 20 TX+
7005-148585	1606-0.4-60 VP L UHM20 HPX	7005-148583	1606-0.4-60 VP R UHM20 HPX	0.22	0.22	0	0.40	M2	UHM 20 HPX
Call For Details	1606-0.4-60 VP L UHM20 TX+	Call For Details	1606-0.4-60 VP R UHM20 TX+	0.22	0.22	0	0.40	M2	UHM 20 TX+
7005-148589	1606-0.45-60 VP L UHM20 HPX	7005-148587	1606-0.45-60 VP R UHM20 HPX	0.25	0.25	0	0.45	M2.2/2.5	UHM 20 HPX
Call For Details	1606-0.45-60 VP L UHM20 TX+	Call For Details	1606-0.45-60 VP R UHM20 TX+	0.25	0.25	0	0.45	M2.2/2.5	UHM 20 TX+
7005-148593	1606-0.5-60 VP L UHM20 HPX	7005-148591	1606-0.5-60 VP R UHM20 HPX	0.35	0.35	1.4	0.50	M3	UHM 20 HPX
Call For Details	1606-0.5-60 VP L UHM20 TX+	Call For Details	1606-0.5-60 VP R UHM20 TX+	0.35	0.35	1.4	0.50	M3	UHM 20 TX+
Call For Details	1606-0.6-60 VP L UHM20 HPX	Call For Details	1606-0.6-60 VP R UHM20 HPX	0.4	0.4	1.4	0.60	M3.5	UHM 20 HPX
Call For Details	1606-0.6-60 VP L UHM20 TX+	Call For Details	1606-0.6-60 VP R UHM20 TX+	0.4	0.4	1.4	0.60	M3.5	UHM 20 TX+
7005-148597	1606-0.7-60 VP L UHM20 HPX	7005-148595	1606-0.7-60 VP R UHM20 HPX	0.45	0.45	1.8	0.70	M4	UHM 20 HPX
Call For Details	1606-0.7-60 VP L UHM20 TX+	Call For Details	1606-0.7-60 VP R UHM20 TX+	0.45	0.45	1.8	0.70	M4	UHM 20 TX+
Call For Details	1606-0.75-60 VP L UHM20 HPX	Call For Details	1606-0.75-60 VP R UHM20 HPX	0.41	0.41	1.9	0.75	M4.5	UHM 20 HPX
Call For Details	1606-0.75-60 VP L UHM20 TX+	Call For Details	1606-0.75-60 VP R UHM20 TX+	0.41	0.41	1.9	0.75	M4.5	UHM 20 TX+
Call For Details	1606-0.8-60 VP L UHM20 HPX	Call For Details	1606-0.8-60 VP R UHM20 HPX	0.44	0.44	2	0.80	M5	UHM 20 HPX
Call For Details	1606-0.8-60 VP L UHM20 TX+	Call For Details	1606-0.8-60 VP R UHM20 TX+	0.44	0.44	2	0.80	M5	UHM 20 TX+
Call For Details	1606-1.0-60 VP L UHM20 HPX	Call For Details	1606-1.0-60 VP R UHM20 HPX	0.55	0.55	2.4	1.00	M6/7	UHM 20 HPX
Call For Details	1606-1.0-60 VP L UHM20 TX+	Call For Details	1606-1.0-60 VP R UHM20 TX+	0.55	0.55	2.4	1.00	M6/7	UHM 20 TX+
Call For Details	1606-1.25-60 VP L UHM20 HPX	Call For Details	1606-1.25-60 VP R UHM20 HPX	0.69	0.69	2.9	1.25	M8/9	UHM 20 HPX
Call For Details	1606-1.25-60 VP L UHM20 TX+	Call For Details	1606-1.25-60 VP R UHM20 TX+	0.69	0.69	2.9	1.25	M8/9	UHM 20 TX+



Full Profile

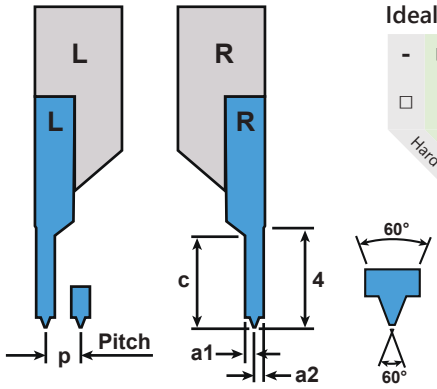

Ideal Cutting Materials

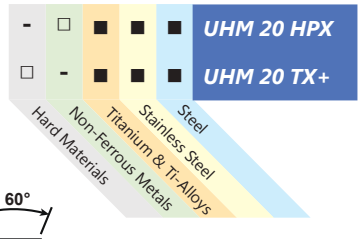


■ Preferred Application
□ Possible Application
- Application Not Recommended


1606 Threading - UNC & UNF

Profile: Full


Left Hand		Dimensions & Features											
Item No.	Description	TPI	p	a_1	a_2	c	Coating	UN	UNC	UNF	UNEF	UNS	UNR
Call For Details	1606-80 UN 60 VP L UHM20 HPX	80	0.317	0.22	0.17	-	UHM 20 HPX			■			
Call For Details	1606-80 UN 60 VP L UHM20 TX+	80	0.317	0.22	0.17	-	UHM 20 TX+			■			
Call For Details	1606-72 UN 60 VP L UHM20 HPX	72	0.353	0.25	0.19	-	UHM 20 HPX			■			
Call For Details	1606-72 UN 60 VP L UHM20 TX+	72	0.353	0.25	0.19	-	UHM 20 TX+			■			
Call For Details	1606-64 UN 60 VP L UHM20 HPX	64	0.397	0.3	0.22	-	UHM 20 HPX		■	■			
Call For Details	1606-64 UN 60 VP L UHM20 TX+	64	0.397	0.3	0.22	-	UHM 20 TX+		■	■			
Call For Details	1606-56 UN 60 VP L UHM20 HPX	56	0.453	0.32	0.25	-	UHM 20 HPX		■	■		■	
Call For Details	1606-56 UN 60 VP L UHM20 TX+	56	0.453	0.32	0.25	-	UHM 20 TX+		■	■		■	
Call For Details	1606-48 UN 60 VP L UHM20 HPX	48	0.529	0.29	0.29	1.4	UHM 20 HPX		■	■		■	
Call For Details	1606-48 UN 60 VP L UHM20 TX+	48	0.529	0.29	0.29	1.4	UHM 20 TX+		■	■		■	
Call For Details	1606-44 UN 60 VP L UHM20 HPX	44	0.577	0.32	0.32	1.4	UHM 20 HPX			■			
Call For Details	1606-44 UN 60 VP L UHM20 TX+	44	0.577	0.32	0.32	1.4	UHM 20 TX+			■			
Call For Details	1606-40 UN 60 VP L UHM20 HPX	40	0.635	0.35	0.35	1.8	UHM 20 HPX		■	■		■	
Call For Details	1606-40 UN 60 VP L UHM20 TX+	40	0.635	0.35	0.35	1.8	UHM 20 TX+		■	■		■	
Call For Details	1606-36 UN 60 VP L UHM20 HPX	36	0.705	0.39	0.39	1.8	UHM 20 HPX			■		■	
Call For Details	1606-36 UN 60 VP L UHM20 TX+	36	0.705	0.39	0.39	1.8	UHM 20 TX+			■		■	
Call For Details	1606-32 UN 60 VP L UHM20 HPX	32	0.794	0.44	0.44	2	UHM 20 HPX		■	■	■		■
Call For Details	1606-32 UN 60 VP L UHM20 TX+	32	0.794	0.44	0.44	2	UHM 20 TX+		■	■	■		■
Call For Details	1606-28 UN 60 VP L UHM20 HPX	28	0.907	0.5	0.5	2.2	UHM 20 HPX		■	■		■	■
Call For Details	1606-28 UN 60 VP L UHM20 TX+	28	0.907	0.5	0.5	2.2	UHM 20 TX+		■	■		■	■
Call For Details	1606-24 UN 60 VP L UHM20 HPX	24	1.058	0.58	0.58	2.2	UHM 20 HPX		■	■	■	■	
Call For Details	1606-24 UN 60 VP L UHM20 TX+	24	1.058	0.58	0.58	2.2	UHM 20 TX+		■	■	■	■	
Call For Details	1606-20 UN 60 VP L UHM20 HPX	20	1.27	0.7	0.7	2.9	UHM 20 HPX	■	■	■	■		■
Call For Details	1606-20 UN 60 VP L UHM20 TX+	20	1.27	0.7	0.7	2.9	UHM 20 TX+	■	■	■	■		■



Full Profile
UNC & UNF

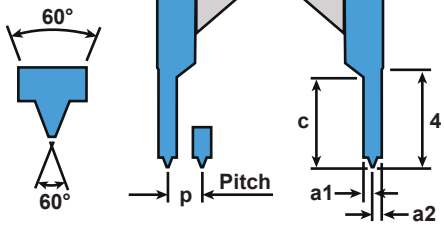

Ideal Cutting Materials

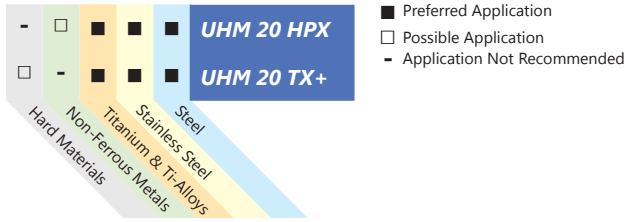


■ Preferred Application
□ Possible Application
- Application Not Recommended

Continued On Next Page


1606 Threading - UNC & UNF

Profile: Full


Right Hand		Dimensions & Features											
Item No.	Description	TPI	p	a_1	a_2	c	Coating	UN	UNC	UNF	UNEF	UNS	UNR
Call For Details	1606-80 UN 60 VP R UHM20 HPX	80	0.317	0.22	0.17	-	UHM 20 HPX			■			
Call For Details	1606-80 UN 60 VP R UHM20 TX+	80	0.317	0.22	0.17	-	UHM 20 TX+			■			
Call For Details	1606-72 UN 60 VP R UHM20 HPX	72	0.353	0.25	0.19	-	UHM 20 HPX			■			
Call For Details	1606-72 UN 60 VP R UHM20 TX+	72	0.353	0.25	0.19	-	UHM 20 TX+			■			
Call For Details	1606-64 UN 60 VP R UHM20 HPX	64	0.397	0.3	0.22	-	UHM 20 HPX		■	■			
Call For Details	1606-64 UN 60 VP R UHM20 TX+	64	0.397	0.3	0.22	-	UHM 20 TX+		■	■			
Call For Details	1606-56 UN 60 VP R UHM20 HPX	56	0.453	0.32	0.25	-	UHM 20 HPX		■	■		■	
Call For Details	1606-56 UN 60 VP R UHM20 TX+	56	0.453	0.32	0.25	-	UHM 20 TX+		■	■		■	
Call For Details	1606-48 UN 60 VP R UHM20 HPX	48	0.529	0.29	0.29	1.4	UHM 20 HPX		■	■		■	
Call For Details	1606-48 UN 60 VP R UHM20 TX+	48	0.529	0.29	0.29	1.4	UHM 20 TX+		■	■		■	
Call For Details	1606-44 UN 60 VP R UHM20 HPX	44	0.577	0.32	0.32	1.4	UHM 20 HPX			■			
Call For Details	1606-44 UN 60 VP R UHM20 TX+	44	0.577	0.32	0.32	1.4	UHM 20 TX+			■			
Call For Details	1606-40 UN 60 VP R UHM20 HPX	40	0.635	0.35	0.35	1.8	UHM 20 HPX		■	■		■	
Call For Details	1606-40 UN 60 VP R UHM20 TX+	40	0.635	0.35	0.35	1.8	UHM 20 TX+		■	■		■	
Call For Details	1606-36 UN 60 VP R UHM20 HPX	36	0.705	0.39	0.39	1.8	UHM 20 HPX			■		■	
Call For Details	1606-36 UN 60 VP R UHM20 TX+	36	0.705	0.39	0.39	1.8	UHM 20 TX+			■		■	
Call For Details	1606-32 UN 60 VP R UHM20 HPX	32	0.794	0.44	0.44	2	UHM 20 HPX		■	■	■		■
Call For Details	1606-32 UN 60 VP R UHM20 TX+	32	0.794	0.44	0.44	2	UHM 20 TX+		■	■	■		■
Call For Details	1606-28 UN 60 VP R UHM20 HPX	28	0.907	0.5	0.5	2.2	UHM 20 HPX		■	■		■	■
Call For Details	1606-28 UN 60 VP R UHM20 TX+	28	0.907	0.5	0.5	2.2	UHM 20 TX+		■	■		■	■
Call For Details	1606-24 UN 60 VP R UHM20 HPX	24	1.058	0.58	0.58	2.2	UHM 20 HPX		■	■	■	■	
Call For Details	1606-24 UN 60 VP R UHM20 TX+	24	1.058	0.58	0.58	2.2	UHM 20 TX+		■	■	■	■	
Call For Details	1606-20 UN 60 VP R UHM20 HPX	20	1.27	0.7	0.7	2.9	UHM 20 HPX	■	■	■	■		■
Call For Details	1606-20 UN 60 VP R UHM20 TX+	20	1.27	0.7	0.7	2.9	UHM 20 TX+	■	■	■	■		■



Full Profile
UNC & UNF

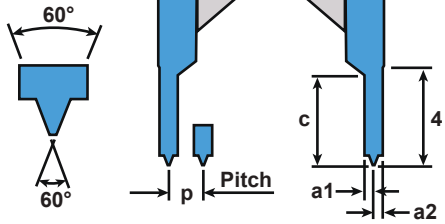

Ideal Cutting Materials

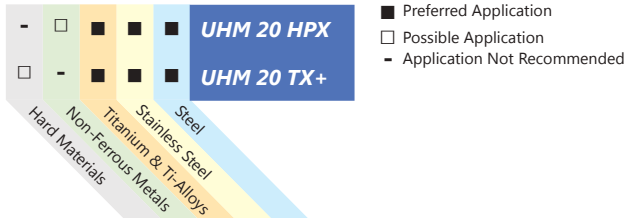

1606 Threading - HA Form

Profile: Full


Repeatability = R : <20µm

Left Hand		Dimensions & Features											
Item No.	Description	ISO 5835	P	a1	a2	α	β	d1	ds Tolerance	e	r4	r5	Coating
Call For Details	1606 HA1.5 VP L UHM20 HPX	HA1.5	0.5	0.4	0.4	35°	3°	1.5	1.1 +0/-0.1	0.1	0.3	0.1	UHM 20 HPX
Call For Details	1606 HA1.5 VP L UHM20 TX+	HA1.5	0.5	0.4	0.4	35°	3°	1.5	1.1 +0/-0.1	0.1	0.3	0.1	UHM 20 TX+
Call For Details	1606 HA2.0 VP L UHM20 HPX	HA2.0	0.6	0.45	0.45	35°	3°	2.0	1.3 +0/-0.15	0.1	0.4	0.1	UHM 20 HPX
Call For Details	1606 HA2.0 VP L UHM20 TX+	HA2.0	0.6	0.45	0.45	35°	3°	2.0	1.3 +0/-0.15	0.1	0.4	0.1	UHM 20 TX+
Call For Details	1606 HA2.7 VP L UHM20 HPX	HA2.7	1.0	0.65	0.65	35°	3°	2.7	1.9 +0/-0.15	0.1	0.6	0.2	UHM 20 HPX
Call For Details	1606 HA2.7 VP L UHM20 TX+	HA2.7	1.0	0.65	0.65	35°	3°	2.7	1.9 +0/-0.15	0.1	0.6	0.2	UHM 20 TX+
Call For Details	1606 HA3.5 VP L UHM20 HPX	HA3.5	1.25	0.78	0.78	35°	3°	3.5	12.4 +0/-0.15	0.1	0.8	0.2	UHM 20 HPX
Call For Details	1606 HA3.5 VP L UHM20 TX+	HA3.5	1.25	0.78	0.78	35°	3°	3.5	2.4 +0/-0.15	0.1	0.8	0.2	UHM 20 TX+
Call For Details	1606 HA4.0 VP L UHM20 HPX	HA4.0	1.5	0.9	0.9	35°	3°	4.0	2.9 +0/-0.15	0.1	0.8	0.2	UHM 20 HPX
Call For Details	1606 HA4.0 VP L UHM20 TX+	HA4.0	1.5	0.9	0.9	35°	3°	4.0	2.9 +0/-0.15	0.1	0.8	0.2	UHM 20 TX+
Call For Details	1606 HA4.5 VP L UHM20 HPX	HA4.5	1.75	1.03	1.03	35°	3°	4.5	3.0 +0/-0.15	0.1	1.0	0.3	UHM 20 HPX
Call For Details	1606 HA4.5 VP L UHM20 TX+	HA4.5	1.75	1.03	1.03	35°	3°	4.5	3.0 +0/-0.15	0.1	1.0	0.3	UHM 20 TX+
Call For Details	1606 HA5.0 VP L UHM20 HPX	HA5.0	1.75	1.03	1.03	35°	3°	5.0	3.5 +0/-0.15	0.1	1.0	0.3	UHM 20 HPX
Call For Details	1606 HA5.0 VP L UHM20 TX+	HA5.0	1.75	1.03	1.03	35°	3°	5.0	3.5 +0/-0.15	0.1	1.0	0.3	UHM 20 TX+


Right Hand		Dimensions & Features											
Item No.	Description	ISO 5835	P	a1	a2	α	β	d1	ds Tolerance	e	r4	r5	Coating
Call For Details	1606 HA1.5 VP R UHM20 HPX	HA1.5	0.5	0.4	0.4	35°	3°	1.5	1.1 +0/-0.1	0.1	0.3	0.1	UHM 20 HPX
Call For Details	1606 HA1.5 VP R UHM20 TX+	HA1.5	0.5	0.4	0.4	35°	3°	1.5	1.1 +0/-0.1	0.1	0.3	0.1	UHM 20 TX+
Call For Details	1606 HA2.0 VP R UHM20 HPX	HA2.0	0.6	0.45	0.45	35°	3°	2.0	1.3 +0/-0.15	0.1	0.4	0.1	UHM 20 HPX
Call For Details	1606 HA2.0 VP R UHM20 TX+	HA2.0	0.6	0.45	0.45	35°	3°	2.0	1.3 +0/-0.15	0.1	0.4	0.1	UHM 20 TX+
Call For Details	1606 HA2.7 VP R UHM20 HPX	HA2.7	1.0	0.65	0.65	35°	3°	2.7	1.9 +0/-0.15	0.1	0.6	0.2	UHM 20 HPX
Call For Details	1606 HA2.7 VP R UHM20 TX+	HA2.7	1.0	0.65	0.65	35°	3°	2.7	1.9 +0/-0.15	0.1	0.6	0.2	UHM 20 TX+
Call For Details	1606 HA3.5 VP R UHM20 HPX	HA3.5	1.25	0.78	0.78	35°	3°	3.5	12.4 +0/-0.15	0.1	0.8	0.2	UHM 20 HPX
Call For Details	1606 HA3.5 VP R UHM20 TX+	HA3.5	1.25	0.78	0.78	35°	3°	3.5	2.4 +0/-0.15	0.1	0.8	0.2	UHM 20 TX+
Call For Details	1606 HA4.0 VP R UHM20 HPX	HA4.0	1.5	0.9	0.9	35°	3°	4.0	2.9 +0/-0.15	0.1	0.8	0.2	UHM 20 HPX
Call For Details	1606 HA4.0 VP R UHM20 TX+	HA4.0	1.5	0.9	0.9	35°	3°	4.0	2.9 +0/-0.15	0.1	0.8	0.2	UHM 20 TX+
Call For Details	1606 HA4.5 VP R UHM20 HPX	HA4.5	1.75	1.03	1.03	35°	3°	4.5	3.0 +0/-0.15	0.1	1.0	0.3	UHM 20 HPX
Call For Details	1606 HA4.5 VP R UHM20 TX+	HA4.5	1.75	1.03	1.03	35°	3°	4.5	3.0 +0/-0.15	0.1	1.0	0.3	UHM 20 TX+
Call For Details	1606 HA5.0 VP R UHM20 HPX	HA5.0	1.75	1.03	1.03	35°	3°	5.0	3.5 +0/-0.15	0.1	1.0	0.3	UHM 20 HPX
Call For Details	1606 HA5.0 VP R UHM20 TX+	HA5.0	1.75	1.03	1.03	35°	3°	5.0	3.5 +0/-0.15	0.1	1.0	0.3	UHM 20 TX+




Full Profile Forms HA

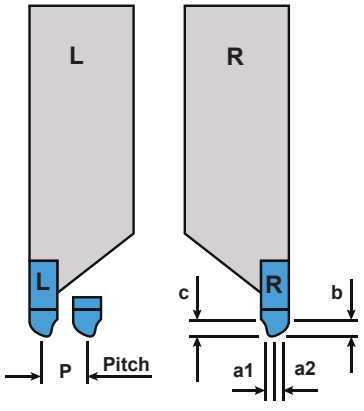

Ideal Cutting Materials

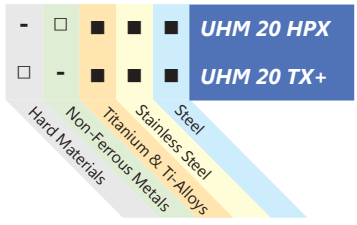

■ Preferred Application
□ Possible Application
- Application Not Recommended

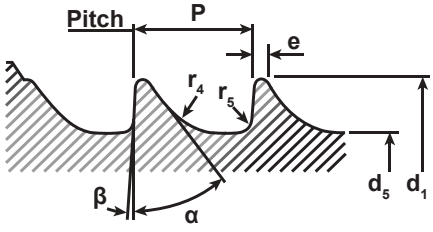

1606 Threading - HB Form

Profile: Full


Repeatability = R : <20µm


Left Hand		Dimensions & Features											
Item No.	Description	ISO 5835	P	a1	a2	α	β	d1	ds Tolerance	e	r4	r5	Coating
Call For Details	1606 HB4.0 VP R UHM20 HPX	HB4.0	1.75	1.03	1.03	25°	5°	4.0	1.9 +0/-0.15	0.1	0.8	0.3	UHM 20 HPX
Call For Details	1606 HB4.0 VP R UHM20 TX+	HB4.0	1.75	1.03	1.03	25°	5°	4.0	1.9 +0/-0.15	0.1	0.8	0.3	UHM 20 TX+
Call For Details	1606 HB6.5 VP R UHM20 HPX	HB6.5	2.75	1.58	1.58	25°	5°	6.5	3.0 +0/-0.15	0.2	1.2	0.8	UHM 20 HPX
Call For Details	1606 HB6.5 VP R UHM20 TX+	HB6.5	2.75	1.58	1.58	25°	5°	6.5	3.0 +0/-0.15	0.2	1.2	0.8	UHM 20 TX+


Right Hand		Dimensions & Features											
Item No.	Description	ISO 5835	P	a1	a2	α	β	d1	ds Tolerance	e	r4	r5	Coating
Call For Details	1606 HB4.0 VP R UHM20 HPX	HB4.0	1.75	1.03	1.03	25°	5°	4.0	1.9 +0/-0.15	0.1	0.8	0.3	UHM 20 HPX
Call For Details	1606 HB4.0 VP R UHM20 TX+	HB4.0	1.75	1.03	1.03	25°	5°	4.0	1.9 +0/-0.15	0.1	0.8	0.3	UHM 20 TX+
Call For Details	1606 HB6.5 VP R UHM20 HPX	HB6.5	2.75	1.58	1.58	25°	5°	6.5	3.0 +0/-0.15	0.2	1.2	0.8	UHM 20 HPX
Call For Details	1606 HB6.5 VP R UHM20 TX+	HB6.5	2.75	1.58	1.58	25°	5°	6.5	3.0 +0/-0.15	0.2	1.2	0.8	UHM 20 TX+



Full Profile Forms HB

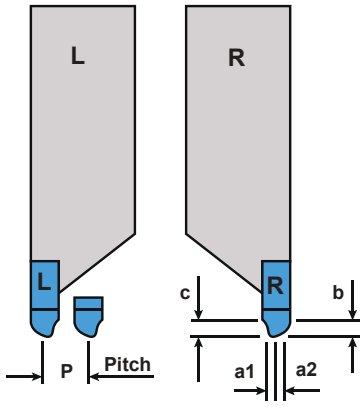

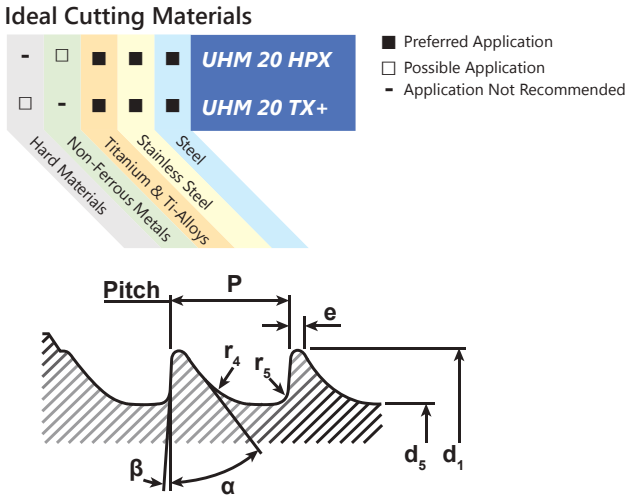




1606 Threading


Profile: Partial (55°/60°)

Repeatability = R : ■ <20µm, ■ <50µm


Left Hand		Right Hand		Dimensions & Features						
Item No.	Description	Item No.	Description	R	p	a	c	α	e	Coating
Call For Details	1606-2-4-55 L UHM20 HPX	Call For Details	1606-2-4-55 R UHM20 HPX	■	.25-2	2	4	55°	.035mm / .001in	UHM 20 HPX
Call For Details	1606-2-4-55 L UHM20 TX+	Call For Details	1606-2-4-55 R UHM20 TX+	■	.25-2	2	4	55°	.035mm / .001in	UHM 20 TX+
7005-148599	1606-2-4-60 L UHM20 HPX	7005-148601	1606-2-4-60 R UHM20 HPX	■	.25-2	2	4	60°	.035mm / .001in	UHM 20 HPX
Call For Details	1606-2-4-60 L UHM20 TX+	Call For Details	1606-2-4-60 R UHM20 TX+	■	.25-2	2	4	60°	.035mm / .001in	UHM 20 TX+
Call For Details	1606 B-2-4-55 L UHM20 HPX	Call For Details	1606 B-2-4-55 R UHM20 HPX	■	.25-2	2	4	55°	.035mm / .001in	UHM 20 HPX
Call For Details	1606 B-2-4-60 L UHM20 HPX	Call For Details	1606 B-2-4-60 R UHM20 HPX	■	.25-2	2	4	60°	.035mm / .001in	UHM 20 HPX




Partial Profile

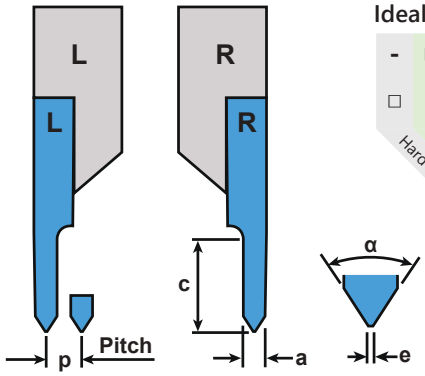

Ideal Cutting Materials

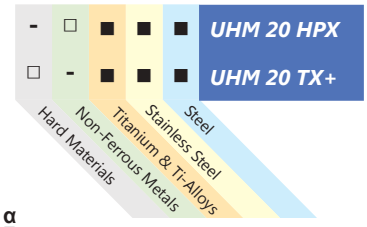

■ Preferred Application
□ Possible Application
- Application Not Recommended




1606 Threading (Pipe Thread)


Profile: Full

Repeatability = R : <20µm


Left Hand		Right Hand		Dimensions & Features							
Item No.	Description	Item No.	Description	ANSI B1.1	P (T/ Inch)	P	h_{min}	a_1	a_2	c	Coating
Call For Details	1606-G 28-55 VP L UHM20 HPX	Call For Details	1606-G 28-55 VP R UHM20 HPX	1/8, 1/6	28	0.907	0.581	0.5	0.5	2.3	UHM 20 HX
Call For Details	1606-G 28-55 VP L UHM20 TX+	Call For Details	1606-G 28-55 VP R UHM20 TX+								UHM 20 TX+
Call For Details	1606-G 19-55 VP L UHM20 HPX	Call For Details	1606-G 19-55 VP R UHM20 HPX	1/4, 3/8	19	1.337	0.856	0.74	0.74	3.3	UHM 20 HX
Call For Details	1606-G 19-55 VP L UHM20 TX+	Call For Details	1606-G 19-55 VP R UHM20 TX+								UHM 20 TX+
Call For Details	1606-G 14-55 VP L UHM20 HPX	Call For Details	1606-G 14-55 VP R UHM20 HPX	1/2, 5/8, 3/4, 7/8	14	1.814	1.162	1	1	4	UHM 20 HX
Call For Details	1606-G 14-55 VP L UHM20 TX+	Call For Details	1606-G 14-55 VP R UHM20 TX+								UHM 20 TX+




Partial Profile
Pipe Thread

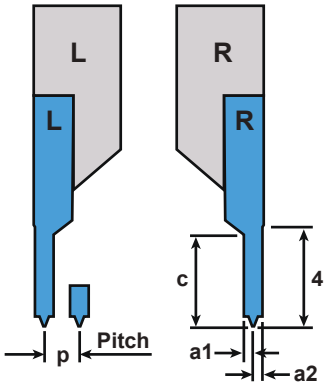


Ideal Cutting Materials

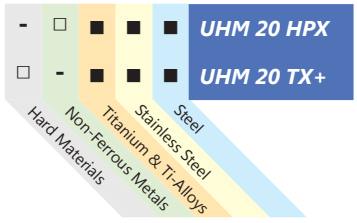

■ Preferred Application
□ Possible Application
- Application Not Recommended





1607 Full Radius Grooving


Cut: Standard

Chip Breaker: None


Repeatability = R : ■<10µm, ■<20µm

Left Hand		Right Hand		Dimensions & Features				
Item No.	Description	Item No.	Description	R	a	d	r	Coating
7005-148603	1607-R0.25-2 L UHM20 HPX	7005-148605	1607-R0.25-2 R UHM20 HPX	■	0.5	2	0.25	UHM 20 HPX
Call For Details	1607-R0.25-2 L UHM20 TX+	Call For Details	1607-R0.25-2 R UHM20 TX+	■	0.5	2	0.25	UHM 20 TX+
Call For Details	1607-R0.4-2.5 L UHM20 HPX	Call For Details	1607-R0.4-2.5 R UHM20 HPX	■	0.8	2.5	0.4	UHM 20 HPX
Call For Details	1607-R0.4-2.5 L UHM20 TX+	Call For Details	1607-R0.4-2.5 R UHM20 TX+	■	0.8	2.5	0.4	UHM 20 TX+
7005-148607	1607-R0.5-2.5 L UHM20 HPX	7005-148609	1607-R0.5-2.5 R UHM20 HPX	■	1	2.5	0.5	UHM 20 HPX
Call For Details	1607-R0.5-2.5 L UHM20 TX+	Call For Details	1607-R0.5-2.5 R UHM20 TX+	■	1	2.5	0.5	UHM 20 TX+
7005-148611	1607-R0.6-2.5 L UHM20 HPX	7005-148613	1607-R0.6-2.5 R UHM20 HPX	■	1.2	2.5	0.6	UHM 20 HPX
Call For Details	1607-R0.6-2.5 L UHM20 TX+	Call For Details	1607-R0.6-2.5 R UHM20 TX+	■	1.2	2.5	0.6	UHM 20 TX+
7005-148615	1607-R0.75-3 L UHM20 HPX	7005-148617	1607-R0.75-3 R UHM20 HPX	■	1.5	3	0.75	UHM 20 HPX
Call For Details	1607-R0.75-3 L UHM20 TX+	Call For Details	1607-R0.75-3 R UHM20 TX+	■	1.5	3	0.75	UHM 20 TX+
7005-148619	1607-R0.8-3 L UHM20 HPX	7005-148621	1607-R0.8-3 R UHM20 HPX	■	1.6	3	0.8	UHM 20 HPX
Call For Details	1607-R0.8-3 L UHM20 TX+	Call For Details	1607-R0.8-3 R UHM20 TX+	■	1.6	3	0.8	UHM 20 TX+
7005-148623	1607-R1.0-4 L UHM20 HPX	7005-148625	1607-R1.0-4 R UHM20 HPX	■	2	4	1	UHM 20 HPX
Call For Details	1607-R1.0-4 L UHM20 TX+	Call For Details	1607-R1.0-4 R UHM20 TX+	■	2	4	1	UHM 20 TX+
7005-148627	1607-R1.5-4 L UHM20 HPX	7005-148629	1607-R1.5-4 R UHM20 HPX	■	3	4	1.5	UHM 20 HPX
Call For Details	1607-R1.5-4 L UHM20 TX+	Call For Details	1607-R1.5-4 R UHM20 TX+	■	3	4	1.5	UHM 20 TX+




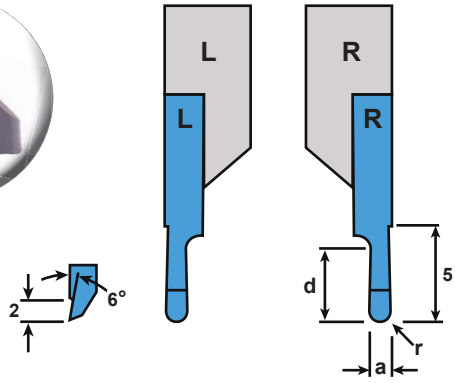

Ideal Cutting Materials

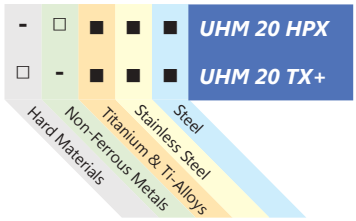

■ Preferred Application
□ Possible Application
- Application Not Recommended

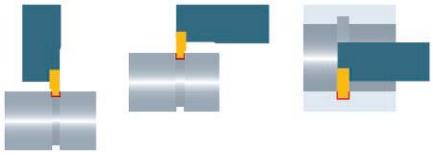

1610 Grooving (Radial)


Cut: Standard


Chip Breaker: None


Repeatability = R : ■<10µm, ■<20µm

Left Hand		Right Hand		Dimensions & Features							
Item No.	Description	Item No.	Description	R	a	a tol	c	d	β	s	Coating
Call For Details	1610-0.05-0.1 L UHM20 HPX	Call For Details	1610-0.05-0.1 R UHM20 HPX	■	0.05	±.01	5	0.1	6°	1	UHM 20 HPX
Call For Details	1610-0.05-0.1 L UHM20 TX+	Call For Details	1610-0.05-0.1 R UHM20 TX+	■	0.05	±.01	5	0.1	6°	1	UHM 20 TX+
Call For Details	1610-0.10-0.2 L UHM20 HPX	Call For Details	1610-0.10-0.2 R UHM20 HPX	■	0.1	±.01	5	0.2	6°	1	UHM 20 HPX
Call For Details	1610-0.10-0.2 L UHM20 TX+	Call For Details	1610-0.10-0.2 R UHM20 TX+	■	0.1	±.01	5	0.2	6°	1	UHM 20 TX+
Call For Details	1610-0.15-0.3 L UHM20 HPX	Call For Details	1610-0.15-0.3 R UHM20 HPX	■	0.15	±.01	5	0.3	6°	1	UHM 20 HPX
Call For Details	1610-0.15-0.3 L UHM20 TX+	Call For Details	1610-0.15-0.3 R UHM20 TX+	■	0.15	±.01	5	0.3	6°	1	UHM 20 TX+
7005-148631	1610-0.24-0.5 L UHM20 HPX	7005-148633	1610-0.24-0.5 R UHM20 HPX	■	0.24	±.04/-0	5	0.5	10°	3	UHM 20 HPX
Call For Details	1610-0.24-0.5 L UHM20 TX+	Call For Details	1610-0.24-0.5 R UHM20 TX+	■	0.24	±.04/-0	5	0.5	10°	3	UHM 20 TX+
7005-148635	1610-0.30-0.6 L UHM20 HPX	7005-148637	1610-0.30-0.6 R UHM20 HPX	■	0.3	±.02	5	0.6	6°	1	UHM 20 HPX
Call For Details	1610-0.30-0.6 L UHM20 TX+	Call For Details	1610-0.30-0.6 R UHM20 TX+	■	0.3	±.02	5	0.6	6°	1	UHM 20 TX+
7005-148639	1610-0.34-0.6 L UHM20 HPX	7005-148641	1610-0.34-0.6 R UHM20 HPX	■	0.34	±.04/-0	5	0.6	10°	3	UHM 20 HPX
Call For Details	1610-0.34-0.6 L UHM20 TX+	Call For Details	1610-0.34-0.6 R UHM20 TX+	■	0.34	±.04/-0	5	0.6	10°	3	UHM 20 TX+
7005-148643	1610-0.40-0.8 L UHM20 HPX	7005-148645	1610-0.40-0.8 R UHM20 HPX	■	0.4	±.02	5	0.8	6°	1	UHM 20 HPX
Call For Details	1610-0.40-0.8 L UHM20 TX+	Call For Details	1610-0.40-0.8 R UHM20 TX+	■	0.4	±.02	5	0.8	6°	1	UHM 20 TX+
7005-148647	1610-0.44-0.8 L UHM20 HPX	7005-148649	1610-0.44-0.8 R UHM20 HPX	■	0.44	±.04/-0	5	0.8	10°	3	UHM 20 HPX
Call For Details	1610-0.44-0.8 L UHM20 TX+	Call For Details	1610-0.44-0.8 R UHM20 TX+	■	0.44	±.04/-0	5	0.8	10°	3	UHM 20 TX+
7005-148653	1610-0.45-1.5 L UHM20 HPX	7005-148651	1610-0.45-1.5 R UHM20 HPX	■	0.45	±.02	5	1.5	6°	1	UHM 20 HPX
Call For Details	1610-0.45-1.5 L UHM20 TX+	Call For Details	1610-0.45-1.5 R UHM20 TX+	■	0.45	±.02	5	1.5	6°	1	UHM 20 TX+
7005-148655	1610-0.50-1.0 L UHM20 HPX	7005-148657	1610-0.50-1.0 R UHM20 HPX	■	0.5	±.02	5	1	6°	1	UHM 20 HPX
Call For Details	1610-0.50-1.0 L UHM20 TX+	Call For Details	1610-0.50-1.0 R UHM20 TX+	■	0.5	±.02	5	1	6°	1	UHM 20 TX+
7005-148659	1610-0.54-0.8 L UHM20 HPX	7005-148661	1610-0.54-0.8 R UHM20 HPX	■	0.54	±.05/-0	5	0.8	10°	3	UHM 20 HPX
Call For Details	1610-0.54-0.8 L UHM20 TX+	Call For Details	1610-0.54-0.8 R UHM20 TX+	■	0.54	±.05/-0	5	0.8	10°	3	UHM 20 TX+
7005-148663	1610-0.60-1.2 L UHM20 HPX	7005-148665	1610-0.60-1.2 R UHM20 HPX	■	0.6	±.02	5	1.2	6°	1	UHM 20 HPX
Call For Details	1610-0.60-1.2 L UHM20 TX+	Call For Details	1610-0.60-1.2 R UHM20 TX+	■	0.6	±.02	5	1.2	6°	1	UHM 20 TX+
7005-148667	1610-0.64-1.0 L UHM20 HPX	7005-148669	1610-0.64-1.0 R UHM20 HPX	■	0.64	±.05/-0	5	1	10°	3	UHM 20 HPX
Call For Details	1610-0.64-1.0 L UHM20 TX+	Call For Details	1610-0.64-1.0 R UHM20 TX+	■	0.64	±.05/-0	5	1	10°	3	UHM 20 TX+
7005-148671	1610-0.64-1.2 L UHM20 HPX	7005-148673	1610-0.64-1.2 R UHM20 HPX	■	0.64	±.05/-0	5	1.2	10°	3	UHM 20 HPX
Call For Details	1610-0.64-1.2 L UHM20 TX+	Call For Details	1610-0.64-1.2 R UHM20 TX+	■	0.64	±.05/-0	5	1.2	10°	3	UHM 20 TX+
7005-148675	1610-0.65-0.7 L UHM20 HPX	7005-148677	1610-0.65-0.7 R UHM20 HPX	■	0.65	±.02	5	0.7	10°	3	UHM 20 HPX
Call For Details	1610-0.65-0.7 L UHM20 TX+	Call For Details	1610-0.65-0.7 R UHM20 TX+	■	0.65	±.02	5	0.7	10°	3	UHM 20 TX+
7005-148679	1610-0.70-1.4 L UHM20 HPX	7005-148681	1610-0.70-1.4 R UHM20 HPX	■	0.7	±.02	5	1.4	6°	1	UHM 20 HPX
Call For Details	1610-0.70-1.4 L UHM20 TX+	Call For Details	1610-0.70-1.4 R UHM20 TX+	■	0.7	±.02	5	1.4	6°	1	UHM 20 TX+
7005-148683	1610-0.74-1.8 L UHM20 HPX	7005-148685	1610-0.74-1.8 R UHM20 HPX	■	0.74	±.05/-0	5	1.8	10°	3	UHM 20 HPX
Call For Details	1610-0.74-1.8 L UHM20 TX+	Call For Details	1610-0.74-1.8 R UHM20 TX+	■	0.74	±.05/-0	5	1.8	10°	3	UHM 20 TX+
7005-148687	1610-0.85-0.9 L UHM20 HPX	7005-148689	1610-0.85-0.9 R UHM20 HPX	■	0.85	±.02	5	0.9	10°	3	UHM 20 HPX
Call For Details	1610-0.85-0.9 L UHM20 TX+	Call For Details	1610-0.85-0.9 R UHM20 TX+	■	0.85	±.02	5	0.9	10°	3	UHM 20 TX+
7005-148691	1610-0.85-1.2 L UHM20 HPX	7005-148693	1610-0.85-1.2 R UHM20 HPX	■	0.85	±.02	5	1.2	10°	3	UHM 20 HPX
Call For Details	1610-0.85-1.2 L UHM20 TX+	Call For Details	1610-0.85-1.2 R UHM20 TX+	■	0.85	±.02	5	1.2	10°	3	UHM 20 TX+








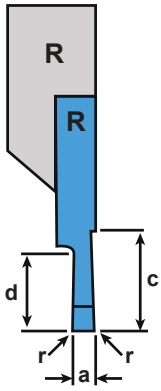


Ideal Cutting Materials

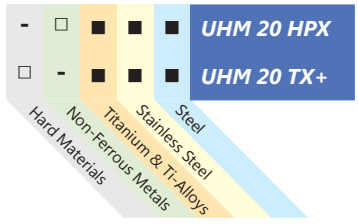

■ Preferred Application
□ Possible Application
- Application Not Recommended

Continued On Next Page

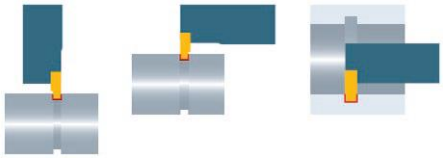


1610 Grooving (Radial)


Cut: Standard
Chip Breaker: None


Repeatability = R : ■<10µm, ■<20µm

Left Hand		Right Hand		Dimensions & Features							
Item No.	Description	Item No.	Description	R	a	a tol	c	d	β	s	Coating
7005-148695	1610-0.94-2.3 L UHM20 HPX	7005-148697	1610-0.94-2.3 R UHM20 HPX	■	0.94	+.05/-0	5	2.3	10°	3	UHM 20 HPX
Call For Details	1610-0.94-2.3 L UHM20 TX+	Call For Details	1610-0.94-2.3 R UHM20 TX+	■	0.94	+.05/-0	5	2.3	10°	3	UHM 20 TX+
7005-148699	1610-0.95-1.0 L UHM20 HPX	7005-148701	1610-0.95-1.0 R UHM20 HPX	■	0.95	±.02	5	1	10°	3	UHM 20 HPX
Call For Details	1610-0.95-1.0 L UHM20 TX+	Call For Details	1610-0.95-1.0 R UHM20 TX+	■	0.95	±.02	5	1	10°	3	UHM 20 TX+
7005-148703	1610-1.00-1.14 L UHM20 HPX	7005-148705	1610-1.00-1.14 R UHM20 HPX	■	1	±.02	5	1.14	10°	3	UHM 20 HPX
Call For Details	1610-1.00-1.14 L UHM20 TX+	Call For Details	1610-1.00-1.14 R UHM20 TX+	■	1	±.02	5	1.14	10°	3	UHM 20 TX+
7005-148707	1610-1.05-2.3 L UHM20 HPX	7005-148709	1610-1.05-2.3 R UHM20 HPX	■	1.05	+.08/-0	5	2.3	10°	3	UHM 20 HPX
Call For Details	1610-1.05-2.3 L UHM20 TX+	Call For Details	1610-1.05-2.3 R UHM20 TX+	■	1.05	+.08/-0	5	2.3	10°	3	UHM 20 TX+
7005-148711	1610-1.15-2.8 L UHM20 HPX	7005-148713	1610-1.15-2.8 R UHM20 HPX	■	1.15	+.08/-0	5	2.8	10°	3	UHM 20 HPX
Call For Details	1610-1.15-2.8 L UHM20 TX+	Call For Details	1610-1.15-2.8 R UHM20 TX+	■	1.15	+.08/-0	5	2.8	10°	3	UHM 20 TX+
7005-148715	1610-1.2-1.34 L UHM20 HPX	7005-148717	1610-1.2-1.34 R UHM20 HPX	■	1.2	±.02	5	1.34	10°	3	UHM 20 HPX
Call For Details	1610-1.2-1.34 L UHM20 TX+	Call For Details	1610-1.2-1.34 R UHM20 TX+	■	1.2	±.02	5	1.34	10°	3	UHM 20 TX+
7005-148719	1610-1.25-2.8 L UHM20 HPX	7005-148721	1610-1.25-2.8 R UHM20 HPX	■	1.25	+.08/-0	5	2.8	10°	3	UHM 20 HPX
Call For Details	1610-1.25-2.8 L UHM20 TX+	Call For Details	1610-1.25-2.8 R UHM20 TX+	■	1.25	+.08/-0	5	2.8	10°	3	UHM 20 TX+
7005-148723	1610-1.35-3.3 L UHM20 HPX	7005-148725	1610-1.35-3.3 R UHM20 HPX	■	1.35	+.08/-0	5	3.3	10°	3	UHM 20 HPX
Call For Details	1610-1.35-3.3 L UHM20 TX+	Call For Details	1610-1.35-3.3 R UHM20 TX+	■	1.35	+.08/-0	5	3.3	10°	3	UHM 20 TX+
7005-148727	1610-1.4-1.53 L UHM20 HPX	7005-148729	1610-1.4-1.53 R UHM20 HPX	■	1.4	±.02	5	1.53	10°	3	UHM 20 HPX
Call For Details	1610-1.4-1.53 L UHM20 TX+	Call For Details	1610-1.4-1.53 R UHM20 TX+	■	1.4	±.02	5	1.53	10°	3	UHM 20 TX+
Call For Details	1610-1.5-3L UHM20 HPX	Call For Details	1610-1.5-3R UHM20 HPX	■	1.5	±.02	5	3	10°	3	UHM 20 HPX
Call For Details	1610-1.5-3L UHM20 TX+	Call For Details	1610-1.5-3R UHM20 TX+	■	1.5	±.02	5	3	10°	3	UHM 20 TX+
7005-148731	1610-1.55-3.8 L UHM20 HPX	7005-148733	1610-1.55-3.8 R UHM20 HPX	■	1.55	+.08/-0	5	3.8	10°	3	UHM 20 HPX
Call For Details	1610-1.55-3.8 L UHM20 TX+	Call For Details	1610-1.55-3.8 R UHM20 TX+	■	1.55	+.08/-0	5	3.8	10°	3	UHM 20 TX+
7005-148735	1610-1.70-1.82 L UHM20 HPX	7005-148737	1610-1.70-1.82 R UHM20 HPX	■	1.7	±.02	5	1.82	10°	3	UHM 20 HPX
Call For Details	1610-1.70-1.82 L UHM20 TX+	Call For Details	1610-1.70-1.82 R UHM20 TX+	■	1.7	±.02	5	1.82	10°	3	UHM 20 TX+
7005-148739	1610-1.95-2.0 L UHM20 HPX	7005-148741	1610-1.95-2.0 R UHM20 HPX	■	1.95	±.02	5	2	10°	3	UHM 20 HPX
Call For Details	1610-1.95-2.0 L UHM20 TX+	Call For Details	1610-1.95-2.0 R UHM20 TX+	■	1.95	±.02	5	2	10°	3	UHM 20 TX+
7005-148743	1610-2.25-2.0 L UHM20 HPX	7005-148745	1610-2.25-2.0 R UHM20 HPX	■	2.25	±.02	5	2	10°	3	UHM 20 HPX
Call For Details	1610-2.25-2.0 L UHM20 TX+	Call For Details	1610-2.25-2.0 R UHM20 TX+	■	2.25	±.02	5	2	10°	3	UHM 20 TX+
7005-148747	1610-2.75-2.0 L UHM20 HPX	7005-148749	1610-2.75-2.0 R UHM20 HPX	■	2.75	±.02	5	2	10°	3	UHM 20 HPX
Call For Details	1610-2.75-2.0 L UHM20 TX+	Call For Details	1610-2.75-2.0 R UHM20 TX+	■	2.75	±.02	5	2	10°	3	UHM 20 TX+









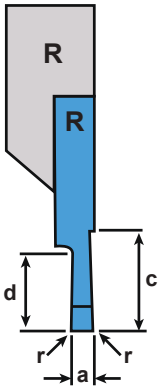

Ideal Cutting Materials

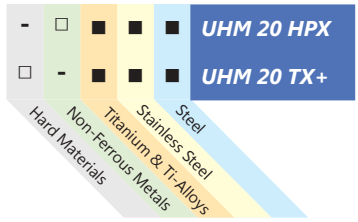

■ Preferred Application
□ Possible Application
- Application Not Recommended




1611 Grooving (Axial)

Cut: Standard
Chip Breaker: None


Repeatability <20µm

Left Hand		Right Hand		Dimensions & Features					
Item No.	Description	Item No.	Description	a	d	r	s	Dmin	Coating
7005-148751	1611-0.5-1 L UHM20 HPX	7005-148753	1611-0.5-1 R UHM20 HPX	0.5	1	0.05	1.2	7	UHM 20 HPX
Call For Details	1611-0.5-1 L UHM20 TX+	Call For Details	1611-0.5-1 R UHM20 TX+	0.5	1	0.05	1.2	7	UHM 20 TX+
Call For Details	1611-0.6-1.2 L UHM20 HPX	Call For Details	1611-0.6-1.2 R UHM20 HPX	0.6	1.2	0.05	1.2	8	UHM 20 HPX
Call For Details	1611-0.6-1.2 L UHM20 TX+	Call For Details	1611-0.6-1.2 R UHM20 TX+	0.6	1.2	0.05	1.2	8	UHM 20 TX+
7005-148755	1611-0.8-1.5 L UHM20 HPX	7005-148757	1611-0.8-1.5 R UHM20 HPX	0.8	1.5	0.05	1.2	8	UHM 20 HPX
Call For Details	1611-0.8-1.5 L UHM20 TX+	Call For Details	1611-0.8-1.5 R UHM20 TX+	0.8	1.5	0.05	1.2	8	UHM 20 TX+
7005-148759	1611-1.0-2 L UHM20 HPX	7005-148761	1611-1.0-2 R UHM20 HPX	1	2	0.05	1.2	8	UHM 20 HPX
Call For Details	1611-1.0-2 L UHM20 TX+	Call For Details	1611-1.0-2 R UHM20 TX+	1	2	0.05	1.2	8	UHM 20 TX+
7005-148763	1611-1.5-2.5 L UHM20 HPX	7005-148765	1611-1.5-2.5 R UHM20 HPX	1.5	2.5	0.05	1.2	14	UHM 20 HPX
Call For Details	1611-1.5-2.5 L UHM20 TX+	Call For Details	1611-1.5-2.5 R UHM20 TX+	1.5	2.5	0.05	1.2	14	UHM 20 TX+
7005-148767	1611-2.0-3 L UHM20 HPX	7005-148769	1611-2.0-3 R UHM20 HPX	2	3	0.05	1.2	18	UHM 20 HPX
Call For Details	1611-2.0-3 L UHM20 TX+	Call For Details	1611-2.0-3 R UHM20 TX+	2	3	0.05	1.2	18	UHM 20 TX+
7005-148771	1611-2.5-3.5 L UHM20 HPX	7005-148773	1611-2.5-3.5 R UHM20 HPX	2.5	3.5	0.05	1.2	18	UHM 20 HPX
Call For Details	1611-2.5-3.5 L UHM20 TX+	Call For Details	1611-2.5-3.5 R UHM20 TX+	2.5	3.5	0.05	1.2	18	UHM 20 TX+



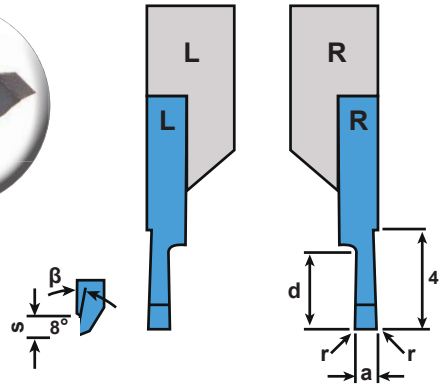


Ideal Cutting Materials

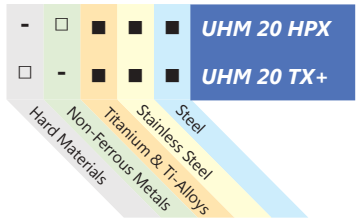

■ Preferred Application
□ Possible Application
- Application Not Recommended



*Note: The groove must not be made underneath the Dmin position.




1612 Chamfering


Cut: Standard
Chip Breaker: None

Repeatability <20µm


Left Hand		Right Hand		Dimensions & Features					
Item No.	Description	Item No.	Description	a	c	e	α	β	Coating
Call For Details	1612-1-4-45 L UHM20 HPX	Call For Details	1612-1-4-45 R UHM20 HPX	1	4	-	45°	90°	UHM 20 HPX
Call For Details	1612-1-4-45 L UHM20 TX+	Call For Details	1612-1-4-45 R UHM20 TX+	1	4	-	45°	90°	UHM 20 TX+
Call For Details	1612-2-4-60 L UHM20 HPX	Call For Details	1612-2-4-60 R UHM20 HPX	2	4	.035	0°	60°	UHM 20 HPX
Call For Details	1612-2-4-60 L UHM20 TX+	Call For Details	1612-2-4-60 R UHM20 TX+	2	4	.035	0°	60°	UHM 20 TX+



Ideal Cutting Materials

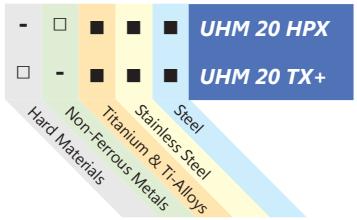

■ Preferred Application
□ Possible Application
- Application Not Recommended





1611-45 Grooving (Axial)

Cut: Standard
Chip Breaker: None


Repeatability <10µm

Left Hand		Right Hand		Dimensions & Features						
Item No.	Description	Item No.	Description	a	d	r	s	Dmin	Holder	Coating
Call For Details	1611-45-0.25-0.5 L UHM20 HPX	Call For Details	1611-45-0.25-0.5 R UHM20 HPX	0.25	0.5	0	0.5	0.8	45 ST A	UHM 20 HPX
Call For Details	1611-45-0.25-0.5 L UHM20 TX+	Call For Details	1611-45-0.25-0.5 R UHM20 TX+	0.25	0.5	0	0.5	0.8	45 ST A	UHM 20 TX+
Call For Details	1611-45-0.5-1.0 L UHM20 HPX	Call For Details	1611-45-0.5-1.0 R UHM20 HPX	0.5	1	0	1	1.6	45 ST A	UHM 20 HPX
Call For Details	1611-45-0.5-1.0 L UHM20 TX+	Call For Details	1611-45-0.5-1.0 R UHM20 TX+	0.5	1	0	1	1.6	45 ST A	UHM 20 TX+
Call For Details	1611-45-0.75-1.5 L UHM20 HPX	Call For Details	1611-45-0.75-1.5 R UHM20 HPX	0.75	1.5	0	1.5	2.4	45 ST A	UHM 20 HPX
Call For Details	1611-45-0.75-1.5 L UHM20 TX+	Call For Details	1611-45-0.75-1.5 R UHM20 TX+	0.75	1.5	0	1.5	2.4	45 ST A	UHM 20 TX+
Call For Details	1611-45-1.0-2.0 L UHM20 HPX	Call For Details	1611-45-1.0-2.0 R UHM20 HPX	1	2	0	2	3.2	45 ST A	UHM 20 HPX
Call For Details	1611-45-1.0-2.0 L UHM20 TX+	Call For Details	1611-45-1.0-2.0 R UHM20 TX+	1	2	0	2	3.2	45 ST A	UHM 20 TX+



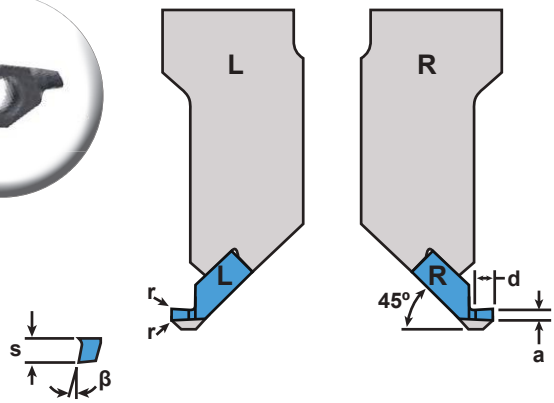


Ideal Cutting Materials

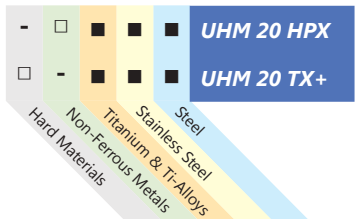

■ Preferred Application
□ Possible Application
- Application Not Recommended



*Note: The groove must be made exactly on the Dmin position.




1600 Holder


Type: Standard
Coolant-Thru: None

Repeatability = R : ■ <20µm, ■ <50µm

Left Hand		Right Hand		Dimensions & Features				
Item No.	Description	Item No.	Description	R	h	b	l	Inserts
7005-042975	1600-07x100 L	7005-042976	1600-07x100 R	■	7	7	100	1600 Series
7005-147532	1600-08x80 L	7005-147530	1600-08x80 R	■	8	8	80	1600 Series
7005-042977	1600-08x100 L	7005-042978	1600-08x100 R	■	8	8	100	1600 Series
7005-147533	1600-10x80 L	7005-147531	1600-10x80 R	■	10	10	80	1600 Series
7005-043196	1600-10x100 L	7005-043197	1600-10x100 R	■	10	10	100	1600 Series
7005-043198	1600-12x100 L	7005-043199	1600-12x100 R	■	12	12	100	1600 Series
7005-043202	1600-16x125 L	7005-043203	1600-16x125 R	■	16	16	125	1600 Series
7005-043536	1600-20x125 L	7005-043537	1600-20x125 R	■	20	20	125	1600 Series
7005-138899	1600-25x125 L	7005-138900	1600-25x125 R	■	25	25	125	1600 Series
7005-147537	1600-3/8"x80 L	7005-147536	1600-3/8"x80 R	■	.375"	.375"	80	1600 Series
7005-138425	1600-3/8"x100 L	7005-138424	1600-3/8"x100 R	■	.375"	.375"	100	1600 Series
7005-138427	1600-1/2"x100 L	7005-138426	1600-1/2"x100 R	■	.500"	.500"	100	1600 Series
7005-139770	1600-5/8"x125 L	7005-139769	1600-5/8"x125 R	■	.625"	.625"	125	1600 Series
7005-113702	1600-3/4"x125 L	7005-113703	1600-3/4"x125 R	■	.75"	.75"	125	1600 Series
Call For Details	1600 B-10x100 L	Call For Details	1600 B-10x100 R	■	10	10	100	1600 Series
Call For Details	1600 B-12x100 L	7005-153298	1600 B-12x100 R	■	12	12	100	1600 Series
Call For Details	1600 B-16x125 L	Call For Details	1600 B-16x125 R	■	16	16	125	1600 Series



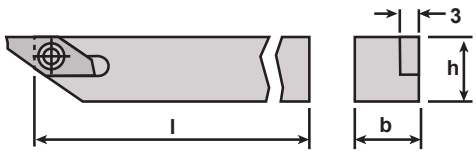




1600 Holder Coolant-Thru

Type: Standard
Coolant-Thru: Rear & Side Ports

Repeatability <10µm

Left Hand		Right Hand		Dimensions & Features							Coolant Fittings	
Item No.	Description	Item No.	Description	h	b	l	z^1	x^1	(d)	Inserts	Side	Rear
7005-146079A	1600-08x100 L IC	7005-129894A	1600-08x100 R IC	8	10	100	15	11.5	M5	1600 Series	4005-000111	4005-000111
7005-146080A	1600-10x100 L IC	7005-146077A	1600-10x100 R IC	10	10	100	15	13.5	M5	1600 Series	4005-000111	4005-000111
7005-146081A	1600-12x100 L IC	7005-129790A	1600-12x100 R IC	12	12	100	17	15.5	M5	1600 Series	4005-000111	4005-000111
7005-146082A	1600-16x125 L IC	7005-146065A	1600-16x125 R IC	16	16	125	17	19.5	G 1/8"	1600 Series	4005-000111	4005-000104
7005-146083A	1600-20x125 L IC	7005-146078A	1600-20x125 R IC	20	20	125	20	23.5	G 1/8"	1600 Series	4005-000111	4005-000104
7005-146098A	1600-3/8"x100 L IC	7005-146094A	1600-3/8"x100 R IC	.375"	.375"	100	15	13	M5	1600 Series	4005-000111	4005-000111
7005-146298A	1600-1/2"x100 L IC	7005-146095A	1600-1/2"x100 R IC	.500"	.500"	100	17	16.2	M5	1600 Series	4005-000111	4005-000111
7005-146299A	1600-5/8"x125 L IC	7005-146096A	1600-5/8"x125 R IC	.625"	.625"	125	17	19.4	G 1/8"	1600 Series	4005-000111	4005-000104
7005-146300A	1600-3/4"x125 L IC	7005-146097A	1600-3/4"x125 R IC	.750"	.750"	125	20	22.6	G 1/8"	1600 Series	4005-000111	4005-000104

Features (5) connection ports for simple connection to your oil delivery system. (4) Side ports and (1) one end port making connection possible on most machine tool positions.

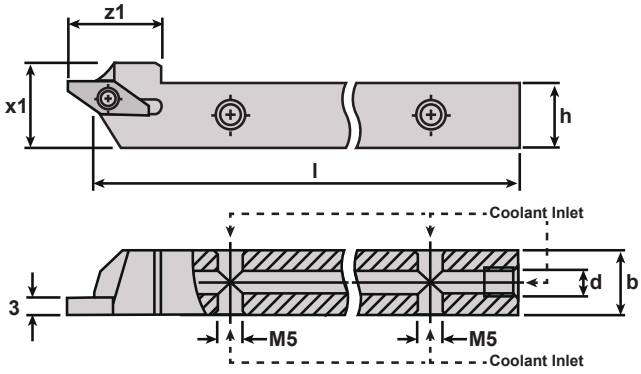






4005-000111
Connects to side ports on ALL shank sizes
0° Male Union - M5-0.8 to 1/4 JIC Flare Fitting
Included With All Coolant-Thru Shanks



4005-000104
Connects to end port on 5/8" and larger shanks
0° Male Union - 1/8 BSPP to 1/4 JIC Flare Fitting
Fits Position (d) On Tool Holders Sold Separately




1600 Holder


Type: Offset Shank
Coolant-Thru: None

Repeatability <20µm

Left Hand		Right Hand		Dimensions & Features			
Item No.	Description	Item No.	Description	h	b	l	Inserts
7005-147555	1600-08x80 LAV	7005-147553	1600-08x80 RAV	8	8	80	1600 Series
7005-139238	1600-08x100 LAV	7005-139232	1600-08x100 RAV	8	8	100	1600 Series
7005-147556	1600-10x80 LAV	7005-147554	1600-10x80 RAV	10	10	80	1600 Series
7005-139240	1600-10x100 LAV	7005-139234	1600-10x100 RAV	10	10	100	1600 Series
7005-139242	1600-12x100 LAV	7005-139236	1600-12x100 RAV	12	12	100	1600 Series
7005-113706	1600-16x125 LAV	7005-113707	1600-16x125 RAV	16	16	125	1600 Series
7005-147558	1600-3/8"x80 LAV	7005-147557	1600-3/8"x80 RAV	.375"	.375"	80	1600 Series
7005-139253	1600-3/8"x100 LAV	7005-139252	1600-3/8"x100 RAV	.375"	.375"	100	1600 Series
7005-139255	1600-1/2"x100 LAV	7005-139254	1600-1/2"x100 RAV	.500"	.500"	100	1600 Series
7005-139774	1600-5/8"x125 LAV	7005-139773	1600-5/8"x125 RAV	.625"	.625"	125	1600 Series



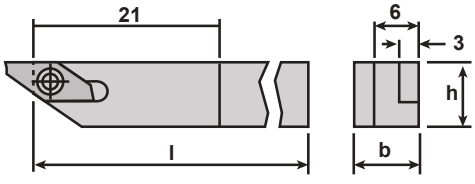




1600 Holder


Type: Offset Shank & Insert
Coolant-Thru: None

Repeatability <20µm

Left Hand		Right Hand		Dimensions & Features			
Item No.	Description	Item No.	Description	h	b	l	Inserts
7005-147546	1600-08x80 LA	7005-147544	1600-08x80 RA	8	8	80	1600 Series
7005-139226	1600-08x100 LA	7005-139220	1600-08x100 RA	8	8	100	1600 Series
7005-147547	1600-10x80 LA	7005-147545	1600-10x80 RA	10	10	80	1600 Series
7005-139228	1600-10x100 LA	7005-124007	1600-10x100 RA	10	10	100	1600 Series
7005-139230	1600-12x100 LA	7005-139224	1600-12x100 RA	12	12	100	1600 Series
7005-113704	1600-16x125 LA	7005-113705	1600-16x125 RA	16	16	125	1600 Series
7005-147552	1600-3/8"x80 LA	7005-139248	1600-3/8"x100 RA	.375"	.375"	80	1600 Series
7005-139249	1600-3/8"x100 LA	7005-139248	1600-3/8"x100 RA	.375"	.375"	100	1600 Series
7005-139251	1600-1/2"x100 LA	7005-139250	1600-1/2"x100 RA	.500"	.500"	100	1600 Series
7005-139772	1600-5/8"x125 LA	7005-139771	1600-5/8"x125 RA	.625"	.625"	125	1600 Series



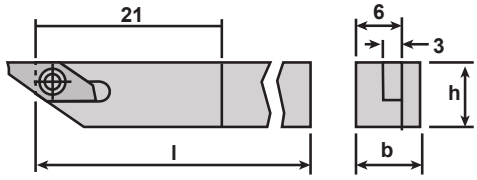




1600 Holder (4, 6, & 8mm Width Inserts)


Type: Standard
Coolant-Thru: None

Repeatability <20µm

Insert Width	Left Hand		Right Hand		Dimensions & Features			
	Item No.	Description	Item No.	Description	h	b	l	Inserts
4mm	7005-147540	1600-08x80-4 L	7005-147538	1600-08x80-4 R	8	8	80	1694...
	7005-139699	1600-08x100-4 L	7005-139700	1600-08x100-4 R	8	8	100	1694...
	7005-147541	1600-10x80-4 L	7005-147539	1600-10x80-4 R	10	10	80	1694...
	7005-139701	1600-10x100-4 L	7005-139702	1600-10x100-4 R	10	10	100	1694...
	7005-139703	1600-12x100-4 L	7005-139704	1600-12x100-4 R	12	12	100	1694...
	7005-139705	1600-16x125-4 L	7005-139706	1600-16x125-4 R	16	16	125	1694...
	7005-139707	1600-20x125-4 L	7005-139708	1600-20x125-4 R	20	20	125	1694...
	Call For Details	1600-25x150-4 L	Call For Details	1600-25x150-4 R	25	25	150	1694...
6mm	7005-147543	1600-10x80-6 L	7005-147542	1600-10x80-6 R	10	10	80	1696...
	7005-139711	1600-10x100-6 L	7005-139712	1600-10x100-6 R	10	10	100	1696...
	7005-139713	1600-12x100-6 L	7005-139714	1600-12x100-6 R	12	12	100	1696...
	7005-139715	1600-16x125-6 L	7005-139716	1600-16x125-6 R	16	16	125	1696...
	7005-139717	1600-20x125-6 L	7005-139718	1600-20x125-6 R	20	20	125	1696...
	Call For Details	1600-25x150-6 L	Call For Details	1600-25x150-6 R	25	25	150	1696...
8mm	7005-139721	1600-12x100-8 L	7005-139722	1600-12x100-8 R	12	12	100	1698...
	7005-139723	1600-16x125-8 L	7005-139724	1600-16x125-8 R	16	16	125	1698...
	7005-139725	1600-20x125-8 L	7005-139726	1600-20x125-8 R	20	20	125	1698...
	Call For Details	1600-25x150-8 L	Call For Details	1600-25x150-8 R	25	25	150	1698...



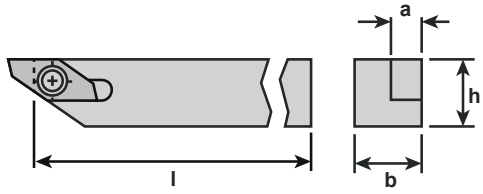




1600 Holder


Type: Round Shank
Coolant-Thru: Rear Coolant Port

Repeatability <20µm



Left Hand		Right Hand		Dimensions & Features					
Item No.	Description	Item No.	Description	d	l_1	h_{max}	h	f	Inserts
Call For Details	1600-12x125 00 RD L IC	Call For Details	1600-12x125 00 RD R IC	12	125	5	11	6	1600 Series
Call For Details	1600-16x125 00 RD L IC	Call For Details	1600-16x125 00 RD R IC	16	125	5	15	8	1600 Series
Call For Details	1600-20x125 00 RD L IC	Call For Details	1600-20x125 00 RD R IC	20	125	5	19	10	1600 Series
Call For Details	1600-22x125 00 RD L IC	Call For Details	1600-22x125 00 RD R IC	22	125	5	21	11	1600 Series
Call For Details	1600-3/4"x125 00 RD L IC	Call For Details	1600-3/4"x125 00 RD R IC	19.05	125	5	18	9.53	1600 Series

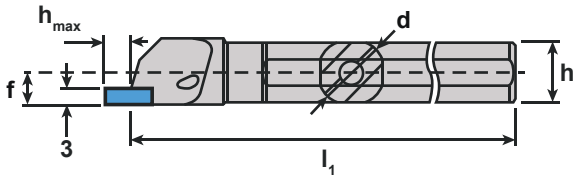

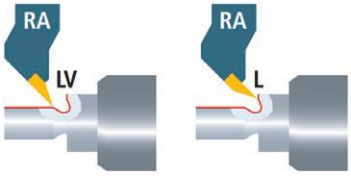


1600 Holder (Angled 45°)

Type: Offset Shank & Insert
Coolant-Thru: Rear Coolant Port


Repeatability <20µm



Left Hand		Right Hand		Dimensions & Features				
Item No.	Description	Item No.	Description	h	b	l	hmax	Inserts
7005-113113	1600-08x100 45 ST LA	7005-113109	1600-08x100 45 ST RA	8	8	100	2	
7005-147568	1600-10x80 45 ST LA	7005-147566	1600-10x80 45 ST RA	10	10	80	2	
7005-113114	1600-10x100 45 ST LA	7005-113110	1600-10x100 45 ST RA	10	10	100	2	
7005-113115	1600-12x100 45 ST LA	7005-113111	1600-12x100 45 ST RA	12	12	100	2	1604...SP
7005-113116	1600-16x125 45 ST LA	7005-113112	1600-16x125 45 ST RA	16	16	125	2	1611-45
7005-147570	1600-3/8"x80 45 ST LA	7005-147569	1600-3/8"x80 45 ST RA	9.525	9.525	80	2	1699...
7005-113121	1600-3/8"x100 45 ST LA	7005-113117	1600-3/8"x100 45 ST RA	9.525	9.525	100	2	
7005-113122	1600-1/2"x100 45 ST LA	7005-113118	1600-1/2"x100 45 ST RA	12.7	12.7	100	2	
7005-113123	1600-5/8"x125 45 ST LA	7005-113120	1600-5/8"x125 45 ST RA	15.875	15.875	125	2	

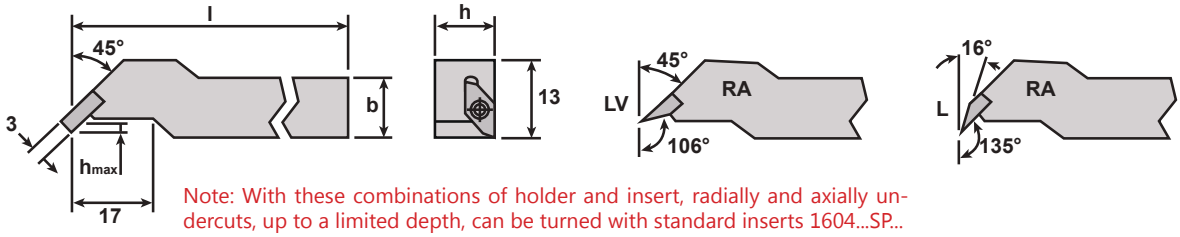

Note: With these combinations of holder and insert, radially and axially undercuts, up to a limited depth, can be turned with standard inserts 1604...SP...




1600 Holder (Angled 90°)

Type: Standard
Coolant-Thru: None

Repeatability <20µm



Left Hand		Right Hand		Dimensions & Features				
Item No.	Description	Item No.	Description	h	b	l	Dmin	Inserts
7005-043220	1600-10x100 90 L	7005-043221	1600-10x100 90 R	10	10	100	17	1699
7005-043222	1600-12x100 90 L	7005-043223	1600-12x100 90 R	12	12	100	17	1699

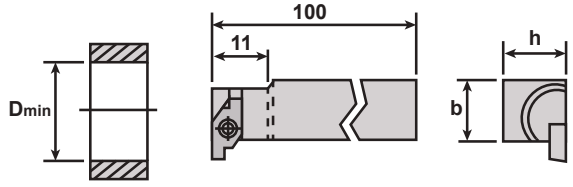

Note: These holders require an opposite insert (ie: a right-hand holder uses a left-hand insert). These holders require 1699 series inserts - refer to the full multidec® catalog for details.




1600 Strengthened Holder (Angled 90°)

Type: Standard
Coolant-Thru: None


Repeatability <20µm

Left Hand		Right Hand		Dimensions & Features					
Item No.	Description	Item No.	Description	h	b	l	hmax	Dmin	Inserts
7005-043224	1600-10x100 90 ST L	7005-043225	1600-10x100 90 ST R	10	10	100	4	21	1600 Series
7005-043226	1600-12x100 90 ST L	7005-043227	1600-12x100 90 ST R	12	12	100	4	21	1600 Series
7005-113138	1600-16x125 90 ST L	7005-113137	1600-16x125 90 ST R	16	16	125	4	21	1600 Series



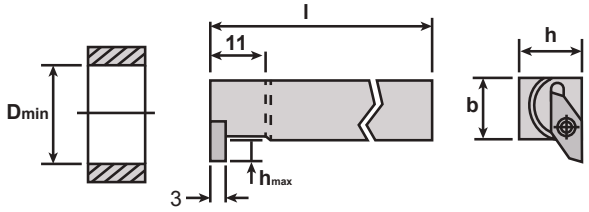

Note: These holders require an opposite insert (ie: a right-hand holder uses a left-hand insert).




1600 Strengthened Holder (Angled 90°)

Type: Offset Shank & Insert
Coolant-Thru: None


Repeatability <20µm

Left Hand		Right Hand		Dimensions & Features						
Item No.	Description	Item No.	Description	h	b	l	v	w	hmax	Inserts
7005-147561	1600-08x80 90 ST LA	7005-147559	1600-08x80 90 ST RA	8	8	80	17	15	4	1611...
7005-113611	1600-08x100 90 ST LA	7005-113610	1600-08x100 90 ST RA	8	8	100	17	15	4	1611...
7005-147562	1600-10x80 90 ST LA	7005-147560	1600-10x80 90 ST RA	10	10	80	17	15	4	1611...
7005-139244	1600-10x100 90 ST LA	7005-139245	1600-10x100 90 ST RA	10	10	100	17	15	4	1611...
7005-139246	1600-12x100 90 ST LA	7005-139247	1600-12x100 90 ST RA	12	12	100	17	15	4	1611...
7005-113092	1600-16x125 90 ST LA	7005-113091	1600-16x125 90 ST RA	16	16	125	17	16	4	1611...
7005-113613	1600-20x125 90 ST LA	7005-113612	1600-20x125 90 ST RA	20	20	125	17	20	4	1611...
7005-147564	1600-3/8"x80 90 ST LA	7005-147563	1600-3/8"x80 90 ST RA	9.525	9.525	80	17	15	4	1611...
7005-139509	1600-3/8"x100 90 ST LA	7005-139510	1600-3/8"x100 90 ST RA	9.525	9.525	100	17	15	4	1611...
7005-139511	1600-1/2"x100 90 ST LA	7005-139512	1600-1/2"x100 90 ST RA	12.7	12.7	100	17	15	4	1611...
7005-139776	1600-5/8"x125 90 ST LA	7005-139775	1600-5/8"x125 90 ST RA	15.875	15.875	125	17	15.875	4	1611...
7005-113615	1600-3/4"x125 90 ST LA	7005-113614	1600-3/4"x125 90 ST RA	19.05	19.05	125	17	19.05	4	1611...



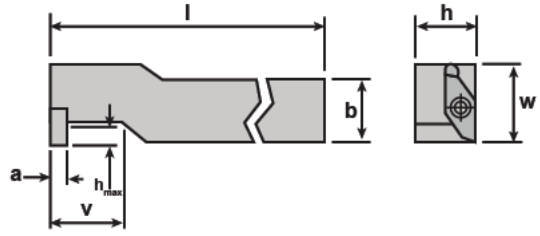

Note: These holders require an opposite insert (ie: a right-hand holder uses a left-hand insert).




1600 Holder (Angled 90°)

Type: Round Shank
Coolant-Thru: Rear Coolant Port


Repeatability <20µm

Left Hand		Right Hand		Dimensions & Features				
Item No.	Description	Item No.	Description	d	l	hmax	Dmin	Inserts
Call For Details	1600-12x125 90 RD L IC	Call For Details	1600-12x125 90 RD R IC	12	125	3	17	1600 Series
Call For Details	1600-16x150 90 RD L IC	Call For Details	1600-16x150 90 RD R IC	16	150	3.5	21	1600 Series
Call For Details	1600-20x180 90 RD L IC	Call For Details	1600-20x180 90 RD R IC	20	180	4	25	1600 Series



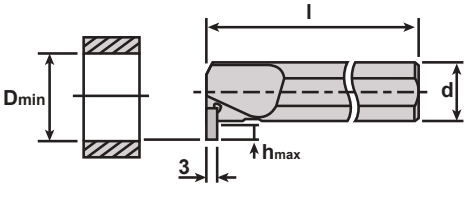

Note: These holders require an opposite insert (ie: a right-hand holder uses a left-hand insert).




1600 Twin Holder


Type: Two Operations/Inserts
Coolant-Thru: None

Repeatability <20µm

Left Hand		Right Hand		Dimensions & Features								
Item No.	Description	Item No.	Description	h	b	l	z_1	x_1	x_2	x_3	Inserts	Max Ø
Call For Details	1600L/1600L-0810x100 Twin	Call For Details	1600R/1600R-0810x100 Twin	8	10	100	20	16	4	8	1600 Series	11.5
Call For Details	1600L/1600L-10x100 Twin	7005-150758	1600R/1600R-10x100 Twin	10	10	100	20	16	5	8	1600 Series	11.5
Call For Details	1600L/1600L-12x100 Twin	Call For Details	1600R/1600R-12x100 Twin	12	12	100	20	16	6	8	1600 Series	11.5
Call For Details	1600L/1600L-16x125 Twin	Call For Details	1600R/1600R-16x125 Twin	16	16	125	20	20	8	10	1600 Series	19
Call For Details	1600L/1600L-20x125 Twin	Call For Details	1600R/1600R-20x125 Twin	20	20	125	20	24	8	14	1600 Series	34
Call For Details	1600L/1600L-3/8"x100 Twin	Call For Details	1600R/1600R-3/8"x100 Twin	3/8"	3/8"	100	20	16	5	8	1600 Series	11.5
Call For Details	1600L/1600L-1/2"x100 Twin	Call For Details	1600R/1600R-1/2"x100 Twin	1/2"	1/2"	100	20	16	6	8	1600 Series	11.5
Call For Details	1600L/1600L-5/8"x125 Twin	Call For Details	1600R/1600R-5/8"x125 Twin	5/8"	5/8"	125	20	20	8	10	1600 Series	19
Call For Details	1600L/1600L-3/4"x125 Twin	Call For Details	1600R/1600R-3/4"x125 Twin	3/4"	3/4"	125	20	24	7	14	1600 Series	34

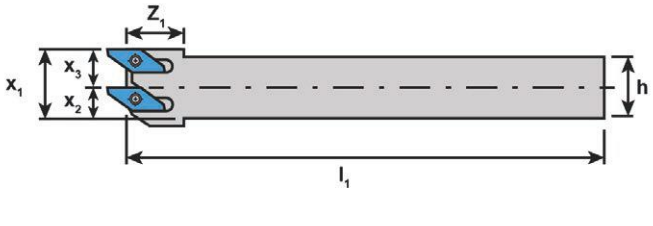






1600 Twin Holder Coolant-Thru

Type: Two Operations/Inserts
Coolant-Thru: Side & Rear Coolant Ports

Repeatability <10µm

Left Hand		Right Hand		Dimensions & Features										
Item No.	Description	Item No.	Description	h	b	l	z_1	x_1	x_2	x_3	d	Inserts	Max Ø
Call For Details	1600L/1600L-0812x100 Twin IC	Call For Details	1600R/1600R-0812x100 Twin IC	8	12	100	20	20	3	8	M5	1600 Series	11.5
Call For Details	1600L/1600L-1012x100 Twin IC	Call For Details	1600R/1600R-1012x100 Twin IC	10	12	100	20	20	4	8	M5	1600 Series	11.5
Call For Details	1600L/1600L-12x100 Twin IC	7005-150353	1600R/1600R-12x100 Twin IC	12	12	100	20	20	5	8	M5	1600 Series	11.5
Call For Details	1600L/1600L-16x125 Twin IC	Call For Details	1600R/1600R-16x125 Twin IC	16	16	125	20	24	7	10	G1/8	1600 Series	19
Call For Details	1600L/1600L-20x125 Twin IC	Call For Details	1600R/1600R-20x125 Twin IC	20	20	125	20	28	7	14	G1/8	1600 Series	34
Call For Details	1600L/1600L-3/8"12x100 Twin IC	Call For Details	1600R/1600R-3/8"12x100 Twin IC	3/8"	3/8"	100	20	20	4	8	M5	1600 Series	11.5
Call For Details	1600L/1600L-1/2"x100 Twin IC	Call For Details	1600R/1600R-1/2"x100 Twin IC	1/2"	1/2"	100	20	20	6	8	M5	1600 Series	11.5
Call For Details	1600L/1600L-5/8"x125 Twin IC	Call For Details	1600R/1600R-5/8"x125 Twin IC	5/8"	5/8"	125	20	24	7	10	G1/8	1600 Series	19
Call For Details	1600L/1600L-3/4"x125 Twin IC	Call For Details	1600R/1600R-3/4"x125 Twin IC	3/4"	3/4"	125	20	28	6	14	G1/8	1600 Series	34

Features (5) connection ports for simple connection to your oil delivery system. (4) Side ports and (1) one end port making connection possible on most machine tool positions.

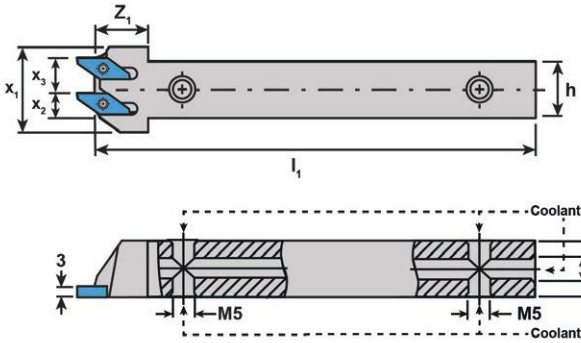




4005-000111
Connects to side ports on ALL shank sizes
0° Male Union - M5-0.8 to 1/4 JIC Flare Fitting
Included With All Coolant-Thru Shanks



4005-000104
Connects to end port on 5/8" and larger shanks
0° Male Union - 1/8 BSPP to 1/4 JIC Flare Fitting
Fits Position (d) On Tool Holders Sold Separately





1600 Y-Axis Holder

Type: Standard

Coolant-Thru: Side & Rear Coolant Ports


Superb Chip Control On Stringy Materials



Repeatability <10µm

Right Hand		Dimensions & Features							Coolant Fittings	
Item No.	Description	h	b	l	z_1	x_1	d	Inserts	Side	Rear
Call For Details	1600 YA-12x100-20 R IC	12	12	100	20	19.5	M5	1600 Series	4005-000111	4005-000111
Call For Details	1600 YA-12x100-25 R IC	12	12	100	25	19.5	M5	1600 Series	4005-000111	4005-000111
Call For Details	1600 YA-12x100-30 R IC	12	12	100	30	19.5	M5	1600 Series	4005-000111	4005-000111
Call For Details	1600 YA-16x125-20 R IC	16	16	125	20	19.5	G1/8	1600 Series	4005-000111	4005-000104
Call For Details	1600 YA-16x125-25 R IC	16	16	125	25	19.5	G1/8	1600 Series	4005-000111	4005-000104
Call For Details	1600 YA-16x125-30 R IC	16	16	125	30	19.5	G1/8	1600 Series	4005-000111	4005-000104
Call For Details	1600 YA-1/2"x100-20 R IC	1/2"	1/2"	100	20	19.5	M5	1600 Series	4005-000111	4005-000111
Call For Details	1600 YA-1/2"x100-25 R IC	1/2"	1/2"	100	25	19.5	M5	1600 Series	4005-000111	4005-000111
Call For Details	1600 YA-1/2"x100-30 R IC	1/2"	1/2"	100	30	19.5	M5	1600 Series	4005-000111	4005-000111
Call For Details	1600 YA-5/8"x125-20 R IC	5/8"	5/8"	125	20	19.5	G1/8	1600 Series	4005-000111	4005-000104
Call For Details	1600 YA-5/8"x125-25 R IC	5/8"	5/8"	125	25	19.5	G1/8	1600 Series	4005-000111	4005-000104
Call For Details	1600 YA-5/8"x125-30 R IC	5/8"	5/8"	125	30	19.5	G1/8	1600 Series	4005-000111	4005-000104

Features (5) connection ports for simple connection to your oil delivery system: (4) Side ports and (1) one end port making connection possible on most machine tool positions.

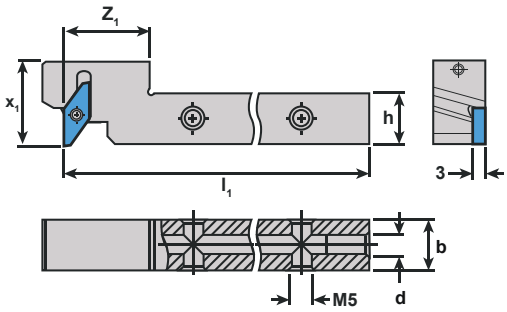




4005-000111

Connects to side ports on ALL shank sizes
0° Male Union - M5-0.8 to 1/4 JIC Flare Fitting
Included With All Coolant-Thru Shanks




4005-000104


Connects to end port on 5/8" and larger shanks
0° Male Union - 1/8 BSPP to 1/4 JIC Flare Fitting
Fits Position (d) On Tool Holders Sold Separately



To avoid problems, two Y-Axis holders must not be mounted directly next to each other.



Mount a standard tool holder between the Y-Axis holders.



To prevent collisions, move back the holder in accordance with the over-hanging length before changing the tool position.

multidec® SHORT

multidec® SHORT coolant-thru holders enable the use of multidec® turning inserts on commonly available quick change tooling systems. **multidec® 1600, 3000, ISO VC, & ISO VP** series inserts are currently available.

See Pg. 306
For Full Details



3000 Series Insert Shown

Speeds And Feeds Multidec CUT


CUT	Unalloyed Steel			Low-Alloy Steel			High-Alloy Steel		
Hardness (HB)-(HRC)	125-300 HB			180-250 HB			200-350 HB		
Category	I			II			III		
Machining Method	▼ Roughing	▼▼ Medium Cut	▼▼▼ Micro Finishing	▼ Roughing	▼▼ Medium Cut	▼▼▼ Micro Finishing	▼ Roughing	▼▼ Medium Cut	▼▼▼ Micro Finishing
Feeds	f(in/rev)								
	.004-.010	.0008-.006	.0002-.003	.004-.010	.0008-.006	.0002-.003	.004-.010	.0008-.006	.0002-.003
Depth of cut	ap(in)								
	<.197	<.118	<.079	<.197	<.118	<.079	<.157	<.098	<.059
Cutting speeds	vc(ft/min)								
Carbide grade									
UHM 20	130-360	190-390	190-460	190-330	190-390	190-430	130-290	190-360	190-390
UHM 20 HPX	490-650	590-720	650-850	260-490	330-590	520-720	230-330	290-490	390-590
UHM 20 TX+	-	-	-	260-430	330-490	520-620	230-290	290-430	390-490
UHM 30	100-230	160-260	160-330	100-200	130-260	130-290	-	100-230	100-60
UHM 30 HX	160-460	160-590	160-720	160-430	160-20	160-650	130-390	160-460	160-590
UHM 30 TX+	-	-	-	-	-	-	-	-	-
High speed steel									
HSS	80-100	80-115	80-130	65-100	65-115	65-115	50-65	50-80	50-100
HSS HX	100-130	115-130	115-160	50-115	50-130	50-150	65-100	65-100	65-115

Speeds And Feeds Multidec CUT

CUT	Stainless Steel			Stainless Steel			Titanium		
Hardness (HB)-(HRC)	180-220 HB			220-330 HB			-		
Category	V			VI			IV		
Machining Method	▼ Roughing	▼▼ Medium Cut	▼▼▼ Micro Finishing	▼ Roughing	▼▼ Medium Cut	▼▼▼ Micro Finishing	▼ Roughing	▼▼ Medium Cut	▼▼▼ Micro Finishing
Feeds	f(in/rev)								
	.004-.008	.0004-.005	.0002-.003	.004-.008	.0004-.05	.0002-.003	.004-.010	.0008-.003	.0002-.002
Depth of cut	ap(in)								
	<.157	<.098	<.059	<.157	<.098	<.059	<.157	<.098	<.059
Cutting speeds	vc(ft/min)								
Carbide grade									
UHM 20	130-330	130-360	130-390	100-230	100-260	100-260	130-190	160-230	190-260
UHM 20 HPX	300-490	360-590	520-650	230-300	300-390	360-490	160-330	190-390	190-460
UHM 20 TX+	300-430	360-520	520-590	230-300	300-390	360-490	160-330	190-390	190-460
UHM 30	-	100-230	100-260	-	65-130	65-130	-	80-190	100-230
UHM 30 HX	130-330	130-460	130-590	100-190	130-230	130-290	100-290	130-330	130-390
UHM 30 TX+	-	-	-	-	-	-	-	-	-
High speed steel									
HSS	50-65	50-80	50-100	30-65	50-65	50-80	30-65	50-65	50-80
HSS HX	65-100	65-100	65-115	65-100	65-100	65-115	65-100	65-100	65-115

Speeds And Feeds Multidec CUT

CUT	Aluminum			Brass			Hard Materials		
Hardness (HB)-(HRC)	60-130 HB			-			45-70 HRC		
Category	VII			VIII			X		
Machining Method	▼ Roughing	▼▼ Medium Cut	▼▼▼ Micro Finishing	▼ Roughing	▼▼ Medium Cut	▼▼▼ Micro Finishing	▼ Roughing	▼▼ Medium Cut	▼▼▼ Micro Finishing
Feeds	f(in/rev)								
	.004-.012	.0008-.010	.0002-.008	.004-.012	.0008-006	.0002-.004	-	-	-
Depth of cut	ap(in)								
	.197	.118	.079	.197	.118	.079	-	-	-
Cutting speeds	vc(ft/min)								
Carbide grade									
UHM 20	330-4920	390-6560	520-8200	260-980	330-1310	390-1640	-	-	-
UHM 20 HPX	-	-	-	-	-	-	-	-	-
UHM 20 TX+	-	-	-	-	-	-	-	-	-
UHM 30	160-3280	190-3940	260-9840	130-330	160-460	160-520	-	-	-
UHM 30 HX	230-4920	260-6560	330-9840	160-490	160-650	160-820	-	-	-
UHM 30 TX+	-	-	-	-	-	-	-	-	-
High speed steel									
HSS	100-260	130-260	160-290	100-160	100-190	130-230	-	-	-
HSS HX	130-290	160-330	160-390	130-190	130-260	160-290	-	-	-

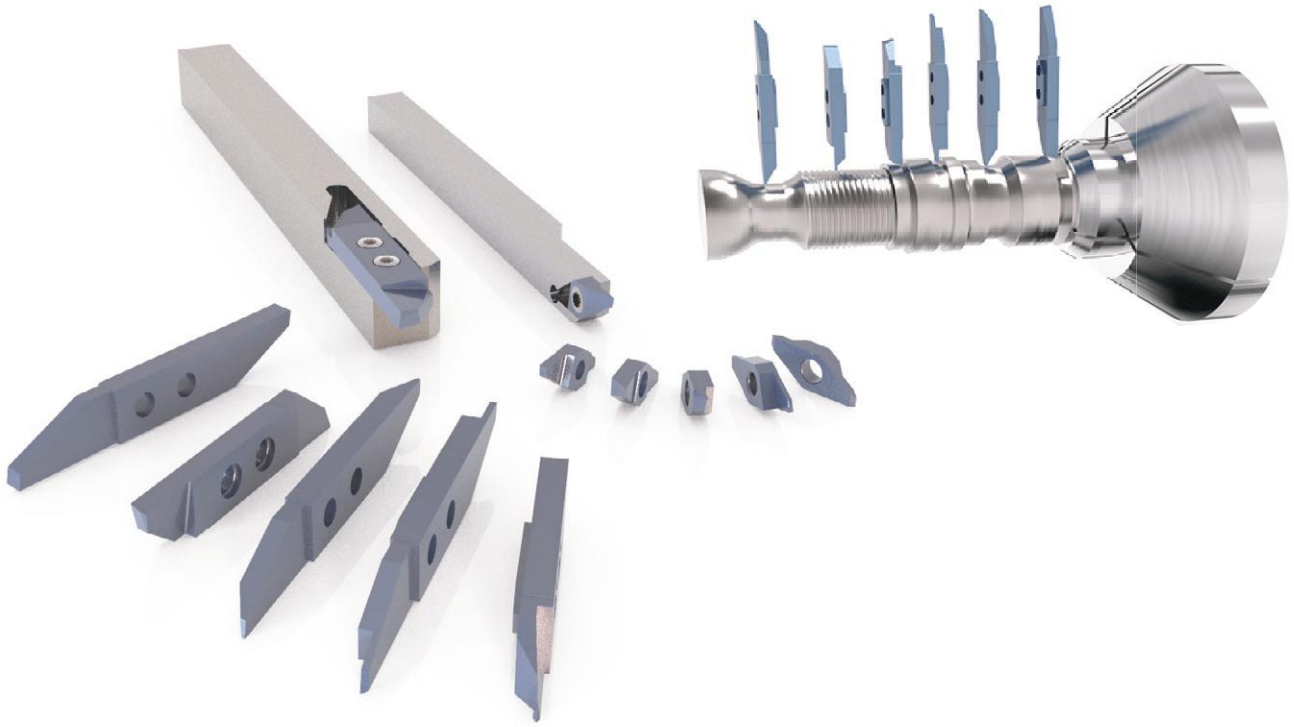

UTILIS


multidec®

swiss type tools

ISO Series



- Highly focused ISO style insert range collected specifically for Swiss applications
- Holders especially designed for Swiss-type machines
- Large choice of carbide grades cover a wide range of materials
- Vast assortment of chip breaker styles and geometries






80° ISO
Inserts & Holders



55° ISO
Inserts & Holders




35° ISO
Inserts & Holders

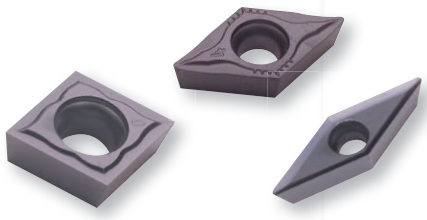



Works Great On Stringy Materials

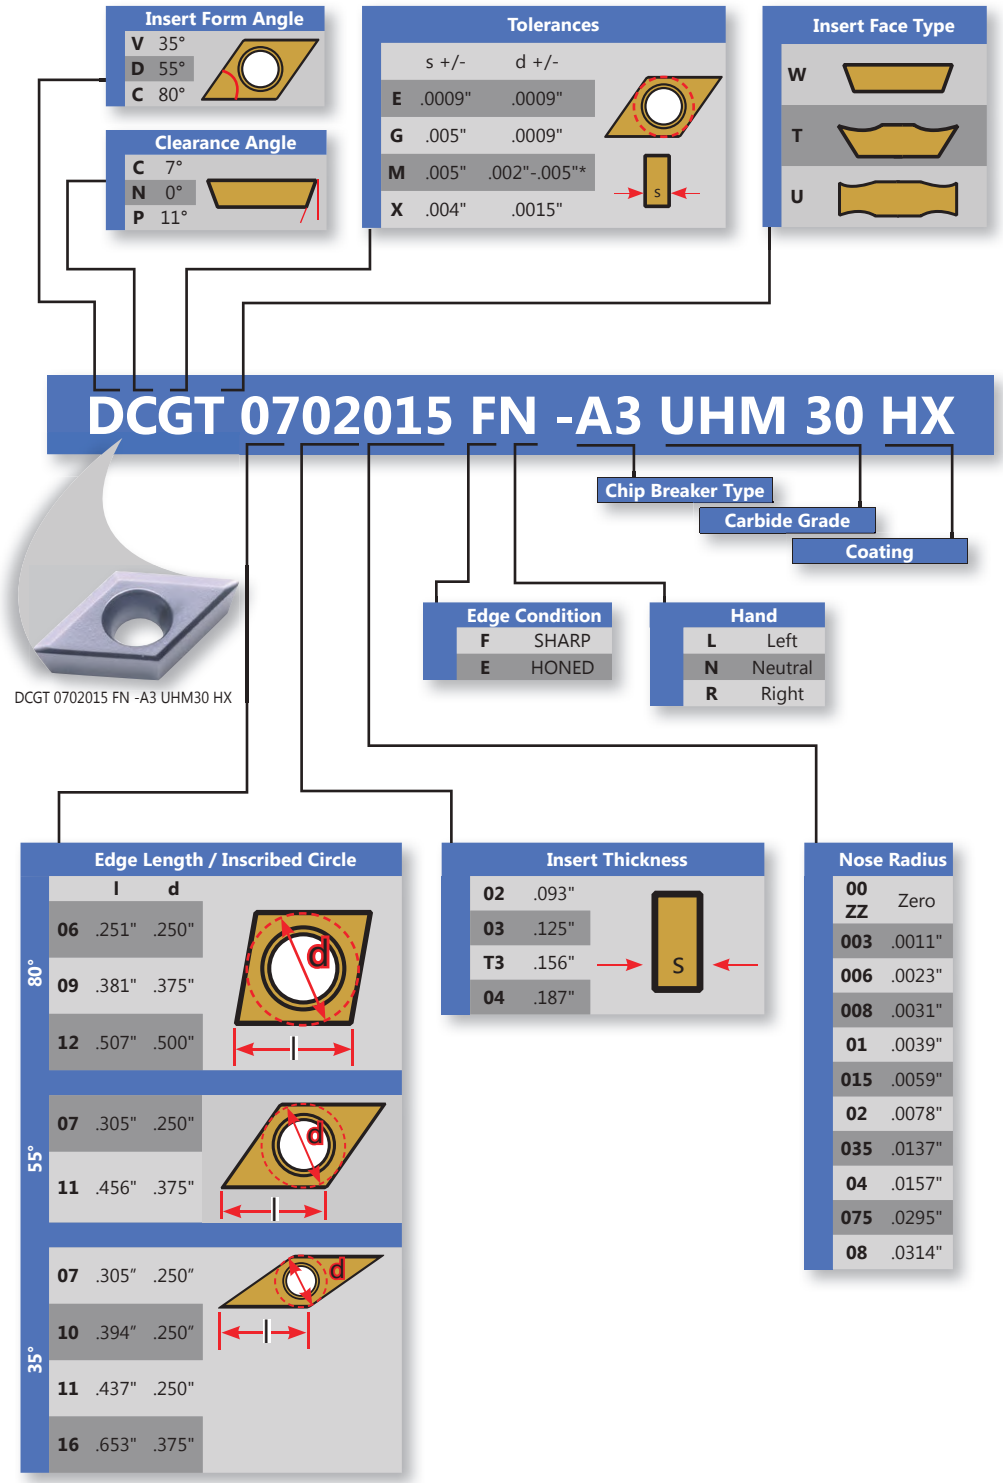
Insert Form Angle
V 35°
D 55°
C 80°
Clearance Angle
C 7°
N 0°
P 11°
Tolerances
s +/- d +/-
E .0009" .0009"
G .005" .0009"
M .005" .002"-.005"*
X .004" .0015"
s
Insert Face Type
W
T
U
DCGT 0702015 FN -A3 UHM 30 HX
Chip Breaker Type
Carbide Grade
Coating
DCGT 0702015 FN -A3 UHM30 HX
Edge Condition
F SHARP
E HONED
Hand
L Left
N Neutral
R Right
Edge Length / Inscribed Circle
l d
80°
06 .251" .250"
09 .381" .375"
12 .507" .500"
55°
07 .305" .250"
11 .456" .375"
35°
07 .305" .250"
10 .394" .250"
11 .437" .250"
16 .653" .375"
d
Insert Thickness
02 .093"
03 .125"
T3 .156"
04 .187"
S
Nose Radius
00 ZZ Zero
003 .0011"
006 .0023"
008 .0031"
01 .0039"
015 .0059"
02 .0078"
035 .0137"
04 .0157"
075 .0295"
08 .0314"


Coatings vs Material Type

Carbide												Cermet		Diamond			Materials
UHM 10	UHM 10 HX	UHM 10 TX+	UHM 10 MZ	UHM 20 HPX	UHM 20 TX+	UHM 20 MZ	UHM 30	UHM 30 HX	UHM 30 TX+	UHM 30 MZ	UHM 30 SX	UCM 10	UCM 10 HX	UCVD 08	UPCD 15	UPCD 20	
-	-	■	■	■	■	■	□	□	■	■	□	■	■	-	-	-	**Steel**
-	■	■	-	■	■	□	□	■	■	■	■	□	■	-	-	-	Stainless Steel
□	■	■	-	□	■	-	□	■	■	-	-	-	-	-	-	-	Titanium & Ti-Alloys
■	□	-	-	-	-	-	□	□	-	-	□	-	-	■	■	■	Non-Ferrous Metals
-	-	■	-	-	-	-	-	-	-	-	-	-	-	-	-	-	Mard Materials

Material Class								
I	II	III	IV	V	VI	VII	VIII	IX
Unalloyed Steel	Low-Alloy Steel	High-Alloy Steel	Titanium	Stainless Steel (HB<220)	Stainless Steel (HB≥220)	Aluminum	Brass	Synthetics / Composits




CC...06 inserts: d =.250"
CC...09 inserts: d =.375"
CC...12 inserts: d =.500"



CCGT Carbide PA3

Cut: Neutral


Chip Breaker: PA3, Polished Rake, Sharp Cutting Edge



Repeatability <20µm

Dimensions & Features							
Item No.	Description	Edge	l	l_1	Nose Radius	Holder	Coating
7005-123554	CCGT 060202 FN PA3 UHM10 HX	Sharp	6.4	4	.20mm/.0079in	SC...06	UHM 10 HX
Call For Details	CCGT 060202 FN PA3 UHM10 TX+	Sharp	6.4	4	.20mm/.0079in	SC...06	UHM 10 TX+
7005-123560	CCGT 060204 FN PA3 UHM10 HX	Sharp	6.4	4	.40mm/.0157in	SC...06	UHM 10 HX
Call For Details	CCGT 060204 FN PA3 UHM10 TX+	Sharp	6.4	4	.40mm/.0157in	SC...06	UHM 10 TX+
7005-123578	CCGT 09T304 FN PA3 UHM10 HX	Sharp	9.7	4	.40mm/.0157in	SC...09	UHM 10 HX
Call For Details	CCGT 09T304 FN PA3 UHM10 TX+	Sharp	9.7	4	.40mm/.0157in	SC...09	UHM 10 TX+
7005-123258	CCGT 09T308 FN PA3 UHM10 HX	Sharp	9.7	4	.80mm/.0315in	SC...09	UHM 10 HX
Call For Details	CCGT 09T308 FN PA3 UHM10 TX+	Sharp	9.7	4	.80mm/.0315in	SC...09	UHM 10 TX+

Application	Material Class								
	I	II	III	IV	V	VI	VII	VIII	IX
Roughing	-	-	-	-	-	-	□	-	□
Finishing	□	□	□	□	□	■	■	-	■
Micro Finishing	■	■	■	■	■	■	■	-	■

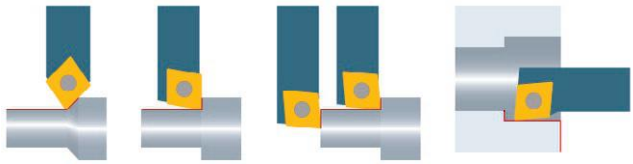




CCGT Carbide PA5

Cut: Neutral


Chip Breaker: PA5, Polished Rake, Sharp Cutting Edge



Repeatability <20µm

Dimensions & Features							
Item No.	Description	Edge	l	l_1	Nose Radius	Holder	Coating
7005-123441	CCGT 060202 FN PA5 UHM10 HX	Sharp	6.4	4	.20mm/.0079in	SC...06	UHM 10 HX
Call For Details	CCGT 060202 FN PA5 UHM10 TX+	Sharp	6.4	4	.20mm/.0079in	SC...06	UHM 10 TX+
7005-123443	CCGT 060204 FN PA5 UHM10 HX	Sharp	6.4	4	.40mm/.0157in	SC...06	UHM 10 HX
Call For Details	CCGT 060204 FN PA5 UHM10 TX+	Sharp	6.4	4	.40mm/.0157in	SC...06	UHM 10 TX+
Call For Details	CCGT 09T302 FN PA5 UHM10 HX	Sharp	9.7	6	.20mm/.0079in	SC...09	UHM 10 HX
Call For Details	CCGT 09T302 FN PA5 UHM10 TX+	Sharp	9.7	6	.20mm/.0079in	SC...09	UHM 10 TX+
7005-123445	CCGT 09T304 FN PA5 UHM10 HX	Sharp	9.7	6	.40mm/.0157in	SC...09	UHM 10 HX
Call For Details	CCGT 09T304 FN PA5 UHM10 TX+	Sharp	9.7	6	.40mm/.0157in	SC...09	UHM 10 TX+
Call For Details	CCGT 09T308 FN PA5 UHM10 HX	Sharp	9.7	6	.80mm/.0315in	SC...09	UHM 10 HX
Call For Details	CCGT 09T308 FN PA5 UHM10 TX+	Sharp	9.7	6	.80mm/.0315in	SC...09	UHM 10 TX+
Call For Details	CCGT 120402 FN PA5 UHM10 HX	Sharp	12.9	8	.20mm/.0079in	SC...12	UHM 10 HX
Call For Details	CCGT 120402 FN PA5 UHM10 TX+	Sharp	12.9	8	.20mm/.0079in	SC...12	UHM 10 TX+
7005-123447	CCGT 120404 FN PA5 UHM10 HX	Sharp	12.9	8	.40mm/.0157in	SC...12	UHM 10 HX
Call For Details	CCGT 120404 FN PA5 UHM10 TX+	Sharp	12.9	8	.40mm/.0157in	SC...12	UHM 10 TX+
7005-123448	CCGT 120408 FN PA5 UHM10 HX	Sharp	12.9	8	.80mm/.0315in	SC...12	UHM 10 HX
Call For Details	CCGT 120408 FN PA5 UHM10 TX+	Sharp	12.9	8	.80mm/.0315in	SC...12	UHM 10 TX+

Application	Material Class I	II	III	IV	V	VI	VII	VIII	IX
Roughing	-	-	-	-	-	-	□	-	□
Finishing	■	■	■	□	■	■	■	-	■
Micro Finishing	■	■	■	□	■	■	■	-	■

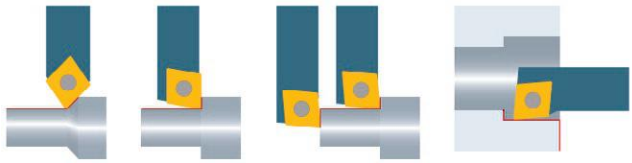


Coatings vs Material Type

Carbide												Cermet		Diamond			Materials
-	-	■	■	■	■	■	□	□	■	■	□	■	■	-	-	-	**Steel**
-	■	■	-	■	■	□	□	■	■	■	■	□	■	-	-	-	Stainless Steel
□	■	■	-	□	■	-	□	■	■	-	-	-	-	-	-	-	Titanium & Ti-Alloys
■	□	-	-	-	-	-	□	□	-	-	□	-	-	■	■	■	Non-Ferrous Metals
-	-	■	-	-	-	-	-	-	-	-	-	-	-	-	-	-	Mard Materials
UHM 10	UHM 10 HX	UHM 10 TX+	UHM 10 MZ	UHM 20 HPX	UHM 20 TX+	UHM 20 MZ	UHM 30	UHM 30 HX	UHM 30 TX+	UHM 30 MZ	UHM 30 SX	UCM 10	UCM 10 HX	UCVD 08	UPCD 15	UPCD 20	


Material Class								
I	II	III	IV	V	VI	VII	VIII	IX
Unalloyed Steel	Low-Alloy Steel	High-Alloy Steel	Titanium	Stainless Steel (HB<220)	Stainless Steel (HB≥220)	Aluminum	Brass	Synthetics / Composits



CC...06 inserts: d =.250"
CC...09 inserts: d =.375"
CC...12 inserts: d =.500"



Repeatability <20µm




CCGT Carbide PA7


Cut: Neutral

Chip Breaker: PA7, Sharp Cutting Edge

Dimensions & Features							
Item No.	Description	Edge	l	l_1	Nose Radius	Holder	Coating
7005-123442	CCGT 060202 FN PA7 UHM10 HX	Sharp	6.4	4	.20mm/.0079in	SC...06	UHM 10 HX
Call For Details	CCGT 060202 FN PA7 UHM10 TX+	Sharp	6.4	4	.20mm/.0079in	SC...06	UHM 10 TX+
7005-123444	CCGT 060204 FN PA7 UHM10 HX	Sharp	6.4	4	.40mm/.0157in	SC...06	UHM 10 HX
Call For Details	CCGT 060204 FN PA7 UHM10 TX+	Sharp	6.4	4	.40mm/.0157in	SC...06	UHM 10 TX+
Call For Details	CCGT 09T305 FN PA7 UHM10 HX	Sharp	9.7	6	.05mm/.0019in	SC...09	UHM 10 HX
Call For Details	CCGT 09T305 FN PA7 UHM10 TX+	Sharp	9.7	6	.05mm/.0019in	SC...09	UHM 10 TX+
7005-114379	CCGT 09T301 FN PA7 UHM10 HX	Sharp	9.7	6	.10mm/.0039in	SC...09	UHM 10 HX
Call For Details	CCGT 09T301 FN PA7 UHM10 TX+	Sharp	9.7	6	.10mm/.0039in	SC...09	UHM 10 TX+
7005-123572	CCGT 09T302 FN PA7 UHM10 HX	Sharp	9.7	6	.20mm/.0079in	SC...09	UHM 10 HX
Call For Details	CCGT 09T302 FN PA7 UHM10 TX+	Sharp	9.7	6	.20mm/.0079in	SC...09	UHM 10 TX+
7005-123446	CCGT 09T304 FN PA7 UHM10 HX	Sharp	9.7	6	.40mm/.0157in	SC...09	UHM 10 HX
Call For Details	CCGT 09T304 FN PA7 UHM10 TX+	Sharp	9.7	6	.40mm/.0157in	SC...09	UHM 10 TX+
7005-123260	CCGT 09T308 FN PA7 UHM10 HX	Sharp	9.7	6	.80mm/.0315in	SC...09	UHM 10 HX
Call For Details	CCGT 09T308 FN PA7 UHM10 TX+	Sharp	9.7	6	.80mm/.0315in	SC...09	UHM 10 TX+
7005-123579	CCGT 120402 FN PA7 UHM10 HX	Sharp	12.9	8	.20mm/.0079in	SC...12	UHM 10 HX
Call For Details	CCGT 120402 FN PA7 UHM10 TX+	Sharp	12.9	8	.20mm/.0079in	SC...12	UHM 10 TX+
7005-123315	CCGT 120404 FN PA7 UHM10 HX	Sharp	12.9	8	.40mm/.0157in	SC...12	UHM 10 HX
Call For Details	CCGT 120404 FN PA7 UHM10 TX+	Sharp	12.9	8	.40mm/.0157in	SC...12	UHM 10 TX+
7005-123449	CCGT 120408 FN PA7 UHM10 HX	Sharp	12.9	8	.80mm/.0315in	SC...12	UHM 10 HX
Call For Details	CCGT 120408 FN PA7 UHM10 TX+	Sharp	12.9	8	.80mm/.0315in	SC...12	UHM 10 TX+

Application	Material Class								
	I	II	III	IV	V	VI	VII	VIII	IX
Roughing	-	-	-	-	-	-	□	-	□
Finishing	□	□	□	□	□	□	■	-	■
Micro Finishing	■	■	■	□	■	■	■	-	■

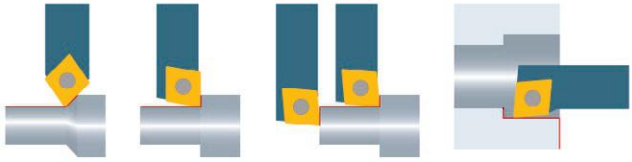




CCXT Carbide PA9

Cut: Neutral


Chip Breaker: PA9, Round Cutting Edge



Repeatability <50µm

Dimensions & Features							
Item No.	Description	Edge	l	l_1	Nose Radius	Holder	Coating
7005-138582	CCXT 060204 EN PA9 UHM10 HX	Round	6.4	4	.40mm/.0157in	SC...06	UHM 10 HX
Call For Details	CCXT 060204 EN PA9 UHM10 TX+	Round	6.4	4	.40mm/.0157in	SC...06	UHM 10 TX+
7005-138584	CCXT 09T304 EN PA9 UHM10 HX	Round	9.7	6	.40mm/.0157in	SC...09	UHM 10 HX
Call For Details	CCXT 09T304 EN PA9 UHM10 TX+	Round	9.7	6	.40mm/.0157in	SC...09	UHM 10 TX+
7005-138586	CCXT 09T308 EN PA9 UHM10 HX	Round	9.7	6	.80mm/.0315in	SC...09	UHM 10 HX
Call For Details	CCXT 09T308 EN PA9 UHM10 TX+	Round	9.7	6	.80mm/.0315in	SC...09	UHM 10 TX+

	Material Class								
Application	I	II	III	IV	V	VI	VII	VIII	IX
Roughing	□	□	□	□	□	□	■	-	-
Finishing	■	■	■	■	■	■	□	-	-
Micro Finishing	□	□	□	-	□	□	-	-	-

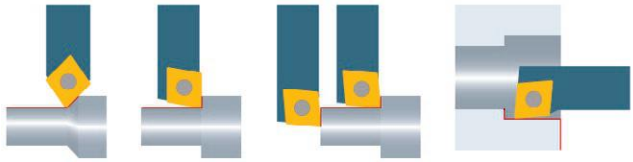




CCGT Carbide PF

Cut: Neutral


Chip Breaker: PF, Round Cutting Edge



Repeatability <20µm

Dimensions & Features							
Item No.	Description	Edge	l	l_1	Nose Radius	Holder	Coating
7005-123321	CCGT 060202 EN PF UHM20 MZ	Round	6.4	1.5	.20mm/.0079in	SC...06	UHM 20 MZ
7005-123323	CCGT 060202 EN PF UHM30 MZ	Round	6.4	1.5	.20mm/.0079in	SC...06	UHM 30 MZ
Call For Details	CCGT 060202 EN PF UHM10 HX	Round	6.4	1.5	.20mm/.0079in	SC...06	UHM 10 HX
Call For Details	CCGT 060202 EN PF UHM10 MZ	Round	6.4	1.5	.20mm/.0079in	SC...06	UHM 10 MZ
Call For Details	CCGT 060204 EN PF UHM10 HX	Round	6.4	1.5	.40mm/.0157in	SC...06	UHM 10 HX
Call For Details	CCGT 060204 EN PF UHM10 MZ	Round	6.4	1.5	.40mm/.0157in	SC...06	UHM 10 MZ
Call For Details	CCGT 09T302 EN PF UHM10 HX	Round	9.7	2	.20mm/.0079in	SC...09	UHM 10 HX
Call For Details	CCGT 09T302 EN PF UHM10 MZ	Round	9.7	2	.20mm/.0079in	SC...09	UHM 10 MZ
Call For Details	CCGT 09T304 EN PF UHM10 HX	Round	9.7	2	.40mm/.0157in	SC...09	UHM 10 HX
Call For Details	CCGT 09T304 EN PF UHM10 MZ	Round	9.7	2	.40mm/.0157in	SC...09	UHM 10 MZ
Call For Details	CCGT 09T308 EN PF UHM10 MZ	Round	9.7	2	.80mm/.0315in	SC...09	UHM 10 MZ
Call For Details	CCGT 120404 EN PF UHM10 HX	Round	12.9	3.2	.40mm/.0157in	SC...12	UHM 10 HX

	Material Class								
Application	I	II	III	IV	V	VI	VII	VIII	IX
Roughing	□	□	□	-	□	□	-	-	-
Finishing	■	■	■	-	■	■	-	-	-
Micro Finishing	■	■	■	-	■	■	-	-	-

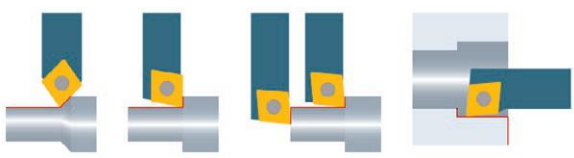

Coatings vs Material Type

Carbide												Cermet		Diamond			Materials
-	-	■	■	■	■	■	□	□	■	■	□	■	■	-	-	-	**Steel**
-	■	■	-	■	■	□	□	■	■	■	■	□	■	-	-	-	Stainless Steel
□	■	■	-	□	■	-	□	■	■	-	-	-	-	-	-	-	Titanium & Ti-Alloys
■	□	-	-	-	-	-	□	□	-	-	□	-	-	■	■	■	Non-Ferrous Metals
-	-	■	-	-	-	-	-	-	-	-	-	-	-	-	-	-	Mard Materials
UHM 10	UHM 10 HX	UHM 10 TX+	UHM 10 MZ	UHM 20 HPX	UHM 20 TX+	UHM 20 MZ	UHM 30	UHM 30 HX	UHM 30 TX+	UHM 30 MZ	UHM 30 SX	UCM 10	UCM 10 HX	UCVD 08	UPCD 15	UPCD 20	

Material Class								
I	II	III	IV	V	VI	VII	VIII	IX
Unalloyed Steel	Low-Alloy Steel	High-Alloy Steel	Titanium	Stainless Steel (HB<220)	Stainless Steel (HB≥220)	Aluminum	Brass	Synthetics / Composits




CC...06 inserts: d =.250"
CC...09 inserts: d =.375"
CC...12 inserts: d =.500"



CCGT Carbide FN PF23

Cut: Neutral


Chip Breaker: PF23, Polished Rake, Sharp Cutting Edge



Repeatability <20µm

Dimensions & Features							
Item No.	Description	Edge	l	l_1	Nose Radius	Holder	Coating
Call For Details	CCGT 0602005 FN PF23 UHM20 HPX	Sharp	6.4	2	.05mm/.0019in	SC...06	UHM 20 HPX
Call For Details	CCGT 0602005 FN PF23 UHM 20 TX+	Sharp	6.4	2	.05mm/.0019in	SC...06	UHM 20 TX+
Call For Details	CCGT 0602005 FN PF23 UHM30 HX	Sharp	6.4	2	.05mm/.0019in	SC...06	UHM 30 HX
Call For Details	CCGT 060201 FN PF23 UHM20 HPX	Sharp	6.4	2	.10mm/.0039in	SC...06	UHM 20 HPX
Call For Details	CCGT 060201 FN PF23 UHM 20 TX+	Sharp	6.4	2	.10mm/.0039in	SC...06	UHM 20 TX+
Call For Details	CCGT 060201 FN PF23 UHM30 HX	Sharp	6.4	2	.10mm/.0039in	SC...06	UHM 30 HX
Call For Details	CCGT 060202 FN PF23 UHM20 HPX	Sharp	6.4	2	.20mm/.0079in	SC...06	UHM 20 HPX
Call For Details	CCGT 060202 FN PF23 UHM 20 TX+	Sharp	6.4	2	.20mm/.0079in	SC...06	UHM 20 TX+
Call For Details	CCGT 060202 FN PF23 UHM30 HX	Sharp	6.4	2	.20mm/.0079in	SC...06	UHM 30 HX
Call For Details	CCGT 09T3005 FN PF23 UHM20 HPX	Sharp	9.7	3	.05mm/.0019in	SC...09	UHM 20 HPX
Call For Details	CCGT 09T3005 FN PF23 UHM 20 TX+	Sharp	9.7	3	.05mm/.0019in	SC...09	UHM 20 TX+
Call For Details	CCGT 09T3005 FN PF23 UHM30 HX	Sharp	9.7	3	.05mm/.0019in	SC...09	UHM 30 HX
Call For Details	CCGT 09T301 FN PF23 UHM20 HPX	Sharp	9.7	3	.10mm/.0039in	SC...09	UHM 20 HPX
Call For Details	CCGT 09T301 FN PF23 UHM 20 TX+	Sharp	9.7	3	.10mm/.0039in	SC...09	UHM 20 TX+
Call For Details	CCGT 09T301 FN PF23 UHM30 HX	Sharp	9.7	3	.10mm/.0039in	SC...09	UHM 30 HX
Call For Details	CCGT 09T302 FN PF23 UHM20 HPX	Sharp	9.7	3	.20mm/.0079in	SC...09	UHM 20 HPX
Call For Details	CCGT 09T302 FN PF23 UHM 20 TX+	Sharp	9.7	3	.20mm/.0079in	SC...09	UHM 20 TX+
Call For Details	CCGT 09T302 FN PF23 UHM30 HX	Sharp	9.7	3	.20mm/.0079in	SC...09	UHM 30 HX

Application	Material Class I	II	III	IV	V	VI	VII	VIII	IX
Roughing	-	-	-	-	-	-	-	-	-
Finishing	□	□	□	□	□	□	□	-	-
Micro Finishing	■	■	■	□	■	■	□	-	□

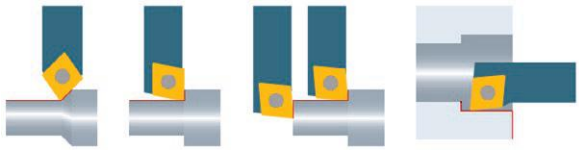




CCGT Carbide EN PF23

Cut: Neutral


Chip Breaker: PF23, Polished Rake, Round Cutting Edge



Repeatability <20µm

Dimensions & Features							
Item No.	Description	Edge	l	l_1	Nose Radius	Holder	Coating
Call For Details	CCGT 0602005 EN PF23 UHM20 HPX	Round	6.4	2	.05mm/.0019in	SC...06	UHM 20 HPX
Call For Details	CCGT 0602005 EN PF23 UHM20 TX+	Round	6.4	2	.05mm/.0019in	SC...06	UHM 20 TX+
Call For Details	CCGT 060201 EN PF23 UHM20 HPX	Round	6.4	2	.10mm/.0039in	SC...06	UHM 20 HPX
Call For Details	CCGT 060201 EN PF23 UHM20 TX+	Round	6.4	2	.10mm/.0039in	SC...06	UHM 20 TX+
Call For Details	CCGT 060202 EN PF23 UHM20 HPX	Round	6.4	2	.20mm/.0079in	SC...06	UHM 20 HPX
Call For Details	CCGT 060202 EN PF23 UHM20 TX+	Round	6.4	2	.20mm/.0079in	SC...06	UHM 20 TX+
Call For Details	CCGT 09T3005 EN PF23 UHM20 HPX	Round	9.7	3	.05mm/.0019in	SC...09	UHM 20 HPX
Call For Details	CCGT 09T3005 EN PF23 UHM20 TX+	Round	9.7	3	.05mm/.0019in	SC...09	UHM 20 TX+
Call For Details	CCGT 09T301 EN PF23 UHM20 HPX	Round	9.7	3	.10mm/.0039in	SC...09	UHM 20 HPX
Call For Details	CCGT 09T301 EN PF23 UHM20 TX+	Round	9.7	3	.10mm/.0039in	SC...09	UHM 20 TX+
Call For Details	CCGT 09T302 EN PF23 UHM20 HPX	Round	9.7	3	.20mm/.0079in	SC...09	UHM 20 HPX
Call For Details	CCGT 09T302 EN PF23 UHM20 TX+	Round	9.7	3	.20mm/.0079in	SC...09	UHM 20 TX+

	Material Class								
Application	I	II	III	IV	V	VI	VII	VIII	IX
Roughing	-	-	-	-	-	-	-	-	-
Finishing	□	□	□	□	□	□	□	-	-
Micro Finishing	■	■	■	□	■	■	□	-	□

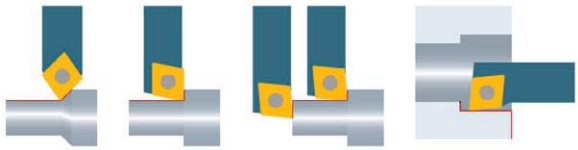




CCMT Carbide PF43

Cut: Neutral


Chip Breaker: PF43, Round Cutting Edge



Repeatability <50µm

Dimensions & Features							
Item No.	Description	Edge	l	l_1	Nose Radius	Holder	Coating
Call For Details	CCMT 060202 EN PF43 UHM30 HX	Round	6.4	2.6	.20mm/.0079in	SC...06	UHM 30 HX
Call For Details	CCMT 060204 EN PF43 UHM30 HX	Round	6.4	2.6	.40mm/.0157in	SC...06	UHM 30 HX
Call For Details	CCMT 09T302 EN PF43 UHM30 HX	Round	9.7	4	.20mm/.0079in	SC...09	UHM 30 HX
Call For Details	CCMT 09T304 EN PF43 UHM30 MZ	Round	9.7	4	.40mm/.0157in	SC...09	UHM 30 MZ
Call For Details	CCMT 09T308 EN PF43 UHM30 MZ	Round	9.7	4	.80mm/.0315in	SC...09	UHM 30 MZ

	Material Class								
Application	I	II	III	IV	V	VI	VII	VIII	IX
Roughing	■	■	■	-	■	■	-	-	-
Finishing	■	■	■	-	■	■	-	-	-
Micro Finishing	-	-	-	-	-	-	-	-	-

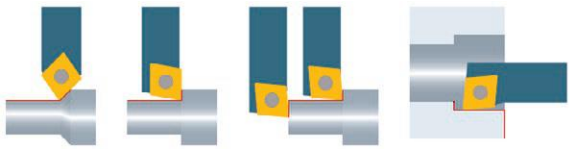

Coatings vs Material Type

Carbide												Cermet		Diamond			Materials
UHM 10	UHM 10 HX	UHM 10 TX+	UHM 10 MZ	UHM 20 HPX	UHM 20 TX+	UHM 20 MZ	UHM 30	UHM 30 HX	UHM 30 TX+	UHM 30 MZ	UHM 30 SX	UCM 10	UCM 10 HX	UCVD 08	UPCD 15	UPCD 20	
-	-	■	■	■	■	■	□	□	■	■	□	■	■	-	-	-	**Steel**
-	■	■	-	■	■	□	□	■	■	■	■	□	■	-	-	-	Stainless Steel
□	■	■	-	□	■	-	□	■	■	-	-	-	-	-	-	-	Titanium & Ti-Alloys
■	□	-	-	-	-	-	□	□	-	-	□	-	-	■	■	■	Non-Ferrous Metals
-	-	■	-	-	-	-	-	-	-	-	-	-	-	-	-	-	Mard Materials

Material Class								
I	II	III	IV	V	VI	VII	VIII	IX
Unalloyed Steel	Low-Alloy Steel	High-Alloy Steel	Titanium	Stainless Steel (HB<220)	Stainless Steel (HB≥220)	Aluminum	Brass	Synthetics / Composits




CC...06 inserts: d =.250"
CC...09 inserts: d =.375"
CC...12 inserts: d =.500"



CCMT Carbide PM


Cut: Neutral
Chip Breaker: PM, Round Cutting Edge



Repeatability <50µm

Dimensions & Features							
Item No.	Description	Edge	l	l_1	Nose Radius	Holder	Coating
7005-113683	CCMT 060204 EN PM UHM10 MZ	Round	6.4	2	.40mm/.0157in	SC...06	UHM 10 MZ
7005-123336	CCMT 060204 EN PM UHM20 MZ	Round	6.4	2	.40mm/.0157in	SC...06	UHM 20 MZ
7005-123337	CCMT 060204 EN PM UHM30 MZ	Round	6.4	2	.40mm/.0157in	SC...06	UHM 30 MZ
7005-113684	CCMT 060208 EN PM UHM10 MZ	Round	6.4	2	.80mm/.0315in	SC...06	UHM 10 MZ
7005-123338	CCMT 060208 EN PM UHM30 MZ	Round	6.4	2	.80mm/.0315in	SC...06	UHM 30 MZ
7005-113685	CCMT 09T304 EN PM UHM10 MZ	Round	9.7	3.2	.40mm/.0157in	SC...09	UHM 10 MZ
7005-123341	CCMT 09T304 EN PM UHM20 MZ	Round	9.7	3.2	.40mm/.0157in	SC...09	UHM 20 MZ
7005-123342	CCMT 09T304 EN PM UHM30 MZ	Round	9.7	3.2	.40mm/.0157in	SC...09	UHM 30 MZ
7005-113686	CCMT 09T308 EN PM UHM10 MZ	Round	9.7	3.2	.80mm/.0315in	SC...09	UHM 10 MZ
7005-123344	CCMT 09T308 EN PM UHM20 MZ	Round	9.7	3.2	.80mm/.0315in	SC...09	UHM 20 MZ
7005-123345	CCMT 09T308 EN PM UHM30 MZ	Round	9.7	3.2	.80mm/.0315in	SC...09	UHM 30 MZ
7005-113687	CCMT 120404 EN PM UHM10 MZ	Round	12.9	4.8	.40mm/.0157in	SC...12	UHM 10 MZ
7005-123347	CCMT 120404 EN PM UHM20 MZ	Round	12.9	4.8	.40mm/.0157in	SC...12	UHM 20 MZ
7005-123348	CCMT 120404 EN PM UHM30 MZ	Round	12.9	4.8	.40mm/.0157in	SC...12	UHM 30 MZ
7005-113688	CCMT 120408 EN PM UHM10 MZ	Round	12.9	4.8	.80mm/.0315in	SC...12	UHM 10 MZ
7005-123350	CCMT 120408 EN PM UHM20 MZ	Round	12.9	4.8	.80mm/.0315in	SC...12	UHM 20 MZ
7005-123351	CCMT 120408 EN PM UHM30 MZ	Round	12.9	4.8	.80mm/.0315in	SC...12	UHM 30 MZ

Application	Material Class I	II	III	IV	V	VI	VII	VIII	IX
Roughing	■	■	■	-	■	■	-	-	-
Finishing	□	□	□	-	□	□	-	-	-
Micro Finishing	-	-	-	-	-	-	-	-	-

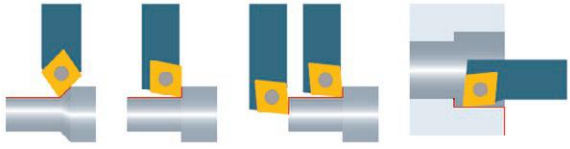




CCMT Cermet PMF

Cut: Neutral


Chip Breaker: PMF, Round Cutting Edge




Repeatability <50µm

Dimensions & Features							
Item No.	Description	Edge	l	l_1	Nose Radius	Holder	Coating
Call For Details	CCMT 060204 EN PMF UCM10 MZ	Round	6.4	2	.40mm/.0157in	SC...06	UCM 10 MZ
7005-126986	CCMT 09T304 EN PMF UCM10 MZ	Round	9.7	3.2	.40mm/.0157in	SC...09	UCM 10 MZ
Call For Details	CCMT 09T308 EN PMF UCM10 MZ	Round	9.7	3.2	.80mm/.0315in	SC...09	UCM 10 MZ
7005-126992	CCMT 120404 EN PMF UCM10 MZ	Round	12.9	4.8	.40mm/.0157in	SC...12	UCM 10 MZ

	Material Class								
Application	I	II	III	IV	V	VI	VII	VIII	IX
Roughing	■	■	■	-	■	■	-	-	-
Finishing	■	■	■	-	■	■	-	-	-
Micro Finishing	-	-	-	-	-	-	-	-	-

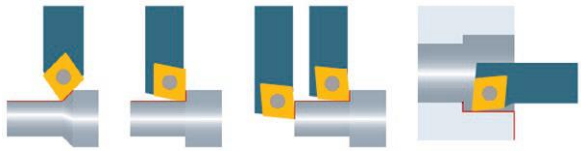




CCMT Carbide PM25

Cut: Neutral


Chip Breaker: PM25, Round Cutting Edge



Repeatability <50µm

Dimensions & Features							
Item No.	Description	Edge	l	l_1	Nose Radius	Holder	Coating
7005-112937	CCMT 060204 EN PM25 UHM20 HPX	Round	6.4	2	.40mm/.0157in	SC...06	UHM 20 HPX
7005-112938	CCMT 09T304 EN PM25 UHM20 HPX	Round	9.7	2.2	.40mm/.0157in	SC...09	UHM 20 HPX
7005-112939	CCMT 09T308 EN PM25 UHM20 HPX	Round	9.7	3.2	.80mm/.0315in	SC...09	UHM 20 HPX

	Material Class								
Application	I	II	III	IV	V	VI	VII	VIII	IX
Roughing	-	-	-	-	-	-	-	-	-
Finishing	□	□	□	-	■	■	-	-	-
Micro Finishing	-	-	-	-	-	-	-	-	-

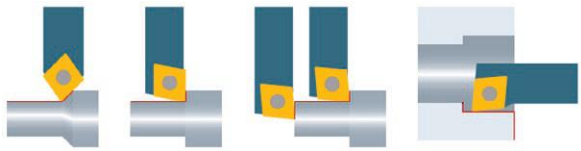

Coatings vs Material Type

Carbide												Cermet		Diamond			Materials
UHM 10	UHM 10 HX	UHM 10 TX+	UHM 10 MZ	UHM 20 HPX	UHM 20 TX+	UHM 20 MZ	UHM 30	UHM 30 HX	UHM 30 TX+	UHM 30 MZ	UHM 30 SX	UCM 10	UCM 10 HX	UCVD 08	UPCD 15	UPCD 20	
-	-	■	■	■	■	■	□	□	■	■	□	■	■	-	-	-	**Steel**
-	■	■	-	■	■	□	□	■	■	■	■	□	■	-	-	-	Stainless Steel
□	■	■	-	□	■	-	□	■	■	-	-	-	-	-	-	-	Titanium & Ti-Alloys
■	□	-	-	-	-	-	□	□	-	-	□	-	-	■	■	■	Non-Ferrous Metals
-	-	■	-	-	-	-	-	-	-	-	-	-	-	-	-	-	Mard Materials

Material Class								
I	II	III	IV	V	VI	VII	VIII	IX
Unalloyed Steel	Low-Alloy Steel	High-Alloy Steel	Titanium	Stainless Steel (HB<220)	Stainless Steel (HB≥220)	Aluminum	Brass	Synthetics / Composits




CC...06 inserts: d =.250"
CC...09 inserts: d =.375"
CC...12 inserts: d =.500"



CCMT Carbide PM55


Cut: Neutral
Chip Breaker: PM55, Round Cutting Edge



Repeatability <50µm

Dimensions & Features							
Item No.	Description	Edge	l	l_1	Nose Radius	Holder	Coating
7005-112940	CCMT 060204 EN PM55 UHM20 HPX	Round	6.4	2.6	.40mm/.0157in	SC...06	UHM 20 HPX
7005-112721	CCMT 09T304 EN PM55 UHM20 HPX	Round	9.7	3	.40mm/.0157in	SC...09	UHM 20 HPX
7005-112941	CCMT 09T308 EN PM55 UHM20 HPX	Round	9.7	4	.80mm/.0315in	SC...09	UHM 20 HPX
Call For Details	CCMT 120404 EN PM55 UHM20 HPX	Round	12.9	4	.40mm/.0157in	SC...12	UHM 20 HPX
Call For Details	CCMT 120408 EN PM55 UHM20 HPX	Round	12.9	4.8	.80mm/.0315in	SC...12	UHM 20 HPX

Application	Material Class								
	I	II	III	IV	V	VI	VII	VIII	IX
Roughing	□	□	□	-	■	■	-	-	-
Finishing	-	-	-	-	-	-	-	-	-
Micro Finishing	-	-	-	-	-	-	-	-	-

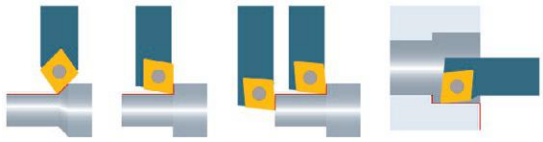




CCET Carbide -U

Cut: Neutral


Chip Breaker: -U, Ground Rake, Sharp Cutting Edge



Repeatability <10µm

Item No.	Description	Dimensions & Features					
		Edge	l	l_1	Nose Radius	Holder	Coating
7005-123190	CCET 0602003 FR U UHM10 HX	Sharp	6.4	2.5	.03mm/.0012in	SC...06	UHM 10 HX
Call For Details	CCET 0602003 FR U UHM10 TX+	Sharp	6.4	2.5	.03mm/.0012in	SC...06	UHM 10 TX+
7005-123551	CCET 060201 FR U UHM10 HX	Sharp	6.4	2.5	.10mm/.0039in	SC...06	UHM 10 HX
Call For Details	CCET 060201 FR U UHM10 TX+	Sharp	6.4	2.5	.10mm/.0039in	SC...06	UHM 10 TX+
7005-123556	CCET 060202 FR U UHM10 HX	Sharp	6.4	2.5	.20mm/.0079in	SC...06	UHM 10 HX
Call For Details	CCET 060202 FR U UHM10 TX+	Sharp	6.4	2.5	.20mm/.0079in	SC...06	UHM 10 TX+
7005-123565	CCET 09T3003 FR U UHM10 HX	Sharp	9.7	4	.03mm/.0012in	SC...09	UHM 10 HX
Call For Details	CCET 09T3003 FR U UHM10 TX+	Sharp	9.7	4	.03mm/.0012in	SC...09	UHM 10 TX+
7005-123569	CCET 09T301 FR U UHM10 HX	Sharp	9.7	4	.10mm/.0039in	SC...09	UHM 10 HX
Call For Details	CCET 09T301 FR U UHM10 TX+	Sharp	9.7	4	.10mm/.0039in	SC...09	UHM 10 TX+
7005-123574	CCET 09T302 FR U UHM10 HX	Sharp	9.7	4	.20mm/.0079in	SC...09	UHM 10 HX
Call For Details	CCET 09T302 FR U UHM10 TX+	Sharp	9.7	4	.20mm/.0079in	SC...09	UHM 10 TX+

Application	Material Class								
	I	II	III	IV	V	VI	VII	VIII	IX
Roughing	-	-	-	-	-	-	-	-	-
Finishing	□	□	□	-	□	□	-	-	-
Micro Finishing	■	■	■	□	■	■	□	-	□

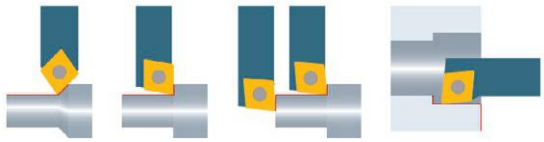




CCGT Diamond

Cut: Neutral


Chip Breaker: Sharp Cutting Edge



Repeatability <20µm

Item No.	Description	Dimensions & Features					
		Edge	l	l_1	Nose Radius	Holder	Coating
7005-129021	CCGT 060201 FN UPCD15	Sharp	6.4	3.5	.10mm/.0039in	SC...06	UPCD 15
7005-116078	CCGT 060201 FN UPCD20	Sharp	6.4	3.5	.10mm/.0039in	SC...06	UPCD 20
7005-137707	CCGT 060202 FN UPCD15	Sharp	6.4	3.5	.20mm/.0079in	SC...06	UPCD 15
7005-116081	CCGT 060202 FN UPCD20	Sharp	6.4	3.5	.20mm/.0079in	SC...06	UPCD 20
7005-137708	CCGT 060204 FN UPCD15	Sharp	6.4	3.5	.40mm/.0157in	SC...06	UPCD 15
7005-137709	CCGT 060208 FN UPCD15	Sharp	6.4	3	.80mm/.0315in	SC...06	UPCD 15
7005-137710	CCGT 09T302 FN UPCD15	Sharp	9.7	4.5	.20mm/.0079in	SC...09	UPCD 15
7005-116091	CCGT 09T302 FN UPCD20	Sharp	9.7	4.5	.20mm/.0079in	SC...09	UPCD 20
7005-137711	CCGT 09T304 FN UPCD15	Sharp	9.7	4.3	.40mm/.0157in	SC...09	UPCD 15
7005-137712	CCGT 09T308 FN UPCD15	Sharp	9.7	4.1	.80mm/.0315in	SC...09	UPCD 15
7005-137713	CCGT 120404 FN UPCD15	Sharp	12.9	4.3	.40mm/.0157in	SC...12	UPCD 15
7005-116101	CCGT 120404 FN UPCD20	Sharp	12.9	4.3	.40mm/.0157in	SC...12	UPCD 20
7005-137714	CCGT 120408 FN UPCD15	Sharp	12.9	4.1	.80mm/.0315in	SC...12	UPCD 15


Application	Material Class								
	I	II	III	IV	V	VI	VII	VIII	IX
Roughing	-	-	-	-	-	-	□	□	□
Finishing	-	-	-	-	-	-	■	■	■
Micro Finishing	-	-	-	-	-	-	■	■	■

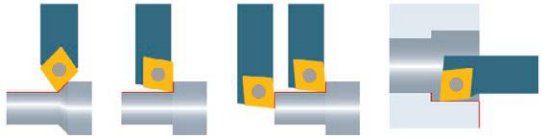


Coatings vs Material Type

Carbide												Cermet		Diamond			Materials
UHM 10	UHM 10 HX	UHM 10 TX+	UHM 10 MZ	UHM 20 HPX	UHM 20 TX+	UHM 20 MZ	UHM 30	UHM 30 HX	UHM 30 TX+	UHM 30 MZ	UHM 30 SX	UCM 10	UCM 10 HX	UCVD 08	UPCD 15	UPCD 20	
-	-	■	■	■	■	■	□	□	■	■	□	■	■	-	-	-	**Steel**
-	■	■	-	■	■	□	□	■	■	■	■	□	■	-	-	-	Stainless Steel
□	■	■	-	□	■	-	□	■	■	-	-	-	-	-	-	-	Titanium & Ti-Alloys
■	□	-	-	-	-	-	□	□	-	-	□	-	-	■	■	■	Non-Ferrous Metals
-	-	■	-	-	-	-	-	-	-	-	-	-	-	-	-	-	Mard Materials


Material Class								
I	II	III	IV	V	VI	VII	VIII	IX
Unalloyed Steel	Low-Alloy Steel	High-Alloy Steel	Titanium	Stainless Steel (HB<220)	Stainless Steel (HB≥220)	Aluminum	Brass	Synthetics / Composits



CC...06 inserts: d =.250"
CC...09 inserts: d =.375"
CC...12 inserts: d =.500"



Repeatability <20µm




CCGT Diamond -UWS

Cut: Neutral

Chip Breaker: -UWS, Sharp Cutting Edge

Dimensions & Features							
Item No.	Description	Edge	l	l_1	Nose Radius	Holder	Coating
7005-116449	CCGT 060202 FN UWS UCVD08	Sharp	6.4	3	.20mm/.0079in	SC...06	UCVD 08
7005-116253	CCGT 060202 FN UWS UPCD15	Sharp	6.4	3	.20mm/.0079in	SC...06	UPCD 15
7005-116459	CCGT 060204 FN UWS UCVD08	Sharp	6.4	3	.40mm/.0157in	SC...06	UCVD 08
7005-116263	CCGT 060204 FN UWS UPCD15	Sharp	6.4	3	.40mm/.0157in	SC...06	UPCD 15
7005-116282	CCGT 09T302 FN UWS UPCD15	Sharp	9.7	3	.20mm/.0079in	SC...09	UPCD 15
7005-116489	CCGT 09T304 FN UWS UCVD08	Sharp	9.7	3	.40mm/.0157in	SC...09	UCVD 08
7005-116291	CCGT 09T304 FN UWS UPCD15	Sharp	9.7	3	.40mm/.0157in	SC...09	UPCD 15

Application	Material Class								
	I	II	III	IV	V	VI	VII	VIII	IX
Roughing	-	-	-	-	-	-	-	-	-
Finishing	-	-	-	-	-	-	□	□	□
Micro Finishing	-	-	-	-	-	-	■	■	■

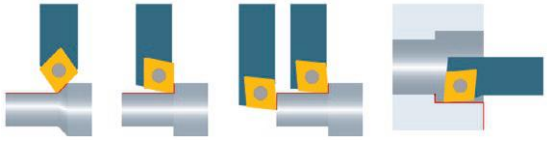




CCGT Diamond -UWN

Cut: Neutral


Chip Breaker: -UWN, Sharp Cutting Edge



Repeatability <20µm

Item No.	Description	Dimensions & Features					
		Edge	l	l_1	Nose Radius	Holder	Coating
7005-116448	CCGT 060202 FN UWN UCVD08	Sharp	6.4	3	.20mm/.0079in	SC...06	UCVD 08
7005-116252	CCGT 060202 FN UWN UPCD20	Sharp	6.4	3	.20mm/.0079in	SC...06	UPCD 20
7005-116458	CCGT 060204 FN UWN UCVD08	Sharp	6.4	3	.40mm/.0157in	SC...06	UCVD 08
Call For Details	CCGT 060204 FN UWN UPCD15	Sharp	6.4	3	.40mm/.0157in	SC...06	UPCD 15
7005-116262	CCGT 060204 FN UWN UPCD20	Sharp	6.4	3	.40mm/.0157in	SC...06	UPCD 20
7005-116478	CCGT 09T302 FN UWN UCVD08	Sharp	9.7	3	.20mm/.0079in	SC...09	UCVD 08
7005-116281	CCGT 09T302 FN UWN UPCD20	Sharp	9.7	3	.20mm/.0079in	SC...09	UPCD 20
7005-116488	CCGT 09T304 FN UWN UCVD08	Sharp	9.7	3	.40mm/.0157in	SC...09	UCVD 08
7005-116290	CCGT 09T304 FN UWN UPCD20	Sharp	9.7	3	.40mm/.0157in	SC...09	UPCD 20

Application	Material Class								
	I	II	III	IV	V	VI	VII	VIII	IX
Roughing	-	-	-	-	-	-	□	□	□
Finishing	-	-	-	-	-	-	■	■	■
Micro Finishing	-	-	-	-	-	-	-	-	-

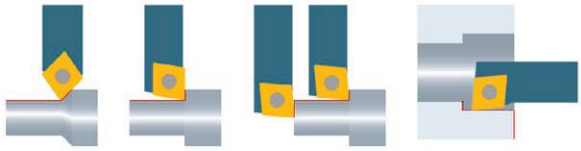




CCGT Diamond -UWN TOP Wiper

Cut: Neutral


Chip Breaker: -UWN, TOP Wiper, Sharp Cutting Edge




Repeatability <20µm

Item No.	Description	Dimensions & Features					
		Edge	l	l_1	Nose Radius	Holder	Coating
7005-116452	CCGT 060202 FN TOP UWN UCVD08	Sharp	6.4	3	.20mm/.0079in	SC...06	UCVD 08
7005-116256	CCGT 060202 FN TOP UWN UPCD15	Sharp	6.4	3	.20mm/.0079in	SC...06	UPCD 15
Call For Details	CCGT 060202 FN TOP UWN UPCD20	Sharp	6.4	3	.20mm/.0079in	SC...06	UPCD 20
Call For Details	CCGT 060204 FN TOP UWN UCVD08	Sharp	6.4	3	.40mm/.0157in	SC...06	UCVD 08
7005-116266	CCGT 060204 FN TOP UWN UPCD15	Sharp	6.4	3	.40mm/.0157in	SC...06	UPCD 15
Call For Details	CCGT 060204 FN TOP UWN UPCD20	Sharp	6.4	3	.40mm/.0157in	SC...06	UPCD 20
7005-116482	CCGT 09T302 FN TOP UWN UCVD08	Sharp	9.7	3	.20mm/.0079in	SC...09	UCVD 08
7005-116285	CCGT 09T302 FN TOP UWN UPCD15	Sharp	9.7	3	.20mm/.0079in	SC...09	UPCD 15
Call For Details	CCGT 09T302 FN TOP UWN UPCD20	Sharp	9.7	3	.20mm/.0079in	SC...09	UPCD 20
7005-116492	CCGT 09T304 FN TOP UWN UCVD08	Sharp	9.7	3	.40mm/.0157in	SC...09	UCVD 08
7005-116294	CCGT 09T304 FN TOP UWN UPCD15	Sharp	9.7	3	.40mm/.0157in	SC...09	UPCD 15
Call For Details	CCGT 09T304 FN TOP UWN UPCD20	Sharp	9.7	3	.40mm/.0157in	SC...09	UPCD 20

Application	Material Class								
	I	II	III	IV	V	VI	VII	VIII	IX
Roughing	-	-	-	-	-	-	□	□	□
Finishing	-	-	-	-	-	-	■	■	■
Micro Finishing	-	-	-	-	-	-	-	-	-

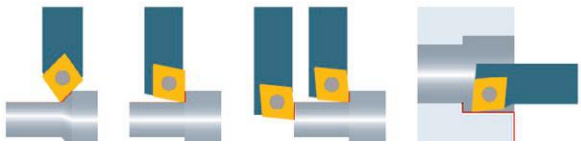




ISO Holder SCAC...U


Type: 90°
Coolant-Thru: None

Repeatability <20µm



Left Hand		Right Hand		Dimensions & Features				
Item No.	Description	Item No.	Description	h	b	l	f	Inserts
7005-045072	SCACL 0808 K06 U	7005-045078	SCACR 0808 K06 U	8	8	125	8	CC 0602
7005-045073	SCACL 1010 M06 U	7005-045079	SCACR 1010 M06 U	10	10	150	10	CC 0602
7005-045074	SCACL 1212 M09 U	7005-045080	SCACR 1212 M09 U	12	12	150	12	CC 09T3
7005-045076	SCACL 1616 H09 U	7005-045082	SCACR 1616 H09 U	16	16	100	16	CC 09T3
7005-045077	SCACL 2020 K12 U	7005-045083	SCACR 2020 K12 U	20	20	125	20	CC 1204

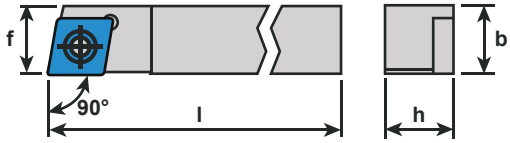




ISO Holder SCDC...U


Type: 45°
Coolant-Thru: None

Repeatability <20µm



Left Hand		Dimensions & Features				
Item No.	Description	h	b	l	f	Inserts
7005-045084	SCDCL 0808 K06 U	8	8	125	8	CC 0602
7005-045085	SCDCL 1010 M06 U	10	10	150	10	CC 0602
7005-045086	SCDCL 1212 M09 U	12	12	150	12	CC 09T3

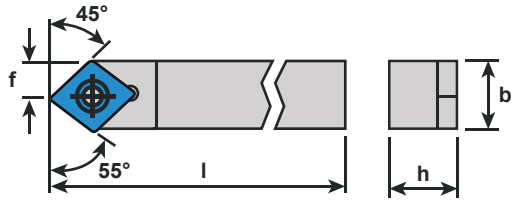




ISO Holder SCLC...U


Type: 95°
Coolant-Thru: None

Repeatability <20µm



Left Hand		Right Hand		Dimensions & Features				
Item No.	Description	Item No.	Description	h	b	l	f	Inserts
7005-148792	SCLCL 0808 F06 U	7005-148790	SCLCR 0808 F06 U	8	8	80	8	CC 0602
7005-045176	SCLCL 0808 H06 U	7005-045179	SCLCR 0808 H06 U	8	8	100	8	CC 0602
7005-148793	SCLCL 1010 F06 U	7005-148791	SCLCR 1010 F06 U	10	10	80	10	CC 0602
Call For Details	SCLCL 1010 H06 U	7005-045182	SCLCR 1010 H06 U	10	10	100	10	CC 0602
7005-045178	SCLCL 1212 H09 U	7005-045180	SCLCR 1212 H09 U	12	12	100	12	CC 09T3
Call For Details	SCLCL 1616 K09 U	Call For Details	SCLCR 1616 K09 U	16	16	125	16	CC 09T3
Call For Details	SCLCL 3/8" H06 U	Call For Details	SCLCR 3/8" H06 U	3/8"	3/8"	100	3/8"	CC 09T3
Call For Details	SCLCL 1/2" H09 U	7005-144711	SCLCR 1/2" H09 U	1/2"	1/2"	100	1/2"	CC 09T3
Call For Details	SCLCL 5/8" K09 U	Call For Details	SCLCR 5/8" K09 U	5/8"	5/8"	125	5/8"	CC 09T3

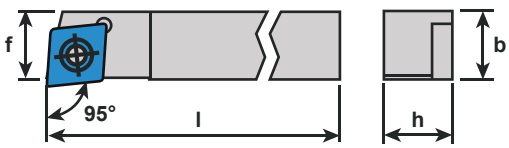




ISO Coolant-Thru Holder SCLC...U

Type: 95°
Coolant-Thru: Rear & Side Ports

Repeatability <10µm

Left Hand		Right Hand		Dimensions & Features							Coolant Fittings		
Item No.	Description	Item No.	Description	h	b	l	z^1	x^1	f	(d)	Side	Rear	Inserts
7005-146351	SCLCL 0808 H06 U IC	7005-146348	SCLCR 0808 H06 U IC	8	8	100	16	11.5	8	M5	4005-000111	4005-000111	CC 0602
7005-146352	SCLCL 1010 H06 U IC	7005-146349	SCLCR 1010 H06 U IC	10	10	100	16	13.5	10	M5	4005-000111	4005-000111	CC 0602
7005-146353	SCLCL 1212 H09 U IC	7005-146350	SCLCR 1212 H09 U IC	12	12	100	19	15.5	12	M5	4005-000111	4005-000111	CC 09T3
7005-169189	SCLCL 1616 K09 U IC	7005-169188	SCLCR 1616 K09 U IC	16	16	125	19	19.5	16	G1/8"	4005-000111	4005-000104	CC 09T3
Call For Details	SCLCL 3/8" H06 U IC	Call For Details	SCLCR 3/8" H06 U IC	3/8"	3/8"	100	16	13	3/8"	M5	4005-000111	4005-000111	CC 0602
Call For Details	SCLCL 1/2" H09 U IC	Call For Details	SCLCR 1/2" H09 U IC	1/2"	1/2"	100	19	16.2	1/2"	M5	4005-000111	4005-000111	CC 09T3
Call For Details	SCLCL 5/8" K09 U IC	7005-144716	SCLCR 5/8" K09 U IC	5/8"	5/8"	125	19	19.4	5/8"	G1/8"	4005-000111	4005-000104	CC 09T3

Features (5) connection ports for simple connection to your oil delivery system. (4) Side ports and (1) one end port making connection possible on most machine tool positions.

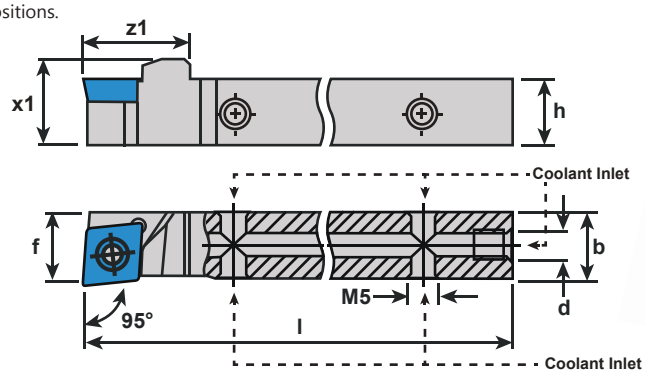






4005-000111
Connects to side ports on ALL shank sizes
0° Male Union - M5-0.8 to 1/4 JIC Flare Fitting
Included With All Coolant-Thru Shanks



4005-000104
Connects to end port on 5/8" and larger shanks
0° Male Union - 1/8 BSPP to 1/4 JIC Flare Fitting
Fits Position (d) On Tool Holders Sold Separately




ISO Round Shank Holder SCFC


Type: 90°
Coolant-Thru: None

Repeatability <20µm

Left Hand		Right Hand		Dimensions & Features						
Item No.	Description	Item No.	Description	h	d	l_1	l_2	f	D_{min}	Inserts
7005-045209	A08F SCFCL 06	7005-045213	A08F SCFCR 06	7.6	8	80	17	5	11	CC 0602
7005-045211	A10H SCFCL 06	7005-045214	A10H SCFCR 06	9.5	10	100	19	7	13	CC 0602
7005-045212	A12K SCFCL 06	7005-045215	A12K SCFCR 06	11.5	12	125	22	9	16	CC 0602



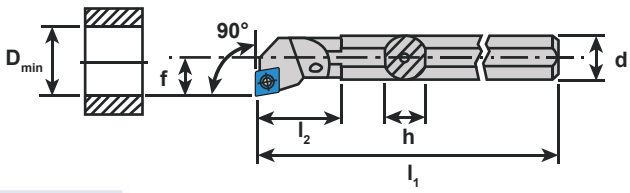




ISO Round Shank Holder SCLC

Type: 95°
Coolant-Thru: None

Repeatability <20µm

Left Hand		Right Hand		Dimensions & Features						
Item No.	Description	Item No.	Description	h	d	l_1	l_2	f	D_{min}	Inserts
7005-045216	A08F SCLCL 06	7005-045217	A08F SCLCR 06	7.6	8	80	17	5	11	CC 0602
7005-045218	A10H SCLCL 06	7005-045219	A10H SCLCR 06	9.5	10	100	19	7	13	CC 0602
7005-045220	A12K SCLCL 06	7005-045221	A12K SCLCR 06	11.5	12	125	22	9	16	CC 0602
7005-045222	A16M SCLCL 09	7005-045223	A16M SCLCR 09	15	16	150	29	11	20	CC 09T3
7005-045224	A20Q SCLCL 09	7005-045225	A20Q SCLCR 09	18.5	20	180	32	13	25	CC 09T3




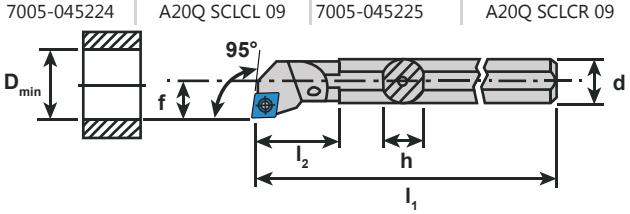


Coatings vs Material Type


Carbide												Cermet		Diamond			Materials
UHM 10	UHM 10 HX	UHM 10 TX+	UHM 10 MZ	UHM 20 HPX	UHM 20 TX+	UHM 20 MZ	UHM 30	UHM 30 HX	UHM 30 TX+	UHM 30 MZ	UHM 30 SX	UCM 10	UCM 10 HX	UCVD 08	UPCD 15	UPCD 20	
-	-	■	■	■	■	■	□	□	■	■	□	■	■	-	-	-	**Steel**
-	■	■	-	■	■	□	□	■	■	■	■	□	■	-	-	-	Stainless Steel
□	■	■	-	□	■	-	□	■	■	-	-	-	-	-	-	-	Titanium & Ti-Alloys
■	□	-	-	-	-	-	□	□	-	-	□	-	-	■	■	■	Non-Ferrous Metals
-	-	■	-	-	-	-	-	-	-	-	-	-	-	-	-	-	Mard Materials

Material Class								
I	II	III	IV	V	VI	VII	VIII	IX
Unalloyed Steel	Low-Alloy Steel	High-Alloy Steel	Titanium	Stainless Steel (HB<220)	Stainless Steel (HB≥220)	Aluminum	Brass	Synthetics / Composits



DC...07 inserts: d =.250"
DC...11 inserts: d =.375"





DCGT Carbide FN A3


Cut: Neutral


Chip Breaker: A3, Polished Rake, Sharp Cutting Edge

Repeatability <20µm

Dimensions & Features							
Item No.	Description	Edge	l	l_1	Nose Radius	Holder	Coating
7005-123090	DCGT 0702006 FN A3 UHM10 HX	Sharp	7.75	4.1	.06mm/.0023in	SD...07	UHM 10 HX
Call For Details	DCGT 0702006 FN A3 UHM10 TX+	Sharp	7.75	4.1	.06mm/.0023in	SD...07	UHM 20 TX+
Call For Details	DCGT 0702006 FN A3 UHM20 HPX	Sharp	7.75	4.1	.06mm/.0023in	SD...07	UHM 20 HPX
Call For Details	DCGT 0702006 FN A3 UHM20 TX+	Sharp	7.75	4.1	.06mm/.0023in	SD...07	UHM 10 TX+
7005-123092	DCGT 0702015 FN A3 UHM10 HX	Sharp	7.75	4.1	.15mm/.0059in	SD...07	UHM 10 HX
Call For Details	DCGT 0702015 FN A3 UHM10 TX+	Sharp	7.75	4.1	.15mm/.0059in	SD...07	UHM 20 TX+
Call For Details	DCGT 0702015 FN A3 UHM20 HPX	Sharp	7.75	4.1	.15mm/.0059in	SD...07	UHM 20 HPX
Call For Details	DCGT 0702015 FN A3 UHM20 TX+	Sharp	7.75	4.1	.15mm/.0059in	SD...07	UHM 10 TX+
7005-137043	DCGT 0702035 FN A3 UHM10 HX	Sharp	7.75	4.1	.35mm/.0137in	SD...07	UHM 10 HX
Call For Details	DCGT 0702035 FN A3 UHM10 TX+	Sharp	7.75	4.1	.35mm/.0137in	SD...07	UHM 20 TX+
7005-116985	DCGT 0702035 FN A3 UHM20 HPX	Sharp	7.75	4.1	.35mm/.0137in	SD...07	UHM 20 HPX
Call For Details	DCGT 0702035 FN A3 UHM20 TX+	Sharp	7.75	4.1	.35mm/.0137in	SD...07	UHM 10 TX+
7005-123094	DCGT 11T3008 FN A3 UHM10 HX	Sharp	11.6	7.2	.08mm/.0031in	SD...11	UHM 10 HX
Call For Details	DCGT 11T3008 FN A3 UHM10 TX+	Sharp	11.6	7.2	.08mm/.0031in	SD...11	UHM 20 TX+
Call For Details	DCGT 11T3008 FN A3 UHM20 HPX	Sharp	11.6	7.2	.08mm/.0031in	SD...11	UHM 20 HPX
Call For Details	DCGT 11T3008 FN A3 UHM20 TX+	Sharp	11.6	7.2	.08mm/.0031in	SD...11	UHM 10 TX+
7005-123096	DCGT 11T3015 FN A3 UHM10 HX	Sharp	11.6	7.2	.15mm/.0059in	SD...11	UHM 10 HX
Call For Details	DCGT 11T3015 FN A3 UHM10 TX+	Sharp	11.6	7.2	.15mm/.0059in	SD...11	UHM 20 TX+
Call For Details	DCGT 11T3015 FN A3 UHM20 HPX	Sharp	11.6	7.2	.15mm/.0059in	SD...11	UHM 20 HPX
Call For Details	DCGT 11T3015 FN A3 UHM20 TX+	Sharp	11.6	7.2	.15mm/.0059in	SD...11	UHM 10 TX+
7005-123947	DCGT 11T3035 FN A3 UHM10 HX	Sharp	11.6	7.2	.35mm/.0137in	SD...11	UHM 10 HX
Call For Details	DCGT 11T3035 FN A3 UHM10 TX+	Sharp	11.6	7.2	.35mm/.0137in	SD...11	UHM 20 TX+
Call For Details	DCGT 11T3035 FN A3 UHM20 HPX	Sharp	11.6	7.2	.35mm/.0137in	SD...11	UHM 20 HPX
Call For Details	DCGT 11T3035 FN A3 UHM20 TX+	Sharp	11.6	7.2	.35mm/.0137in	SD...11	UHM 10 TX+

Application	Material Class I	II	III	IV	V	VI	VII	VIII	IX
Roughing	-	-	-	-	-	-	-	-	-
Finishing	□	□	□	□	□	□	■	-	■
Micro Finishing	■	■	■	■	■	■	■	-	■

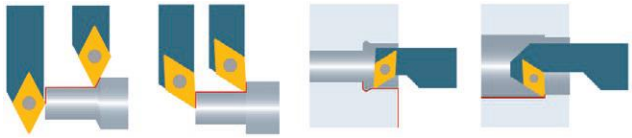




DCGT Carbide EN A3

Cut: Neutral


Chip Breaker: A3, Polished Rake, Round Cutting Edge




Repeatability <20µm

Item No.	Description	Dimensions & Features					
		Edge	l	l_1	Nose Radius	Holder	Coating
Call For Details	DCGT 0702006 EN A3 UHM20 HPX	Round	7.75	4.1	.06mm/.0023in	SD...07	UHM 20 HPX
Call For Details	DCGT 0702006 EN A3 UHM20 TX+	Round	7.75	4.1	.06mm/.0023in	SD...07	UHM 10 TX+
Call For Details	DCGT 0702015 EN A3 UHM20 HPX	Round	7.75	4.1	.15mm/.0059in	SD...07	UHM 20 HPX
Call For Details	DCGT 0702015 EN A3 UHM20 TX+	Round	7.75	4.1	.15mm/.0059in	SD...07	UHM 10 TX+
Call For Details	DCGT 0702035 EN A3 UHM20 HPX	Round	7.75	4.1	.35mm/.0137in	SD...07	UHM 20 HPX
Call For Details	DCGT 0702035 EN A3 UHM20 TX+	Round	7.75	4.1	.35mm/.0137in	SD...07	UHM 10 TX+
Call For Details	DCGT 11T3008 EN A3 UHM20 HPX	Round	11.6	7.2	.08mm/.0031in	SD...11	UHM 20 HPX
Call For Details	DCGT 11T3008 EN A3 UHM20 TX+	Round	11.6	7.2	.08mm/.0031in	SD...11	UHM 10 TX+
Call For Details	DCGT 11T3015 EN A3 UHM20 HPX	Round	11.6	7.2	.15mm/.0059in	SD...11	UHM 20 HPX
Call For Details	DCGT 11T3015 EN A3 UHM20 TX+	Round	11.6	7.2	.15mm/.0059in	SD...11	UHM 10 TX+
Call For Details	DCGT 11T3035 EN A3 UHM20 HPX	Round	11.6	7.2	.35mm/.0137in	SD...11	UHM 20 HPX
Call For Details	DCGT 11T3035 EN A3 UHM20 TX+	Round	11.6	7.2	.35mm/.0137in	SD...11	UHM 10 TX+

Application	Material Class								
	I	II	III	IV	V	VI	VII	VIII	IX
Roughing	-	-	-	-	-	-	-	-	-
Finishing	□	□	□	□	□	□	■	-	■
Micro Finishing	■	■	■	■	■	■	■	-	■

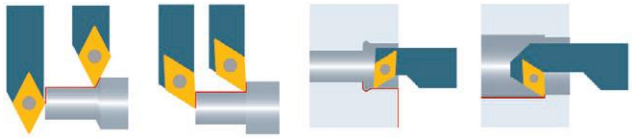




DCGT Carbide PA3

Cut: Neutral


Chip Breaker: PA3, Polished Rake, Sharp Cutting Edge



Repeatability <20µm

Item No.	Description	Dimensions & Features					
		Edge	l	l_1	Nose Radius	Holder	Coating
7005-123606	DCGT 070204 FN PA3 UHM10 HX	Sharp	7.75	4	0.4mm/.0157in	SD...07	UHM 10 HX
Call For Details	DCGT 070204 FN PA3 UHM10 TX+	Sharp	7.75	4	0.4mm/.0157in	SD...07	UHM 10 TX+
7005-123632	DCGT 11T304 FN PA3 UHM10 HX	Sharp	11.6	6.2	0.4mm/.0157in	SD...11	UHM 10 HX
Call For Details	DCGT 11T304 FN PA3 UHM10 TX+	Sharp	11.6	6.2	0.4mm/.0157in	SD...11	UHM 10 TX+
7005-013474	DCGT 11T308 FN PA3 UHM10 HX	Sharp	11.6	6.2	0.8mm/.0314in	SD...11	UHM 10 HX
Call For Details	DCGT 11T308 FN PA3 UHM10 TX+	Sharp	11.6	6.2	0.8mm/.0314in	SD...11	UHM 10 TX+


Application	Material Class								
	I	II	III	IV	V	VI	VII	VIII	IX
Roughing	-	-	-	-	-	-	□	-	□
Finishing	□	□	□	□	□	□	■	-	■
Micro Finishing	■	■	■	■	■	■	■	-	■

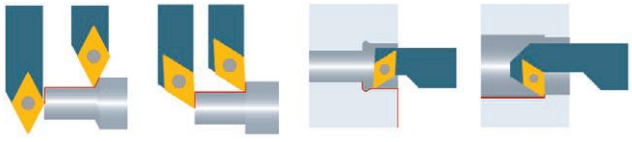


Coatings vs Material Type

Carbide												Cermet		Diamond			Materials
-	-	■	■	■	■	■	□	□	■	■	□	■	■	-	-	-	**Steel**
-	■	■	-	■	■	□	□	■	■	■	■	□	■	-	-	-	Stainless Steel
□	■	■	-	□	■	-	□	■	■	-	-	-	-	-	-	-	Titanium & Ti-Alloys
■	□	-	-	-	-	-	□	□	-	-	□	-	-	■	■	■	Non-Ferrous Metals
-	-	■	-	-	-	-	-	-	-	-	-	-	-	-	-	-	Mard Materials
UHM 10	UHM 10 HX	UHM 10 TX+	UHM 10 MZ	UHM 20 HPX	UHM 20 TX+	UHM 20 MZ	UHM 30	UHM 30 HX	UHM 30 TX+	UHM 30 MZ	UHM 30 SX	UCM 10	UCM 10 HX	UCVD 08	UPCD 15	UPCD 20	

Material Class								
I	II	III	IV	V	VI	VII	VIII	IX
Unalloyed Steel	Low-Alloy Steel	High-Alloy Steel	Titanium	Stainless Steel (HB<220)	Stainless Steel (HB≥220)	Aluminum	Brass	Synthetics / Composits




DC...07 inserts: d =.250"
DC...11 inserts: d =.375"



DCGT Carbide PA5

Cut: Neutral


Chip Breaker: PA5, Polished Rake, Sharp Cutting Edge



Repeatability <20µm

Dimensions & Features							
Item No.	Description	Edge	l	l_1	Nose Radius	Holder	Coating
7005-123450	DCGT 070202 FN PA5 UHM10 HX	Sharp	7.75	4.1	.2mm/.0078in	SD...07	UHM 10 HX
Call For Details	DCGT 070202 FN PA5 UHM10 TX+	Sharp	7.75	4.1	.2mm/.0078in	SD...07	UHM 10 TX+
7005-123452	DCGT 070204 FN PA5 UHM10 HX	Sharp	7.75	4.1	.4mm/.0157in	SD...07	UHM 10 HX
Call For Details	DCGT 070204 FN PA5 UHM10 TX+	Sharp	7.75	4.1	.4mm/.0157in	SD...07	UHM 10 TX+
7005-125738	DCGT 11T302 FN PA5 UHM10 HX	Sharp	11.6	7.2	.2mm/.0078in	SD...11	UHM 10 HX
Call For Details	DCGT 11T302 FN PA5 UHM10 TX+	Sharp	11.6	7.2	.2mm/.0078in	SD...11	UHM 10 TX+
7005-123453	DCGT 11T304 FN PA5 UHM10 HX	Sharp	11.6	7.2	.4mm/.0157in	SD...11	UHM 10 HX
Call For Details	DCGT 11T304 FN PA5 UHM10 TX+	Sharp	11.6	7.2	.4mm/.0157in	SD...11	UHM 10 TX+
7005-123769	DCGT 11T308 FN PA5 UHM10 HX	Sharp	11.6	7.2	.8mm/.0314in	SD...11	UHM 10 HX
Call For Details	DCGT 11T308 FN PA5 UHM10 TX+	Sharp	11.6	7.2	.8mm/.0314in	SD...11	UHM 10 TX+

Application	Material Class								
	I	II	III	IV	V	VI	VII	VIII	IX
Roughing	-	-	-	-	-	-	□	-	□
Finishing	■	■	■	□	■	■	■	-	■
Micro Finishing	■	■	■	□	■	■	■	-	■






DCGT Carbide TOP5

Cut: Neutral


Chip Breaker: TOP5, Polished Rake, Sharp Cutting Edge




Repeatability <20µm

Dimensions & Features								
Item No.	Description	Hand	Edge	l	l_1	Nose Radius	Holder	Coating
7005-126913	DCGT 11T304 FL TOP5 UHM10 HX	Left	Sharp	11.6	7.2	.4mm/.0157in	SD...11	UHM 10 HX
Call For Details	DCGT 11T304 FL TOP5 UHM10 TX+	Left	Sharp	11.6	7.2	.4mm/.0157in	SD...11	UHM 10 TX+
7005-126917	DCGT 11T308 FL TOP5 UHM10 HX	Left	Sharp	11.6	7.2	.8mm/.0314in	SD...11	UHM 10 HX
Call For Details	DCGT 11T308 FL TOP5 UHM10 TX+	Left	Sharp	11.6	7.2	.8mm/.0314in	SD...11	UHM 10 TX+
7005-126904	DCGT 11T304 FR TOP5 UHM10 HX	Right	Sharp	11.6	7.2	.4mm/.0157in	SD...11	UHM 10 HX
Call For Details	DCGT 11T304 FR TOP5 UHM10 TX+	Right	Sharp	11.6	7.2	.4mm/.0157in	SD...11	UHM 10 TX+
7005-126905	DCGT 11T308 FR TOP5 UHM10 HX	Right	Sharp	11.6	7.2	.8mm/.0314in	SD...11	UHM 10 HX
Call For Details	DCGT 11T308 FR TOP5 UHM10 TX+	Right	Sharp	11.6	7.2	.8mm/.0314in	SD...11	UHM 10 TX+
7005-126924	DCGT 11T304 FN TOP5 UHM10 HX	Neutral	Sharp	11.6	7.2	.4mm/.0157in	SD...11	UHM 10 HX
Call For Details	DCGT 11T304 FN TOP5 UHM10 TX+	Neutral	Sharp	11.6	7.2	.4mm/.0157in	SD...11	UHM 10 TX+
7005-126927	DCGT 11T308 FN TOP5 UHM10 HX	Neutral	Sharp	11.6	7.2	.8mm/.0314in	SD...11	UHM 10 HX
Call For Details	DCGT 11T308 FN TOP5 UHM10 TX+	Neutral	Sharp	11.6	7.2	.8mm/.0314in	SD...11	UHM 10 TX+

Material Class									
Application	I	II	III	IV	V	VI	VII	VIII	IX
Roughing	□	□	□	□	□	□	□	-	□
Finishing	■	■	■	□	■	■	■	-	■
Micro Finishing	□	□	□	□	□	□	□	-	□






DCGT Carbide PA7

Cut: Neutral


Chip Breaker: PA7, Sharp Cutting Edge



Repeatability <20µm

Dimensions & Features							
Item No.	Description	Edge	l	l_1	Nose Radius	Holder	Coating
7005-114381	DCGT 0702005 FN PA7 UHM10 HX	Sharp	7.75	4	.05mm/.0019in	SD...07	UHM 10 HX
Call For Details	DCGT 0702005 FN PA7 UHM10 TX+	Sharp	7.75	4	.05mm/.0019in	SD...07	UHM 10 TX+
7005-113032	DCGT 070201 FN PA7 UHM10 HX	Sharp	7.75	4	.1mm/.0039in	SD...07	UHM 10 HX
Call For Details	DCGT 070201 FN PA7 UHM10 TX+	Sharp	7.75	4	.1mm/.0039in	SD...07	UHM 10 TX+
7005-123451	DCGT 070202 FN PA7 UHM10 HX	Sharp	7.75	4	.2mm/.0078in	SD...07	UHM 10 HX
Call For Details	DCGT 070202 FN PA7 UHM10 TX+	Sharp	7.75	4	.2mm/.0078in	SD...07	UHM 10 TX+
7005-012952	DCGT 070204 FN PA7 UHM10 HX	Sharp	7.75	4	.4mm/.0157in	SD...07	UHM 10 HX
Call For Details	DCGT 070204 FN PA7 UHM10 TX+	Sharp	7.75	4	.4mm/.0157in	SD...07	UHM 10 TX+
7005-114383	DCGT 11T3005 FN PA7 UHM10 HX	Sharp	11.6	7.2	.05mm/.0019in	SD...11	UHM 10 HX
Call For Details	DCGT 11T3005 FN PA7 UHM10 TX+	Sharp	11.6	7.2	.05mm/.0019in	SD...11	UHM 10 TX+
7005-114385	DCGT 11T301 FN PA7 UHM10 HX	Sharp	11.6	7.2	.1mm/.0039in	SD...11	UHM 10 HX
Call For Details	DCGT 11T301 FN PA7 UHM10 TX+	Sharp	11.6	7.2	.1mm/.0039in	SD...11	UHM 10 TX+
7005-013265	DCGT 11T302 FN PA7 UHM10 HX	Sharp	11.6	7.2	.2mm/.0078in	SD...11	UHM 10 HX
Call For Details	DCGT 11T302 FN PA7 UHM10 TX+	Sharp	11.6	7.2	.2mm/.0078in	SD...11	UHM 10 TX+
7005-123454	DCGT 11T304 FN PA7 UHM10 HX	Sharp	11.6	7.2	.4mm/.0157in	SD...11	UHM 10 HX
Call For Details	DCGT 11T304 FN PA7 UHM10 TX+	Sharp	11.6	7.2	.4mm/.0157in	SD...11	UHM 10 TX+
7005-123455	DCGT 11T308 FN PA7 UHM10 HX	Sharp	11.6	7.2	.8mm/.0314in	SD...11	UHM 10 HX
Call For Details	DCGT 11T308 FN PA7 UHM10 TX+	Sharp	11.6	7.2	.8mm/.0314in	SD...11	UHM 10 TX+


Material Class									
Application	I	II	III	IV	V	VI	VII	VIII	IX
Roughing	-	-	-	-	-	-	□	-	□
Finishing	□	□	□	□	□	□	■	-	■
Micro Finishing	■	■	■	□	■	■	■	-	■

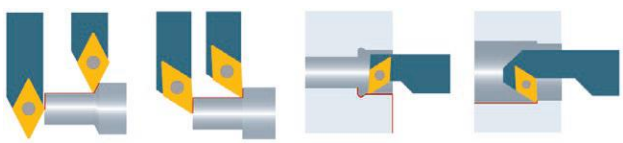


Coatings vs Material Type

Carbide												Cermet		Diamond			Materials
UHM 10	UHM 10 HX	UHM 10 TX+	UHM 10 MZ	UHM 20 HPX	UHM 20 TX+	UHM 20 MZ	UHM 30	UHM 30 HX	UHM 30 TX+	UHM 30 MZ	UHM 30 SX	UCM 10	UCM 10 HX	UCVD 08	UPCD 15	UPCD 20	
-	-	■	■	■	■	■	□	□	■	■	□	■	■	-	-	-	**Steel**
-	■	■	-	■	■	□	□	■	■	■	■	□	■	-	-	-	Stainless Steel
□	■	■	-	□	■	-	□	■	■	-	-	-	-	-	-	-	Titanium & Ti-Alloys
■	□	-	-	-	-	-	□	□	-	-	□	-	-	■	■	■	Non-Ferrous Metals
-	-	■	-	-	-	-	-	-	-	-	-	-	-	-	-	-	Mard Materials

Material Class								
I	II	III	IV	V	VI	VII	VIII	IX
Unalloyed Steel	Low-Alloy Steel	High-Alloy Steel	Titanium	Stainless Steel (HB<220)	Stainless Steel (HB≥220)	Aluminum	Brass	Synthetics / Composits



DC...07 inserts: d =.250"
DC...11 inserts: d =.375"



Repeatability <50µm




DCXT Carbide PA9

Cut: Neutral

Chip Breaker: PA9, Round Cutting Edge

Dimensions & Features							
Item No.	Description	Edge	l	l_1	Nose Radius	Holder	Coating
7005-138588	DCXT 070204 EN PA9 UHM10 HX	Round	7.75	4	.4mm/.0157in	SD...11	UHM 10 HX
Call For Details	DCXT 070204 EN PA9 UHM10 TX+	Round	7.75	4	.4mm/.0157in	SD...11	UHM 10 TX+
7005-138590	DCXT 11T304 EN PA9 UHM10 HX	Round	11.6	7.2	.4mm/.0157in	SD...11	UHM 10 HX
Call For Details	DCXT 11T304 EN PA9 UHM10 TX+	Round	11.6	7.2	.4mm/.0157in	SD...11	UHM 10 TX+
7005-138592	DCXT 11T308 EN PA9 UHM10 HX	Round	11.6	7.2	.8mm/.0314in	SD...16	UHM 10 HX
Call For Details	DCXT 11T308 EN PA9 UHM10 TX+	Round	11.6	7.2	.8mm/.0314in	SD...16	UHM 10 TX+

	Material Class								
Application	I	II	III	IV	V	VI	VII	VIII	IX
Roughing	□	□	□	□	□	□	■	-	-
Finishing	■	■	■	■	■	■	□	-	-
Micro Finishing	□	□	□	-	□	□	-	-	-

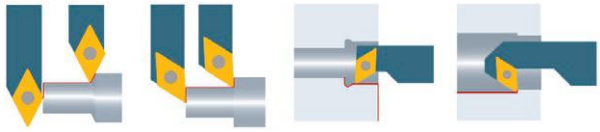




DCGT Carbide/Cermet FN PF

Cut: Neutral


Chip Breaker: PF, Sharp Cutting Edge



Repeatability <20µm

Dimensions & Features							
Item No.	Description	Edge	l	l_1	Nose Radius	Holder	Coating
Call For Details	DCGT 070201 FN PF UHM20 HPX	Sharp	7.75	2.8	.1mm/.0039in	SD...07	UHM 20 HPX
Call For Details	DCGT 070201 FN PF UHM20 TX+	Sharp	7.75	2.8	.1mm/.0039in	SD...07	UHM 20 TX+
Call For Details	DCGT 070202 FN PF UHM20 HPX	Sharp	7.75	2.8	.2mm/.0078in	SD...07	UHM 20 HPX
Call For Details	DCGT 070202 FN PF UHM20 TX+	Sharp	7.75	2.8	.2mm/.0078in	SD...07	UHM 20 TX+
Call For Details	DCGT 11T302 FN PF UHM20 HPX	Sharp	11.6	3.9	.2mm/.0078in	SD...11	UHM 20 HPX
Call For Details	DCGT 11T302 FN PF UHM20 TX+	Sharp	11.6	3.9	.2mm/.0078in	SD...11	UHM 20 TX+
Call For Details	DCGT 11T304 FN PF UHM20 HPX	Sharp	11.6	3.9	.4mm/.0157in	SD...11	UHM 20 HPX
Call For Details	DCGT 11T304 FN PF UHM20 TX+	Sharp	11.6	3.9	.4mm/.0157in	SD...11	UHM 20 TX+

	Material Class								
Application	I	II	III	IV	V	VI	VII	VIII	IX
Roughing	□	□	□	-	□	□	-	-	-
Finishing	■	■	■	-	■	■	-	-	-
Micro Finishing	■	■	■	-	■	■	-	-	-

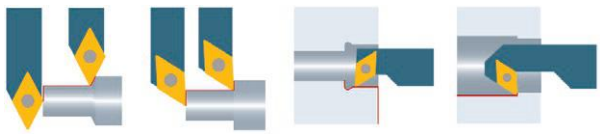




DCGT Carbide/Cermet EN PF

Cut: Neutral


Chip Breaker: PF, Round Cutting Edge



Repeatability <20µm

Dimensions & Features							
Item No.	Description	Edge	l	l_1	Nose Radius	Holder	Coating
7005-138962	DCGT 070201 EN PF UCM10 HX	Round	7.75	2.8	.1mm/.0039in	SD...07	UCM 10 HX
7005-123353	DCGT 070202 EN PF UHM20 MZ	Round	7.75	2.8	.2mm/.0078in	SD...07	UHM 20 MZ
7005-123354	DCGT 070202 EN PF UHM30 MZ	Round	7.75	2.8	.2mm/.0078in	SD...07	UHM 30 MZ
7005-123839	DCGT 070202 EN PF UCM10 HX	Round	7.75	2.8	.2mm/.0078in	SD...07	UCM 10 HX
Call For Details	DCGT 070202 EN PF UCM10 MZ	Round	7.75	2.8	.2mm/.0078in	SD...07	UCM 10 MZ
7005-123604	DCGT 070204 EN PF UCM10 HX	Round	7.75	2.8	.4mm/.0157in	SD...07	UCM 10 HX
Call For Details	DCGT 070204 EN PF UCM10 MZ	Round	7.75	2.8	.4mm/.0157in	SD...07	UCM 10 MZ
7005-013460	DCGT 11T302 EN PF UCM10 HX	Round	11.6	3.9	.2mm/.0078in	SD...11	UCM 10 HX
7005-127009	DCGT 11T302 EN PF UCM10 MZ	Round	11.6	3.9	.2mm/.0078in	SD...11	UCM 10 MZ
7005-013274	DCGT 11T304 EN PF UCM10 HX	Round	11.6	3.9	.4mm/.0157in	SD...11	UCM 10 HX
Call For Details	DCGT 11T304 EN PF UCM10 MZ	Round	11.6	3.9	.4mm/.0157in	SD...11	UCM 10 MZ
7005-123635	DCGT 11T308 EN PF UCM10 HX	Round	11.6	3.9	.8mm/.0314in	SD...11	UCM 10 HX
Call For Details	DCGT 11T308 EN PF UCM10 MZ	Round	11.6	3.9	.8mm/.0314in	SD...11	UCM 10 MZ

	Material Class								
Application	I	II	III	IV	V	VI	VII	VIII	IX
Roughing	□	□	□	-	□	□	-	-	-
Finishing	■	■	■	-	■	■	-	-	-
Micro Finishing	■	■	■	-	■	■	-	-	-

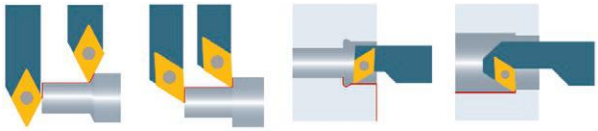




DCMT Carbide PF

Cut: Neutral


Chip Breaker: PF, Round Cutting Edge



Repeatability <50µm

Dimensions & Features							
Item No.	Description	Edge	l	l_1	Nose Radius	Holder	Coating
Call For Details	DCMT 070204 EN -PF UHM10 HX	Round	7.75	2.9	.4mm/.0157in	SD...07	UHM 10 HX
7005-123361	DCMT 070204 EN -PF UHM20 MZ	Round	7.75	2.9	.4mm/.0157in	SD...07	UHM 20 MZ
7005-123362	DCMT 070204 EN -PF UHM30 MZ	Round	7.75	2.9	.4mm/.0157in	SD...07	UHM 30 MZ
Call For Details	DCMT 11T304 EN -PF UHM10 HX	Round	11.6	4.4	.4mm/.0157in	SD...11	UHM 10 HX
7005-123366	DCMT 11T304 EN -PF UHM20 MZ	Round	11.6	4.4	.4mm/.0157in	SD...11	UHM 20 MZ
7005-123367	DCMT 11T304 EN -PF UHM30 MZ	Round	11.6	4.4	.4mm/.0157in	SD...11	UHM 30 MZ
Call For Details	DCMT 11T308 EN -PF UHM10 HX	Round	11.6	4.4	.8mm/.0314in	SD...11	UHM 10 HX
7005-123370	DCMT 11T308 EN -PF UHM20 MZ	Round	11.6	4.4	.8mm/.0314in	SD...11	UHM 20 MZ
7005-123371	DCMT 11T308 EN -PF UHM30 MZ	Round	11.6	4.4	.8mm/.0314in	SD...11	UHM 30 MZ


	Material Class								
Application	I	II	III	IV	V	VI	VII	VIII	IX
Roughing	■	■	■	-	■	■	-	-	-
Finishing	□	□	□	-	□	□	-	-	-
Micro Finishing	-	-	-	-	-	-	-	-	-

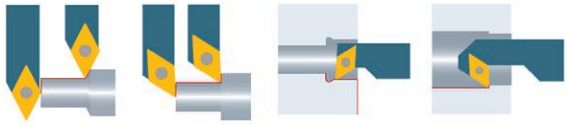

Coatings vs Material Type

Carbide												Cermet		Diamond			Materials
UHM 10	UHM 10 HX	UHM 10 TX+	UHM 10 MZ	UHM 20 HPX	UHM 20 TX+	UHM 20 MZ	UHM 30	UHM 30 HX	UHM 30 TX+	UHM 30 MZ	UHM 30 SX	UCM 10	UCM 10 HX	UCVD 08	UPCD 15	UPCD 20	
-	-	■	■	■	■	■	□	□	■	■	□	■	■	-	-	-	**Steel**
-	■	■	-	■	■	□	□	■	■	■	■	□	■	-	-	-	Stainless Steel
□	■	■	-	□	■	-	□	■	■	-	-	-	-	-	-	-	Titanium & Ti-Alloys
■	□	-	-	-	-	-	□	□	-	-	□	-	-	■	■	■	Non-Ferrous Metals
-	-	■	-	-	-	-	-	-	-	-	-	-	-	-	-	-	Mard Materials

Material Class								
I	II	III	IV	V	VI	VII	VIII	IX
Unalloyed Steel	Low-Alloy Steel	High-Alloy Steel	Titanium	Stainless Steel (HB<220)	Stainless Steel (HB≥220)	Aluminum	Brass	Synthetics / Composits




DC...07 inserts: d =.250"
DC...11 inserts: d =.375"



DCET Carbide PF05


Cut: Neutral

Chip Breaker: PF05, Polished Rake, Sharp Cutting Edge



Repeatability <20µm

Dimensions & Features							
Item No.	Description	Edge	l	l_1	Nose Radius	Holder	Coating
Call For Details	DCET 0702005 FN -PF05 UHM10 HX	Sharp	7.75	2	.05mm/.0019in	SD...07	UHM 10 HX
Call For Details	DCET 070201 FN -PF05 UHM10 HX	Sharp	7.75	2	.1mm/.0039in	SD...07	UHM 10 HX
Call For Details	DCET 0702015 FN -PF05 UHM10 HX	Sharp	7.75	2	.15mm/.0059in	SD...07	UHM 10 HX
Call For Details	DCET 070202 FN -PF05 UHM10 HX	Sharp	7.75	2	.2mm/.0078in	SD...07	UHM 10 HX
Call For Details	DCET 11T3005 FN -PF05 UHM10 HX	Sharp	11.6	3	.05mm/.0019in	SD...11	UHM 10 HX
Call For Details	DCET 11T301 FN -PF05 UHM10 HX	Sharp	11.6	3	.1mm/.0039in	SD...11	UHM 10 HX
Call For Details	DCET 11T315 FN -PF05 UHM10 HX	Sharp	11.6	3	.15mm/.0059in	SD...11	UHM 10 HX
Call For Details	DCET 11T302 FN -PF05 UHM10 HX	Sharp	11.6	3	.2mm/.0078in	SD...11	UHM 10 HX
Call For Details	DCET 11T304 FN -PF05 UHM10 HX	Sharp	11.6	3	.4mm/.0157in	SD...11	UHM 10 HX

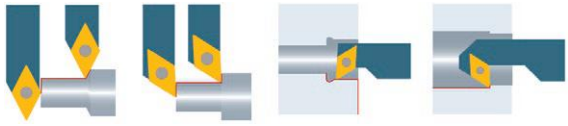




DCGT Carbide FN PF23

Cut: Neutral


Chip Breaker: PF23, Polished Rake, Sharp Cutting Edge



Repeatability <20µm

Dimensions & Features							
Item No.	Description	Edge	l	l_1	Nose Radius	Holder	Coating
Call For Details	DCGT 0702005 FN PF23 UHM20 HPX	Sharp	7.75	3.6	.05mm/.0019in	SD...07	UHM 20 HPX
Call For Details	DCGT 0702005 FN PF23 UHM20 TX+	Sharp	7.75	3.6	.05mm/.0019in	SD...07	UHM 20 TX+
7005-127747	DCGT 0702005 FN PF23 UHM30 HX	Sharp	7.75	3.6	.05mm/.0019in	SD...07	UHM 30 HX
Call For Details	DCGT 070201 FN PF23 UHM20 HPX	Sharp	7.75	3.6	.1mm/.0039in	SD...07	UHM 20 HPX
Call For Details	DCGT 070201 FN PF23 UHM20 TX+	Sharp	7.75	3.6	.1mm/.0039in	SD...07	UHM 20 TX+
7005-126998	DCGT 070201 FN PF23 UHM30 HX	Sharp	7.75	3.6	.1mm/.0039in	SD...07	UHM 30 HX
Call For Details	DCGT 070202 FN PF23 UHM20 HPX	Sharp	7.75	3.6	.2mm/.0078in	SD...07	UHM 20 HPX
Call For Details	DCGT 070202 FN PF23 UHM20 TX+	Sharp	7.75	3.6	.2mm/.0078in	SD...07	UHM 20 TX+
7005-127752	DCGT 070202 FN PF23 UHM30 HX	Sharp	7.75	3.6	.2mm/.0078in	SD...07	UHM 30 HX
Call For Details	DCGT 11T3005 FN PF23 UHM20 HPX	Sharp	11.6	5.2	.05mm/.0019in	SD...11	UHM 20 HPX
Call For Details	DCGT 11T3005 FN PF23 UHM20 TX+	Sharp	11.6	5.2	.05mm/.0019in	SD...11	UHM 20 TX+
7005-127755	DCGT 11T3005 FN PF23 UHM30 HX	Sharp	11.6	5.2	.05mm/.0019in	SD...11	UHM 30 HX
Call For Details	DCGT 11T301 FN PF23 UHM20 HPX	Sharp	11.6	5.2	.1mm/.0039in	SD...11	UHM 20 HPX
Call For Details	DCGT 11T301 FN PF23 UHM20 TX+	Sharp	11.6	5.2	.1mm/.0039in	SD...11	UHM 20 TX+
7005-127006	DCGT 11T301 FN PF23 UHM30 HX	Sharp	11.6	5.2	.1mm/.0039in	SD...11	UHM 30 HX
Call For Details	DCGT 11T302 FN PF23 UHM20 HPX	Sharp	11.6	5.2	.2mm/.0078in	SD...11	UHM 20 HPX
Call For Details	DCGT 11T302 FN PF23 UHM20 TX+	Sharp	11.6	5.2	.2mm/.0078in	SD...11	UHM 20 TX+
7005-127760	DCGT 11T302 FN PF23 UHM30 HX	Sharp	11.6	5.2	.2mm/.0078in	SD...11	UHM 30 HX

	Material Class								
Application	I	II	III	IV	V	VI	VII	VIII	IX
Roughing	-	-	-	-	-	-	-	-	-
Finishing	□	□	□	□	□	□	□	-	-
Micro Finishing	■	■	■	□	■	■	□	-	□

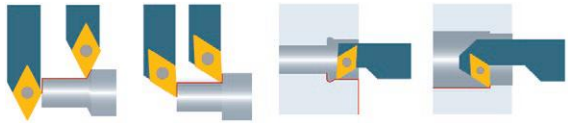




DCGT Carbide EN PF23

Cut: Neutral


Chip Breaker: PF23, Polished Rake, Round Cutting Edge



Repeatability <20µm

Dimensions & Features							
Item No.	Description	Edge	l	l_1	Nose Radius	Holder	Coating
Call For Details	DCGT 0702003 EN PF23 UHM30 HX	Round	7.75	3.6	.03mm/.0012in	SD...07	UHM 30 HX
Call For Details	DCGT 0702005 EN PF23 UHM20 HPX	Round	7.75	3.6	.05mm/.0019in	SD...07	UHM 20 HPX
Call For Details	DCGT 0702005 EN PF23 UHM20 TX+	Round	7.75	3.6	.05mm/.0019in	SD...07	UHM 20 TX+
Call For Details	DCGT 070201 EN PF23 UHM20 HPX	Round	7.75	3.6	.1mm/.0039in	SD...07	UHM 20 HPX
Call For Details	DCGT 070201 EN PF23 UHM20 TX+	Round	7.75	3.6	.1mm/.0039in	SD...07	UHM 20 TX+
Call For Details	DCGT 070202 EN PF23 UHM20 HPX	Round	7.75	3.6	.2mm/.0078in	SD...07	UHM 20 HPX
Call For Details	DCGT 070202 EN PF23 UHM20 TX+	Round	7.75	3.6	.2mm/.0078in	SD...07	UHM 20 TX+
Call For Details	DCGT 11T3005 EN PF23 UHM20 HPX	Round	11.6	5.2	.05mm/.0019in	SD...11	UHM 20 HPX
Call For Details	DCGT 11T3005 EN PF23 UHM20 TX+	Round	11.6	5.2	.05mm/.0019in	SD...11	UHM 20 TX+
Call For Details	DCGT 11T301 EN PF23 UHM20 HPX	Round	11.6	5.2	.1mm/.0039in	SD...11	UHM 20 HPX
Call For Details	DCGT 11T301 EN PF23 UHM20 TX+	Round	11.6	5.2	.1mm/.0039in	SD...11	UHM 20 TX+
Call For Details	DCGT 11T302 EN PF23 UHM20 HPX	Round	11.6	5.2	.2mm/.0078in	SD...11	UHM 20 HPX
Call For Details	DCGT 11T302 EN PF23 UHM20 TX+	Round	11.6	5.2	.2mm/.0078in	SD...11	UHM 20 TX+


	Material Class								
Application	I	II	III	IV	V	VI	VII	VIII	IX
Roughing	-	-	-	-	-	-	-	-	-
Finishing	□	□	□	□	□	□	□	-	-
Micro Finishing	■	■	■	□	■	■	□	-	□

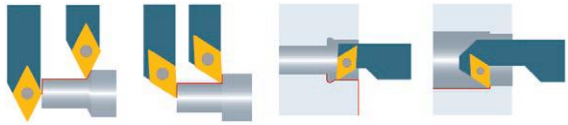


Coatings vs Material Type

Carbide												Cermet		Diamond			Materials
UHM 10	UHM 10 HX	UHM 10 TX+	UHM 10 MZ	UHM 20 HPX	UHM 20 TX+	UHM 20 MZ	UHM 30	UHM 30 HX	UHM 30 TX+	UHM 30 MZ	UHM 30 SX	UCM 10	UCM 10 HX	UCVD 08	UPCD 15	UPCD 20	
-	-	■	■	■	■	■	□	□	■	■	□	■	■	-	-	-	**Steel**
-	■	■	-	■	■	□	□	■	■	■	■	□	■	-	-	-	Stainless Steel
□	■	■	-	□	■	-	□	■	■	-	-	-	-	-	-	-	Titanium & Ti-Alloys
■	□	-	-	-	-	-	□	□	-	-	□	-	-	■	■	■	Non-Ferrous Metals
-	-	■	-	-	-	-	-	-	-	-	-	-	-	-	-	-	Mard Materials

Material Class								
I	II	III	IV	V	VI	VII	VIII	IX
Unalloyed Steel	Low-Alloy Steel	High-Alloy Steel	Titanium	Stainless Steel (HB<220)	Stainless Steel (HB≥220)	Aluminum	Brass	Synthetics / Composits



DC...07 inserts: d =.250"
DC...11 inserts: d =.375"





DCGT Carbide FN PF33


Cut: Neutral

Chip Breaker: PF33, Polished Rake, Sharp Cutting Edge

Repeatability <20µm

Dimensions & Features							
Item No.	Description	Edge	l	l_1	Nose Radius	Holder	Coating
Call For Details	DCGT 0702005 FN PF33 UHM20 HPX	Sharp	7.75	3.6	.05mm/.0019in	SD...07	UHM 20 HPX
Call For Details	DCGT 0702005 FN PF33 UHM20 TX+	Sharp	7.75	3.6	.05mm/.0019in	SD...07	UHM 20 TX+
7005-114398	DCGT 0702005 FN PF33 UHM30 HX	Sharp	7.75	3.6	.05mm/.0019in	SD...07	UHM 30 HX
Call For Details	DCGT 070201 FN PF33 UHM20 HPX	Sharp	7.75	3.6	.1mm/.0039in	SD...07	UHM 20 HPX
Call For Details	DCGT 070201 FN PF33 UHM20 TX+	Sharp	7.75	3.6	.1mm/.0039in	SD...07	UHM 20 TX+
7005-114400	DCGT 070201 FN PF33 UHM30 HX	Sharp	7.75	3.6	.1mm/.0039in	SD...07	UHM 30 HX
Call For Details	DCGT 070202 FN PF33 UHM20 HPX	Sharp	7.75	3.6	.2mm/.0078in	SD...07	UHM 20 HPX
Call For Details	DCGT 070202 FN PF33 UHM20 TX+	Sharp	7.75	3.6	.2mm/.0078in	SD...07	UHM 20 TX+
7005-114402	DCGT 070202 FN PF33 UHM30 HX	Sharp	7.75	3.6	.2mm/.0078in	SD...07	UHM 30 HX
Call For Details	DCGT 070204 FN PF33 UHM20 HPX	Sharp	7.75	3.6	.4mm/.0157in	SD...07	UHM 20 HPX
Call For Details	DCGT 070204 FN PF33 UHM20 TX+	Sharp	7.75	3.6	.4mm/.0157in	SD...07	UHM 20 TX+
7005-114404	DCGT 070204 FN PF33 UHM30 HX	Sharp	7.75	3.6	.4mm/.0157in	SD...07	UHM 30 HX
Call For Details	DCGT 11T3005 FN PF33 UHM20 HPX	Sharp	11.6	5.2	.05mm/.0019in	SD...11	UHM 20 HPX
Call For Details	DCGT 11T3005 FN PF33 UHM20 TX+	Sharp	11.6	5.2	.05mm/.0019in	SD...11	UHM 20 TX+
7005-114373	DCGT 11T3005 FN PF33 UHM30 HX	Sharp	11.6	5.2	.05mm/.0019in	SD...11	UHM 30 HX
Call For Details	DCGT 11T301 FN PF33 UHM20 HPX	Sharp	11.6	5.2	.1mm/.0039in	SD...11	UHM 20 HPX
Call For Details	DCGT 11T301 FN PF33 UHM20 TX+	Sharp	11.6	5.2	.1mm/.0039in	SD...11	UHM 20 TX+
7005-114407	DCGT 11T301 FN PF33 UHM30 HX	Sharp	11.6	5.2	.1mm/.0039in	SD...11	UHM 30 HX
Call For Details	DCGT 11T302 FN PF33 UHM20 HPX	Sharp	11.6	5.2	.2mm/.0078in	SD...11	UHM 20 HPX
Call For Details	DCGT 11T302 FN PF33 UHM20 TX+	Sharp	11.6	5.2	.2mm/.0078in	SD...11	UHM 20 TX+
7005-114409	DCGT 11T302 FN PF33 UHM30 HX	Sharp	11.6	5.2	.2mm/.0078in	SD...11	UHM 30 HX
Call For Details	DCGT 11T304 FN PF33 UHM20 HPX	Sharp	11.6	5.2	.4mm/.0157in	SD...11	UHM 20 HPX
Call For Details	DCGT 11T304 FN PF33 UHM20 TX+	Sharp	11.6	5.2	.4mm/.0157in	SD...11	UHM 20 TX+
7005-114411	DCGT 11T304 FN PF33 UHM30 HX	Sharp	11.6	5.2	.4mm/.0157in	SD...11	UHM 30 HX

Application	Material Class								
	I	II	III	IV	V	VI	VII	VIII	IX
Roughing	□	□	□	-	□	□	-	-	-
Finishing	■	■	■	-	■	■	-	-	-
Micro Finishing	■	■	■	-	■	■	-	-	-

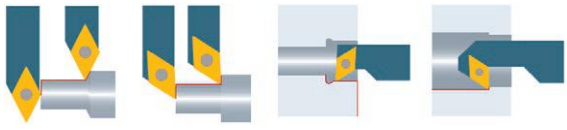




DCGT Carbide EN PF33

Cut: Neutral


Chip Breaker: PF33, Polished Rake, Round Cutting Edge



Repeatability <20µm

Dimensions & Features							
Item No.	Description	Edge	l	l_1	Nose Radius	Holder	Coating
Call For Details	DCGT 0702005 EN PF33 UHM20 HPX	Round	7.75	3.6	.05mm/.0019in	SD...07	UHM 20 HPX
Call For Details	DCGT 0702005 EN PF33 UHM20 TX+	Round	7.75	3.6	.05mm/.0019in	SD...07	UHM 20 TX+
Call For Details	DCGT 070201 EN PF33 UHM20 HPX	Round	7.75	3.6	.1mm/.0039in	SD...07	UHM 20 HPX
Call For Details	DCGT 070201 EN PF33 UHM20 TX+	Round	7.75	3.6	.1mm/.0039in	SD...07	UHM 20 TX+
Call For Details	DCGT 070202 EN PF33 UHM20 HPX	Round	7.75	3.6	.2mm/.0078in	SD...07	UHM 20 HPX
Call For Details	DCGT 070202 EN PF33 UHM20 TX+	Round	7.75	3.6	.2mm/.0078in	SD...07	UHM 20 TX+
Call For Details	DCGT 070204 EN PF33 UHM20 HPX	Round	7.75	3.6	.4mm/.0157in	SD...07	UHM 20 HPX
Call For Details	DCGT 070204 EN PF33 UHM20 TX+	Round	7.75	3.6	.4mm/.0157in	SD...07	UHM 20 TX+
Call For Details	DCGT 11T3005 EN PF33 UHM20 HPX	Round	11.6	5.2	.05mm/.0019in	SD...11	UHM 20 HPX
Call For Details	DCGT 11T3005 EN PF33 UHM20 TX+	Round	11.6	5.2	.05mm/.0019in	SD...11	UHM 20 TX+
Call For Details	DCGT 11T301 EN PF33 UHM20 HPX	Round	11.6	5.2	.1mm/.0039in	SD...11	UHM 20 HPX
Call For Details	DCGT 11T301 EN PF33 UHM20 TX+	Round	11.6	5.2	.1mm/.0039in	SD...11	UHM 20 TX+
Call For Details	DCGT 11T302 EN PF33 UHM20 HPX	Round	11.6	5.2	.2mm/.0078in	SD...11	UHM 20 HPX
Call For Details	DCGT 11T302 EN PF33 UHM20 TX+	Round	11.6	5.2	.2mm/.0078in	SD...11	UHM 20 TX+
Call For Details	DCGT 11T304 EN PF33 UHM20 HPX	Round	11.6	5.2	.4mm/.0157in	SD...11	UHM 20 HPX
Call For Details	DCGT 11T304 EN PF33 UHM20 TX+	Round	11.6	5.2	.4mm/.0157in	SD...11	UHM 20 TX+

Material Class									
Application	I	II	III	IV	V	VI	VII	VIII	IX
Roughing	□	□	□	-	□	□	-	-	-
Finishing	■	■	■	-	■	■	-	-	-
Micro Finishing	■	■	■	-	■	■	-	-	-

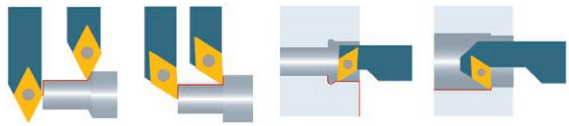




DCMT Carbide PF43

Cut: Neutral


Chip Breaker: PF43, Round Cutting Edge



Repeatability <50µm

Dimensions & Features							
Item No.	Description	Edge	l	l_1	Nose Radius	Holder	Coating
7005-114727	DCMT 070202 EN PF43 UHM20 MZ	Round	7.75	3.8	.2mm/.0078in	SD...07	UHM 20 MZ
7005-127209	DCMT 070202 EN PF43 UHM30 MZ	Round	7.75	3.8	.2mm/.0078in	SD...07	UHM 30 MZ
7005-127210	DCMT 070204 EN PF43 UHM30 MZ	Round	7.75	3.8	.4mm/.0157in	SD...07	UHM 30 MZ
7005-127211	DCMT 11T302 EN PF43 UHM30 MZ	Round	11.6	5.5	.2mm/.0078in	SD...11	UHM 30 MZ
7005-127212	DCMT 11T304 EN PF43 UHM30 MZ	Round	11.6	5.5	.4mm/.0157in	SD...11	UHM 30 MZ
7005-127213	DCMT 11T308 EN PF43 UHM30 MZ	Round	11.6	5.5	.8mm/.0314in	SD...11	UHM 30 MZ


Material Class									
Application	I	II	III	IV	V	VI	VII	VIII	IX
Roughing	■	■	■	-	■	■	-	-	-
Finishing	■	■	■	-	■	■	-	-	-
Micro Finishing	-	-	-	-	-	-	-	-	-

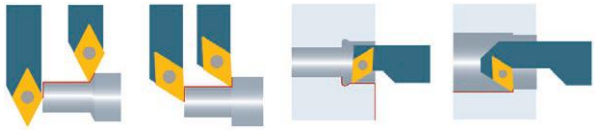


Coatings vs Material Type

Carbide												Cermet		Diamond			Materials
UHM 10	UHM 10 HX	UHM 10 TX+	UHM 10 MZ	UHM 20 HPX	UHM 20 TX+	UHM 20 MZ	UHM 30	UHM 30 HX	UHM 30 TX+	UHM 30 MZ	UHM 30 SX	UCM 10	UCM 10 HX	UCVD 08	UPCD 15	UPCD 20	
-	-	■	■	■	■	■	□	□	■	■	□	■	■	-	-	-	**Steel**
-	■	■	-	■	■	□	□	■	■	■	■	□	■	-	-	-	Stainless Steel
□	■	■	-	□	■	-	□	■	■	-	-	-	-	-	-	-	Titanium & Ti-Alloys
■	□	-	-	-	-	-	□	□	-	-	□	-	-	■	■	■	Non-Ferrous Metals
-	-	■	-	-	-	-	-	-	-	-	-	-	-	-	-	-	Mard Materials

Material Class								
I	II	III	IV	V	VI	VII	VIII	IX
Unalloyed Steel	Low-Alloy Steel	High-Alloy Steel	Titanium	Stainless Steel (HB<220)	Stainless Steel (HB≥220)	Aluminum	Brass	Synthetics / Composits




DC...07 inserts: d =.250"
DC...11 inserts: d =.375"



DCMT Carbide PM Roughing


Cut: Neutral
Chip Breaker: PM, Round Cutting Edge




Repeatability <50µm

Dimensions & Features							
Item No.	Description	Edge	l	l_1	Nose Radius	Holder	Coating
7005-113692	DCMT 070204 EN PM UHM10 MZ	Round	7.75	2.6	.4mm/.0157in	SD...07	UHM 10 MZ
7005-123363	DCMT 070204 EN PM UHM20 MZ	Round	7.75	2.6	.4mm/.0157in	SD...07	UHM 20 MZ
7005-123291	DCMT 070204 EN PM UHM30 MZ	Round	7.75	2.6	.4mm/.0157in	SD...07	UHM 30 MZ
7005-123365	DCMT 070208 EN PM UHM30 MZ	Round	7.75	2.6	.8mm/.0314in	SD...07	UHM 30 MZ
7005-113693	DCMT 11T304 EN PM UHM10 MZ	Round	11.6	4.1	.4mm/.0157in	SD...11	UHM 10 MZ
7005-123368	DCMT 11T304 EN PM UHM20 MZ	Round	11.6	4.1	.4mm/.0157in	SD...11	UHM 20 MZ
7005-123369	DCMT 11T304 EN PM UHM30 MZ	Round	11.6	4.1	.4mm/.0157in	SD...11	UHM 30 MZ
7005-113694	DCMT 11T308 EN PM UHM10 MZ	Round	11.6	4.1	.8mm/.0314in	SD...11	UHM 10 MZ
7005-123372	DCMT 11T308 EN PM UHM20 MZ	Round	11.6	4.1	.8mm/.0314in	SD...11	UHM 20 MZ
7005-123373	DCMT 11T308 EN PM UHM30 MZ	Round	11.6	4.1	.8mm/.0314in	SD...11	UHM 30 MZ


Application	Material Class								
	I	II	III	IV	V	VI	VII	VIII	IX
Roughing	■	■	■	-	■	■	-	-	-
Finishing	□	□	□	-	□	□	-	-	-
Micro Finishing	-	-	-	-	-	-	-	-	-

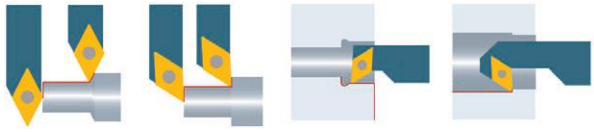



DCMT Cermet PMF


Cut: Neutral
Chip Breaker: PMF, Round Cutting Edge




Repeatability <50µm

Dimensions & Features							
Item No.	Description	Edge	l	l_1	Nose Radius	Holder	Coating
Call For Details	DCMT 070202 EN PMF UCM10 MZ	Round	7.75	2.6	.2mm/.0078in	SD...07	UCM 10 MZ
Call For Details	DCMT 070204 EN PMF UCM10 MZ	Round	7.75	2.6	.4mm/.0157in	SD...07	UCM 10 MZ
Call For Details	DCMT 11T304 EN PMF UCM10 MZ	Round	11.6	4.1	.4mm/.0157in	SD...11	UCM 10 MZ
Call For Details	DCMT 11T308 EN PMF UCM10 MZ	Round	11.6	4.1	.8mm/.0314in	SD...11	UCM 10 MZ

Application	Material Class								
	I	II	III	IV	V	VI	VII	VIII	IX
Roughing	■	■	■	-	■	■	-	-	-
Finishing	■	■	■	-	■	■	-	-	-
Micro Finishing	-	-	-	-	-	-	-	-	-






DCMT Carbide PM25

Cut: Neutral


Chip Breaker: PM25, Round Cutting Edge




Repeatability <50µm

Dimensions & Features							
Item No.	Description	Edge	l	l_1	Nose Radius	Holder	Coating
7005-112944	DCMT 070202 EN PM25 UHM20 HPX	Round	7.75	1.6	.2mm/.0078in	SD...07	UHM 20 HPX
7005-112945	DCMT 070204 EN PM25 UHM20 HPX	Round	7.75	2	.4mm/.0157in	SD...07	UHM 20 HPX
7005-147276	DCMT 11T302 EN PM25 UHM20 HPX	Round	11.6	2	.2mm/.0078in	SD...11	UHM 20 HPX
7005-147277	DCMT 11T304 EN PM25 UHM20 HPX	Round	11.6	2.2	.4mm/.0157in	SD...11	UHM 20 HPX
Call For Details	DCMT 11T308 EN PM25 UHM20 HPX	Round	11.6	3.2	.8mm/.0314in	SD...11	UHM 20 HPX

	Material Class								
Application	I	II	III	IV	V	VI	VII	VIII	IX
Roughing	-	-	-	-	-	-	-	-	-
Finishing	□	□	□	-	■	■	-	-	-
Micro Finishing	-	-	-	-	-	-	-	-	-






DCMT Carbide PM55

Cut: Neutral


Chip Breaker: PM55, Round Cutting Edge



Repeatability <50µm

Dimensions & Features							
Item No.	Description	Edge	l	l_1	Nose Radius	Holder	Coating
7005-112946	DCMT 070204 EN PM55 UHM20 HPX	Round	7.75	2.2	.4mm/.0157in	SD...07	UHM 20 HPX
7005-112947	DCMT 070208 EN PM55 UHM20 HPX	Round	7.75	2.4	.8mm/.0314in	SD...07	UHM 20 HPX
7005-112948	DCMT 11T304 EN PM55 UHM20 HPX	Round	11.6	3	.4mm/.0157in	SD...11	UHM 20 HPX
7005-112949	DCMT 11T308 EN PM55 UHM20 HPX	Round	11.6	4	.8mm/.0314in	SD...11	UHM 20 HPX


	Material Class								
Application	I	II	III	IV	V	VI	VII	VIII	IX
Roughing	□	□	□	-	■	■	-	-	-
Finishing	-	-	-	-	-	-	-	-	-
Micro Finishing	-	-	-	-	-	-	-	-	-




Coatings vs Material Type

Carbide												Cermet		Diamond			Materials
-	-	■	■	■	■	■	□	□	■	■	□	■	■	-	-	-	**Steel**
-	■	■	-	■	■	□	□	■	■	■	■	□	■	-	-	-	Stainless Steel
□	■	■	-	□	■	-	□	■	■	-	-	-	-	-	-	-	Titanium & Ti-Alloys
■	□	-	-	-	-	-	□	□	-	-	□	-	-	■	■	■	Non-Ferrous Metals
-	-	■	-	-	-	-	-	-	-	-	-	-	-	-	-	-	Mard Materials
UHM 10	UHM 10 HX	UHM 10 TX+	UHM 10 MZ	UHM 20 HPX	UHM 20 TX+	UHM 20 MZ	UHM 30	UHM 30 HX	UHM 30 TX+	UHM 30 MZ	UHM 30 SX	UCM 10	UCM 10 HX	UCVD 08	UPCD 15	UPCD 20	


Material Class								
I	II	III	IV	V	VI	VII	VIII	IX
Unalloyed Steel	Low-Alloy Steel	High-Alloy Steel	Titanium	Stainless Steel (HB<220)	Stainless Steel (HB≥220)	Aluminum	Brass	Synthetics / Composits



DC...07 inserts: d =.250"
DC...11 inserts: d =.375"



Repeatability <20µm




DCGT Diamond UWS Micro Finishing

Cut: Neutral


Chip Breaker: UWS, Sharp Cutting Edge

Dimensions & Features							
Item No.	Description	Edge	l	l_1	Nose Radius	Holder	Coating
7005-116334	DCGT 070201 FN UWS UPCD15	Sharp	7.75	3	.1mm/.0039in	SD...07	UPCD 15
7005-147206	DCGT 070201 FN UWS UPCD20	Sharp	7.75	3	.1mm/.0039in	SD...07	UPCD 20
7005-116537	DCGT 070202 FN UWS UCVD08	Sharp	7.75	3	.2mm/.0078in	SD...07	UCVD 08
7005-116341	DCGT 070202 FN UWS UPCD15	Sharp	7.75	3	.2mm/.0078in	SD...07	UPCD 15
Call For Details	DCGT 070202 FN UWS UPCD20	Sharp	7.75	3	.2mm/.0078in	SD...07	UPCD 20
7005-116549	DCGT 070204 FN UWS UCVD08	Sharp	7.75	3	.4mm/.0157in	SD...07	UCVD 08
7005-116352	DCGT 070204 FN UWS UPCD15	Sharp	7.75	3	.4mm/.0157in	SD...07	UPCD 15
Call For Details	DCGT 070204 FN UWS UPCD20	Sharp	7.75	3	.4mm/.0157in	SD...07	UPCD 20
7005-116557	DCGT 070208 FN UWS UCVD08	Sharp	7.75	3	.8mm/.0314in	SD...07	UCVD 08
7005-116358	DCGT 070208 FN UWS UPCD15	Sharp	7.75	3	.8mm/.0314in	SD...07	UPCD 15
7005-116360	DCGT 11T301 FN UWS UPCD15	Sharp	11.6	3	.1mm/.0039in	SD...11	UPCD 15
Call For Details	DCGT 11T301 FN UWS UPCD20	Sharp	11.6	3	.1mm/.0039in	SD...11	UPCD 20
7005-116568	DCGT 11T302 FN UWS UCVD08	Sharp	11.6	3	.2mm/.0078in	SD...11	UCVD 08
7005-116367	DCGT 11T302 FN UWS UPCD15	Sharp	11.6	3	.2mm/.0078in	SD...11	UPCD 15
Call For Details	DCGT 11T302 FN UWS UPCD20	Sharp	11.6	3	.2mm/.0078in	SD...11	UPCD 20
7005-116579	DCGT 11T304 FN UWS UCVD08	Sharp	11.6	3	.4mm/.0157in	SD...11	UCVD 08
7005-116380	DCGT 11T304 FN UWS UPCD15	Sharp	11.6	3	.4mm/.0157in	SD...11	UPCD 15
Call For Details	DCGT 11T304 FN UWS UPCD20	Sharp	11.6	3	.4mm/.0157in	SD...11	UPCD 20
7005-116587	DCGT 11T308 FN UWS UCVD08	Sharp	11.6	3	.8mm/.0314in	SD...11	UCVD 08
7005-116387	DCGT 11T308 FN UWS UPCD15	Sharp	11.6	3	.8mm/.0314in	SD...11	UPCD 15
Call For Details	DCGT 11T308 FN UWS UPCD20	Sharp	11.6	3	.8mm/.0314in	SD...11	UPCD 20
Call For Details	DCGT 11T312 FN UWS UPCD15	Sharp	11.6	3.6	1.2mm/.0472in	SD...11	UPCD 15

Application	Material Class I	II	III	IV	V	VI	VII	VIII	IX
Roughing	-	-	-	-	-	-	-	-	-
Finishing	-	-	-	-	-	-	□	□	□
Micro Finishing	-	-	-	-	-	-	■	■	■

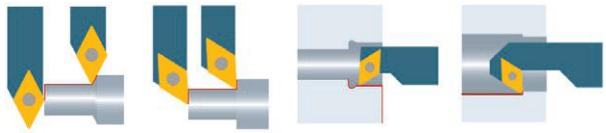


Great For Unstable or Thin-walled Parts



DCGT Diamond

Cut: Neutral


Chip Breaker: Sharp Cutting Edge



Repeatability <20µm

Dimensions & Features							
Item No.	Description	Edge	l	l_1	Nose Radius	Holder	Coating
7005-116136	DCGT 070201 FN UPCD20	Sharp	7.75	3.8	.1mm/.0039in	SD...07	UPCD 20
7005-137717	DCGT 070202 FN UPCD15	Sharp	7.75	3.7	.2mm/.0078in	SD...07	UPCD 15
7005-116139	DCGT 070202 FN UPCD20	Sharp	7.75	3.7	.2mm/.0078in	SD...07	UPCD 20
7005-137718	DCGT 070204 FN UPCD15	Sharp	7.75	3.4	.4mm/.0157in	SD...07	UPCD 15
7005-137719	DCGT 070208 FN UPCD15	Sharp	7.75	3	.8mm/.0314in	SD...07	UPCD 15
7005-116152	DCGT 11T301 FN UPCD20	Sharp	11.6	4.8	.1mm/.0039in	SD...11	UPCD 20
7005-129055	DCGT 11T302 FN UPCD15	Sharp	11.6	4.7	.2mm/.0078in	SD...11	UPCD 15
7005-116155	DCGT 11T302 FN UPCD20	Sharp	11.6	4.7	.2mm/.0078in	SD...11	UPCD 20
7005-137720	DCGT 11T304 FN UPCD15	Sharp	11.6	4.3	.4mm/.0157in	SD...11	UPCD 15
7005-137721	DCGT 11T308 FN UPCD15	Sharp	11.6	4	.8mm/.0314in	SD...11	UPCD 15
7005-137722	DCGT 11T312 FN UPCD15	Sharp	11.6	3.5	1.2mm/.0472in	SD...11	UPCD 15

Material Class									
Application	I	II	III	IV	V	VI	VII	VIII	IX
Roughing	-	-	-	-	-	-	□	□	□
Finishing	-	-	-	-	-	-	■	■	■
Micro Finishing	-	-	-	-	-	-	■	■	■

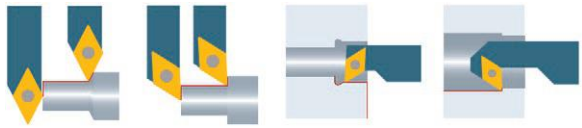




DCET Carbide/Cermet U

Cut: Neutral


Chip Breaker: U, Ground Rake, Sharp Cutting Edge



Repeatability <10µm

Dimensions & Features							
Item No.	Description	Edge	l	l_1	Nose Radius	Holder	Coating
7005-123590	DCET 0702003 FR U UHM10 HX	Sharp	7.75	2.5	.03mm/.0012in	SD...07	UHM 10 HX
Call For Details	DCET 0702003 FR U UHM10 TX+	Sharp	7.75	2.5	.03mm/.0012in	SD...07	UHM 10 TX+
7005-123595	DCET 070201 FR U UHM10 HX	Sharp	7.75	2.5	.1mm/.0039in	SD...07	UHM 10 HX
Call For Details	DCET 070201 FR U UHM10 TX+	Sharp	7.75	2.5	.1mm/.0039in	SD...07	UHM 10 TX+
7005-123594	DCET 070201 FR U UCM10 HX	Sharp	7.75	2.5	.1mm/.0039in	SD...07	UCM 10 HX
7005-121955	DCET 070202 FR U UHM10 HX	Sharp	7.75	2.5	.2mm/.0078in	SD...07	UHM 10 HX
Call For Details	DCET 070202 FR U UHM10 TX+	Sharp	7.75	2.5	.2mm/.0078in	SD...07	UHM 10 TX+
7005-123602	DCET 070202 FR U UCM10 HX	Sharp	7.75	2.5	.2mm/.0078in	SD...07	UCM 10 HX
7005-123622	DCET 11T301 FR U UHM10 HX	Sharp	11.6	4	.1mm/.0039in	SD...11	UHM 10 HX
Call For Details	DCET 11T301 FR U UHM10 TX+	Sharp	11.6	4	.1mm/.0039in	SD...11	UHM 10 TX+
7005-123621	DCET 11T301 FR U UCM10 HX	Sharp	11.6	4	.1mm/.0039in	SD...11	UCM 10 HX
7005-123629	DCET 11T302 FR U UHM10 HX	Sharp	11.6	4	.2mm/.0078in	SD...11	UHM 10 HX
Call For Details	DCET 11T302 FR U UHM10 TX+	Sharp	11.6	4	.2mm/.0078in	SD...11	UHM 10 TX+
7005-123628	DCET 11T302 FR U UCM10 HX	Sharp	11.6	4	.2mm/.0078in	SD...11	UCM 10 HX
7005-123634	DCET 11T304 FR U UHM10 HX	Sharp	11.6	4	.4mm/.0157in	SD...11	UHM 10 HX
Call For Details	DCET 11T304 FR U UHM10 TX+	Sharp	11.6	4	.4mm/.0157in	SD...11	UHM 10 TX+


Material Class									
Application	I	II	III	IV	V	VI	VII	VIII	IX
Roughing	-	-	-	-	-	-	-	-	-
Finishing	□	□	□	-	□	□	-	-	-
Micro Finishing	■	■	■	□	■	■	□	-	□

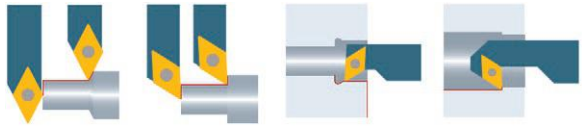

Coatings vs Material Type

Carbide												Cermet		Diamond			Materials
UHM 10	UHM 10 HX	UHM 10 TX+	UHM 10 MZ	UHM 20 HPX	UHM 20 TX+	UHM 20 MZ	UHM 30	UHM 30 HX	UHM 30 TX+	UHM 30 MZ	UHM 30 SX	UCM 10	UCM 10 HX	UCVD 08	UPCD 15	UPCD 20	
-	-	■	■	■	■	■	□	□	■	■	□	■	■	-	-	-	**Steel**
-	■	■	-	■	■	□	□	■	■	■	■	□	■	-	-	-	Stainless Steel
□	■	■	-	□	■	-	□	■	■	-	-	-	-	-	-	-	Titanium & Ti-Alloys
■	□	-	-	-	-	-	□	□	-	-	□	-	-	■	■	■	Non-Ferrous Metals
-	-	■	-	-	-	-	-	-	-	-	-	-	-	-	-	-	Mard Materials

Material Class								
I	II	III	IV	V	VI	VII	VIII	IX
Unalloyed Steel	Low-Alloy Steel	High-Alloy Steel	Titanium	Stainless Steel (HB<220)	Stainless Steel (HB≥220)	Aluminum	Brass	Synthetics / Composits




DC...07 inserts: d =.250"
DC...11 inserts: d =.375"



DCGT Diamond UWN Micro Finishing

Cut: Neutral


Chip Breaker: UWN, Sharp Cutting Edge




Repeatability <20µm

Dimensions & Features							
Item No.	Description	Edge	l	l_1	Nose Radius	Holder	Coating
Call For Details	DCGT 070201 FN UWN UPCD20	Sharp	7.75	3	.1mm/.0039in	SD...07	UPCD 20
7005-116536	DCGT 070202 FN UWN UCVD08	Sharp	7.75	3	.2mm/.0078in	SD...07	UCVD 08
Call For Details	DCGT 070202 FN UWN UPCD20	Sharp	7.75	3	.2mm/.0078in	SD...07	UPCD 20
7005-116548	DCGT 070204 FN UWN UCVD08	Sharp	7.75	3	.4mm/.0157in	SD...07	UCVD 08
Call For Details	DCGT 070204 FN UWN UPCD20	Sharp	7.75	3	.4mm/.0157in	SD...07	UPCD 20
7005-116556	DCGT 070208 FN UWN UCVD08	Sharp	7.75	3	.8mm/.0314in	SD...07	UCVD 08
7005-116357	DCGT 070208 FN UWN UPCD20	Sharp	7.75	3	.8mm/.0314in	SD...07	UPCD 20
Call For Details	DCGT 11T301 FN UWN UPCD20	Sharp	11.6	3	.1mm/.0039in	SD...11	UPCD 20
7005-116567	DCGT 11T302 FN UWN UCVD08	Sharp	11.6	3	.2mm/.0078in	SD...11	UCVD 08
7005-116366	DCGT 11T302 FN UWN UPCD20	Sharp	11.6	3	.2mm/.0078in	SD...11	UPCD 20
7005-116578	DCGT 11T304 FN UWN UCVD08	Sharp	11.6	3	.4mm/.0157in	SD...11	UCVD 08
7005-116379	DCGT 11T304 FN UWN UPCD20	Sharp	11.6	3	.4mm/.0157in	SD...11	UPCD 20
7005-116586	DCGT 11T308 FN UWN UCVD08	Sharp	11.6	3	.8mm/.0314in	SD...11	UCVD 08
7005-116386	DCGT 11T308 FN UWN UPCD20	Sharp	11.6	3	.8mm/.0314in	SD...11	UPCD 20

Application	Material Class I	II	III	IV	V	VI	VII	VIII	IX
Roughing	-	-	-	-	-	-	□	□	□
Finishing	-	-	-	-	-	-	■	■	■
Micro Finishing	-	-	-	-	-	-	-	-	-

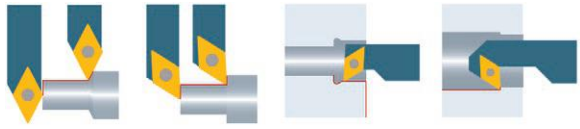


Great For Stable or Solid Parts



DCGW Diamond

Cut: Neutral


Chip Breaker: Sharp Cutting Edge




Repeatability <20µm

Dimensions & Features							
Item No.	Description	Edge	l	l_1	Nose Radius	Holder	Coating
Call For Details	DCGW 0702005 FN UPCD20	Sharp	7.75	3.5	.05mm/.0019in	SD...07	UPCD 20
7005-129023	DCGW 070201 FN UPCD20	Sharp	7.75	3.8	.1mm/.0039in	SD...07	UPCD 20
7005-138610	DCGW 070202 FN UCVD08	Sharp	7.75	3.7	.2mm/.0078in	SD...07	UCVD 08
7005-129022	DCGW 070202 FN UPCD15	Sharp	7.75	3.7	.2mm/.0078in	SD...07	UPCD 15
7005-116173	DCGW 070202 FN UPCD20	Sharp	7.75	3.7	.2mm/.0078in	SD...07	UPCD 20
7005-116888	DCGW 070204 FN UCVD08	Sharp	7.75	3.4	.4mm/.0157in	SD...07	UCVD 08
7005-012747	DCGW 070204 FN UPCD15	Sharp	7.75	3.4	.4mm/.0157in	SD...07	UPCD 15
7005-116176	DCGW 070204 FN UPCD20	Sharp	7.75	3.4	.4mm/.0157in	SD...07	UPCD 20
7005-116889	DCGW 070208 FN UCVD08	Sharp	7.75	3	.8mm/.0314in	SD...07	UCVD 08
7005-137723	DCGW 070208 FN UPCD15	Sharp	7.75	3	.8mm/.0314in	SD...07	UPCD 15
7005-116178	DCGW 070208 FN UPCD20	Sharp	7.75	3	.8mm/.0314in	SD...07	UPCD 20
7005-116183	DCGW 11T301 FN UPCD20	Sharp	11.6	4.8	.1mm/.0039in	SD...11	UPCD 20
7005-116891	DCGW 11T302 FN UCVD08	Sharp	11.6	4.7	.2mm/.0078in	SD...11	UCVD 08
7005-129057	DCGW 11T302 FN UPCD15	Sharp	11.6	4.7	.2mm/.0078in	SD...11	UPCD 15
7005-116186	DCGW 11T302 FN UPCD20	Sharp	11.6	4.7	.2mm/.0078in	SD...11	UPCD 20
7005-116892	DCGW 11T304 FN UCVD08	Sharp	11.6	4.3	.4mm/.0157in	SD...11	UCVD 08
7005-129054	DCGW 11T304 FN UPCD15	Sharp	11.6	4.3	.4mm/.0157in	SD...11	UPCD 15
7005-116188	DCGW 11T304 FN UPCD20	Sharp	11.6	4.3	.4mm/.0157in	SD...11	UPCD 20
7005-116893	DCGW 11T308 FN UCVD08	Sharp	11.6	4	.8mm/.0314in	SD...11	UCVD 08
7005-137724	DCGW 11T308 FN UPCD15	Sharp	11.6	4	.8mm/.0314in	SD...11	UPCD 15
7005-116190	DCGW 11T308 FN UPCD20	Sharp	11.6	4	.8mm/.0314in	SD...11	UPCD 20
7005-116191	DCGW 11T312 FN UPCD15	Sharp	11.6	3.6	1.2mm/.0472in	SD...11	UPCD 15
7005-116192	DCGW 11T312 FN UPCD20	Sharp	11.6	3.6	1.2mm/.0472in	SD...11	UPCD 20

	Material Class								
Application	I	II	III	IV	V	VI	VII	VIII	IX
Roughing	-	-	-	-	-	-	□	□	□
Finishing	-	-	-	-	-	-	■	■	■
Micro Finishing	-	-	-	-	-	-	■	■	■






ISO Holder SDAC...U


Type: 90°
Coolant-Thru: None

Repeatability <20µm

Left Hand		Right Hand		Dimensions & Features				
Item No.	Description	Item No.	Description	b	h	l	f	Inserts
7005-045104	SDACL 0808 K07 U	7005-045109	SDACR 0808 K07 U	8	8	125	8	DC...0702
7005-045105	SDACL 1010 M07 U	7005-045110	SDACR 1010 M07 U	10	10	150	10	DC...0702
7005-045106	SDACL 1212 M07 U	7005-045111	SDACR 1212 M07 U	12	12	150	12	DC...0702
7005-045107	SDACL 1212 M11 U	7005-045112	SDACR 1212 M11 U	12	12	150	12	DC...11T3
7005-045181	SDACL 1616 K11 U	7005-043488	SDACR 1616 K11 U	16	16	125	16	DC...11T3

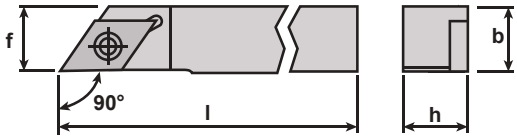






ISO Holder SDHC...U


Type: 107.5°
Coolant-Thru: None

Repeatability <20µm

Left Hand		Right Hand		Dimensions & Features				
Item No.	Description	Item No.	Description	b	h	l	f	Inserts
Call For Details	SDHCL 0808 H07 U	Call For Details	SDHCR 0808 H07 U	8	8	100	11	DC...0702
Call For Details	SDHCL 1010 H07 U	Call For Details	SDHCR 1010 H07 U	10	10	100	11	DC...0702
7005-114527	SDHCL 1212 H07 U	7005-114529	SDHCR 1212 H07 U	12	12	100	12	DC...0702
7005-114528	SDHCL 1616 K11 U	7005-114530	SDHCR 1616 K11 U	16	16	125	16	DC...11T3
Call For Details	SDHCL 3/8" H07 U	Call For Details	SDHCR 3/8" H07 U	3/8"	3/8"	100	11	DC...0702
Call For Details	SDHCL 1/2" H07 U	Call For Details	SDHCR 1/2" H07 U	1/2"	1/2"	100	1/2"	DC...0702
Call For Details	SDHCL 5/8" K11 U	Call For Details	SDHCR 5/8" K11 U	5/8"	5/8"	125	5/8"	DC...11T3

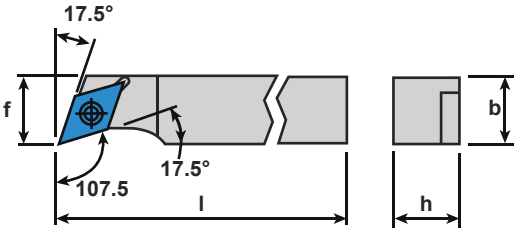





ISO Coolant-Thru Holder SDHC...U IC


Type: 107.5°


Coolant-Thru: Rear & Side Ports

Repeatability <10µm

Left Hand		Right Hand		Dimensions & Features								Coolant Fittings	
Item No.	Description	Item No.	Description	b	h	l	z_1	x_1	d	f	Inserts	Side	Rear
Call For Details	SDHCL 0808 H07 U IC	Call For Details	SDHCR 0808 H07 U IC	8	8	100	18	11.5	M5	11	DC...0702	4005-000111	4005-000111
Call For Details	SDHCL 1010 H07 U IC	Call For Details	SDHCR 1010 H07 U IC	10	10	100	18	13.5	M5	11	DC...0702	4005-000111	4005-000111
Call For Details	SDHCL 1212 H07 U IC	Call For Details	SDHCR 1212 H07 U IC	12	12	100	18	15.5	M5	12	DC...0702	4005-000111	4005-000111
Call For Details	SDHCL 1616 K11 U IC	Call For Details	SDHCR 1616 K11 U IC	16	16	125	21	19.5	G 1/8"	16	DC...11T3	4005-000111	4005-000104
Call For Details	SDHCL 3/8" H07 U IC	Call For Details	SDHCR 3/8" H07 U IC	3/8"	3/8"	100	18	13	M5	11	DC...0702	4005-000111	4005-000111
Call For Details	SDHCL 1/2" H07 U IC	Call For Details	SDHCR 1/2" H07 U IC	1/2"	1/2"	100	18	16.2	M5	1/2"	DC...0702	4005-000111	4005-000111
Call For Details	SDHCL 5/8" K11 U IC	Call For Details	SDHCR 5/8" K11 U IC	5/8"	5/8"	125	22	19.4	G 1/8"	5/8"	DC...11T3	4005-000111	4005-000104

Features (5) connection ports for simple connection to your oil delivery system. (4) Side ports and (1) one end port making connection possible on most machine tool positions.

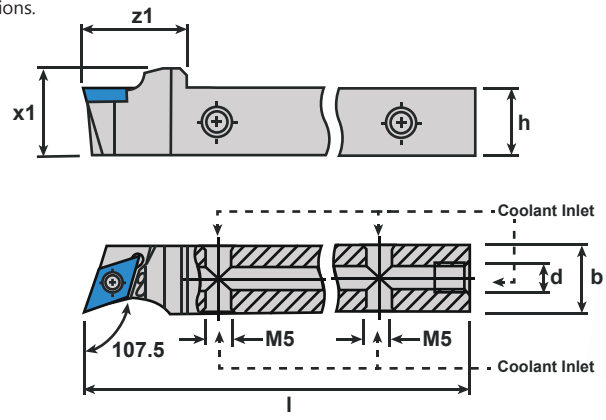

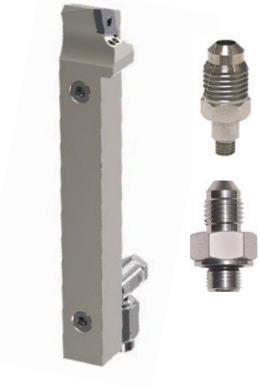


4005-000111

Connects to side ports on ALL shank sizes
0° Male Union - M5-0.8 to 1/4 JIC Flare Fitting
Included With All Coolant-Thru Shanks

4005-000104

Connects to end port on 5/8" and larger shanks
0° Male Union - 1/8 BSPP to 1/4 JIC Flare Fitting
Fits Position (d) On Tool Holders Sold Separately



ISO Holder SDJC...U


Type: 93°


Coolant-Thru: None

Repeatability <20µm

Left Hand		Right Hand		Dimensions & Features				
Item No.	Description	Item No.	Description	b	h	l	f	Inserts
7005-148796	SDJCL 0808 F07 U	7005-148794	SDJCR 0808 F07 U	8	8	80	8	DC...0702
7005-043320	SDJCL 0808 H07 U	7005-043321	SDJCR 0808 H07 U	8	8	100	8	DC...0702
7005-148797	SDJCL 1010 F07 U	7005-148795	SDJCR 1010 F07 U	10	10	80	10	DC...0702
7005-043322	SDJCL 1010 H07 U	7005-043323	SDJCR 1010 H07 U	10	10	100	10	DC...0702
Call For Details	SDJCL 1010 H11 U	7005-114544	SDJCR 1010 H11 U	10	10	100	10	DC...11T3
7005-043324	SDJCL 1212 H07 U	7005-043325	SDJCR 1212 H07 U	12	12	100	12	DC...0702
7005-044121	SDJCL 1212 H11 U	7005-044110	SDJCR 1212 H11 U	12	12	100	12	DC...11T3
7005-043328	SDJCL 1616 K07 U	7005-043329	SDJCR 1616 K07 U	16	16	125	16	DC...0702
7005-044148	SDJCL 1616 K11 U	7005-044149	SDJCR 1616 K11 U	16	16	125	16	DC...11T3
7005-045198	SDJCL 2020 K11 U	7005-045199	SDJCR 2020 K11 U	20	20	125	20	DC...11T3
7005-148800	SDJCL 3/8" F07 U	7005-148798	SDJCR 3/8" F07 U	9.525	9.525	80	9.525	DC...0702
Call For Details	SDJCL 3/8" H07 U	7005-138658	SDJCR 3/8" H07 U	9.525	9.525	100	9.525	DC...0702
7005-148801	SDJCL 3/8" F11 U	7005-148799	SDJCR 3/8" F11 U	9.525	9.525	80	9.525	DC...11T3
Call For Details	SDJCL 3/8" H11 U	7005-138417	SDJCR 3/8" H11 U	9.525	9.525	100	9.525	DC...11T3
7005-114045	SDJCL 1/2" H07 U	7005-127411	SDJCR 1/2" H07 U	12.7	12.7	100	12.7	DC...0702
Call For Details	SDJCL 1/2" H11 U	7005-138419	SDJCR 1/2" H11 U	12.7	12.7	100	12.7	DC...11T3
7005-113714	SDJCL 5/8" K11 U	7005-113715	SDJCR 5/8" K11 U	15.875	15.875	125	15.875	DC...11T3
7005-113716	SDJCL 3/4" K11 U	7005-113717	SDJCR 3/4" K11 U	19.05	19.05	125	19.05	DC...11T3



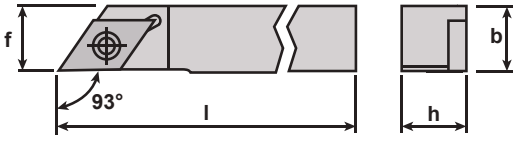



ISO Coolant-Thru Holder SDJC...U IC


Type: 93°

Coolant-Thru: Side and Rear Ports

Repeatability <10µm

Left Hand		Right Hand		Dimensions & Features							Coolant Fittings	
Item No.	Description	Item No.	Description	b	h	l	z_1	x_1	d	Inserts	Side	Rear
Call For Details	SDJCL 0808 H07 U IC	Call For Details	SDJCR 0808 H07 U IC	8	8	100	17	11.5	M5	DC...0702	4005-000111	4005-000111
Call For Details	SDJCL 1010 H07 U IC	Call For Details	SDJCR 1010 H07 U IC	10	10	100	17	13.5	M5	DC...0702	4005-000111	4005-000111
Call For Details	SDJCL 1010 H11 U IC	Call For Details	SDJCR 1010 H11 U IC	10	10	100	22	13.5	M5	DC...11T3	4005-000111	4005-000111
Call For Details	SDJCL 1212 H07 U IC	Call For Details	SDJCR 1212 H07 U IC	12	12	100	17	15.5	M5	DC...0702	4005-000111	4005-000111
Call For Details	SDJCL 1212 H11 U IC	Call For Details	SDJCR 1212 H11 U IC	12	12	100	22	15.5	M5	DC...11T3	4005-000111	4005-000111
Call For Details	SDJCL 1616 K07 U IC	7005-146359A	SDJCR 1616 K07 U IC	16	16	125	17	15.5	G1/8"	DC...0702	4005-000111	4005-000104
7005-146368A	SDJCL 1616 K11 U IC	Call For Details	SDJCR 1616 K11 U IC	16	16	125	22	19.5	G1/8"	DC...11T3	4005-000111	4005-000104
Call For Details	SDJCL 2020 K11 U IC	Call For Details	SDJCR 2020 K11 U IC	20	20	125	22	23.5	G1/8"	DC...11T3	4005-000111	4005-000104
Call For Details	SDJCL 3/8" H07 U IC	Call For Details	SDJCR 3/8" H07 U IC	9.525	9.525	100	17	13	M5	DC...0702	4005-000111	4005-000111
Call For Details	SDJCL 3/8" H11 U IC	7005-146371A	SDJCR 3/8" H11 U IC	9.525	9.525	100	22	13	M5	DC...11T3	4005-000111	4005-000111
7005-146381A	SDJCL 1/2" H07 U IC	7005-146372A	SDJCR 1/2" H07 U IC	12.7	12.7	100	17	16.2	M5	DC...0702	4005-000111	4005-000111
7005-146382A	SDJCL 1/2" H11 U IC	7005-146373A	SDJCR 1/2" H11 U IC	12.7	12.7	100	22	16.2	M5	DC...11T3	4005-000111	4005-000111
Call For Details	SDJCL 5/8" K07 U IC	7005-146374A	SDJCR 5/8" K07 U IC	15.875	15.875	125	17	19.5	G1/8"	DC...0702	4005-000111	4005-000104
7005-146384A	SDJCL 5/8" K11 U IC	7005-146377A	SDJCR 5/8" K11 U IC	15.875	15.875	125	22	19.5	G1/8"	DC...11T3	4005-000111	4005-000104
Call For Details	SDJCL 3/4" K11 U IC	Call For Details	SDJCR 3/4" K11 U IC	19.05	19.05	125	22	22.6	G1/8"	DC...11T3	4005-000111	4005-000104

Features (5) connection ports for simple connection to your oil delivery system. (4) Side ports and (1) one end port making connection possible on most machine tool positions.

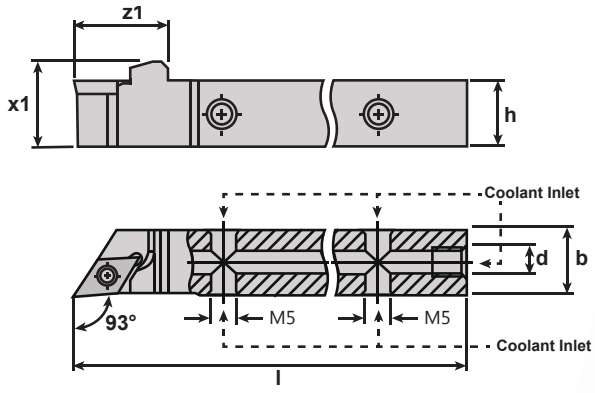






4005-000111


Connects to side ports on ALL shank sizes
0° Male Union - M5-0.8 to 1/4 JIC Flare Fitting
Included With All Coolant-Thru Shanks



4005-000104

Connects to end port on 5/8" and larger shanks
0° Male Union - 1/8 BSPP to 1/4 JIC Flare Fitting
Fits Position (d) On Tool Holders Sold Separately

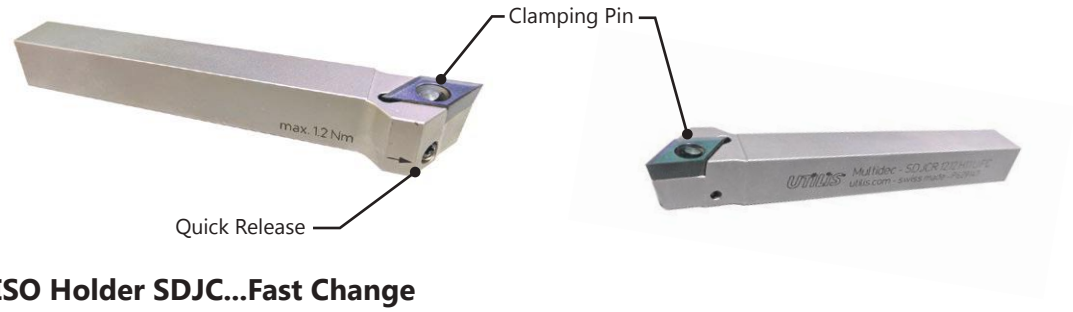





ISO Holder SDJC...Fast Change

Type: 93°
Coolant-Thru: None

Repeatability <20µm

Left Hand		Right Hand		Dimensions & Features				
Item No.	Description	Item No.	Description	b	h	l	f	Inserts
Call For Details	SDJCL 1012 H11 U FC	Call For Details	SDJCR 1012 H11 U FC	12	10	100	16	DC...11T3
7005-153252	SDJCL 1212 H11 U FC	7005-153250	SDJCR 1212 H11 U FC	12	12	100	16	DC...11T3
Call For Details	SDJCL 1616 K11 U FC	7005-153251	SDJCR 1616 K11 U FC	16	16	125	16	DC...11T3
Call For Details	SDJCL 1/2" H11 U FC	Call For Details	SDJCR 1/2" H11 U FC	1/2"	1/2"	100	16	DC...11T3
Call For Details	SDJCL 5/8" K11 U FC	Call For Details	SDJCR 5/8" K11 U FC	5/8"	5/8"	125	15.875	DC...11T3

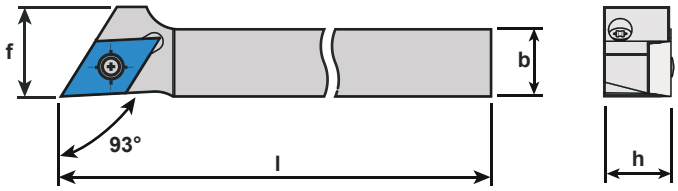




ISO Coolant-Thru Holder SDJC... Fast Change

Type: 93°
Coolant-Thru: Side and Rear Ports

Repeatability <10µm

Left Hand		Right Hand		Dimensions & Features								Coolant Fittings	
Item No.	Description	Item No.	Description	b	h	l	z_1	x_1	d	f	Inserts	Side	Rear
Call For Details	SDJCL 1012 H11 U FC IC	Call For Details	SDJCR 1012 H11 U FC IC	12	10	100	23	13.5	M5	16	DC...11T3	4005-000111	4005-000111
Call For Details	SDJCL 1212 H11 U FC IC	Call For Details	SDJCR 1212 H11 U FC IC	12	12	100	23	15.5	M5	16	DC...11T3	4005-000111	4005-000111
Call For Details	SDJCL 1616 K11 U FC IC	Call For Details	SDJCR 1616 K11 U FC IC	16	16	125	23	19.5	G1/8"	16	DC...11T3	4005-000111	4005-000104
Call For Details	SDJCL 1/2" H11 U FC IC	Call For Details	SDJCR 1/2" H11 U FC IC	1/2"	1/2"	100	23	16.2	M5	16	DC...11T3	4005-000111	4005-000111
Call For Details	SDJCL 5/8" K11 U FC IC	Call For Details	SDJCR 5/8" K11 U FC IC	5/8"	5/8"	125	23	19.4	G1/8"	15.875	DC...11T3	4005-000111	4005-000104

Features (5) connection ports for simple connection to your oil delivery system. (4) Side ports and (1) one end port making connection possible on most machine tool positions.

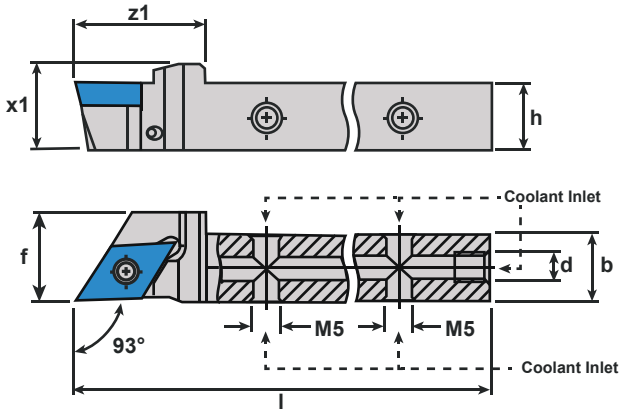




4005-000111
Connects to side ports on ALL shank sizes
0° Male Union - M5-0.8 to 1/4 JIC Flare Fitting
Included With All Coolant-Thru Shanks



4005-000104
Connects to end port on 5/8" and larger shanks
0° Male Union - 1/8 BSPP to 1/4 JIC Flare Fitting
Fits Position (d) On Tool Holders Sold Separately




ISO Holder SDNC


Type: 62.5°
Coolant-Thru: None

Repeatability <20µm

Left Hand		Right Hand		Dimensions & Features				
Item No.	Description	Item No.	Description	b	h	l	f	Inserts
7005-148804	SDNCL 0808 F07 U	7005-148802	SDNCR 0808 F07 U	8	8	80	3.38	DC...0702
7005-113718	SDNCL 0808 H07 U	7005-113719	SDNCR 0808 H07 U	8	8	100	3.38	DC...0702
7005-148805	SDNCL 1010 F07 U	7005-148803	SDNCR 1010 F07 U	10	10	80	3.38	DC...0702
Call For Details	SDNCL 1010 H07 U	7005-045186	SDNCR 1010 H07 U	10	10	100	3.38	DC...0702
Call For Details	SDNCL 1212 H07 U	7005-045187	SDNCR 1212 H07 U	12	12	100	3.38	DC...0702
7005-113720	SDNCL 1212 H11 U	7005-113721	SDNCR 1212 H11 U	12	12	100	5.17	DC...11T3
7005-045203	SDNCL 1616 K11 U	7005-045204	SDNCR 1616 K11 U	16	16	125	5.17	DC...11T3
7005-045205	SDNCL 2020 K11 U	7005-045206	SDNCR 2020 K11 U	20	20	125	5.17	DC...11T3
Call For Details	SDNCL 3/8" H07 U	Call For Details	SDNCR 3/8" H07 U	9.525	9.525	100	3.38	DC...0702
Call For Details	SDNCL 1/2" H07 U	Call For Details	SDNCR 1/2" H07 U	12.7	12.7	100	3.38	DC...0702
Call For Details	SDNCL 1/2" H11 U	Call For Details	SDNCR 1/2" H11 U	12.7	12.7	100	5.17	DC...11T3
Call For Details	SDNCL 5/8" K11 U	Call For Details	SDNCR 5/8" K11 U	15.875	15.875	125	5.17	DC...11T3

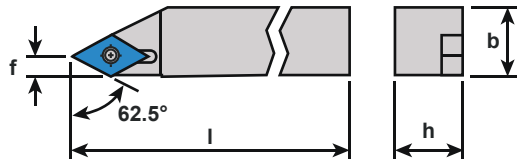






ISO Coolant-Thru Holder SDNC


Type: 62.5°
Coolant-Thru: Side and Rear Ports

Repeatability <10µm

Left Hand		Right Hand		Dimensions & Features								Coolant Fittings	
Item No.	Description	Item No.	Description	b	h	l	z_1	x_1	d	f	Inserts	Side	Rear
Call For Details	SDNCL 1010 H07 U IC	Call For Details	SDNCR 1010 H07 U IC	10	10	100	21	13.5	M5	3.38	DC...0702	4005-000111	4005-000111
Call For Details	SDNCL 1212 H07 U IC	Call For Details	SDNCR 1212 H07 U IC	12	12	100	21	13.5	M5	3.38	DC...0702	4005-000111	4005-000111
Call For Details	SDNCL 1212 H11 U IC	Call For Details	SDNCR 1212 H11 U IC	12	12	100	25	15.5	M5	5.17	DC...11T3	4005-000111	4005-000111
Call For Details	SDNCL 1616 K11 U IC	Call For Details	SDNCR 1616 K11 U IC	16	16	125	25	19.5	G1/8"	5.17	DC...11T3	4005-000111	4005-000104
Call For Details	SDNCL 3/8" H07 U IC	Call For Details	SDNCR 3/8" H07 U IC	9.525	9.525	100	21	13	M5	3.38	DC...0702	4005-000111	4005-000111
Call For Details	SDNCL 1/2" H07 U IC	Call For Details	SDNCR 1/2" H07 U IC	12.7	12.7	100	21	16.2	M5	3.38	DC...0702	4005-000111	4005-000111
Call For Details	SDNCL 1/2" H11 U IC	Call For Details	SDNCR 1/2" H11 U IC	12.7	12.7	100	25	16.2	M5	5.17	DC...11T3	4005-000111	4005-000111
Call For Details	SDNCL 5/8" K11 U IC	Call For Details	SDNCR 5/8" K11 U IC	15.875	15.875	125	25	19.5	G1/8"	5.17	DC...11T3	4005-000111	4005-000104


Features (5) connection ports for simple connection to your oil delivery system. (4) Side ports and (1) one end port making connection possible on most machine tool positions.

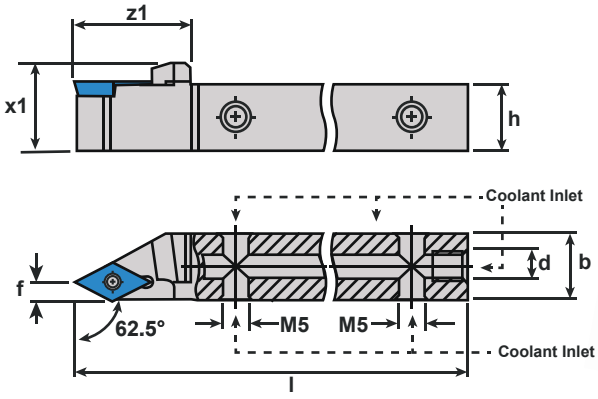

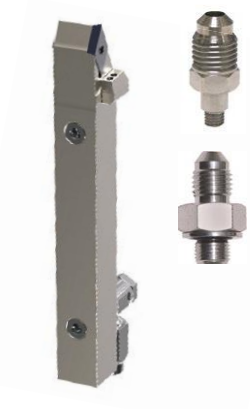

4005-000111
Connects to side ports on ALL shank sizes
0° Male Union - M5-0.8 to 1/4 JIC Flare Fitting
Included With All Coolant-Thru Shanks

4005-000104
Connects to end port on 5/8" and larger shanks
0° Male Union - 1/8 BSPP to 1/4 JIC Flare Fitting
Fits Position (d) On Tool Holders Sold Separately




ISO Holder SDNCN


Type: 62.5°
Coolant-Thru: None

Repeatability <20µm

Neutral Hand		Dimensions & Features				
Item No.	Description	b	h	l	f	Inserts
7005-148806	SDNCN 0808 F07 U	8	8	80	3.38	DC...0702
7005-045136	SDNCN 0808 K07 U	8	8	125	3.38	DC...0702
7005-045137	SDNCN 1010 E07 U	10	10	70	3.38	DC...0702
7005-045138	SDNCN 1010 M07 U	10	10	150	3.38	DC...0702
7005-045139	SDNCN 1212 F07 U	12	12	80	3.38	DC...0702
7005-045140	SDNCN 1212 M07 U	12	12	150	3.38	DC...0702
7005-045141	SDNCN 1212 M11 U	12	12	150	5.17	DC...11T3
7005-045143	SDNCN 1616 H11 U	16	16	100	5.17	DC...11T3
7005-045144	SDNCN 2020 K11 U	20	20	125	5.17	DC...11T3
Call For Details	SDNCN 3/8" H07 U	9.525	9.525	100	3.38	DC...0702
Call For Details	SDNCN 1/2" H07 U	12.7	12.7	100	3.38	DC...0702
Call For Details	SDNCN 1/2" H11 U	12.7	12.7	100	5.17	DC...11T3
7005-144771	SDNCN 5/8" K11 U	15.875	15.875	125	5.17	DC...11T3

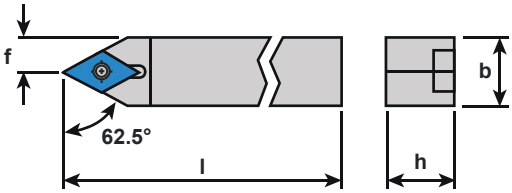






ISO Coolant-Thru Holder SDNCN

Type: 62.5°
Coolant-Thru: Side and Rear Ports

Repeatability <10µm

Neutral		Dimensions & Features								Coolant Fittings	
Item No.	Description	b	h	l	z_1	x_1	d	f	Inserts	Side	Rear
Call For Details	SDNCN 0808 H07 U IC	8	8	80	18	11.5	M5	3.38	DC...0702	4005-000111	4005-000111
Call For Details	SDNCN 1010 H07 U IC	10	10	70	18	13.5	M5	3.38	DC...0702	4005-000111	4005-000111
Call For Details	SDNCN 1212 H07 U IC	12	12	80	18	15.5	M5	3.38	DC...0702	4005-000111	4005-000111
Call For Details	SDNCN 1616 K11 U IC	16	16	100	22	19.5	G1/8"	5.17	DC...11T3	4005-000111	4005-000104
Call For Details	SDNCN 3/8" H07 U IC	9.525	9.525	100	18	13	M5	3.38	DC...0702	4005-000111	4005-000111
Call For Details	SDNCN 1/2" H07 U IC	12.7	12.7	100	18	16.2	M5	3.38	DC...0702	4005-000111	4005-000111
7005-144765A	SDNCN 1/2" H11 U IC	12.7	12.7	100	18	16.2	M5	5.17	DC...11T3	4005-000111	4005-000111
Call For Details	SDNCN 5/8" K11 U IC	15.875	15.875	125	22	19.4	G1/8"	5.17	DC...11T3	4005-000111	4005-000104

Features (5) connection ports for simple connection to your oil delivery system. (4) Side ports and (1) one end port making connection possible on most machine tool positions.

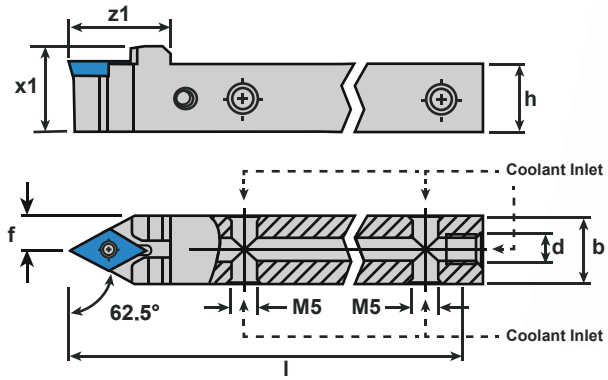






4005-000111
Connects to side ports on ALL shank sizes
0° Male Union - M5-0.8 to 1/4 JIC Flare Fitting
Included With All Coolant-Thru Shanks



4005-000104
Connects to end port on 5/8" and larger shanks
0° Male Union - 1/8 BSPP to 1/4 JIC Flare Fitting
Fits Position (d) On Tool Holders Sold Separately

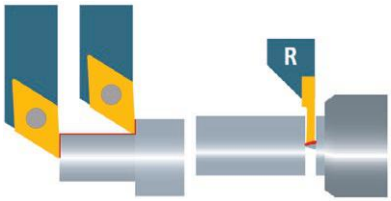


ISO TWIN Holder SDJC


Type: 93°, DC Inserts / 1600 Inserts
Coolant-Thru: None

Repeatability <20µm

Right Hand		Dimensions & Features								
Item No.	Description	b	h	l	z_1	x_1	x_2	x_3	d_{max}	Inserts
Call For Details	SDJCR/1600R-0810 H07 Twin	8	8	80	20	16	4	8	23	DC...0702
Call For Details	SDJCR/1600R-1010 H07 Twin	8	8	100	20	16	5	8	23	DC...0702
Call For Details	SDJCR/1600R-1212 H07 Twin	10	10	80	20	16	6	8	23	DC...0702
Call For Details	SDJCR/1600R-1616 K11 Twin	10	10	100	20	20	8	10	35	DC...11T3
Call For Details	SDJCR/1600R-2020 K11 Twin	12	12	100	20	24	8	14	68	DC...11T3
Call For Details	SDJCR/1600R-3/8" H07 Twin	9.525	9.525	100	20	16	4.76	8	23	DC...0702
Call For Details	SDJCR/1600R-1/2" H07 Twin	12.7	12.7	100	20	16	6.35	8	23	DC...0702
Call For Details	SDJCR/1600R-5/8" K11 Twin	15.875	15.875	125	20	20	7.94	10	35	DC...11T3
Call For Details	SDJCR/1600R-3/4" K11 Twin	19.05	19.05	125	20	24	7.53	14	68	DC...11T3

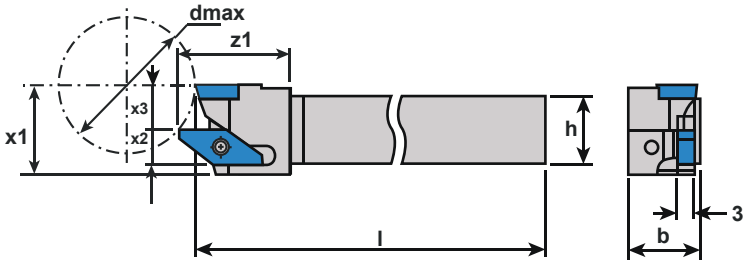



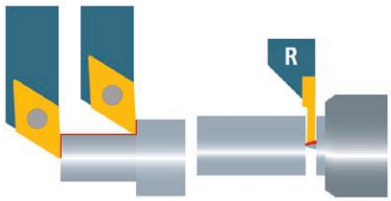


ISO TWIN Coolant-Thru Holder SDJC

Type: 93°, DC Inserts / 1600 Inserts
Coolant-Thru: Rear & Side Ports

Repeatability <10µm

Right Hand		Dimensions & Features										Coolant Fittings	
Item No.	Description	b	h	l	z_1	x_1	x_2	x_3	d	d_{max}	Inserts	Side	Rear
Call For Details	SDJCR/1600R-0810 H07 Twin IC	8	8	100	20	19	2.5	8	M5	23	DC...0702	4005-000111	4005-000111
Call For Details	SDJCR/1600R-1010 H07 Twin IC	8	8	100	20	19	3.5	8	M5	23	DC...0702	4005-000111	4005-000111
Call For Details	SDJCR/1600R-1212 H07 Twin IC	10	10	100	20	19	4.5	8	M5	23	DC...0702	4005-000111	4005-000111
Call For Details	SDJCR/1600R-1616 K11 Twin IC	10	10	125	26	23	6.5	10	G1/8"	35	DC...11T3	4005-000111	4005-000104
Call For Details	SDJCR/1600R-2020 K11 Twin IC	12	12	125	26	27	6.5	14	G1/8"	68	DC...11T3	4005-000111	4005-000104
Call For Details	SDJCR/1600R-3/8" H07 Twin IC	9.525	9.525	100	20	19	3.26	8	M5	23	DC...0702	4005-000111	4005-000111
Call For Details	SDJCR/1600R-1/2" H07 Twin IC	12.7	12.7	100	20	19	4.85	8	M5	23	DC...0702	4005-000111	4005-000111
Call For Details	SDJCR/1600R-5/8" K11 Twin IC	15.875	15.875	125	26	23	6.44	10	G1/8"	35	DC...11T3	4005-000111	4005-000104
Call For Details	SDJCR/1600R-3/4" K11 Twin IC	19.05	19.05	125	26	27	5.53	14	G1/8"	68	DC...11T3	4005-000111	4005-000104


Features (5) connection ports for simple connection to your oil delivery system: (4) Side ports and (1) one end port making connection possible on most machine tool positions.

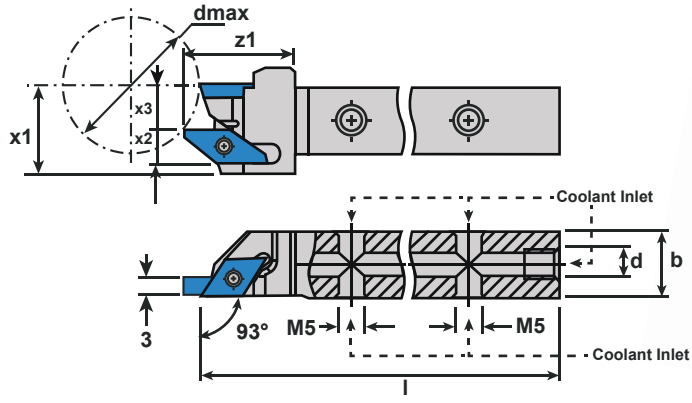



4005-000111
Connects to side ports on ALL shank sizes
0° Male Union - M5-0.8 to 1/4 JIC Flare Fitting
Included With All Coolant-Thru Shanks

4005-000104
Connects to end port on 5/8" and larger shanks
0° Male Union - 1/8 BSPP to 1/4 JIC Flare Fitting
Fits Position (d) On Tool Holders Sold Separately




ISO Round Shank Holder SDOC


Type: 120°
Coolant-Thru: None

Repeatability <20µm

Left Hand		Right Hand		Dimensions & Features						
Item No.	Description	Item No.	Description	d	h	l	l_2	f	d_{max}	Inserts
7005-114039	A12K SDOCL 07	7005-044339	A12K SDOCR 07	12	11.5	125	21	7	14	DC...0702

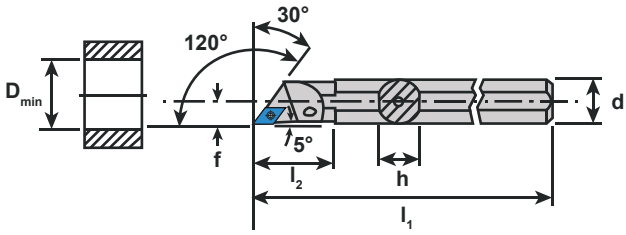






ISO Round Shank Holder SDQC


Type: 107.5°
Coolant-Thru: None

Repeatability <20µm

Left Hand		Right Hand		Dimensions & Features						
Item No.	Description	Item No.	Description	d	h	l	l_2	f	d_{max}	Inserts
7005-045240	A12K SDQCL 07	7005-045241	A12K SDQCR 07	12	11.5	125	22	9	16	DC...0702
7005-045242	A16M SDQCL 07	7005-045243	A16M SDQCR 07	16	15	150	29	11	20	DC...0702
7005-045244	A20Q SDQCL 07	7005-045245	A20Q SDQCR 07	20	18.5	180	32	13	25	DC...0702

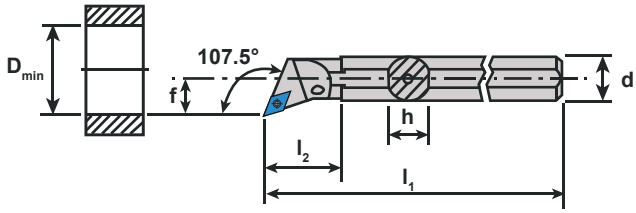






ISO Holder SDUC


Type: 93°
Coolant-Thru: None

Repeatability <20µm

Left Hand		Right Hand		Dimensions & Features						
Item No.	Description	Item No.	Description	b	h	l	l_2	f	d_{max}	Inserts
Call For Details	SDUCL 0808 XH07	Call For Details	SDUCR 0808 XH07	8	8	100	12	14	16	DC...0702
Call For Details	SDUCL 1010 XH07	Call For Details	SDUCR 1010 XH07	10	10	100	12	14	16	DC...0702
7005-043318	SDUCL 1212 XH07	7005-043319	SDUCR 1212 XH07	12	12	100	12	14	16	DC...0702
7005-044107	SDUCL 1616 XK07	7005-044106	SDUCR 1616 XK07	16	16	125	12	14	16	DC...0702

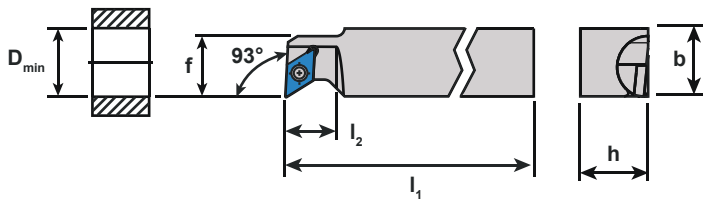





ISO Coolant-Thru Holder SDUC


Type: 93°

Coolant-Thru: Rear & Side Ports

Repeatability <10µm

Left Hand		Right Hand		Dimensions & Features							Coolant Fittings	
Item No.	Description	Item No.	Description	b	h	l	z_1	x_1	d	Inserts	Side	Rear
Call For Details	SDUCL 0808 XH07 IC	Call For Details	SDUCR 0808 XH07 IC	10	8	100	20	11.5	M5	DC...0702	4005-000111	4005-000111
Call For Details	SDUCL 1010 XH07 IC	Call For Details	SDUCR 1010 XH07 IC	10	10	100	20	13.5	M5	DC...0702	4005-000111	4005-000111
Call For Details	SDUCL 1212 XH07 IC	Call For Details	SDUCR 1212 XH07 IC	12	12	100	20	15.5	M5	DC...0702	4005-000111	4005-000111
Call For Details	SDUCL 1616 XH07 IC	Call For Details	SDUCR 1616 XH07 IC	16	16	100	20	19.5	G1/8"	DC...0702	4005-000111	4005-000104
Call For Details	SDUCL 1616 XK07 IC	Call For Details	SDUCR 1616 XK07 IC	16	16	125	20	19.5	G1/8"	DC...0702	4005-000111	4005-000104

Features (5) connection ports for simple connection to your oil delivery system. (4) Side ports and (1) one end port making connection possible on most machine tool positions.

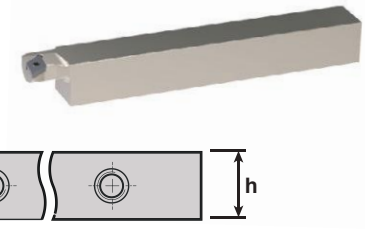




4005-000111

Connects to side ports on ALL shank sizes
0° Male Union - M5-0.8 to 1/4 JIC Flare Fitting
Included With All Coolant-Thru Shanks



4005-000104

Connects to end port on 5/8" and larger shanks
0° Male Union - 1/8 BSPP to 1/4 JIC Flare Fitting
Fits Position (d) On Tool Holders Sold Separately




ISO Round Shank Holder SDUC

Type: 93°

Coolant-Thru: None

Repeatability <20µm

Left Hand		Right Hand		Dimensions & Features						
Item No.	Description	Item No.	Description	d	h	l	l_2	f	d_{max}	Inserts
7005-045293	A10H SDUCL 07	7005-045292	A10H SDUCR 07	10	9	100	-	7	14	DC...0702
7005-045248	A12K SDUCL 07	7005-045249	A12K SDUCR 07	12	11.5	125	22	9	16	DC...0702
7005-045250	A16M SDUCL 07	7005-045251	A16M SDUCR 07	16	15	150	29	11	20	DC...0702
7005-045252	A20Q SDUCL 07	7005-045253	A20Q SDUCR 07	20	18.5	180	32	13	25	DC...0702
7005-045254	A20Q SDUCL 11	7005-045255	A20Q SDUCR 11	20	18.5	180	32	13	25	DC...11T3

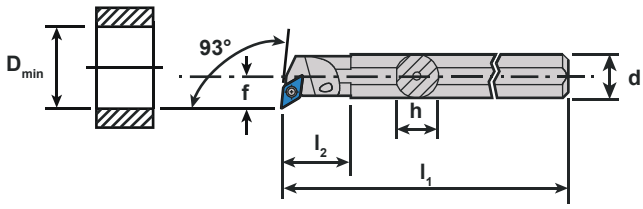




DNGU carbide inserts are ideal for applications where chip control becomes an issue. The high positive geometry insert with negative tool holder creates an ideal situation for rolling chips in a controlled manner.



eatures 4 cutting edges per insert


deal for stainless steels and materials that produce stringy chips

Sharp tool nose radius intended to benefit Swiss-style applications



Coatings vs Material Type

Carbide												Cermet		Diamond			Materials
-	-	■	■	■	■	■	□	□	■	■	□	■	■	-	-	-	**Steel**
-	■	■	-	■	■	□	□	■	■	■	■	□	■	-	-	-	Stainless Steel
□	■	■	-	□	■	-	□	■	■	-	-	-	-	-	-	-	Titanium & Ti-Alloys
■	□	-	-	-	-	-	□	□	-	-	□	-	-	■	■	■	Non-Ferrous Metals
-	-	■	-	-	-	-	-	-	-	-	-	-	-	-	-	-	Mard Materials
UHM 10	UHM 10 HX	UHM 10 TX+	UHM 10 MZ	UHM 20 HPX	UHM 20 TX+	UHM 20 MZ	UHM 30	UHM 30 HX	UHM 30 TX+	UHM 30 MZ	UHM 30 SX	UCM 10	UCM 10 HX	UCVD 08	UPCD 15	UPCD 20	



DC...07 inserts: d =.250"
DC...11 inserts: d =.375"


Material Class								
I	II	III	IV	V	VI	VII	VIII	IX
Unalloyed Steel	Low-Alloy Steel	High-Alloy Steel	Titanium	Stainless Steel (HB<220)	Stainless Steel (HB≥220)	Aluminum	Brass	Synthetics / Composits



DNGU Carbide A4

Cut: Neutral


Chip Breaker: A4, Polished Rake, Sharp Cutting Edge




Repeatability <20µm

Dimensions & Features							
Item No.	Description	Edge	l	l_1	Nose Radius	Holder	Coating
Call For Details	DNGU 1104008 FN A4 UHM20 HPX	Sharp	11.6	2.9	.08mm/.0031in	SDJN...11	UHM 20 HPX
Call For Details	DNGU 1104008 FN A4 UHM20 TX+	Sharp	11.6	2.9	.08mm/.0031in	SDJN...11	UHM 20 TX+
Call For Details	DNGU 1104015 FN A4 UHM20 HPX	Sharp	11.6	2.9	.15mm/.0059in	SDJN...11	UHM 20 HPX
Call For Details	DNGU 1104015 FN A4 UHM20 TX+	Sharp	11.6	2.9	.15mm/.0059in	SDJN...11	UHM 20 TX+
Call For Details	DNGU 1104035 FN -A4 UHM20 HPX	Sharp	11.6	2.9	.35mm/.0138in	SDJN...11	UHM 20 HPX
Call For Details	DNGU 1104035 FN -A4 UHM20 TX+	Sharp	11.6	2.9	.35mm/.0138in	SDJN...11	UHM 20 TX+

Application	Material Class								
	I	II	III	IV	V	VI	VII	VIII	IX
Roughing	-	-	-	-	-	-	-	-	-
Finishing	-	-	-	-	-	-	-	-	-
Micro Finishing	■	■	■	□	■	■	-	-	-






ISO Holder SDJN


Type: 93°, DNGU A4 Inserts
Coolant-Thru: None

Repeatability <20µm

Left Hand		Right Hand		Dimensions & Features				
Item No.	Description	Item No.	Description	b	h	l	f	Inserts
7005-148808	SDJNL 1012 F11	7005-148807	SDJNR 1012 F11	12	10	80	12	DN...11
7005-127479	SDJNL 1012 H11	7005-127476	SDJNR 1012 H11	12	10	100	12	DN...11
7005-127418	SDJNL 1212 H11	7005-126959	SDJNR 1212 H11	12	12	100	12	DN...11
7005-127419	SDJNL 1616 K11	7005-126960	SDJNR 1616 K11	16	16	125	16	DN...11
7005-127480	SDJNL 2020 K11	7005-127477	SDJNR 2020 K11	20	20	125	20	DN...11
7005-138578	SDJNL 2525 M11	7005-138580	SDJNR 2525 M11	25	25	150	25	DN...11
Call For Details	SDJNL 3/8" F11	7005-148809	SDJNR 3/8" F11	9.525	9.525	80	9.525	DN...11
7005-113722	SDJNL 3/8" H11	7005-113723	SDJNR 3/8" H11	9.525	9.525	100	9.525	DN...11
7005-113724	SDJNL 1/2" H11	7005-113725	SDJNR 1/2" H11	12.7	12.7	100	12.7	DN...11
7005-113726	SDJNL 5/8" K11	7005-113727	SDJNR 5/8" K11	15.875	15.875	125	15.875	DN...11
7005-113728	SDJNL 3/4" K11	7005-113729	SDJNR 3/4" K11	19.05	19.05	125	19.05	DN...11



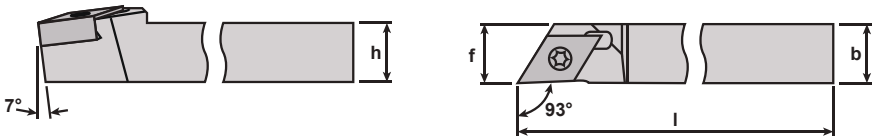




ISO Coolant-Thru Holder SDJN

Type: 93°, DNGU A4 Inserts
Coolant-Thru: Rear & Side Ports

Repeatability <10µm

Left Hand		Right Hand		Dimensions & Features								Coolant Fittings	
Item No.	Description	Item No.	Description	b	h	l	z_1	x_1	d	f	Inserts	Side	Rear
Call For Details	SDJNL 1012 F11 IC	Call For Details	SDJNR 1012 F11 IC	12	10	80	22	16.5	M5	8	DN...11	4005-000111	4005-000111
Call For Details	SDJNL 1012 H11 IC	Call For Details	SDJNR 1012 H11 IC	12	10	100	22	16.5	M5	12	DN...11	4005-000111	4005-000111
Call For Details	SDJNL 1212 H11 IC	Call For Details	SDJNR 1212 H11 IC	12	12	100	22	18.5	M5	12	DN...11	4005-000111	4005-000111
Call For Details	SDJNL 1616 K11 IC	Call For Details	SDJNR 1616 K11 IC	16	16	125	22	22.5	G1/8"	16	DN...11	4005-000111	4005-000104
Call For Details	SDJNL 2020 K11 IC	Call For Details	SDJNR 2020 K11 IC	20	20	125	22	26.5	G1/8"	20	DN...11	4005-000111	4005-000104
Call For Details	SDJNL 2525 M11 IC	Call For Details	SDJNR 2525 M11 IC	25	25	125	22	31.5	G1/8"	25	DN...11	4005-000111	4005-000104
Call For Details	SDJNL 3/8" H11 IC	Call For Details	SDJNR 3/8" H11 IC	12	9.525	100	22	16	M5	12	DN...11	4005-000111	4005-000111
Call For Details	SDJNL 1/2" H11 IC	Call For Details	SDJNR 1/2" H11 IC	12.7	12.7	100	22	19.2	M5	12.7	DN...11	4005-000111	4005-000111
Call For Details	SDJNL 5/8" K11 IC	Call For Details	SDJNR 5/8" K11 IC	15.875	15.875	125	22	22.4	G1/8"	15.875	DN...11	4005-000111	4005-000104
Call For Details	SDJNL 3/4" K11 IC	Call For Details	SDJNR 3/4" K11 IC	19.05	19.05	125	22	25.5	G1/8"	19.05	DN...11	4005-000111	4005-000104

Features (5) connection ports for simple connection to your oil delivery system. (4) Side ports and (1) one end port making connection possible on most machine tool positions.

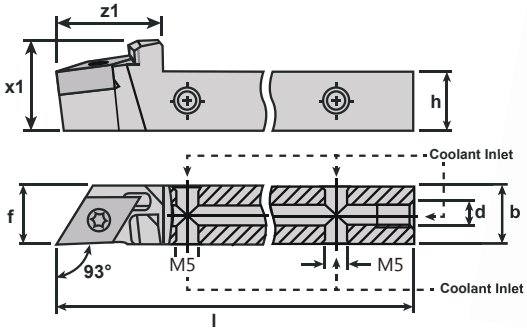






4005-000111
Connects to side ports on ALL shank sizes
0° Male Union - M5-0.8 to 1/4 JIC Flare Fitting
Included With All Coolant-Thru Shanks



4005-000104
Connects to end port on 5/8" and larger shanks
0° Male Union - 1/8 BSPP to 1/4 JIC Flare Fitting
Fits Position (d) On Tool Holders Sold Separately




ISO Holder SDNNN


Type: 62.5°, DNGU A4 Inserts
Coolant-Thru: None

Repeatability <20µm

Left Hand		Right Hand		Dimensions & Features				
Item No.	Description	Item No.	Description	b	h	l	f	Inserts
Call For Details	SDNNN 1012 H11	Call For Details	SDNNN 1012 H11	12	10	100	12	DN...11
Call For Details	SDNNN 1212 H11	Call For Details	SDNNN 1212 H11	12	12	100	12	DN...11
Call For Details	SDNNN 1616 K11	Call For Details	SDNNN 1616 K11	16	16	125	16	DN...11
Call For Details	SDNNN 2020 K11	Call For Details	SDNNN 2020 K11	20	20	125	20	DN...11
Call For Details	SDNNN 2525 K11	Call For Details	SDNNN 2525 K11	25	25	150	25	DN...11
Call For Details	SDNNN 3/8" H11	Call For Details	SDNNN 3/8" H11	9.525	9.525	100	9.525	DN...11
Call For Details	SDNNN 1/2" H11	Call For Details	SDNNN 1/2" H11	12.7	12.7	100	12.7	DN...11
Call For Details	SDNNN 5/8" K11	Call For Details	SDNNN 5/8" K11	15.875	15.875	125	15.875	DN...11
Call For Details	SDNNN 3/4" K11	Call For Details	SDNNN 3/4" K11	19.05	19.05	125	19.05	DN...11

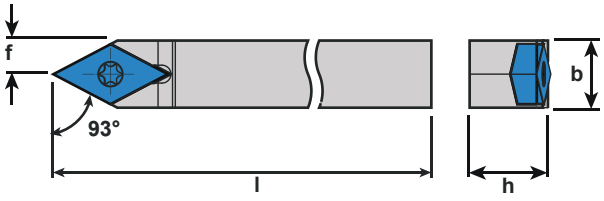






ISO Coolant-Thru Holder SDNNN


Type: 62.5°, DNGU A4 Inserts
Coolant-Thru: Rear & Side Ports

Repeatability <10µm

Left Hand		Right Hand		Dimensions & Features								Coolant Fittings	
Item No.	Description	Item No.	Description	b	h	l	z_1	x_1	d	f	Inserts	Side	Rear
Call For Details	SDNNN 1012 H11 IC	Call For Details	SDNNN 1012 H11 IC	12	10	100	22	15	M5	6	DN...11	4005-000111	4005-000111
Call For Details	SDNNN 1212 H11 IC	Call For Details	SDNNN 1212 H11 IC	12	12	100	22	17	M5	6	DN...11	4005-000111	4005-000111
Call For Details	SDNNN 1616 K11 IC	Call For Details	SDNNN 1616 K11 IC	16	16	125	22	21	G1/8"	8	DN...11	4005-000111	4005-000104
Call For Details	SDNNN 2020 K11 IC	Call For Details	SDNNN 2020 K11 IC	20	20	125	22	25	G1/8"	10	DN...11	4005-000111	4005-000104
Call For Details	SDNNN 2525 K11 IC	Call For Details	SDNNN 2525 K11 IC	25	25	125	25	30.5	G1/8"	12.5	DN...11	4005-000111	4005-000104
Call For Details	SDNNN 3/8" H11 IC	Call For Details	SDNNN 3/8" H11 IC	9.525	9.525	100	22	14.525	M5	4.76	DN...11	4005-000111	4005-000111
Call For Details	SDNNN 1/2" H11 IC	Call For Details	SDNNN 1/2" H11 IC	12.7	12.7	100	22	17.7	M5	6.35	DN...11	4005-000111	4005-000111
Call For Details	SDNNN 5/8" K11 IC	Call For Details	SDNNN 5/8" K11 IC	15.875	15.875	125	22	20.875	G1/8"	7.94	DN...11	4005-000111	4005-000104
Call For Details	SDNNN 3/4" K11 IC	Call For Details	SDNNN 3/4" K11 IC	19.05	19.05	125	22	24.05	G1/8"	9.525	DN...11	4005-000111	4005-000104

Features (5) connection ports for simple connection to your oil delivery system. (4) Side ports and (1) one end port making connection possible on most machine tool positions.

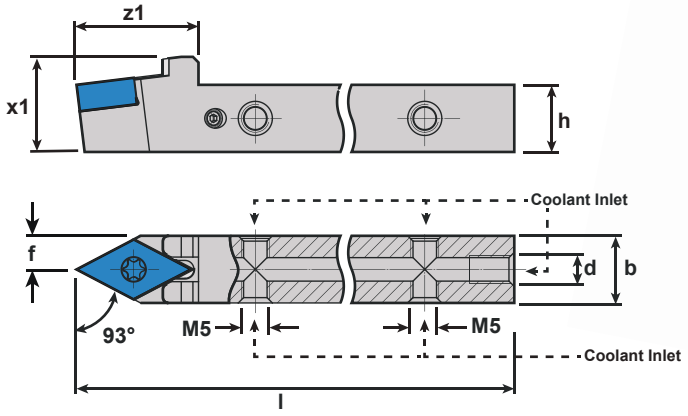

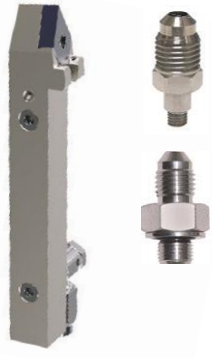

4005-000111
Connects to side ports on ALL shank sizes
0° Male Union - M5-0.8 to 1/4 JIC Flare Fitting
Included With All Coolant-Thru Shanks

4005-000104
Connects to end port on 5/8" and larger shanks
0° Male Union - 1/8 BSPP to 1/4 JIC Flare Fitting
Fits Position (d) On Tool Holders Sold Separately


Coatings vs Material Type

Carbide												Cermet		Diamond			Materials
UHM 10	UHM 10 HX	UHM 10 TX+	UHM 10 MZ	UHM 20 HPX	UHM 20 TX+	UHM 20 MZ	UHM 30	UHM 30 HX	UHM 30 TX+	UHM 30 MZ	UHM 30 SX	UCM 10	UCM 10 HX	UCVD 08	UPCD 15	UPCD 20	
-	-	■	■	■	■	■	□	□	■	■	□	■	■	-	-	-	**Steel**
-	■	■	-	■	■	□	□	■	■	■	■	□	■	-	-	-	Stainless Steel
□	■	■	-	□	■	-	□	■	■	-	-	-	-	-	-	-	Titanium & Ti-Alloys
■	□	-	-	-	-	-	□	□	-	-	□	-	-	■	■	■	Non-Ferrous Metals
-	-	■	-	-	-	-	-	-	-	-	-	-	-	-	-	-	Mard Materials

Material Class								
I	II	III	IV	V	VI	VII	VIII	IX
Unalloyed Steel	Low-Alloy Steel	High-Alloy Steel	Titanium	Stainless Steel (HB<220)	Stainless Steel (HB≥220)	Aluminum	Brass	Synthetics / Composits




VC...07 inserts: d =.250"
VC...10 inserts: d =.250"
VC...11 inserts: d =.250"
VC...16 inserts: d =.375"



VCGT Carbide FN A3

Cut: Neutral


Chip Breaker: A3, Polished Rake, Sharp Cutting Edge

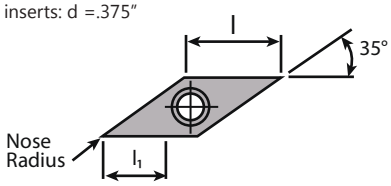


Repeatability <20µm

Dimensions & Features							
Item No.	Description	Edge	l	l_1	Nose Radius	Holder	Coating
7005-153760	VCGT 0702006 FN A3 UHM10 HX	Sharp	6.8	3	.06mm/.0024in	SD...07	UHM 10 HX
Call For Details	VCGT 0702006 FN A3 UHM20 HPX	Sharp	6.8	3	.06mm/.0024in	SD...07	UHM 20 HPX
Call For Details	VCGT 070201 FN A3 UHM10 HX	Sharp	6.8	3	.1mm/.0039in	SD...07	UHM 10 HX
Call For Details	VCGT 070201 FN A3 UHM10 TX+	Sharp	6.8	3	.1mm/.0039in	SD...07	UHM 10 TX+
Call For Details	VCGT 0702015 FN A3 UHM10 HX	Sharp	6.8	3	.15mm/.0059in	SD...07	UHM 10 HX
Call For Details	VCGT 0702015 FN A3 UHM10 TX+	Sharp	6.8	3	.15mm/.0059in	SD...07	UHM 10 TX+
7005-123088	VCGT 1103008 FN A3 UHM10 HX	Sharp	11.1	6	.08mm/.0031in	SD...11	UHM 10 HX
Call For Details	VCGT 1103008 FN A3 UHM10 TX+	Sharp	11.1	6	.08mm/.0031in	SD...11	UHM 10 TX+
7005-116991	VCGT 1103008 FN A3 UHM20 HPX	Sharp	11.1	6	.08mm/.0031in	SD...11	UHM 20 HPX
Call For Details	VCGT 1103008 FN A3 UHM20 TX+	Sharp	11.1	6	.08mm/.0031in	SD...11	UHM 20 TX+
7005-121880	VCGT 1103015 FN A3 UHM10 HX	Sharp	11.1	6	.15mm/.0059in	SD...11	UHM 10 HX
Call For Details	VCGT 1103015 FN A3 UHM10 TX+	Sharp	11.1	6	.15mm/.0059in	SD...11	UHM 10 TX+
Call For Details	VCGT 1103015 FN A3 UHM20 HPX	Sharp	11.1	6	.15mm/.0059in	SD...11	UHM 20 HPX
Call For Details	VCGT 1103015 FN A3 UHM20 TX+	Sharp	11.1	6	.15mm/.0059in	SD...11	UHM 20 TX+
7005-121881	VCGT 1103035 FN A3 UHM10 HX	Sharp	11.1	6	.35mm/.0137in	SD...11	UHM 10 HX
Call For Details	VCGT 1103035 FN A3 UHM10 TX+	Sharp	11.1	6	.35mm/.0137in	SD...11	UHM 10 TX+
Call For Details	VCGT 1103035 FN A3 UHM20 HPX	Sharp	11.1	6	.35mm/.0137in	SD...11	UHM 20 HPX
Call For Details	VCGT 1103035 FN A3 UHM20 TX+	Sharp	11.1	6	.35mm/.0137in	SD...11	UHM 20 TX+

Application	Material Class								
	I	II	III	IV	V	VI	VII	VIII	IX
Roughing	-	-	-	-	-	-	-	-	-
Finishing	□	□	□	□	□	□	■	-	■
Micro Finishing	■	■	■	■	■	■	■	-	■






VCGT Carbide EN A3

Cut: Neutral


Chip Breaker: A3, Polished Rake, Round Cutting Edge

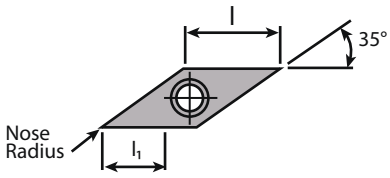


Repeatability <20µm

Dimensions & Features							
Item No.	Description	Edge	l	l_1	Nose Radius	Holder	Coating
Call For Details	VCGT 1103008 EN A3 UHM20 HPX	Round	11.1	6	.08mm/.0031in	SD...11	UHM 20 HPX
Call For Details	VCGT 1103008 EN A3 UHM20 TX+	Round	11.1	6	.08mm/.0031in	SD...11	UHM 20 TX+
Call For Details	VCGT 1103015 EN A3 UHM20 HPX	Round	11.1	6	.15mm/.0059in	SD...11	UHM 20 HPX
Call For Details	VCGT 1103015 EN A3 UHM20 TX+	Round	11.1	6	.15mm/.0059in	SD...11	UHM 20 TX+
Call For Details	VCGT 1103035 EN A3 UHM20 HPX	Round	11.1	6	.35mm/.0137in	SD...11	UHM 20 HPX
Call For Details	VCGT 1103035 EN A3 UHM20 TX+	Round	11.1	6	.35mm/.0137in	SD...11	UHM 20 TX+

Material Class									
Application	I	II	III	IV	V	VI	VII	VIII	IX
Roughing	-	-	-	-	-	-	-	-	-
Finishing	□	□	□	□	□	□	■	-	■
Micro Finishing	■	■	■	■	■	■	■	-	■






VCGT Carbide PA5

Cut: Neutral


Chip Breaker: PA5, Polished Rake, Sharp Cutting Edge

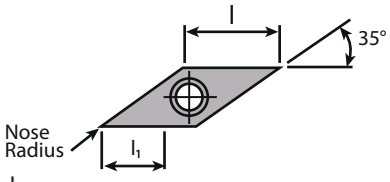

Repeatability <20µm

Dimensions & Features							
Item No.	Description	Edge	l	l_1	Nose Radius	Holder	Coating
7005-126563	VCGT 110302 FN PA5 UHM10 HX	Sharp	11.1	6.8	.2mm/.0078in	SV...11	UHM 10 HX
Call For Details	VCGT 110302 FN PA5 UHM10 TX+	Sharp	11.1	6.8	.2mm/.0078in	SV...11	UHM 10 TX+
7005-126562	VCGT 110304 FN PA5 UHM10 HX	Sharp	11.1	6.8	.4mm/.0157in	SV...11	UHM 10 HX
Call For Details	VCGT 110304 FN PA5 UHM10 TX+	Sharp	11.1	6.8	.4mm/.0157in	SV...11	UHM 10 TX+
7005-123456	VCGT 160404 FN PA5 UHM10 HX	Sharp	16.6	8.9	.4mm/.0157in	SV...16	UHM 10 HX
Call For Details	VCGT 160404 FN PA5 UHM10 TX+	Sharp	16.6	8.9	.4mm/.0157in	SV...16	UHM 10 TX+
7005-123457	VCGT 160408 FN PA5 UHM10 HX	Sharp	16.6	8.9	.8mm/.0314in	SV...16	UHM 10 HX
Call For Details	VCGT 160408 FN PA5 UHM10 TX+	Sharp	16.6	8.9	.8mm/.0314in	SV...16	UHM 10 TX+

Material Class									
Application	I	II	III	IV	V	VI	VII	VIII	IX
Roughing	-	-	-	-	-	-	□	-	□
Finishing	■	■	■	□	■	■	■	-	■
Micro Finishing	■	■	■	□	■	■	■	-	■




Coatings vs Material Type

Carbide												Cermet		Diamond			Materials
-	-	■	■	■	■	■	□	□	■	■	□	■	■	-	-	-	**Steel**
-	■	■	-	■	■	□	□	■	■	■	■	□	■	-	-	-	Stainless Steel
□	■	■	-	□	■	-	□	■	■	-	-	-	-	-	-	-	Titanium & Ti-Alloys
■	□	-	-	-	-	-	□	□	-	-	□	-	-	■	■	■	Non-Ferrous Metals
-	-	■	-	-	-	-	-	-	-	-	-	-	-	-	-	-	Mard Materials
UHM 10	UHM 10 HX	UHM 10 TX+	UHM 10 MZ	UHM 20 HPX	UHM 20 TX+	UHM 20 MZ	UHM 30	UHM 30 HX	UHM 30 TX+	UHM 30 MZ	UHM 30 SX	UCM 10	UCM 10 HX	UCVD 08	UPCD 15	UPCD 20	




VC...07 inserts: d =.250"
VC...10 inserts: d =.250"
VC...11 inserts: d =.250"
VC...16 inserts: d =.375"

Material Class								
I	II	III	IV	V	VI	VII	VIII	IX
Unalloyed Steel	Low-Alloy Steel	High-Alloy Steel	Titanium	Stainless Steel (HB<220)	Stainless Steel (HB≥220)	Aluminum	Brass	Synthetics / Composits



VCGT Carbide TOP5 Wiper


Cut: Right Hand, Left Hand
Chip Breaker: TOP5, Polished Rake, Sharp Cutting Edge

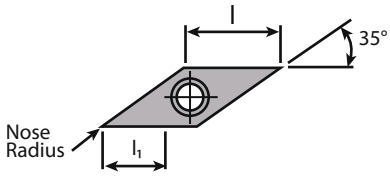


Repeatability <20µm

Dimensions & Features								
Item No.	Description	Hand	Edge	l	l_1	Nose Radius	Holder	Coating
7005-126920	VCGT 110304 FL TOP5 UHM10 HX	Left	Sharp	11.1	7	.4mm/.0157in	SV...11	UHM 10 HX
Call For Details	VCGT 110304 FL TOP5 UHM10 TX+	Left	Sharp	11.1	7	.4mm/.0157in	SV...11	UHM 10 TX+
7005-126906	VCGT 110304 FR TOP5 UHM10 HX	Right	Sharp	11.1	7	.4mm/.0157in	SV...11	UHM 10 HX
Call For Details	VCGT 110304 FR TOP5 UHM10 TX+	Right	Sharp	11.1	7	.4mm/.0157in	SV...11	UHM 10 TX+

Application	Material Class I	II	III	IV	V	VI	VII	VIII	IX
Roughing	□	□	□	□	□	□	□	-	□
Finishing	■	■	■	□	■	■	■	-	■
Micro Finishing	□	□	□	□	□	□	□	-	□






VCGT Carbide PA7

Cut: Neutral


Chip Breaker: PA7, Sharp Cutting Edge

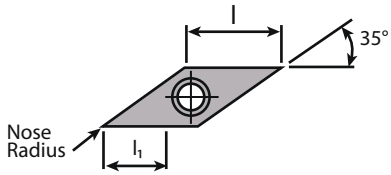

Repeatability <20µm

Item No.	Description	Dimensions & Features					
		Edge	l	l_1	Nose Radius	Holder	Coating
7005-114387	VCGT 1103005 FN PA7 UHM10 HX	Sharp	11.1	5.5	.05mm/.0019in	SV...11	UHM 10 HX
Call For Details	VCGT 1103005 FN PA7 UHM 10 TX+	Sharp	11.1	5.5	.05mm/.0019in	SV...11	UHM 10 TX+
7005-114390	VCGT 110301 FN PA7 UHM10 HX	Sharp	11.1	5.5	.1mm/.0039in	SV...11	UHM 10 HX
Call For Details	VCGT 110301 FN PA7 UHM10 TX+	Sharp	11.1	5.5	.1mm/.0039in	SV...11	UHM 10 TX+
7005-123648	VCGT 110302 FN PA7 UHM10 HX	Sharp	11.1	5.5	.2mm/.0078in	SV...11	UHM 10 HX
Call For Details	VCGT 110302 FN PA7 UHM10 TX+	Sharp	11.1	5.5	.2mm/.0078in	SV...11	UHM 10 TX+
7005-012984	VCGT 110304 FN PA7 UHM10 HX	Sharp	11.1	5.5	.4mm/.0157in	SV...11	UHM 10 HX
Call For Details	VCGT 110304 FN PA7 UHM10 TX+	Sharp	11.1	5.5	.4mm/.0157in	SV...11	UHM 10 TX+
7005-123649	VCGT 110308 FN PA7 UHM10 HX	Sharp	11.1	5.5	.8mm/.0314in	SV...11	UHM 10 HX
Call For Details	VCGT 110308 FN PA7 UHM10 TX+	Sharp	11.1	5.5	.8mm/.0314in	SV...11	UHM 10 TX+
7005-114396	VCGT 160402 FN PA7 UHM10 HX	Sharp	16.6	8.9	.2mm/.0078in	SV...16	UHM 10 HX
Call For Details	VCGT 160402 FN PA7 UHM10 TX+	Sharp	16.6	8.9	.2mm/.0078in	SV...16	UHM 10 TX+
7005-123316	VCGT 160404 FN PA7 UHM10 HX	Sharp	16.6	8.9	.4mm/.0157in	SV...16	UHM 10 HX
Call For Details	VCGT 160404 FN PA7 UHM10 TX+	Sharp	16.6	8.9	.4mm/.0157in	SV...16	UHM 10 TX+
7005-123458	VCGT 160408 FN PA7 UHM10 HX	Sharp	16.6	8.9	.8mm/.0314in	SV...16	UHM 10 HX
Call For Details	VCGT 160408 FN PA7 UHM10 TX+	Sharp	16.6	8.9	.8mm/.0314in	SV...16	UHM 10 TX+

Application	Material Class								
	I	II	III	IV	V	VI	VII	VIII	IX
Roughing	-	-	-	-	-	-	□	-	□
Finishing	□	□	□	□	□	□	■	-	■
Micro Finishing	■	■	■	□	■	■	■	-	■






VCXT Carbide PA9

Cut: Neutral


Chip Breaker: PA9, Sharp Cutting Edge

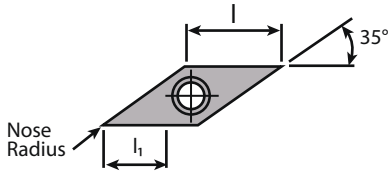

Repeatability <50µm

Item No.	Description	Dimensions & Features					
		Edge	l	l_1	Nose Radius	Holder	Coating
7005-138594	VCXT 160404 EN PA9 UHM10 HX	Sharp	16.6	8.9	.4mm/.0157in	SV...16	UHM 10 HX
Call For Details	VCXT 160404 EN PA9 UHM10 TX+	Sharp	16.6	8.9	.4mm/.0157in	SV...16	UHM 10 TX+
7005-138596	VCXT 160408 EN PA9 UHM10 HX	Sharp	16.6	8.9	.8mm/.0314in	SV...16	UHM 10 HX
Call For Details	VCXT 160408 EN PA9 UHM10 TX+	Sharp	16.6	8.9	.8mm/.0314in	SV...16	UHM 10 TX+

Application	Material Class								
	I	II	III	IV	V	VI	VII	VIII	IX
Roughing	□	□	□	□	□	□	■	-	-
Finishing	■	■	■	■	■	■	□	-	-
Micro Finishing	□	□	□	-	□	□	-	-	-




Coatings vs Material Type

Carbide												Cermet		Diamond			Materials
UHM 10	UHM 10 HX	UHM 10 TX+	UHM 10 MZ	UHM 20 HPX	UHM 20 TX+	UHM 20 MZ	UHM 30	UHM 30 HX	UHM 30 TX+	UHM 30 MZ	UHM 30 SX	UCM 10	UCM 10 HX	UCVD 08	UPCD 15	UPCD 20	
-	-	■	■	■	■	■	□	□	■	■	□	■	■	-	-	-	**Steel**
-	■	■	-	■	■	□	□	■	■	■	■	□	■	-	-	-	Stainless Steel
□	■	■	-	□	■	-	□	■	■	-	-	-	-	-	-	-	Titanium & Ti-Alloys
■	□	-	-	-	-	-	□	□	-	-	□	-	-	■	■	■	Non-Ferrous Metals
-	-	■	-	-	-	-	-	-	-	-	-	-	-	-	-	-	Mard Materials



VC...07 inserts: d =.250"
VC...10 inserts: d =.250"
VC...11 inserts: d =.250"
VC...16 inserts: d =.375"


Material Class								
I	II	III	IV	V	VI	VII	VIII	IX
Unalloyed Steel	Low-Alloy Steel	High-Alloy Steel	Titanium	Stainless Steel (HB<220)	Stainless Steel (HB≥220)	Aluminum	Brass	Synthetics / Composits



VCGT Carbide/Cermet PF

Cut: Neutral


Chip Breaker: PF, Polished Rake, Round Cutting Edge

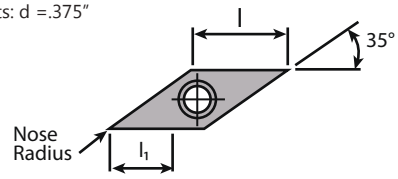


Repeatability <20µm

Dimensions & Features							
Item No.	Description	Edge	l	l_1	Nose Radius	Holder	Coating
7005-113695	VCGT 110302 EN PF UHM10 MZ	Round	11.1	4.8	.2mm/.0078in	SD...11	UHM 10 MZ
7005-123394	VCGT 110302 EN PF UHM20 MZ	Round	11.1	4.8	.2mm/.0078in	SD...11	UHM 20 MZ
7005-123395	VCGT 110302 EN PF UHM30 MZ	Round	11.1	4.8	.2mm/.0078in	SD...11	UHM 30 MZ
7005-123647	VCGT 110302 EN PF UCM10 HX	Round	11.1	4.8	.2mm/.0078in	SD...11	UCM 10 HX
Call For Details	VCGT 110302 EN PF UCM10 MZ	Round	11.1	4.8	.2mm/.0078in	SD...11	UCM 10 MZ
7005-113696	VCGT 110304 EN PF UHM10 MZ	Round	11.1	4.8	.4mm/.0157in	SD...11	UHM 10 MZ
7005-123396	VCGT 110304 EN PF UHM20 MZ	Round	11.1	4.8	.4mm/.0157in	SD...11	UHM 20 MZ
7005-123397	VCGT 110304 EN PF UHM30 MZ	Round	11.1	4.8	.4mm/.0157in	SD...11	UHM 30 MZ
7005-013273	VCGT 110304 EN PF UCM10 HX	Round	11.1	4.8	.4mm/.0157in	SD...11	UCM 10 HX
Call For Details	VCGT 110304 EN PF UCM10 MZ	Round	11.1	4.8	.4mm/.0157in	SD...11	UCM 10 MZ
7005-113697	VCGT 110308 EN PF UHM10 MZ	Round	11.1	4.8	.8mm/.0314in	SD...11	UHM 10 MZ
7005-127966	VCGT 110308 EN PF UHM20 MZ	Round	11.1	4.8	.8mm/.0314in	SD...11	UHM 20 MZ
7005-123399	VCGT 110308 EN PF UHM30 MZ	Round	11.1	4.8	.8mm/.0314in	SD...11	UHM 30 MZ
7005-123650	VCGT 160404 EN PF UCM10 HX	Round	16.6	6	.4mm/.0157in	SD...16	UCM 10 HX
Call For Details	VCGT 160404 EN PF UCM10 MZ	Round	16.6	6	.4mm/.0157in	SD...16	UCM 10 MZ
7005-123651	VCGT 160408 EN PF UCM10 HX	Round	16.6	6	.8mm/.0314in	SD...16	UCM 10 HX
Call For Details	VCGT 160408 EN PF UCM10 MZ	Round	16.6	6	.8mm/.0314in	SD...16	UCM 10 MZ

Application	Material Class								
	I	II	III	IV	V	VI	VII	VIII	IX
Roughing	□	□	□	-	□	□	-	-	-
Finishing	■	■	■	-	■	■	-	-	-
Micro Finishing	■	■	■	-	■	■	-	-	-

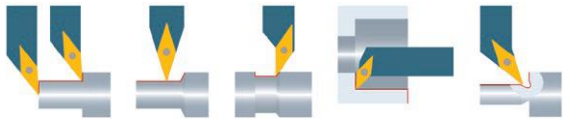




VCMT Carbide PF

Cut: Neutral


Chip Breaker: PF, Round Cutting Edge

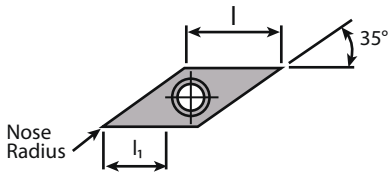

Repeatability <50µm

Item No.	Description	Dimensions & Features					
		Edge	l	l_1	Nose Radius	Holder	Coating
7005-113698	VCMT 160404 EN PF UHM10 MZ	Round	16.6	6	.2mm/.0078in	SV...16	UHM 10 MZ
7005-123401	VCMT 160404 EN PF UHM20 MZ	Round	16.6	6	.2mm/.0078in	SV...16	UHM 20 MZ
7005-123402	VCMT 160404 EN PF UHM30 MZ	Round	16.6	6	.2mm/.0078in	SV...16	UHM 30 MZ
7005-113699	VCMT 160408 EN PF UHM10 MZ	Round	16.6	6	.4mm/.0157in	SV...16	UHM 10 MZ
7005-123405	VCMT 160408 EN PF UHM20 MZ	Round	16.6	6	.4mm/.0157in	SV...16	UHM 20 MZ

Application	Material Class								
	I	II	III	IV	V	VI	VII	VIII	IX
Roughing	■	■	■	-	■	■	-	-	-
Finishing	□	□	□	-	□	□	-	-	-
Micro Finishing	-	-	-	-	-	-	-	-	-






VCET Carbide PF05


Cut: Neutral

Chip Breaker: PF, Polished Rake, Round Cutting Edge

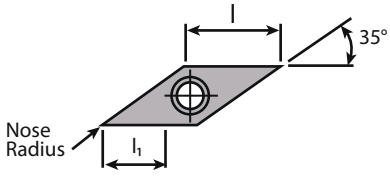

Repeatability <50µm

Item No.	Description	Dimensions & Features					
		Edge	l	l_1	Nose Radius	Holder	Coating
7005-113698	VCMT 160404 EN PF UHM10 MZ	Round	16.6	6	.2mm/.0078in	SV...16	UHM 10 MZ
7005-123401	VCMT 160404 EN PF UHM20 MZ	Round	16.6	6	.2mm/.0078in	SV...16	UHM 20 MZ
7005-123402	VCMT 160404 EN PF UHM30 MZ	Round	16.6	6	.2mm/.0078in	SV...16	UHM 30 MZ
7005-113699	VCMT 160408 EN PF UHM10 MZ	Round	16.6	6	.4mm/.0157in	SV...16	UHM 10 MZ
7005-123405	VCMT 160408 EN PF UHM20 MZ	Round	16.6	6	.4mm/.0157in	SV...16	UHM 20 MZ

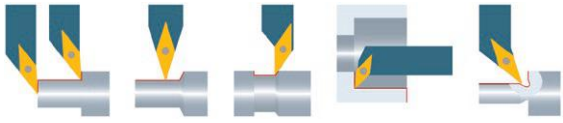

Coatings vs Material Type

Carbide												Cermet		Diamond			Materials
UHM 10	UHM 10 HX	UHM 10 TX+	UHM 10 MZ	UHM 20 HPX	UHM 20 TX+	UHM 20 MZ	UHM 30	UHM 30 HX	UHM 30 TX+	UHM 30 MZ	UHM 30 SX	UCM 10	UCM 10 HX	UCVD 08	UPCD 15	UPCD 20	
-	-	■	■	■	■	■	□	□	■	■	□	■	■	-	-	-	**Steel**
-	■	■	-	■	■	□	□	■	■	■	■	□	■	-	-	-	Stainless Steel
□	■	■	-	□	■	-	□	■	■	-	-	-	-	-	-	-	Titanium & Ti-Alloys
■	□	-	-	-	-	-	□	□	-	-	□	-	-	■	■	■	Non-Ferrous Metals
-	-	■	-	-	-	-	-	-	-	-	-	-	-	-	-	-	Mard Materials

Material Class								
I	II	III	IV	V	VI	VII	VIII	IX
Unalloyed Steel	Low-Alloy Steel	High-Alloy Steel	Titanium	Stainless Steel (HB<220)	Stainless Steel (HB≥220)	Aluminum	Brass	Synthetics / Composits




VC...07 inserts: d =.250"
VC...10 inserts: d =.250"
VC...11 inserts: d =.250"
VC...16 inserts: d =.375"



VCGT Carbide FN PF23

Cut: Neutral


Chip Breaker: PF23, Polished Rake, Sharp Cutting Edge

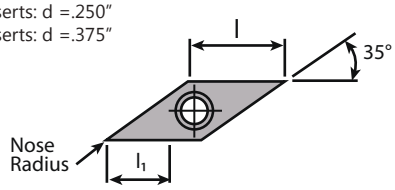

Repeatability <20µm

Item No.	Description	Dimensions & Features					
		Edge	l	l_1	Nose Radius	Holder	Coating
Call For Details	VCGT 1103005 FN PF23 UHM20 HPX	Sharp	11.1	4.8	.05mm/.0019in	SV...11	UHM 20 HPX
Call For Details	VCGT 1103005 FN PF23 UHM20 TX+	Sharp	11.1	4.8	.05mm/.0019in	SV...11	UHM 20 TX+
7005-127763	VCGT 1103005 FN PF23 UHM30 HX	Sharp	11.1	4.8	.05mm/.0019in	SV...11	UHM 30 HX
Call For Details	VCGT 110301 FN PF23 UHM20 HPX	Sharp	11.1	4.8	.1mm/.0039in	SV...11	UHM 20 HPX
Call For Details	VCGT 110301 FN PF23 UHM20 TX+	Sharp	11.1	4.8	.1mm/.0039in	SV...11	UHM 20 TX+
7005-127215	VCGT 110301 FN PF23 UHM30 HX	Sharp	11.1	4.8	.1mm/.0039in	SV...11	UHM 30 HX
Call For Details	VCGT 110302 FN PF23 UHM20 HPX	Sharp	11.1	4.8	.2mm/.0078in	SV...11	UHM 20 HPX
Call For Details	VCGT 110302 FN PF23 UHM20 TX+	Sharp	11.1	4.8	.2mm/.0078in	SV...11	UHM 20 TX+
7005-137705	VCGT 110302 FN PF23 UHM30 HX	Sharp	11.1	4.8	.2mm/.0078in	SV...11	UHM 30 HX
Call For Details	VCGT 160401 FN PF23 UHM20 HPX	Sharp	16.6	8.4	.1mm/.0039in	SV...16	UHM 20 HPX
Call For Details	VCGT 160401 FN PF23 UHM20 TX+	Sharp	16.6	8.4	.1mm/.0039in	SV...16	UHM 20 TX+
7005-127217	VCGT 160401 FN PF23 UHM30 HX	Sharp	16.6	8.4	.1mm/.0039in	SV...16	UHM 30 HX
Call For Details	VCGT 160402 FN PF23 UHM20 HPX	Sharp	16.6	8.4	.2mm/.0078in	SV...16	UHM 20 HPX
Call For Details	VCGT 160402 FN PF23 UHM20 TX+	Sharp	16.6	8.4	.2mm/.0078in	SV...16	UHM 20 TX+
7005-137998	VCGT 160402 FN PF23 UHM30 HX	Sharp	16.6	8.4	.2mm/.0078in	SV...16	UHM 30 HX

Application	Material Class								
	I	II	III	IV	V	VI	VII	VIII	IX
Roughing	-	-	-	-	-	-	-	-	-
Finishing	□	□	□	□	□	□	□	-	-
Micro Finishing	■	■	■	□	■	■	□	-	□

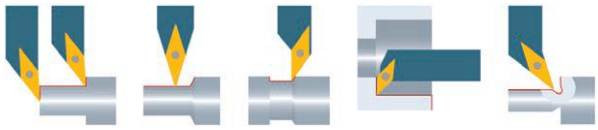




VCGT Carbide EN PF23

Cut: Neutral


Chip Breaker: PF23, Polished Rake, Round Cutting Edge

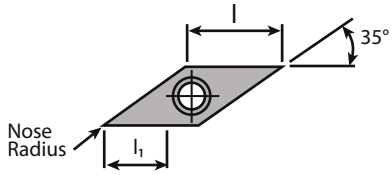

Repeatability <20µm

Item No.	Description	Dimensions & Features					
		Edge	l	l_1	Nose Radius	Holder	Coating
Call For Details	VCGT 1103005 EN PF23 UHM20 HPX	Round	11.1	4.8	.05mm/.0019in	SV...11	UHM 20 HPX
Call For Details	VCGT 1103005 EN PF23 UHM20 TX+	Round	11.1	4.8	.05mm/.0019in	SV...11	UHM 20 TX+
Call For Details	VCGT 110301 EN PF23 UHM20 HPX	Round	11.1	4.8	.1mm/.0039in	SV...11	UHM 20 HPX
Call For Details	VCGT 110301 EN PF23 UHM20 TX+	Round	11.1	4.8	.1mm/.0039in	SV...11	UHM 20 TX+
Call For Details	VCGT 110302 EN PF23 UHM20 HPX	Round	11.1	4.8	.2mm/.0078in	SV...11	UHM 20 HPX
Call For Details	VCGT 110302 EN PF23 UHM20 TX+	Round	11.1	4.8	.2mm/.0078in	SV...11	UHM 20 TX+
Call For Details	VCGT 160401 EN PF23 UHM20 HPX	Round	16.6	8.4	.1mm/.0039in	SV...16	UHM 20 HPX
Call For Details	VCGT 160401 EN PF23 UHM20 TX+	Round	16.6	8.4	.1mm/.0039in	SV...16	UHM 20 TX+
Call For Details	VCGT 160402 EN PF23 UHM20 HPX	Round	16.6	8.4	.2mm/.0078in	SV...16	UHM 20 HPX
Call For Details	VCGT 160402 EN PF23 UHM20 TX+	Round	16.6	8.4	.2mm/.0078in	SV...16	UHM 20 TX+

Application	Material Class								
	I	II	III	IV	V	VI	VII	VIII	IX
Roughing	-	-	-	-	-	-	-	-	-
Finishing	□	□	□	□	□	□	□	-	-
Micro Finishing	■	■	■	□	■	■	□	-	□






VCGT Carbide EN PF33

Cut: Neutral


Chip Breaker: PF33, Polished Rake, Round Cutting Edge

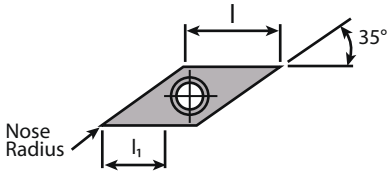

Repeatability <20µm

Item No.	Description	Dimensions & Features					
		Edge	l	l_1	Nose Radius	Holder	Coating
Call For Details	VCGT 1103005 EN PF33 UHM20 HPX	Round	11.1	4.8	.05mm/.0019in	SV...11	UHM 20 HPX
Call For Details	VCGT 1103005 EN PF33 UHM20 TX+	Round	11.1	4.8	.05mm/.0019in	SV...11	UHM 20 TX+
Call For Details	VCGT 110301 EN PF33 UHM20 HPX	Round	11.1	4.8	.1mm/.0039in	SV...11	UHM 20 HPX
Call For Details	VCGT 110301 EN PF33 UHM20 TX+	Round	11.1	4.8	.1mm/.0039in	SV...11	UHM 20 TX+
Call For Details	VCGT 110302 EN PF33 UHM20 HPX	Round	11.1	4.8	.2mm/.0078in	SV...11	UHM 20 HPX
Call For Details	VCGT 110302 EN PF33 UHM20 TX+	Honed	11.1	4.8	.2mm/.0078in	SV...11	UHM 20 TX+
Call For Details	VCGT 110304 EN PF33 UHM20 HPX	Round	11.1	4.8	.4mm/.0157in	SV...11	UHM 20 HPX
Call For Details	VCGT 110304 EN PF33 UHM20 TX+	Round	11.1	4.8	.4mm/.0157in	SV...11	UHM 20 TX+
Call For Details	VCGT 160401 EN PF33 UHM20 HPX	Round	16.6	8.4	.1mm/.0039in	SV...16	UHM 20 HPX
Call For Details	VCGT 160401 EN PF33 UHM20 TX+	Round	16.6	8.4	.1mm/.0039in	SV...16	UHM 20 TX+
Call For Details	VCGT 160402 EN PF33 UHM20 HPX	Round	16.6	8.4	.2mm/.0078in	SV...16	UHM 20 HPX
Call For Details	VCGT 160402 EN PF33 UHM20 TX+	Round	16.6	8.4	.2mm/.0078in	SV...16	UHM 20 TX+
Call For Details	VCGT 160404 EN PF33 UHM20 HPX	Round	16.6	8.4	.4mm/.0157in	SV...16	UHM 20 HPX
Call For Details	VCGT 160404 EN PF33 UHM20 TX+	Round	16.6	8.4	.4mm/.0157in	SV...16	UHM 20 TX+

Application	Material Class								
	I	II	III	IV	V	VI	VII	VIII	IX
Roughing	□	□	□	-	□	□	-	-	-
Finishing	■	■	■	-	■	■	-	-	-
Micro Finishing	■	■	■	-	■	■	-	-	-



Coatings vs Material Type

Carbide												Cermet		Diamond			Materials
UHM 10	UHM 10 HX	UHM 10 TX+	UHM 10 MZ	UHM 20 HPX	UHM 20 TX+	UHM 20 MZ	UHM 30	UHM 30 HX	UHM 30 TX+	UHM 30 MZ	UHM 30 SX	UCM 10	UCM 10 HX	UCVD 08	UPCD 15	UPCD 20	
-	-	■	■	■	■	■	□	□	■	■	□	■	■	-	-	-	**Steel**
-	■	■	-	■	■	□	□	■	■	■	■	□	■	-	-	-	Stainless Steel
□	■	■	-	□	■	-	□	■	■	-	-	-	-	-	-	-	Titanium & Ti-Alloys
■	□	-	-	-	-	-	□	□	-	-	□	-	-	■	■	■	Non-Ferrous Metals
-	-	■	-	-	-	-	-	-	-	-	-	-	-	-	-	-	Mard Materials



VC...07 inserts: d =.250"
VC...10 inserts: d =.250"
VC...11 inserts: d =.250"
VC...16 inserts: d =.375"


Material Class								
I	II	III	IV	V	VI	VII	VIII	IX
Unalloyed Steel	Low-Alloy Steel	High-Alloy Steel	Titanium	Stainless Steel (HB<220)	Stainless Steel (HB≥220)	Aluminum	Brass	Synthetics / Composits



VCGT Carbide FN PF33

Cut: Neutral


Chip Breaker: PF33, Polished Rake, Sharp Cutting Edge

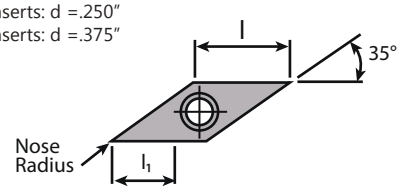


Repeatability <20µm

Dimensions & Features							
Item No.	Description	Edge	l	l_1	Nose Radius	Holder	Coating
Call For Details	VCGT 1103005 FN PF33 UHM20 HPX	Sharp	11.1	4.8	.05mm/.0019in	SV...11	UHM 20 HPX
Call For Details	VCGT 1103005 FN PF33 UHM20 TX+	Sharp	11.1	4.8	.05mm/.0019in	SV...11	UHM 20 TX+
7005-114374	VCGT 1103005 FN PF33 UHM30 HX	Sharp	11.1	4.8	.05mm/.0019in	SV...11	UHM 30 HX
Call For Details	VCGT 110301 FN PF33 UHM20 HPX	Sharp	11.1	4.8	.1mm/.0039in	SV...11	UHM 20 HPX
Call For Details	VCGT 110301 FN PF33 UHM20 TX+	Sharp	11.1	4.8	.1mm/.0039in	SV...11	UHM 20 TX+
7005-114414	VCGT 110301 FN PF33 UHM30 HX	Sharp	11.1	4.8	.1mm/.0039in	SV...11	UHM 30 HX
Call For Details	VCGT 110302 FN PF33 UHM20 HPX	Sharp	11.1	4.8	.2mm/.0078in	SV...11	UHM 20 HPX
Call For Details	VCGT 110302 FN PF33 UHM20 TX+	Sharp	11.1	4.8	.2mm/.0078in	SV...11	UHM 20 TX+
7005-114416	VCGT 110302 FN PF33 UHM30 HX	Sharp	11.1	4.8	.2mm/.0078in	SV...11	UHM 30 HX
Call For Details	VCGT 110304 FN PF33 UHM20 HPX	Sharp	11.1	4.8	.4mm/.0157in	SV...11	UHM 20 HPX
Call For Details	VCGT 110304 FN PF33 UHM20 TX+	Sharp	11.1	4.8	.4mm/.0157in	SV...11	UHM 20 TX+
7005-114418	VCGT 110304 FN PF33 UHM30 HX	Sharp	11.1	4.8	.4mm/.0157in	SV...11	UHM 30 HX
Call For Details	VCGT 160401 FN PF33 UHM20 HPX	Sharp	16.6	8.4	.1mm/.0039in	SV...16	UHM 20 HPX
Call For Details	VCGT 160401 FN PF33 UHM20 TX+	Sharp	16.6	8.4	.1mm/.0039in	SV...16	UHM 20 TX+
7005-114422	VCGT 160401 FN PF33 UHM30 HX	Sharp	16.6	8.4	.1mm/.0039in	SV...16	UHM 30 HX
Call For Details	VCGT 160402 FN PF33 UHM20 HPX	Sharp	16.6	8.4	.2mm/.0078in	SV...16	UHM 20 HPX
Call For Details	VCGT 160402 FN PF33 UHM20 TX+	Sharp	16.6	8.4	.2mm/.0078in	SV...16	UHM 20 TX+
7005-114424	VCGT 160402 FN PF33 UHM30 HX	Sharp	16.6	8.4	.2mm/.0078in	SV...16	UHM 30 HX
Call For Details	VCGT 160404 FN PF33 UHM20 HPX	Sharp	16.6	8.4	.4mm/.0157in	SV...16	UHM 20 HPX
Call For Details	VCGT 160404 FN PF33 UHM20 TX+	Sharp	16.6	8.4	.4mm/.0157in	SV...16	UHM 20 TX+
7005-114426	VCGT 160404 FN PF33 UHM30 HX	Sharp	16.6	8.4	.4mm/.0157in	SV...16	UHM 30 HX

Application	Material Class								
	I	II	III	IV	V	VI	VII	VIII	IX
Roughing	□	□	□	-	□	□	-	-	-
Finishing	■	■	■	-	■	■	-	-	-
Micro Finishing	■	■	■	-	■	■	-	-	-

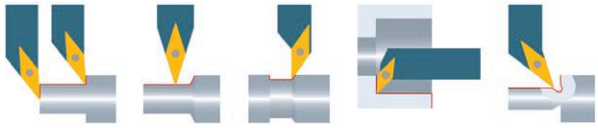




VCMT Carbide PF43

Cut: Neutral


Chip Breaker: PF43, Round Cutting Edge

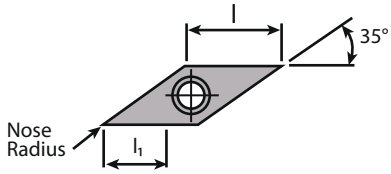

Repeatability <50µm

Dimensions & Features							
Item No.	Description	Edge	l	l_1	Nose Radius	Holder	Coating
Call For Details	VCMT 110302 EN PF43 UHM30 HX	Round	11.1	4.8	.2mm/.0078in	SV...11	UHM 30 HX
7005-127772	VCMT 110304 EN PF43 UHM30 HX	Round	11.1	4.8	.4mm/.0157in	SV...11	UHM 30 HX
Call For Details	VCMT 160404 EN PF43 UHM30 HX	Round	16.6	7	.4mm/.0157in	SV...16	UHM 30 HX

Material Class									
Application	I	II	III	IV	V	VI	VII	VIII	IX
Roughing	■	■	■	-	■	■	-	-	-
Finishing	■	■	■	-	■	■	-	-	-
Micro Finishing	-	-	-	-	-	-	-	-	-

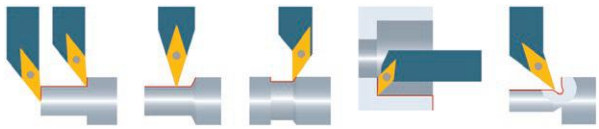




VCMT Carbide PM

Cut: Neutral


Chip Breaker: PM, Round Cutting Edge

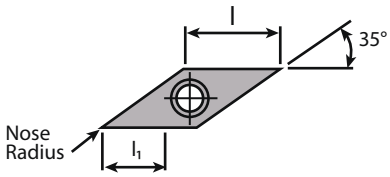

Repeatability <50µm

Dimensions & Features							
Item No.	Description	Edge	l	l_1	Nose Radius	Holder	Coating
7005-113700	VCMT 160404 EN PM UHM10 MZ	Round	16.6	6	.4mm/.0157in	SV...16	UHM 10 MZ
7005-123403	VCMT 160404 EN PM UHM20 MZ	Round	16.6	6	.4mm/.0157in	SV...16	UHM 20 MZ
7005-123404	VCMT 160404 EN PM UHM30 MZ	Round	16.6	6	.4mm/.0157in	SV...16	UHM 30 MZ
7005-113701	VCMT 160408 EN PM UHM10 MZ	Round	16.6	6	.8mm/.0314in	SV...16	UHM 10 MZ
7005-123406	VCMT 160408 EN PM UHM20 MZ	Round	16.6	6	.8mm/.0314in	SV...16	UHM 20 MZ
7005-123407	VCMT 160408 EN PM UHM30 MZ	Round	16.6	6	.8mm/.0314in	SV...16	UHM 30 MZ

Material Class									
Application	I	II	III	IV	V	VI	VII	VIII	IX
Roughing	■	■	■	-	■	■	-	-	-
Finishing	□	□	□	-	□	□	-	-	-
Micro Finishing	-	-	-	-	-	-	-	-	-






VCMT Cermet PMF

Cut: Neutral


Chip Breaker: PMF, Round Cutting Edge

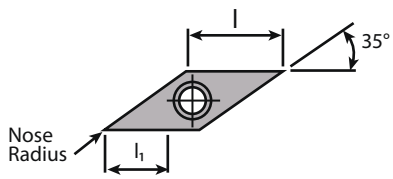

Repeatability <50µm

Dimensions & Features							
Item No.	Description	Edge	l	l_1	Nose Radius	Holder	Coating
Call For Details	VCMT 110304 EN PMF UCM10 MZ	Round	11.1	4.1	.4mm/.0157in	SV...11	UCM 10 MZ
Call For Details	VCMT 160404 EN PMF UCM10 MZ	Round	16.6	6	.4mm/.0157in	SV...16	UCM 10 MZ
Call For Details	VCMT 160408 EN PMF UCM10 MZ	Round	16.6	6	.8mm/.0314in	SV...16	UCM 10 MZ

Material Class									
Application	I	II	III	IV	V	VI	VII	VIII	IX
Roughing	■	■	■	-	■	■	-	-	-
Finishing	■	■	■	-	■	■	-	-	-
Micro Finishing	-	-	-	-	-	-	-	-	-




Coatings vs Material Type

Carbide												Cermet		Diamond			Materials
UHM 10	UHM 10 HX	UHM 10 TX+	UHM 10 MZ	UHM 20 HPX	UHM 20 TX+	UHM 20 MZ	UHM 30	UHM 30 HX	UHM 30 TX+	UHM 30 MZ	UHM 30 SX	UCM 10	UCM 10 HX	UCVD 08	UPCD 15	UPCD 20	
-	-	■	■	■	■	■	□	□	■	■	□	■	■	-	-	-	**Steel**
-	■	■	-	■	■	□	□	■	■	■	■	□	■	-	-	-	Stainless Steel
□	■	■	-	□	■	-	□	■	■	-	-	-	-	-	-	-	Titanium & Ti-Alloys
■	□	-	-	-	-	-	□	□	-	-	□	-	-	■	■	■	Non-Ferrous Metals
-	-	■	-	-	-	-	-	-	-	-	-	-	-	-	-	-	Mard Materials




VC...07 inserts: d =.250"
VC...10 inserts: d =.250"
VC...11 inserts: d =.250"
VC...16 inserts: d =.375"

Material Class								
I	II	III	IV	V	VI	VII	VIII	IX
Unalloyed Steel	Low-Alloy Steel	High-Alloy Steel	Titanium	Stainless Steel (HB<220)	Stainless Steel (HB≥220)	Aluminum	Brass	Synthetics / Composits



VCMT Carbide PM25


Cut: Neutral
Chip Breaker: PM25, Round Cutting Edge

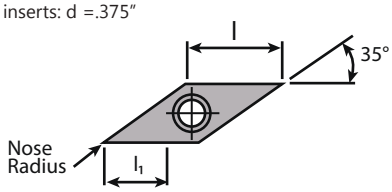


Repeatability <50µm

Item No.	Description	Dimensions & Features: Edge	l	l_1	Nose Radius	Holder	Coating
7005-112950	VCMT 160404 EN PM25 UHM20 HPX	Round	16.6	2.2	.4mm/.0157in	SV...16	UHM 20 HPX


Application	Material Class I	II	III	IV	V	VI	VII	VIII	IX
Roughing	-	-	-	-	-	-	-	-	-
Finishing	□	□	□	-	■	■	-	-	-
Micro Finishing	-	-	-	-	-	-	-	-	-

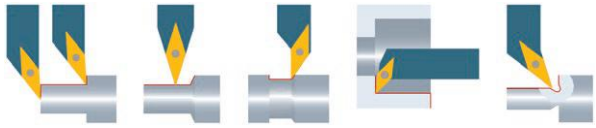



VCMT Carbide PM55


Cut: Neutral
Chip Breaker: PM55, Round Cutting Edge

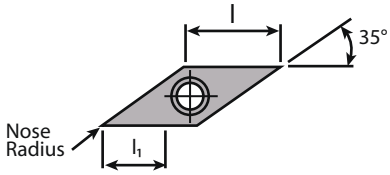


Repeatability <50µm

Item No.	Description	Dimensions & Features: Edge	l	l_1	Nose Radius	Holder	Coating
7005-112951	VCMT 160404 EN PM55 UHM20 HPX	Round	16.6	3	.4mm/.0157in	SV...16	UHM 20 HPX
7005-112952	VCMT 160408 EN PM55 UHM20 HPX	Round	16.6	3.4	.8mm/.0314in	SV...16	UHM 20 HPX

Application	Material Class I	II	III	IV	V	VI	VII	VIII	IX
Roughing	□	□	□	-	■	■	-	-	-
Finishing	-	-	-	-	-	-	-	-	-
Micro Finishing	-	-	-	-	-	-	-	-	-

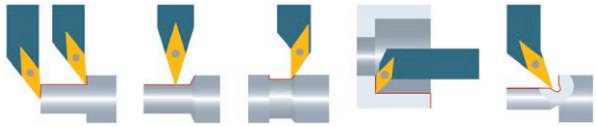




VCGT Diamond

Cut: Neutral


Chip Breaker: Sharp Cutting Edge

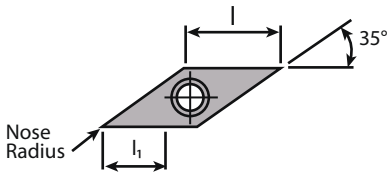

Repeatability <20µm

Dimensions & Features							
Item No.	Description	Edge	l	l_1	Nose Radius	Holder	Coating
Call For Details	VCGT 110301 FN UPCD15	Sharp	11.1	5.4	.1mm/.0039in	SV...11	UPCD 15
7005-116199	VCGT 110301 FN UPCD20	Sharp	11.1	5.4	.1mm/.0039in	SV...11	UPCD 20
7005-137727	VCGT 110302 FN UPCD15	Sharp	11.1	4.6	.2mm/.0078in	SV...11	UPCD 15
7005-116201	VCGT 110302 FN UPCD20	Sharp	11.1	4.6	.2mm/.0078in	SV...11	UPCD 20
7005-129040	VCGT 110304 FN UPCD15	Sharp	11.1	3.9	.4mm/.0157in	SV...11	UPCD 15
7005-116206	VCGT 110304 FN UPCD20	Sharp	11.1	3.9	.4mm/.0157in	SV...11	UPCD 20
7005-137728	VCGT 110308 FN UPCD15	Sharp	11.1	3.3	.8mm/.0314in	SV...11	UPCD 15
7005-116216	VCGT 160401 FN UPCD15	Sharp	16.6	6	.1mm/.0039in	SV...16	UPCD 15
7005-116217	VCGT 160401 FN UPCD20	Sharp	16.6	6	.1mm/.0039in	SV...16	UPCD 20
7005-137729	VCGT 160402 FN UPCD15	Sharp	16.6	5.9	.2mm/.0078in	SV...16	UPCD 15
7005-116218	VCGT 160402 FN UPCD20	Sharp	16.6	5.9	.2mm/.0078in	SV...16	UPCD 20
7005-129039	VCGT 160404 FN UPCD15	Sharp	16.6	5.5	.4mm/.0157in	SV...16	UPCD 15
7005-116221	VCGT 160404 FN UPCD20	Sharp	16.6	5.5	.4mm/.0157in	SV...16	UPCD 20
7005-137730	VCGT 160408 FN UPCD15	Sharp	16.6	5	.8mm/.0314in	SV...16	UPCD 15
7005-137731	VCGT 160412 FN UPCD15	Sharp	16.6	4.5	1.2mm/.0472in	SV...16	UPCD 15

Material Class									
Application	I	II	III	IV	V	VI	VII	VIII	IX
Roughing	-	-	-	-	-	-	-	-	-
Finishing	-	-	-	-	-	-	■	■	■
Micro Finishing	-	-	-	-	-	-	■	■	■

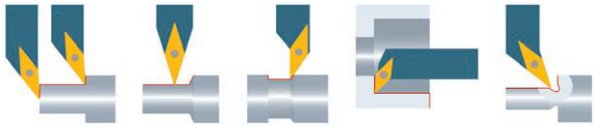




VCGT Diamond UWN

Cut: Neutral


Chip Breaker: UWN, Sharp Cutting Edge



Repeatability <20µm

Dimensions & Features							
Item No.	Description	Edge	l	l_1	Nose Radius	Holder	Coating
7005-116675	VCGT 110302 FN UWN UCVD08	Sharp	11.1	4.6	.2mm/.0078in	SV...11	UCVD 08
7005-116410	VCGT 110302 FN UWN UPCD20	Sharp	11.1	4.6	.2mm/.0078in	SV...11	UPCD 20
7005-116679	VCGT 110304 FN UWN UCVD08	Sharp	11.1	3.9	.4mm/.0157in	SV...11	UCVD 08
7005-116416	VCGT 110304 FN UWN UPCD20	Sharp	11.1	3.9	.4mm/.0157in	SV...11	UPCD 20
7005-116683	VCGT 110308 FN UWN UCVD08	Sharp	11.1	3.3	.8mm/.0314in	SV...11	UCVD 08
Call For Details	VCGT 110308 FN UWN UPCD20	Sharp	11.1	3.3	.8mm/.0314in	SV...11	UPCD 20
7005-116691	VCGT 160402 FN UWN UCVD08	Sharp	16.6	5.9	.2mm/.0078in	SV...16	UCVD 08
Call For Details	VCGT 160402 FN UWN UPCD20	Sharp	16.6	5.9	.2mm/.0078in	SV...16	UPCD 20
7005-116695	VCGT 160404 FN UWN UCVD08	Sharp	16.6	5.5	.4mm/.0157in	SV...16	UCVD 08
Call For Details	VCGT 160404 FN UWN UPCD20	Sharp	16.6	5.5	.4mm/.0157in	SV...16	UPCD 20
7005-116699	VCGT 160408 FN UWN UCVD08	Sharp	16.6	5	.8mm/.0314in	SV...16	UCVD 08
Call For Details	VCGT 160408 FN UWN UPCD20	Sharp	16.6	5	.8mm/.0314in	SV...16	UPCD 20
7005-116703	VCGT 160412 FN UWN UCVD08	Sharp	16.6	4.5	1.2mm/.0472in	SV...16	UCVD 08
Call For Details	VCGT 160412 FN UWN UPCD20	Sharp	16.6	4.5	1.2mm/.0472in	SV...16	UPCD 20

Material Class									
Application	I	II	III	IV	V	VI	VII	VIII	IX
Roughing	-	-	-	-	-	-	□	□	□
Finishing	-	-	-	-	-	-	■	■	■
Micro Finishing	-	-	-	-	-	-	-	-	-

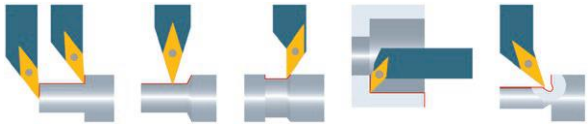

Coatings vs Material Type

Carbide												Cermet		Diamond			Materials
UHM 10	UHM 10 HX	UHM 10 TX+	UHM 10 MZ	UHM 20 HPX	UHM 20 TX+	UHM 20 MZ	UHM 30	UHM 30 HX	UHM 30 TX+	UHM 30 MZ	UHM 30 SX	UCM 10	UCM 10 HX	UCVD 08	UPCD 15	UPCD 20	
-	-	■	■	■	■	■	□	□	■	■	□	■	■	-	-	-	**Steel**
-	■	■	-	■	■	□	□	■	■	■	■	□	■	-	-	-	Stainless Steel
□	■	■	-	□	■	-	□	■	■	-	-	-	-	-	-	-	Titanium & Ti-Alloys
■	□	-	-	-	-	-	□	□	-	-	□	-	-	■	■	■	Non-Ferrous Metals
-	-	■	-	-	-	-	-	-	-	-	-	-	-	-	-	-	Mard Materials




VC...07 inserts: d =.250"
VC...10 inserts: d =.250"
VC...11 inserts: d =.250"
VC...16 inserts: d =.375"

Material Class								
I	II	III	IV	V	VI	VII	VIII	IX
Unalloyed Steel	Low-Alloy Steel	High-Alloy Steel	Titanium	Stainless Steel (HB<220)	Stainless Steel (HB≥220)	Aluminum	Brass	Synthetics / Composits



VCGT Diamond UWS


Cut: Neutral
Chip Breaker: UWS, Sharp Cutting Edge

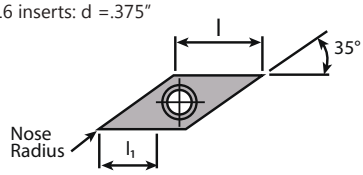

Repeatability <20µm

Item No.	Description	Dimensions & Features					
		Edge	l	l_1	Nose Radius	Holder	Coating
Call For Details	VCGT 110301 FN -UWS UCVD08	Sharp	11.1	4.6	.1mm/.0039in	SV...11	UCVD 08
Call For Details	VCGT 110301 FN -UWS UPCD15	Sharp	11.1	4.6	.1mm/.0039in	SV...11	UPCD 15
7005-116676	VCGT 110302 FN UWS UCVD08	Sharp	11.1	4.6	.2mm/.0078in	SV...11	UCVD 08
7005-116411	VCGT 110302 FN UWS UPCD15	Sharp	11.1	4.6	.2mm/.0078in	SV...11	UPCD 15
7005-116412	VCGT 110302 FN UWS UPCD20	Sharp	11.1	4.6	.2mm/.0078in	SV...11	UPCD 20
7005-116677	VCGT 110304 FN UWS UCVD08	Sharp	11.1	3.9	.4mm/.0157in	SV...11	UCVD 08
7005-116417	VCGT 110304 FN UWS UPCD15	Sharp	11.1	3.9	.4mm/.0157in	SV...11	UPCD 15
7005-116418	VCGT 110304 FN UWS UPCD20	Sharp	11.1	3.9	.4mm/.0157in	SV...11	UPCD 20
7005-116692	VCGT 160402 FN UWS UCVD08	Sharp	16.6	5.9	.2mm/.0078in	SV...16	UCVD 08
7005-116429	VCGT 160402 FN UWS UPCD15	Sharp	16.6	5.9	.2mm/.0078in	SV...16	UPCD 15
7005-116696	VCGT 160404 FN UWS UCVD08	Sharp	16.6	5.5	.4mm/.0157in	SV...16	UCVD 08
7005-116433	VCGT 160404 FN UWS UPCD15	Sharp	16.6	5.5	.4mm/.0157in	SV...16	UPCD 15
7005-116434	VCGT 160404 FN UWS UPCD20	Sharp	16.6	5.5	.4mm/.0157in	SV...16	UPCD 20
7005-116700	VCGT 160408 FN UWS UCVD08	Sharp	16.6	5	.8mm/.0314in	SV...16	UCVD 08
7005-116437	VCGT 160408 FN UWS UPCD15	Sharp	16.6	5	.8mm/.0314in	SV...16	UPCD 15
7005-116438	VCGT 160408 FN UWS UPCD20	Sharp	16.6	5	.8mm/.0314in	SV...16	UPCD 20

Application	Material Class								
	I	II	III	IV	V	VI	VII	VIII	IX
Roughing	-	-	-	-	-	-	-	-	-
Finishing	-	-	-	-	-	-	□	□	□
Micro Finishing	-	-	-	-	-	-	■	■	■

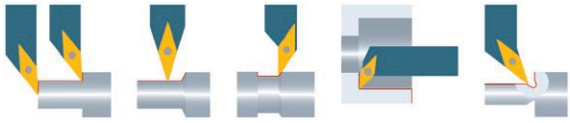


Coatings vs Material Type

Carbide												Cermet		Diamond			Materials
-	-	■	■	■	■	■	□	□	■	■	□	■	■	-	-	-	**Steel**
-	■	■	-	■	■	□	□	■	■	■	■	□	■	-	-	-	Stainless Steel
□	■	■	-	□	■	-	□	■	■	-	-	-	-	-	-	-	Titanium & Ti-Alloys
■	□	-	-	-	-	-	□	□	-	-	□	-	-	■	■	■	Non-Ferrous Metals
-	-	■	-	-	-	-	-	-	-	-	-	-	-	-	-	-	Mard Materials
UHM 10	UHM 10 HX	UHM 10 TX+	UHM 10 MZ	UHM 20 HPX	UHM 20 TX+	UHM 20 MZ	UHM 30	UHM 30 HX	UHM 30 TX+	UHM 30 MZ	UHM 30 SX	UCM 10	UCM 10 HX	UCVD 08	UPCD 15	UPCD 20	



VC...07 inserts: d =.250"
VC...10 inserts: d =.250"
VC...11 inserts: d =.250"
VC...16 inserts: d =.375"


Material Class								
I	II	III	IV	V	VI	VII	VIII	IX
Unalloyed Steel	Low-Alloy Steel	High-Alloy Steel	Titanium	Stainless Steel (HB<220)	Stainless Steel (HB≥220)	Aluminum	Brass	Synthetics / Composits



VCGW Diamond

Cut: Neutral


Chip Breaker: Sharp Cutting Edge



Repeatability <20µm

Dimensions & Features							
Item No.	Description	Edge	l	l_1	Nose Radius	Holder	Coating
7005-116235	VCGW 110301 FN UPCD20	Sharp	11.1	4.6	.1mm/.0039in	SV...11	UPCD 20
Call For Details	VCGW 110302 FN UCVD08	Sharp	11.1	4.6	.2mm/.0078in	SV...11	UCVD 08
7005-129036	VCGW 110302 FN UPCD15	Sharp	11.1	4.6	.2mm/.0078in	SV...11	UPCD 15
7005-116236	VCGW 110302 FN UPCD20	Sharp	11.1	4.6	.2mm/.0078in	SV...11	UPCD 20
7005-116911	VCGW 110304 FN UCVD08	Sharp	11.1	3.9	.4mm/.0157in	SV...11	UCVD 08
Call For Details	VCGW 110304 FN UPCD15	Sharp	11.1	3.9	.4mm/.0157in	SV...11	UPCD 15
7005-116237	VCGW 110304 FN UPCD20	Sharp	11.1	3.9	.4mm/.0157in	SV...11	UPCD 20
7005-116238	VCGW 110308 FN UPCD15	Sharp	11.1	3.3	.8mm/.0314in	SV...11	UPCD 15
7005-116242	VCGW 160401 FN UPCD20	Sharp	16.6	6	.1mm/.0039in	SV...16	UPCD 20
7005-116913	VCGW 160402 FN UCVD08	Sharp	16.6	5.9	.2mm/.0078in	SV...16	UCVD 08
7005-129026	VCGW 160402 FN UPCD15	Sharp	16.6	5.9	.2mm/.0078in	SV...16	UPCD 15
7005-116243	VCGW 160402 FN UPCD20	Sharp	16.6	5.9	.2mm/.0078in	SV...16	UPCD 20
7005-116914	VCGW 160404 FN UCVD08	Sharp	16.6	5.5	.4mm/.0157in	SV...16	UCVD 08
7005-137734	VCGW 160404 FN UPCD15	Sharp	16.6	5.5	.4mm/.0157in	SV...16	UPCD 15
7005-116244	VCGW 160404 FN UPCD20	Sharp	16.6	5.5	.4mm/.0157in	SV...16	UPCD 20
7005-116915	VCGW 160408 FN UCVD08	Sharp	16.6	5	.8mm/.0314in	SV...16	UCVD 08
7005-137735	VCGW 160408 FN UPCD15	Sharp	16.6	5	.8mm/.0314in	SV...16	UPCD 15
7005-116245	VCGW 160408 FN UPCD20	Sharp	16.6	5	.8mm/.0314in	SV...16	UPCD 20
7005-137736	VCGW 160412 FN UPCD15	Sharp	16.6	4.5	1.2mm/.0472in	SV...16	UPCD 15
7005-116246	VCGW 160412 FN UPCD20	Sharp	16.6	4.5	1.2mm/.0472in	SV...16	UPCD 20

Application	Material Class I	II	III	IV	V	VI	VII	VIII	IX
Roughing	-	-	-	-	-	-	□	□	□
Finishing	-	-	-	-	-	-	■	■	■
Micro Finishing	-	-	-	-	-	-	■	■	■

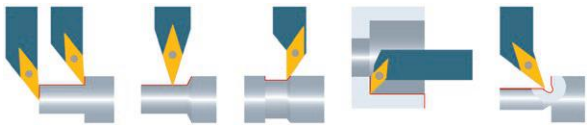




ISO Holder SVAC


Type: 90°
Coolant-Thru: None

Repeatability <20µm

Left Hand		Right Hand		Dimensions & Features				
Item No.	Description	Item No.	Description	b	h	l	f	Inserts
7005-148813	SVACL 0808 F11 U	7005-148811	SVACR 0808 F11 U	8	8	80	7.85	VC...1103
Call For Details	SVACL 0808 H07 U	Call For Details	SVACR 0808 H07 U	8	8	100	7.85	VC...0702
7005-044039	SVACL 0808 H11 U	7005-044040	SVACR 0808 H11 U	8	8	100	7.85	VC...1103
7005-148814	SVACL 1010 F11 U	7005-148812	SVACR 1010 F11 U	10	10	80	9.85	VC...1103
Call For Details	SVACL 1010 H07 U	Call For Details	SVACR 1010 H07 U	10	10	100	9.85	VC...0702
7005-044041	SVACL 1010 H11 U	7005-044042	SVACR 1010 H11 U	10	10	100	9.85	VC...1103
Call For Details	SVACL 1212 H07 U	Call For Details	SVACR 1212 H07 U	12	12	100	11.85	VC...0702
7005-044043	SVACL 1212 H11 U	7005-044044	SVACR 1212 H11 U	12	12	100	11.85	VC...1103

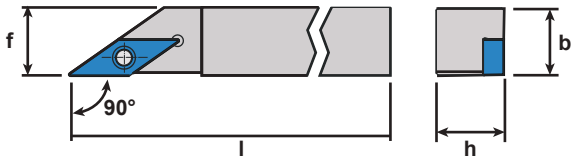






ISO Holder SVJC


Type: 93°
Coolant-Thru: None

Repeatability <20µm

Left Hand		Right Hand		Dimensions & Features				
Item No.	Description	Item No.	Description	b	h	l	f	Inserts
7005-148817	SVJCL 0808 F11 U	7005-148815	SVJCR 0808 F11 U	8	8	80	7.95	VC...1103
Call For Details	SVJCL 0808 H07 U	Call For Details	SVJCR 0808 H07 U	8	8	100	7.95	VC...0702
7005-044031	SVJCL 0808 H11 U	7005-044032	SVJCR 0808 H11 U	8	8	100	7.95	VC...1103
7005-148818	SVJCL 1010 F11 U	7005-148816	SVJCR 1010 F11 U	10	10	80	9.95	VC...1103
Call For Details	SVJCL 1010 H07 U	Call For Details	SVJCR 1010 H07 U	10	10	100	9.95	VC...0702
7005-044033	SVJCL 1010 H11 U	7005-044034	SVJCR 1010 H11 U	10	10	100	9.95	VC...1103
Call For Details	SVJCL 1212 H07 U	Call For Details	SVJCR 1212 H07 U	12	12	100	11.95	VC...0702
7005-044035	SVJCL 1212 H11 U	7005-044036	SVJCR 1212 H11 U	12	12	100	11.95	VC...1103
Call For Details	SVJCL 1212 H16 U	Call For Details	SVJCR 1212 H16 U	16	12	100	15.95	VC...1604
7005-044087	SVJCL 1616 K11 U	7005-044088	SVJCR 1616 K11 U	16	16	125	15.95	VC...1103
7005-044234	SVJCL 1616 K16 U	7005-044233	SVJCR 1616 K16 U	16	16	125	15.95	VC...1604
7005-044089	SVJCL 2020 K11 U	7005-044090	SVJCR 2020 K11 U	20	20	125	19.95	VC...1103
Call For Details	SVJCL 2020 K16 U	7005-044094	SVJCR 2020 K16 U	20	20	125	19.95	VC...1604
7005-148820	SVJCL 3/8" F11 U	7005-148819	SVJCR 3/8" F11 U	9.525	9.525	80	9.475	VC...1103
Call For Details	SVJCL 3/8" H07 U	Call For Details	SVJCR 3/8" H07 U	9.525	9.525	100	9.475	VC...0702
7005-114040	SVJCL 3/8" H11 U	7005-138418	SVJCR 3/8" H11 U	9.525	9.525	100	9.475	VC...1103
Call For Details	SVJCL 1/2" H07 U	Call For Details	SVJCR 1/2" H07 U	12.7	12.7	100	12.65	VC...0702
7005-114041	SVJCL 1/2" H11 U	7005-138420	SVJCR 1/2" H11 U	12.7	12.7	100	12.65	VC...1103
7005-113730	SVJCL 3/4" K11 U	7005-113731	SVJCR 3/4" K11 U	19.05	19.05	125	19	VC...1103
7005-114042	SVJCL 3/4" K16 U	7005-138421	SVJCR 3/4" K16 U	19.05	19.05	125	19	VC...1604

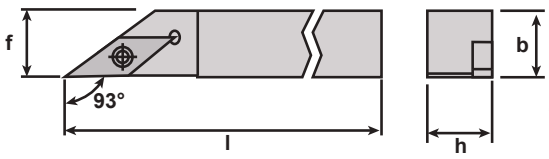





ISO Coolant-Thru Holder SVJC


Type: 93°

Coolant-Thru: Rear & Side Ports

Repeatability <10µm

Left Hand		Right Hand		Dimensions & Features							Coolant Fittings	
Item No.	Description	Item No.	Description	b	h	l	z_1	x_1	d	Inserts	Side	Rear
Call For Details	SVJCL 0808 H07 U IC	Call For Details	SVJCR 0808 H07 U IC	8	8	100	20	11.5	M5	VC...0702	4005-000111	4005-000111
Call For Details	SVJCL 0810 H11 U IC	Call For Details	SVJCR 0810 H11 U IC	8	10	100	21	11.5	M5	VC...1103	4005-000111	4005-000111
Call For Details	SVJCL 1010 H07 U IC	Call For Details	SVJCR 1010 H07 U IC	10	10	100	21	13.5	M5	VC...0702	4005-000111	4005-000111
Call For Details	SVJCL 1010 H11 U IC	Call For Details	SVJCR 1010 H11 U IC	10	10	100	21	13.5	M5	VC...1103	4005-000111	4005-000111
Call For Details	SVJCL 1212 H07 U IC	Call For Details	SVJCR 1212 H07 U IC	12	12	100	20	15.5	M5	VC...0702	4005-000111	4005-000111
Call For Details	SVJCL 1212 H11 U IC	Call For Details	SVJCR 1212 H11 U IC	12	12	100	21	15.5	M5	VC...1103	4005-000111	4005-000111
Call For Details	SVJCL 1216 H16 U IC	Call For Details	SVJCR 1216 H16 U IC	16	12	100	27	15.5	M5	VC...1604	4005-000111	4005-000104
7005-146421A	SVJCL 1616 K11 U IC	7005-146414A	SVJCR 1616 K11 U IC	16	16	125	21	19.5	G1/8"	VC...1103	4005-000111	4005-000104
7005-146422A	SVJCL 1616 K16 U IC	7005-146415A	SVJCR 1616 K16 U IC	16	16	125	27	19.5	G1/8"	VC...1604	4005-000111	4005-000104
Call For Details	SVJCL 2020 K11 U IC	Call For Details	SVJCR 2020 K11 U IC	20	20	125	21	23.5	G1/8"	VC...1103	4005-000111	4005-000104
Call For Details	SVJCL 2020 K16 U IC	Call For Details	SVJCR 2020 K16 U IC	20	20	125	27	23.5	G1/8"	VC...1604	4005-000111	4005-000104
Call For Details	SVJCL 3/8" H07 U IC	Call For Details	SVJCR 3/8" H07 U IC	9.525	9.525	100	20	13	M5	VC...0702	4005-000111	4005-000111
Call For Details	SVJCL 3/8" H11 U IC	7005-146425A	SVJCR 3/8" H11 U IC	9.525	9.525	100	21	13	M5	VC...1103	4005-000111	4005-000111
Call For Details	SVJCL 1/2" H07 U IC	Call For Details	SVJCR 1/2" H07 U IC	12.7	12.7	100	20	16.2	M5	VC...0702	4005-000111	4005-000111
7005-146432A	SVJCL 1/2" H11 U IC	7005-146426A	SVJCR 1/2" H11 U IC	12.7	12.7	100	21	16.2	M5	VC...1103	4005-000111	4005-000111
Call For Details	SVJCL 5/8" K11 U IC	7005-146427A	SVJCR 5/8" K11 U IC	15.875	15.875	125	21	19.5	G1/8"	VC...1103	4005-000111	4005-000104
Call For Details	SVJCL 5/8" K16 U IC	7005-146428A	SVJCR 5/8" K16 U IC	15.875	15.875	125	27	19.5	G1/8"	VC...1604	4005-000111	4005-000104
Call For Details	SVJCL 3/4" K11 U IC	Call For Details	SVJCR 3/4" K11 U IC	19.05	19.05	125	21	22.6	G1/8"	VC...1103	4005-000111	4005-000104
Call For Details	SVJCL 3/4" K16 U IC	7005-146430	SVJCR 3/4" K16 U IC	19.05	19.05	125	27	22.6	G1/8"	VC...1604	4005-000111	4005-000104

Features (5) connection ports for simple connection to your oil delivery system. (4) Side ports and (1) one end port making connection possible on most machine tool positions.

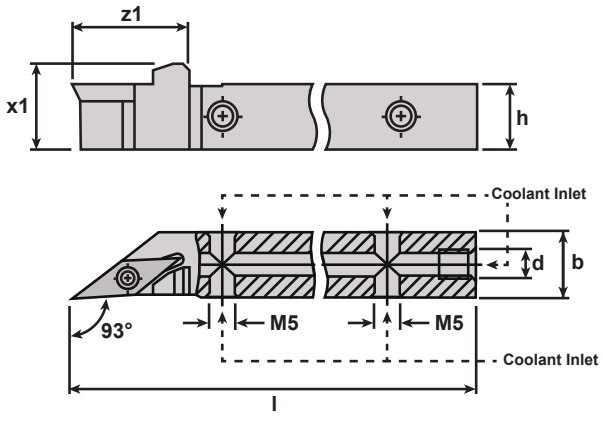






4005-000111

Connects to side ports on ALL shank sizes
0° Male Union - M5-0.8 to 1/4 JIC Flare Fitting
Included With All Coolant-Thru Shanks



4005-000104

Connects to end port on 5/8" and larger shanks
0° Male Union - 1/8 BSPP to 1/4 JIC Flare Fitting
Fits Position (d) On Tool Holders Sold Separately




ISO Holder SVHC


Type: 107.5°
Coolant-Thru: None

Repeatability <20µm

Left Hand		Right Hand		Dimensions & Features				
Item No.	Description	Item No.	Description	b	h	l	f	Inserts
Call For Details	SVHCL 0808 H07 U	Call For Details	SVHCR 0808 H07 U	8	8	100	8	VC...0702
Call For Details	SVHCL 1010 H07 U	Call For Details	SVHCR 1010 H07 U	10	10	100	10	VC...0702
Call For Details	SVHCL 1010 H11 U	Call For Details	SVHCR 1010 H11 U	10	10	100	13	VC...1103
Call For Details	SVHCL 1212 H07 U	Call For Details	SVHCR 1212 H07 U	12	12	100	12	VC...0702
7005-114531	SVHCL 1212 H11 U	7005-114533	SVHCR 1212 H11 U	12	12	100	13	VC...1103
7005-114532	SVHCL 1616 K11 U	7005-114534	SVHCR 1616 K11 U	16	16	125	16	VC...1103
Call For Details	SVHCL 3/8" H07 U	Call For Details	SVHCR 3/8" H07 U	9.525	9.525	100	9.525	VC...0702
Call For Details	SVHCL 3/8" H11 U	Call For Details	SVHCR 3/8" H11 U	9.525	9.525	100	13	VC...1103
Call For Details	SVHCL 1/2" H07 U	Call For Details	SVHCR 1/2" H07 U	12.7	12.7	100	12.7	VC...0702
Call For Details	SVHCL 1/2" H11 U	Call For Details	SVHCR 1/2" H11 U	12.7	12.7	100	13	VC...1103
Call For Details	SVHCL 5/8" K11 U	Call For Details	SVHCR 5/8" K11 U	15.875	15.875	125	16	VC...1103

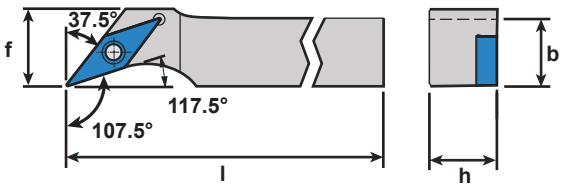






ISO Coolant-Thru Holder SVHC

Type: 107.5°
Coolant-Thru: Rear & Side Ports

Repeatability <10µm

Left Hand		Right Hand		Dimensions & Features								Coolant Fittings	
Item No.	Description	Item No.	Description	b	h	l	z_1	x_1	d	f	Inserts	Side	Rear
Call For Details	SVHCL 0808 H07 U IC	Call For Details	SVHCR 0808 H07 U IC	8	8	100	18	11.5	M5	8	VC...0702	4005-000111	4005-000111
Call For Details	SVHCL 1010 H07 U IC	Call For Details	SVHCR 1010 H07 U IC	10	10	100	18	13.5	M5	10	VC...0702	4005-000111	4005-000111
Call For Details	SVHCL 1212 H07 U IC	Call For Details	SVHCR 1212 H07 U IC	12	12	100	18	15.5	M5	12	VC...0702	4005-000111	4005-000111
Call For Details	SVHCL 1212 H11 U IC	Call For Details	SVHCR 1212 H11 U IC	12	12	100	22	15.5	M5	13	VC...1103	4005-000111	4005-000111
Call For Details	SVHCL 1616 K11 U IC	Call For Details	SVHCR 1616 K11 U IC	16	16	125	22	19.5	G1/8"	16	VC...1103	4005-000111	4005-000104
Call For Details	SVHCL 3/8" H07 U IC	Call For Details	SVHCR 3/8" H07 U IC	9.525	9.525	100	18	13	M5	9.525	VC...0702	4005-000111	4005-000111
Call For Details	SVHCL 1/2" H07 U IC	Call For Details	SVHCR 1/2" H07 U IC	12.7	12.7	100	18	16.2	M5	12.7	VC...0702	4005-000111	4005-000111
Call For Details	SVHCL 1/2" H11 U IC	Call For Details	SVHCR 1/2" H11 U IC	12.7	12.7	100	22	16.2	M5	12.7	VC...1103	4005-000111	4005-000111
Call For Details	SVHCL 5/8" K11 U IC	Call For Details	SVHCR 5/8" K11 U IC	15.875	15.875	125	22	19.4	G1/8"	15.875	VC...1103	4005-000111	4005-000104

Features (5) connection ports for simple connection to your oil delivery system. (4) Side ports and (1) one end port making connection possible on most machine tool positions.

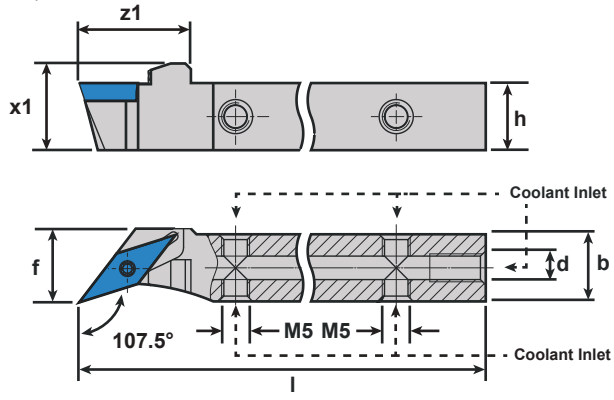






4005-000111
Connects to side ports on ALL shank sizes
0° Male Union - M5-0.8 to 1/4 JIC Flare Fitting
Included With All Coolant-Thru Shanks



4005-000104
Connects to end port on 5/8" and larger shanks
0° Male Union - 1/8 BSPP to 1/4 JIC Flare Fitting
Fits Position (d) On Tool Holders Sold Separately




ISO Holder SVPC


Type: 117.5°
Coolant-Thru: None

Repeatability <20µm

Left Hand		Right Hand		Dimensions & Features				
Item No.	Description	Item No.	Description	b	h	l	f	Inserts
Call For Details	SVPCL 0808 H07 U	Call For Details	SVPCR 0808 H07 U	8	8	100	10	VC...0702
Call For Details	SVPCL 1010 H07 U	Call For Details	SVPCR 1010 H07 U	10	10	100	10	VC...0702
Call For Details	SVPCL 1010 H11 U	Call For Details	SVPCR 1010 H11 U	10	10	100	16	VC...1103
Call For Details	SVPCL 1212 H07 U	Call For Details	SVPCR 1212 H07 U	12	12	100	12	VC...0702
7005-114535	SVPCL 1212 H11 U	7005-114537	SVPCR 1212 H11 U	12	12	100	16	VC...1103
7005-114536	SVPCL 1616 K11 U	7005-114538	SVPCR 1616 K11 U	16	16	125	16	VC...1103
Call For Details	SVPCL 3/8" H07 U	Call For Details	SVPCR 3/8" H07 U	9.525	9.525	100	10	VC...0702
Call For Details	SVPCL 3/8" H11 U	Call For Details	SVPCR 3/8" H11 U	9.525	9.525	100	16	VC...1103
Call For Details	SVPCL 1/2" H07 U	Call For Details	SVPCR 1/2" H07 U	12.7	12.7	100	12.7	VC...0702
Call For Details	SVPCL 1/2" H11 U	Call For Details	SVPCR 1/2" H11 U	12.7	12.7	100	16	VC...1103
Call For Details	SVPCL 5/8" K11 U	Call For Details	SVPCR 5/8" K11 U	15.875	15.875	125	16	VC...1103

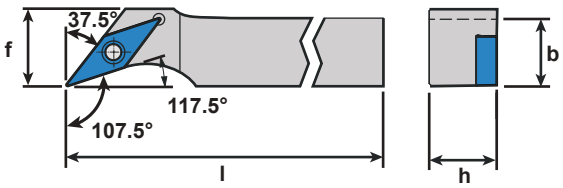






ISO Coolant-Thru Holder SVPC

Type: 117.5°
Coolant-Thru: Rear & Side Ports

Repeatability <10µm

Left Hand		Right Hand		Dimensions & Features								Coolant Fittings	
Item No.	Description	Item No.	Description	b	h	l	z_1	x_1	d	f	Inserts	Side	Rear
Call For Details	SVPCL 0808 H07 U IC	Call For Details	SVPCR 0808 H07 U IC	8	8	100	18	11.5	M5	10	VC...0702	4005-000111	4005-000111
Call For Details	SVPCL 1010 H07 U IC	Call For Details	SVPCR 1010 H07 U IC	10	10	100	18	13.5	M5	10	VC...0702	4005-000111	4005-000111
Call For Details	SVPCL 1010 H11 U IC	Call For Details	SVPCR 1010 H11 U IC	10	10	100	22	13.5	M5	16	VC...1103	4005-000111	4005-000111
Call For Details	SVPCL 1212 H07 U IC	Call For Details	SVPCR 1212 H07 U IC	12	12	100	18	15.5	M5	12	VC...0702	4005-000111	4005-000111
Call For Details	SVPCL 1212 H11 U IC	Call For Details	SVPCR 1212 H11 U IC	12	12	100	22	15.5	M5	16	VC...1103	4005-000111	4005-000111
Call For Details	SVPCL 1616 K11 U IC	Call For Details	SVPCR 1616 K11 U IC	16	16	125	22	19.5	G1/8"	16	VC...1103	4005-000111	4005-000104
Call For Details	SVPCL 3/8" H07 U IC	Call For Details	SVPCR 3/8" H07 U IC	9.525	9.525	100	18	13	M5	10	VC...0702	4005-000111	4005-000111
Call For Details	SVPCL 3/8" H11 U IC	Call For Details	SVPCR 3/8" H11 U IC	9.525	9.525	100	22	13	M5	16	VC...1103	4005-000111	4005-000111
Call For Details	SVPCL 1/2" H07 U IC	Call For Details	SVPCR 1/2" H07 U IC	12.7	12.7	100	18	16.2	M5	12.9	VC...0702	4005-000111	4005-000111
Call For Details	SVPCL 1/2" H11 U IC	Call For Details	SVPCR 1/2" H11 U IC	12.7	12.7	100	22	16.2	M5	16	VC...1103	4005-000111	4005-000111
Call For Details	SVPCL 5/8" K11 U IC	Call For Details	SVPCR 5/8" K11 U IC	15.875	15.875	125	22	19.4	G1/8"	15.875	VC...1103	4005-000111	4005-000104

Features (5) connection ports for simple connection to your oil delivery system. (4) Side ports and (1) one end port making connection possible on most machine tool positions.

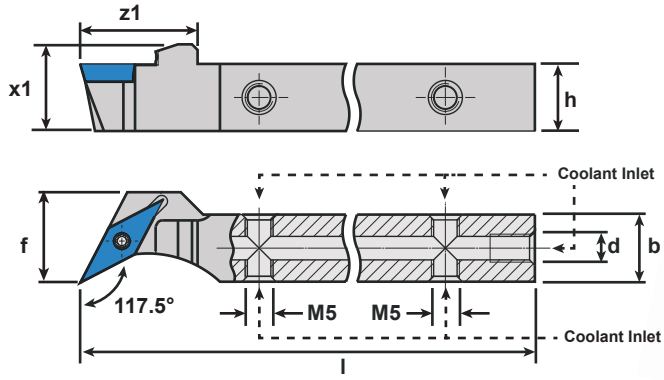






4005-000111
Connects to side ports on ALL shank sizes
0° Male Union - M5-0.8 to 1/4 JIC Flare Fitting
Included With All Coolant-Thru Shanks



4005-000104
Connects to end port on 5/8" and larger shanks
0° Male Union - 1/8 BSPP to 1/4 JIC Flare Fitting
Fits Position (d) On Tool Holders Sold Separately




ISO Holder SVQC


Type: 93°
Coolant-Thru: None

Repeatability <20µm

Left Hand		Right Hand		Dimensions & Features					
Item No.	Description	Item No.	Description	b	h	l	l_2	f	Inserts
Call For Details	SVQCL 0808 H07	Call For Details	SVQCR 0808 H07	8	8	100	6	13.5	VC...0702
Call For Details	SVQCL 1010 H07	Call For Details	SVQCR 1010 H07	10	10	100	6	15.5	VC...0702
Call For Details	SVQCL 1212 H07	Call For Details	SVQCR 1212 H07	12	12	100	6	17.5	VC...0702
7005-043538	SVQCL 1212 H11	7005-043540	SVQCR 1212 H11	12	12	100	8.5	20	VC...1103
7005-043539	SVQCL 1616 K11	7005-043541	SVQCR 1616 K11	16	16	125	8.5	24	VC...1103

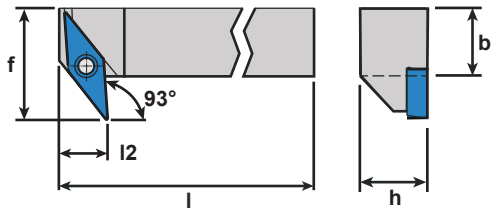






ISO Holder SVVCN


Type: 72.5°
Coolant-Thru: None

Repeatability <20µm

		Dimensions & Features					
Item No.	Description	Hand	b	h	l	f	Inserts
7005-148821	SVVCN 0808 F11 U	Neutral	8	8	80	4	VC...1103
Call For Details	SVVCN 0808 H07 U	Neutral	8	8	100	4	VC...0702
7005-044027	SVVCN 0808 H11 U	Neutral	8	8	100	4	VC...1103
7005-148822	SVVCN 1010 F11 U	Neutral	10	10	80	5	VC...1103
Call For Details	SVVCN 1010 H07 U	Neutral	10	10	100	5	VC...0702
7005-044028	SVVCN 1010 H11 U	Neutral	10	10	100	5	VC...1103
7005-045170	SVVCN 1212 F11 U	Neutral	12	12	100	6	VC...1103
Call For Details	SVVCN 1212 H07 U	Neutral	12	12	100	6	VC...0702
7005-044029	SVVCN 1212 H11 U	Neutral	12	12	100	6	VC...1103
7005-045171	SVVCN 1616 H11 U	Neutral	16	16	125	8	VC...1103
7005-045172	SVVCN 2020 K11 U	Neutral	20	20	125	10	VC...1103
7005-045173	SVVCN 2020 K16 U	Neutral	20	20	125	10	VC...1604
Call For Details	SVVCN 3/8" H07 U	Left	9.525	9.525	100	4.76	VC...0702
Call For Details	SVVCN 3/8" H11 U	Left	9.525	9.525	100	4.76	VC...1103
Call For Details	SVVCN 1/2" H07 U	Left	12.7	12.7	100	6.35	VC...0702
Call For Details	SVVCN 1/2" H11 U	Left	12.7	12.7	100	6.35	VC...1103
Call For Details	SVVCN 5/8" K11 U	Left	15.875	15.875	125	7.93	VC...1103
Call For Details	SVVCN 3/4" K11 U	Left	19.05	19.05	125	9.525	VC...1103
Call For Details	SVVCN 3/4" K16 U	Left	19.05	19.05	125	9.525	VC...1604

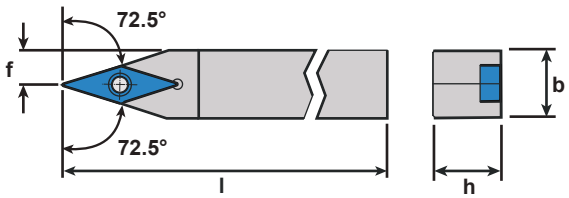






ISO Holder SVUC


Type: 93°
Coolant-Thru: None

Repeatability <20µm

Left Hand		Right Hand		Dimensions & Features				
Item No.	Description	Item No.	Description	b	h	l	f	Inserts
Call For Details	SVUCL 0808 H07	Call For Details	SVUCR 0808 H07	8	8	100	13.5	VC...0702
Call For Details	SVUCL 1010 H07	Call For Details	SVUCR 1010 H07	10	10	100	15.5	VC...0702
Call For Details	SVUCL 1212 H07	Call For Details	SVUCR 1212 H07	12	12	100	17.5	VC...0702
7005-043542	SVUCL 1212 H11	7005-043544	SVUCR 1212 H11	12	12	100	20	VC...1103
7005-043543	SVUCL 1616 K11	7005-043545	SVUCR 1616 K11	16	16	125	24	VC...1103
Call For Details	SVUCL 2020 K11	Call For Details	SVUCR 2020 K11	20	20	125	28	VC...1103

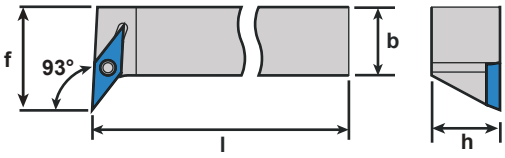






ISO Coolant-Thru Holder SVVCN

Type: 72.5°
Coolant-Thru: Rear & Side Ports

Repeatability <10µm

Left Hand		Dimensions & Features								Coolant Fittings	
Item No.	Description	b	h	l	z_1	x_1	d	f	Inserts	Side	Rear
Call For Details	SVVCN 0808 H07 U IC	8	8	100	20	11.5	M5	4	VC...0702	4005-000111	4005-000111
Call For Details	SVVCN 0810 H11 U IC	10	8	100	21	11.5	M5	5	VC...1103	4005-000111	4005-000111
Call For Details	SVVCN 1010 H07 U IC	10	10	100	20	13.5	M5	5	VC...0702	4005-000111	4005-000111
Call For Details	SVVCN 1010 H11 U IC	10	10	100	21	13.5	M5	5	VC...1103	4005-000111	4005-000111
Call For Details	SVVCN 1212 H07 U IC	12	12	100	20	15.5	M5	6	VC...0702	4005-000111	4005-000111
Call For Details	SVVCN 1212 H11 U IC	12	12	100	21	15.5	M5	6	VC...1103	4005-000111	4005-000111
Call For Details	SVVCN 1616 K11 U IC	16	16	125	21	19.5	G1/8"	8	VC...1103	4005-000111	4005-000104
Call For Details	SVVCN 2020 K11 U IC	20	20	125	21	23.5	G1/8"	10	VC...1103	4005-000111	4005-000104
Call For Details	SVVCN 2020 K16 U IC	20	20	125	27	23.5	G1/8"	10	VC...1604	4005-000111	4005-000104
Call For Details	SVVCN 3/8" H07 U IC	9.525	9.525	100	20	13	M5	4.76	VC...0702	4005-000111	4005-000111
Call For Details	SVVCN 3/8" H11 U IC	9.525	9.525	100	20	13	M5	4.76	VC...1103	4005-000111	4005-000111
Call For Details	SVVCN 1/2" H07 U IC	12.7	12.7	100	21	15.4	M5	6.35	VC...0702	4005-000111	4005-000111
Call For Details	SVVCN 1/2" H11 U IC	12.7	12.7	100	21	15.4	M5	6.35	VC...1103	4005-000111	4005-000111
Call For Details	SVVCN 5/8" K11 U IC	15.875	15.875	125	21	18.6	G1/8"	7.94	VC...1103	4005-000111	4005-000104
Call For Details	SVVCN 3/4" K11 U IC	19.05	19.05	125	21	22.6	G1/8"	9.52	VC...1103	4005-000111	4005-000104
Call For Details	SVVCN 3/4" K16 U IC	19.05	19.05	125	27	22.6	G1/8"	9.52	VC...1604	4005-000111	4005-000104

Features (5) connection ports for simple connection to your oil delivery system. (4) Side ports and (1) one end port making connection possible on most machine tool positions.

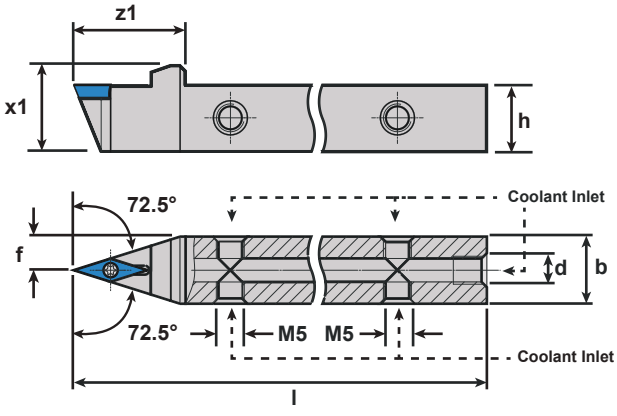






4005-000111
Connects to side ports on ALL shank sizes
0° Male Union - M5-0.8 to 1/4 JIC Flare Fitting
Included With All Coolant-Thru Shanks



4005-000104
Connects to end port on 5/8" and larger shanks
0° Male Union - 1/8 BSPP to 1/4 JIC Flare Fitting
Fits Position (d) On Tool Holders Sold Separately




ISO Holder SVXC


Type: 91°
Coolant-Thru: None

Repeatability <20µm

Left Hand		Right Hand		Dimensions & Features				
Item No.	Description	Item No.	Description	b	h	l	f	Inserts
Call For Details	SVXCL 0808 H07 U	Call For Details	SVXCR 0808 H07 U	8	8	100	2.5	VC...0702
7005-148824	SVXCL 1010 F11 U	7005-148823	SVXCR 1010 F11 U	10	10	80	3	VC...1103
Call For Details	SVXCL 1010 H07 U	Call For Details	SVXCR 1010 H07 U	10	10	100	4.5	VC...0702
7005-044049	SVXCL 1010 H11 U	7005-044050	SVXCR 1010 H11 U	10	10	100	3	VC...1103
Call For Details	SVXCL 1212 H07 U	Call For Details	SVXCR 1212 H07 U	12	12	100	6.5	VC...0702
7005-044051	SVXCL 1212 H11 U	7005-044052	SVXCR 1212 H11 U	12	12	100	5	VC...1103
7005-043075	SVXCL 1616 K11 U	7005-043076	SVXCR 1616 K11 U	16	16	125	9	VC...1103
7005-044055	SVXCL 2020 K16 U	7005-044056	SVXCR 2020 K16 U	20	20	125	9	VC...1604
Call For Details	SVXCL 3/8" F11 U	Call For Details	SVXCR 3/8" F11 U	9.525	9.525	80	2	VC...1103
Call For Details	SVXCL 3/8" H07 U	Call For Details	SVXCR 3/8" H07 U	9.525	9.525	100	4	VC...0702
Call For Details	SVXCL 3/8" H11 U	Call For Details	SVXCR 3/8" H11 U	9.525	9.525	100	2	VC...1103
Call For Details	SVXCL 1/2" H07 U	Call For Details	SVXCR 1/2" H07 U	12.7	12.7	100	7.2	VC...0702
Call For Details	SVXCL 1/2" H11 U	7005-153734	SVXCR 1/2" H11 U	12.7	12.7	100	5	VC...1103
Call For Details	SVXCL 5/8" K11 U	Call For Details	SVXCR 5/8" K11 U	15.875	15.875	125	8	VC...1103
Call For Details	SVXCL 3/4" K16 U	Call For Details	SVXCR 3/4" K16 U	19.05	19.05	125	8	VC...1604

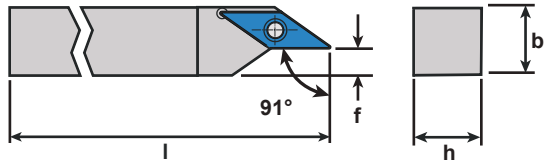



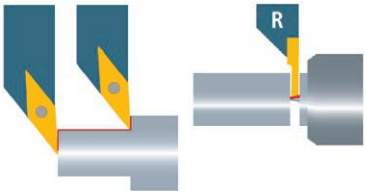


TWIN Insert Holder SVJC


Type: 93° ISO / 1600 Series Inserts
Coolant-Thru: None

Repeatability <20µm

Right Hand		Dimensions & Features							
Item No.	Description	b	h	l	z_1	x_1	x_2	x_3	d_{max}	Inserts
Call For Details	SVJCR/1600R-0810 H07 Twin	10	8	100	24	16	4	8	24	VC...0702
Call For Details	SVJCR/1600R-1010 H07 Twin	10	10	100	24	16	5	8	24	VC...0702
Call For Details	SVJCR/1600R-1212 H07 Twin	12	12	100	24	16	6	8	24	VC...0702
Call For Details	SVJCR/1600R-0810 H11 Twin	10	8	100	24	16	4	8	24	VC...1103
Call For Details	SVJCR/1600R-1010 H11 Twin	10	10	100	24	16	5	8	24	VC...1103
Call For Details	SVJCR/1600R-1212 H11 Twin	12	12	100	24	16	6	8	24	VC...1103
Call For Details	SVJCR/1600R-1616 K11 Twin	16	16	125	24	23	8	10	36	VC...1103
Call For Details	SVJCR/1600R-2020 K11 Twin	20	20	125	24	27	8	14	68	VC...1103
Call For Details	SVJCR/1600R-3/8" H07 Twin	9.525	9.525	100	24	16	4.76	8	24	VC...0702
Call For Details	SVJCR/1600R-1/2" H07 Twin	12.7	12.7	100	24	16	6.35	8	24	VC...0702
Call For Details	SVJCR/1600R-3/8" H11 Twin	9.525	9.525	100	24	16	4.76	8	24	VC...1103
Call For Details	SVJCR/1600R-1/2" H11 Twin	12.7	12.7	100	24	16	6.35	8	24	VC...1103
Call For Details	SVJCR/1600R-5/8" K11 Twin	15.875	15.875	125	24	23	7.94	10	36	VC...1103
Call For Details	SVJCR/1600R-3/4" K11 Twin	19.05	19.05	125	24	27	7.53	14	68	VC...1103

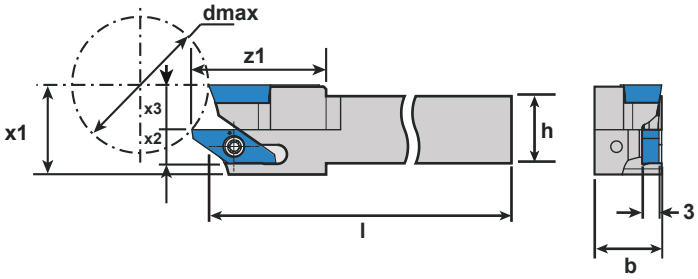





ISO Coolant-Thru Holder SVXC


Type: 91°

Coolant-Thru: Rear & Side Ports

Repeatability <10µm

Left Hand		Right Hand		Dimensions & Features								Coolant Fittings	
Item No.	Description	Item No.	Description	b	h	l	z_1	x_1	d	f	Inserts	Side	Rear
Call For Details	SVXCL 0808 H07 U IC	Call For Details	SVXCR 0808 H07 U IC	8	8	100	18	11.5	M5	2.5	VC...0702	4005-000111	4005-000111
Call For Details	SVXCL 1010 F11 U IC	Call For Details	SVXCR 1010 F11 U IC	10	10	80	21	12.7	M5	3	VC...1103	4005-000111	4005-000111
Call For Details	SVXCL 1010 H07 U IC	Call For Details	SVXCR 1010 H07 U IC	10	10	100	18	13.5	M5	4.5	VC...0702	4005-000111	4005-000111
Call For Details	SVXCL 1010 H11 U IC	Call For Details	SVXCR 1010 H11 U IC	10	10	100	21	12.7	M5	3	VC...1103	4005-000111	4005-000111
Call For Details	SVXCL 1212 H07 U IC	Call For Details	SVXCR 1212 H07 U IC	12	12	100	18	15.5	M5	6.5	VC...0702	4005-000111	4005-000111
Call For Details	SVXCL 1212 H11 U IC	Call For Details	SVXCR 1212 H11 U IC	12	12	100	21	14.7	M5	5	VC...1103	4005-000111	4005-000111
7005-150765A	SVXCL 1616 K11 U IC	Call For Details	SVXCR 1616 K11 U IC	16	16	125	21	18.7	G1/8"	9	VC...1103	4005-000111	4005-000104
Call For Details	SVXCL 2020 K16 U IC	Call For Details	SVXCR 2020 K16 U IC	20	20	125	27	22	G1/8"	9	VC...1604	4005-000111	4005-000104
Call For Details	SVXCL 3/8" F11 U IC	Call For Details	SVXCR 3/8" F11 U IC	9.525	9.525	80	21	12.2	M5	2	VC...1103	4005-000111	4005-000111
Call For Details	SVXCL 3/8" H07 U IC	Call For Details	SVXCR 3/8" H07 U IC	9.525	9.525	100	18	13	M5	4.02	VC...0702	4005-000111	4005-000111
Call For Details	SVXCL 3/8" H11 U IC	Call For Details	SVXCR 3/8" H11 U IC	9.525	9.525	100	21	12.2	M5	2	VC...1103	4005-000111	4005-000111
Call For Details	SVXCL 1/2" H07 U IC	Call For Details	SVXCR 1/2" H07 U IC	12.7	12.7	100	18	16.2	M5	7.19	VC...0702	4005-000111	4005-000111
Call For Details	SVXCL 1/2" H11 U IC	Call For Details	SVXCR 1/2" H11 U IC	12.7	12.7	100	21	15.4	M5	5	VC...1103	4005-000111	4005-000111
Call For Details	SVXCL 5/8" K11 U IC	Call For Details	SVXCR 5/8" K11 U IC	15.875	15.875	125	21	18.6	G1/8"	8	VC...1103	4005-000111	4005-000104
Call For Details	SVXCL 3/4" K16 U IC	Call For Details	SVXCR 3/4" K16 U IC	19.05	19.05	125	27	22	G1/8"	8	VC...1604	4005-000111	4005-000104

Features (5) connection ports for simple connection to your oil delivery system. (4) Side ports and (1) one end port making connection possible on most machine tool positions.

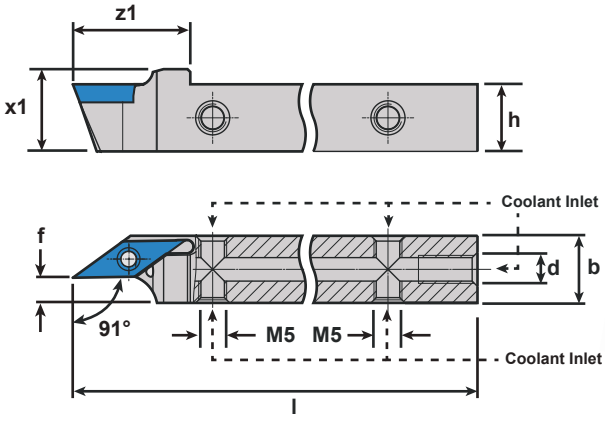






4005-000111

Connects to side ports on ALL shank sizes
0° Male Union - M5-0.8 to 1/4 JIC Flare Fitting
Included With All Coolant-Thru Shanks



4005-000104

Connects to end port on 5/8" and larger shanks
0° Male Union - 1/8 BSPP to 1/4 JIC Flare Fitting
Fits Position (d) On Tool Holders Sold Separately

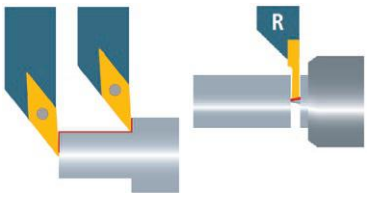


TWIN Insert Coolant-Thru Holder SVJC


Type: 93° ISO / 1600 Series Inserts
Coolant-Thru: Rear & Side Ports


Repeatability <10µm

Right Hand		Dimensions & Features										Coolant Fittings	
Item No.	Description	b	h	l	z_1	x_1	x_2	x_3	d	d_{max}	Inserts	Side	Rear
Call For Details	SVJCR/1600R-0810 H07 Twin IC	10	8	100	24	16	4	8	M5	24	VC...0702	4005-000111	4005-000111
Call For Details	SVJCR/1600R-1010 H07 Twin IC	10	10	100	24	16	5	8	M5	24	VC...0702	4005-000111	4005-000111
Call For Details	SVJCR/1600R-1212 H07 Twin IC	12	12	100	24	16	6	8	M5	24	VC...0702	4005-000111	4005-000111
Call For Details	SVJCR/1600R-0810 H11 Twin IC	10	8	100	24	16	4	8	M5	24	VC...1103	4005-000111	4005-000111
Call For Details	SVJCR/1600R-1010 H11 Twin IC	10	10	100	24	16	5	8	M5	24	VC...1103	4005-000111	4005-000111
Call For Details	SVJCR/1600R-1212 H11 Twin IC	12	12	100	24	16	6	8	M5	24	VC...1103	4005-000111	4005-000111
Call For Details	SVJCR/1600R-1616 K11 Twin IC	16	16	125	24	20	8	10	G1/8"	36	VC...1103	4005-000111	4005-000104
Call For Details	SVJCR/1600R-2020 K11 Twin IC	20	20	125	24	24	8	14	G1/8"	68	VC...1103	4005-000111	4005-000104
Call For Details	SVJCR/1600R-3/8" H07 Twin IC	9.525	9.525	100	24	16	4.76	8	M5	24	VC...0702	4005-000111	4005-000111
Call For Details	SVJCR/1600R-1/2" H07 Twin IC	12.7	12.7	100	24	16	6.35	8	M5	24	VC...0702	4005-000111	4005-000111
Call For Details	SVJCR/1600R-3/8" H07 Twin IC	9.525	9.525	100	24	16	4.76	8	M5	24	VC...0702	4005-000111	4005-000111
Call For Details	SVJCR/1600R-1/2" H07 Twin IC	12.7	12.7	100	24	16	6.35	8	M5	24	VC...0702	4005-000111	4005-000111
Call For Details	SVJCR/1600R-5/8" K11 Twin IC	15.875	15.875	125	24	20	7.94	10	G1/8"	36	VC...1103	4005-000111	4005-000104
Call For Details	SVJCR/1600R-3/4" K11 Twin IC	19.05	19.05	125	24	24	7.53	14	G1/8"	68	VC...1103	4005-000111	4005-000104

Features (5) connection ports for simple connection to your oil delivery system. (4) Side ports and (1) one end port making connection possible on most machine tool positions.

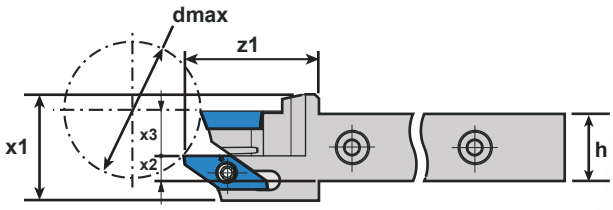

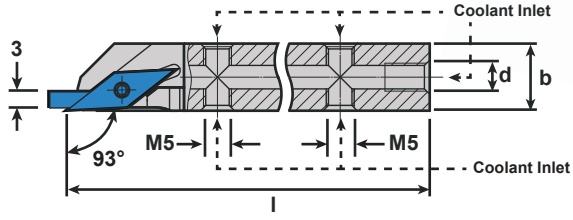

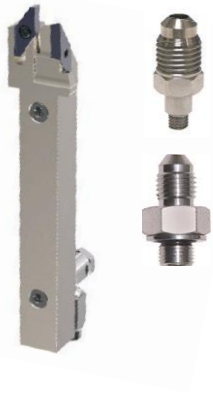

4005-000111
Connects to side ports on ALL shank sizes
0° Male Union - M5-0.8 to 1/4 JIC Flare Fitting
Included With All Coolant-Thru Shanks

4005-000104
Connects to end port on 5/8" and larger shanks
0° Male Union - 1/8 BSPP to 1/4 JIC Flare Fitting
Fits Position (d) On Tool Holders Sold Separately


multidec® SHORT

multidec® SHORT coolant-thru holders enable the use of multidec® turning inserts on commonly available quick change tooling systems. **multidec® 1600, 3000, ISO VC, & ISO VP** series inserts are currently available.

See Pg. 302
For Full Details



3000 Series Insert Shown




ISO Round Shank Holder SVQC


Type: 107.5°
Coolant-Thru: None

Repeatability <20µm

Left Hand		Right Hand		Dimensions & Features						
Item No.	Description	Item No.	Description	d	h	l	l_2	f	d_{min}	Inserts
Call For Details	A10 H SVQCL 07	Call For Details	A10 H SVQCR 07	10	9.5	100	23	8	16	VC...0702
Call For Details	A12 K SVQCL 07	Call For Details	A12 K SVQCR 07	12	11.5	125	25	9	17	VC...0702
Call For Details	A16 M SVQCL 07	Call For Details	A16 M SVQCR 07	16	15	150	29	11	20	VC...0702
7005-045274	A16 M SVQCL 11	7005-045275	A16 M SVQCR 11	16	15	150	29	11	20	VC...1103
7005-045276	A20 Q SVQCL 11	7005-045277	A20 Q SVQCR 11	20	18.5	180	32	13	25	VC...1103

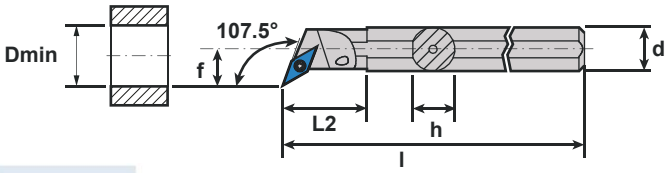






ISO Round Shank Holder SVOC


Type: 140°
Coolant-Thru: None

Repeatability <20µm

Left Hand		Right Hand		Dimensions & Features					
Item No.	Description	Item No.	Description	d	h	l	f	d_{min}	Inserts
Call For Details	A10 H SVOCL 07	Call For Details	A10 H SVOCR 07	10	9.5	100	6	16	VC...0702
Call For Details	A12 K SVOCL 07	Call For Details	A12 K SVOCR 07	12	11.5	125	7	17	VC...0702
7005-114037	A12 K SVOCL 11	7005-044340	A12 K SVOCR 11	12	11.5	125	7	17	VC...1103
Call For Details	A16 M SVOCL 07	Call For Details	A16 M SVOCR 07	16	15.5	150	9	20	VC...0702
7005-114038	A16 M SVOCL 11	7005-044347	A16 M SVOCR 11	16	15.5	150	9	20	VC...1103

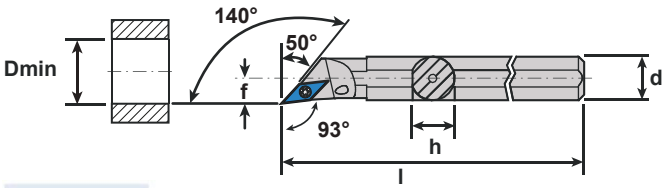






ISO Round Shank Holder SVUC

Type: 93°
Coolant-Thru: None

Repeatability <20µm


Left Hand		Right Hand		Dimensions & Features						
Item No.	Description	Item No.	Description	d	h	l	l_2	f	d_{min}	Inserts
Call For Details	A10 K SVUCL 07	Call For Details	A10 K SVUCR 07	10	9.5	100	23	8	16	VC...0702
Call For Details	A12 K SVUCL 07	Call For Details	A12 K SVUCR 07	12	11.5	125	25	9	17	VC...0702
Call For Details	A16 M SVUCL 07	Call For Details	A16 M SVUCR 07	16	15.5	150	29	11	20	VC...0702
7005-045280	A16 M SVUCL 11	7005-045281	A16 M SVUCR 11	16	15	150	29	11	20	VC...1103
7005-045282	A20 Q SVUCL 11	7005-045283	A20 Q SVUCR 11	20	18.5	180	32	13	25	VC...1103

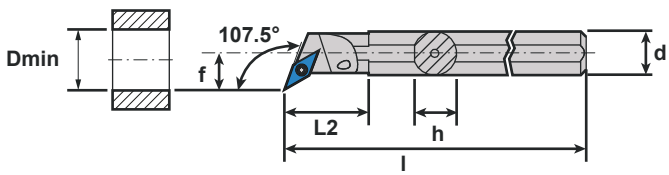





Speeds And Feeds Multidec ISO

ISO	Unalloyed Steel			Low-Alloy Steel			High-Alloy Steel		
Hardness (HB)-(HRC)	125-300 HB			180-250 HB			200-350 HB		
Category	I			II			III		
Machining Method	▼ Roughing	▼▼ Medium Cut	▼▼▼ Micro Finishing	▼ Roughing	▼▼ Medium Cut	▼▼▼ Micro Finishing	▼ Roughing	▼▼ Medium Cut	▼▼▼ Micro Finishing
Cutting Speeds	vc(ft/min)								
Carbide Grade									
UHM 10	130-360	200-390	200-460	200-320	200-390	200-420	130-290	190-780	190-390
UHM 10 HX	200-590	200-720	200-850	200-560	200-660	200-790	160-520	190-590	190-720
UHM 10 TX+	-	-	-	260-490	330-590	520-720	230-330	290-490	390-590
UHM 10 MZ	590-980	720-1310	820-1640	490-920	650-1050	160-1310	390-920	590-1050	590-1050
UHM 20 HPX	490-660	590-720	650-850	260-490	330-590	520-720	230-330	290-490	390-590
UHM 20 TX+	-	-	-	260-430	330-490	520-620	230-290	290-430	430-490
UHM 20 MZ	430-590	520-720	590-850	330-520	360-590	420-720	230-490	360-520	430-620
UHM 30	100-230	160-260	160-320	100-200	130-260	130-330	100-160	100-230	100-260
UHM 30 HX	160-460	160-590	160-720	160-430	160-520	160-650	130-390	160-490	160-590
UHM 30 TX+	160-390	160-460	160-490	160-330	160-390	160-460	130-260	160-330	160-360
UHM 30 MZ	390-520	490-660	550-780	290-460	330-520	390-660	190-430	290-460	360-520
UHM 30 SX	160-390	160-590	160-650	160-330	330-460	160-190	130-290	160-390	160-520
Cermet Grade									
UCM 10	-	590-980	720-1150	-	460-820	190-980	-	460-590	520-650
UCM 10 HX	-	820-1150	980-1470	-	660-980	720-1240	-	780-980	850-
Diamond Grade									
UCVD 08	-	-	-	-	-	-	-	-	-
UPCD 15	-	-	-	-	-	-	-	-	-
UPCD 20	-	-	-	-	-	-	-	-	-




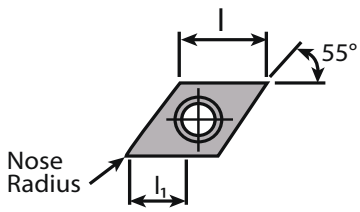


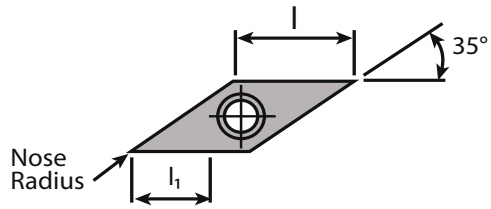


Speeds And Feeds Multidec ISO

ISO	Stainless Steel			Stainless Steel			Titanium		
Hardness (HB)-(HRC)	180-220 HB			220-330 HB			-		
Category	V			VI			IV		
Machining Method	▼ Roughing	▼▼ Medium Cut	▼▼▼ Micro Finishing	▼ Roughing	▼▼ Medium Cut	▼▼▼ Micro Finishing	▼ Roughing	▼▼ Medium Cut	▼▼▼ Micro Finishing
Cutting Speeds	vc(ft/min)								
Carbide Grade									
UHM 10	130-330	130-360	130-390	100-230	100-260	100-260	130-200	160-230	200-260
UHM 10 HX	160-460	160-590	160-720	130-330	160-360	160-430	130-390	130-430	130-490
UHM 10 TX+	300-490	360-590	520-650	230-300	300-390	360-490	160-330	200-390	200-460
UHM 10 MZ	330-590	590-820	720-980	-	-	-	-	-	-
UHM 20 HPX	290-490	360-590	520-650	230-290	290-390	360-490	160-330	200-390	200-460
UHM 20 TX+	290-430	360-520	520-590	230-290	290-390	360-490	160-330	200-390	200-460
UHM 20 MZ	290-490	360-520	420-590	160-260	100-160	130-230	-	-	-
UHM 30	100-200	100-230	100-260	60-100	60-130	60-130	130-160	80-200	100-230
UHM 30 HX	130-330	130-460	130-520	100-190	130-230	130-290	100-290	130-330	130-390
UHM 30 TX+	-	-	-	-	-	-	-	-	-
UHM 30 MZ	260-430	330-460	360-520	130-260	160-300	300-360	-	-	-
UHM 30 SX	100-300	130-390	130-520	60-160	100-200	100-260	-	-	-
Cermet Grade									
UCM 10	-	460-590	490-720	-	230-300	230-360	-	-	-
UCM 10 HX	-	560-750	750-920	-	260-360	360-460	-	-	-
Diamond Grade									
UCVD 08	-	-	-	-	-	-	-	-	-
UPCD 15	-	-	-	-	-	-	-	-	-
UPCD 20	-	-	-	-	-	-	-	-	-




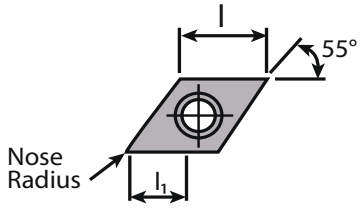


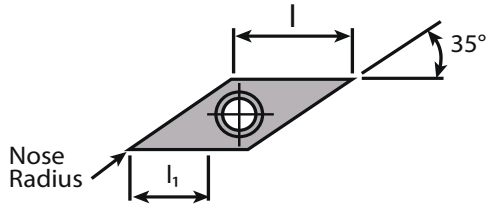


Speeds And Feeds Multidec ISO

ISO	Aluminum			Brass			Hard Materials		
Hardness (HB)-(HRC)	60-130 HB			-			45-70 HRC		
Category	VII			VIII			X		
Machining Method	▼ Roughing	▼▼ Medium Cut	▼▼▼ Micro Finishing	▼ Roughing	▼▼ Medium Cut	▼▼▼ Micro Finishing	▼ Roughing	▼▼ Medium Cut	▼▼▼ Micro Finishing
Cutting Speeds	vc(ft/min)								
Carbide Grade									
UHM 10	330-4920	390-6560	520-8200	260-980	330-1300	390-1640	-	-	-
UHM 10 HX	460-8200	520-9840	650-9840	330-1470	330-1970	330-2460	-	-	-
UHM 10 TX+	-	-	-	-	-	-	50-100	50-130	60-190
UHM 10 MZ	-	-	-	-	-	-	-	-	-
UHM 20 HPX	-	-	-	-	-	-	-	-	-
UHM 20 TX+	-	-	-	-	-	-	-	-	-
UHM 20 MZ	-	-	-	-	-	-	-	-	-
UHM 30	160-3280	190-3940	260-4920	130-330	160-460	160-520	-	-	-
UHM 30 HX	230-4920	260-6560	330-9840	160-490	160-660	160-820	-	-	-
UHM 30 TX+	-	-	-	-	-	-	-	-	-
UHM 30 MZ	-	-	-	-	-	-	-	-	-
UHM 30 SX	200-3940	260-6560	330-9840	160-390	160-590	160-660	-	-	-
Cermet Grade									
UCM 10	-	-	-	-	-	-	-	-	-
UCM 10 HX	-	-	-	-	-	-	-	-	-
Diamond Grade									
UCVD 08	-	980-6560	980-9840	-	820-3280	980-4920	-	-	-
UPCD 15	-	980-6560	980-9840	-	820-3280	980-4920	-	-	-
UPCD 20	-	980-6560	980-9840	-	820-3280	980-4920	-	-	-



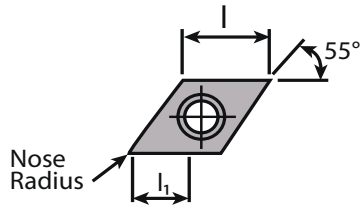

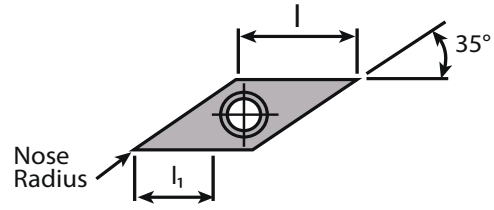


UTILIS
multidec®
swiss type tools
TOP Series



- Wiper geometry enables faster feeds while maintaining good surface finish
- Holders especially designed for front turning and back turning in Swiss-type machines
- Versatile cutting geometry and chip breaker enables turning in three directions
- Decreases cycle time by enabling up to 2X feed rate while maintaining surface quality

multidec® TOP series inserts feature a trailing wiper geometry which produces a stronger cutting edge. This allows for faster feeds while simultaneously increasing surface finish by burnishing the high-points of the turn pattern.


The multidec® TOP series line features a sharp tool nose radius of 0mm .08mm and .15mm with chip control geometry and is ideal for precision small parts turning in tough materials.

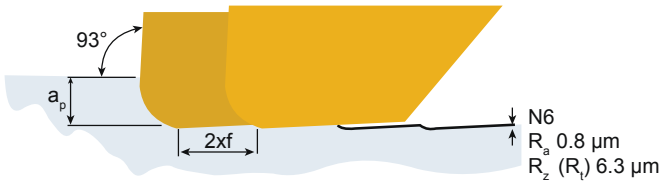

Holder 93°
Corner Radius 0.8mm
multidec® -TOP insert


Turned With A multidec® TOP Wiper Insert

Turned With A Standard VCGT Insert

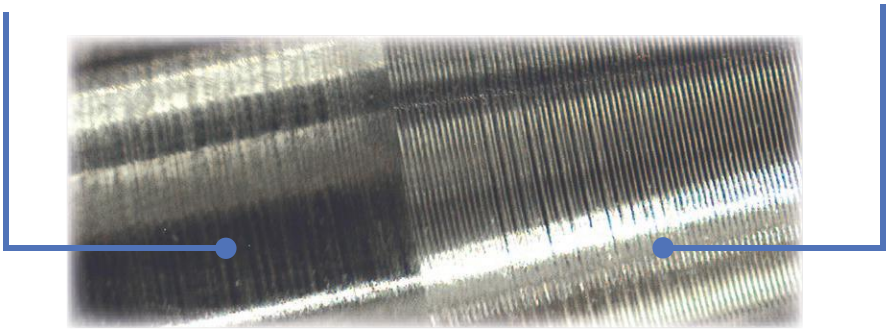


Coatings vs Material Type

Carbide												Cermet		Diamond			Materials
-	-	■	■	■	■	■	□	□	■	■	□	■	■	-	-	-	**Steel**
-	■	■	-	■	■	□	□	■	■	■	■	□	■	-	-	-	Stainless Steel
□	■	■	-	□	■	-	□	■	■	-	-	-	-	-	-	-	Titanium & Ti-Alloys
■	□	-	-	-	-	-	□	□	-	-	□	-	-	■	■	■	Non-Ferrous Metals
-	-	■	-	-	-	-	-	-	-	-	-	-	-	-	-	-	Mard Materials
UHM 10	UHM 10 HX	UHM 10 TX+	UHM 10 MZ	UHM 20 HPX	UHM 20 TX+	UHM 20 MZ	UHM 30	UHM 30 HX	UHM 30 TX+	UHM 30 MZ	UHM 30 SX	UCM 10	UCM 10 HX	UCVD 08	UPCD 15	UPCD 20	

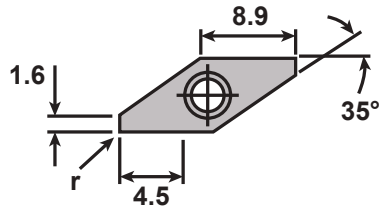

β: 12°
C: <0.002
s: ±0.025 (VPET)
±0.13 (VPGT)
±0.1 (VPXT)



VPET Carbide TOP Wiper (S: ±0.025)

Cut: Standard
Chip Breaker: TOP Wiper, Polished Rake, Sharp Cutting Edge

Repeatability <10µm

Left Hand		Right Hand		Dimensions & Features			
Item No.	Description	Item No.	Description	Edge	Nose Radius	Holder	Coating
Call For Details	VPET 1003ZZ FL TOP UHM10 TX+	Call For Details	VPET 1003ZZ FR TOP UHM10 TX+	Sharp	0	SV...	UHM 10 TX+
7005-129857	VPET 1003ZZ FL TOP UHM20 HPX	7005-129863	VPET 1003ZZ FR TOP UHM20 HPX	Sharp	0	SV...	UHM 20 HPX
Call For Details	VPET 1003ZZ FL TOP UHM20 TX+	Call For Details	VPET 1003ZZ FR TOP UHM20 TX+	Sharp	0	SV...	UHM 20 TX+
Call For Details	VPET 1003008 FL TOP UHM10 TX+	Call For Details	VPET 1003008 FR TOP UHM10 TX+	Sharp	.08mm/.0031in	SV...	UHM 10 TX+
7005-129859	VPET 1003008 FL TOP UHM20 HPX	7005-129865	VPET 1003008 FR TOP UHM20 HPX	Sharp	.08mm/.0031in	SV...	UHM 20 HPX
Call For Details	VPET 1003008 FL TOP UHM20 TX+	Call For Details	VPET 1003008 FR TOP UHM20 TX+	Sharp	.08mm/.0031in	SV...	UHM 20 TX+
Call For Details	VPET 1003015 FL TOP UHM10 TX+	Call For Details	VPET 1003015 FR TOP UHM10 TX+	Sharp	.15mm/.0059in	SV...	UHM 10 TX+
7005-129861	VPET 1003015 FL TOP UHM20 HPX	7005-129867	VPET 1003015 FR TOP UHM20 HPX	Sharp	.15mm/.0059in	SV...	UHM 20 HPX
Call For Details	VPET 1003015 FL TOP UHM20 TX+	Call For Details	VPET 1003015 FR TOP UHM20 TX+	Sharp	.15mm/.0059in	SV...	UHM 20 TX+
7005-114892	VPET 1003015 FL TOP UHM30 SX	7005-114895	VPET 1003015 FR TOP UHM30 SX	Sharp	.15mm/.0059in	SV...	UHM 30 SX



VPGT Carbide TOP Wiper (S: ±0.13)

Cut: Standard
Chip Breaker: TOP Wiper, Polished Rake, Sharp Cutting Edge

Repeatability <20µm

Left Hand		Right Hand		Dimensions & Features			
Item No.	Description	Item No.	Description	Edge	Nose Radius	Holder	Coating
7005-117094	VPGT 1003ZZ FL TOP UHM10 HX	7005-117088	VPGT 1003ZZ FR TOP UHM10 HX	Sharp	0	SV...	UHM 10 HX
Call For Details	VPGT 1003ZZ FL TOP UHM10 TX+	Call For Details	VPGT 1003ZZ FR TOP UHM10 TX+	Sharp	0	SV...	UHM 10 TX+
7005-113207	VPGT 1003ZZ FL TOP UHM20 HPX	7005-113203	VPGT 1003ZZ FR TOP UHM20 HPX	Sharp	0	SV...	UHM 20 HPX
Call For Details	VPGT 1003ZZ FL TOP UHM20 TX+	Call For Details	VPGT 1003ZZ FR TOP UHM20 TX+	Sharp	0	SV...	UHM 20 TX+
7005-117096	VPGT 1003008 FL TOP UHM10 HX	7005-117090	VPGT 1003008 FR TOP UHM10 HX	Sharp	.08mm/.0031in	SV...	UHM 10 HX
Call For Details	VPGT 1003008 FL TOP UHM10 TX+	Call For Details	VPGT 1003008 FR TOP UHM10 TX+	Sharp	.08mm/.0031in	SV...	UHM 10 TX+
7005-113209	VPGT 1003008 FL TOP UHM20 HPX	7005-113205	VPGT 1003008 FR TOP UHM20 HPX	Sharp	.08mm/.0031in	SV...	UHM 20 HPX
Call For Details	VPGT 1003008 FL TOP UHM20 TX+	Call For Details	VPGT 1003008 FR TOP UHM20 TX+	Sharp	.08mm/.0031in	SV...	UHM 20 TX+
7005-117098	VPGT 1003015 FL TOP UHM10 HX	7005-117092	VPGT 1003015 FR TOP UHM10 HX	Sharp	.15mm/.0059in	SV...	UHM 10 HX
Call For Details	VPGT 1003015 FL TOP UHM10 TX+	Call For Details	VPGT 1003015 FR TOP UHM10 TX+	Sharp	.15mm/.0059in	SV...	UHM 10 TX+
7005-113128	VPGT 1003015 FL TOP UHM20 HPX	7005-113130	VPGT 1003015 FR TOP UHM20 HPX	Sharp	.15mm/.0059in	SV...	UHM 20 HPX
Call For Details	VPGT 1003015 FL TOP UHM20 TX+	Call For Details	VPGT 1003015 FR TOP UHM20 TX+	Sharp	.15mm/.0059in	SV...	UHM 20 TX+



VPXT Carbide TOP Wiper (S: ±0.1)

Cut: Standard
Chip Breaker: TOP Wiper, Round Cutting Edge

Repeatability <50µm

Left Hand		Right Hand		Dimensions & Features			
Item No.	Description	Item No.	Description	Edge	Nose Radius	Holder	Coating
7005-138456	VPXT 1003015 EL TOP UHM20 HPX	7005-138457	VPXT 1003015 ER TOP UHM20 HPX	Honed	.15mm/.0059in	SV...	UHM 20 HPX
7005-138462	VPXT 1003035 EL TOP UHM20 HPX	7005-138463	VPXT 1003035 ER TOP UHM20 HPX	Honed	.35mm/.0137in	SV...	UHM 20 HPX




ISO Holder SVAP


Type: 90°
Coolant-Thru: None

Repeatability <20µm

Left Hand		Right Hand		Dimensions & Features				
Item No.	Description	Item No.	Description	h	b	l	f	Inserts
7005-044335	SVAPL 0707 H10	7005-044334	SVAPR 0707 H10	7	7	100	7	VP.. 1003
Call For Details	SVAPL 0708 H10	Call For Details	SVAPR 0708 H10	7	8	100	8	VP.. 1003
7005-148827	SVAPL 0808 F10	7005-148825	SVAPR 0808 F10	8	8	80	8	VP.. 1003
7005-044071	SVAPL 0808 H10	7005-044072	SVAPR 0808 H10	8	8	100	8	VP.. 1003
7005-148828	SVAPL 1010 F10	7005-148826	SVAPR 1010 F10	10	10	80	10	VP.. 1003
7005-044073	SVAPL 1010 H10	7005-044074	SVAPR 1010 H10	10	10	100	10	VP.. 1003
7005-044075	SVAPL 1212 H10	7005-044076	SVAPR 1212 H10	12	12	100	12	VP.. 1003
7005-148830	SVAPL 3/8" F10	7005-148829	SVAPR 3/8" F10	9.525	9.525	80	9.525	VP.. 1003
7005-114029	SVAPL 3/8" H10	7005-138415	SVAPR 3/8" H10	9.525	9.525	100	9.525	VP.. 1003
7005-114030	SVAPL 1/2" H10	7005-138416	SVAPR 1/2" H10	12.7	12.7	100	12.7	VP.. 1003

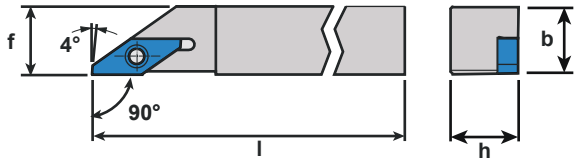






ISO Holder SVJP


Type: 93°
Coolant-Thru: None

Repeatability <20µm

Left Hand		Right Hand		Dimensions & Features				
Item No.	Description	Item No.	Description	h	b	l	f	Inserts
7005-043093	SVJPL 0807 H10	7005-043207	SVJPR 0807 H10	7	8	100	8	VP.. 1003
Call For Details	SVJPL 0808 F10	7005-148831	SVJPR 0808 F10	8	8	80	8	VP.. 1003
7005-043002	SVJPL 0808 H10	7005-043009	SVJPR 0808 H10	8	8	100	8	VP.. 1003
7005-148834	SVJPL 1010 F10	7005-148832	SVJPR 1010 F10	10	10	80	10	VP.. 1003
7005-043003	SVJPL 1010 H10	7005-043010	SVJPR 1010 H10	10	10	100	10	VP.. 1003
7005-043004	SVJPL 1212 H10	7005-043011	SVJPR 1212 H10	12	12	100	12	VP.. 1003
7005-043006	SVJPL 1616 K10	7005-043013	SVJPR 1616 K10	16	16	125	16	VP.. 1003
7005-043007	SVJPL 2020 K10	7005-043014	SVJPR 2020 K10	20	20	125	20	VP.. 1003
7005-148836	SVJPL 3/8" F10	7005-148835	SVJPR 3/8" F10	9.525	9.525	80	9.525	VP.. 1003
7005-114031	SVJPL 3/8" H10	7005-138414	SVJPR 3/8" H10	9.525	9.525	100	9.525	VP.. 1003
7005-114032	SVJPL 1/2" H10	7005-127412	SVJPR 1/2" H10	12.7	12.7	100	12.7	VP.. 1003
7005-113733	SVJPL 5/8" K10	7005-113732	SVJPR 5/8" K10	15.875	15.875	125	15.875	VP.. 1003
7005-113735	SVJPL 3/4" K10	7005-113734	SVJPR 3/4" K10	19.05	19.05	125	19.05	VP.. 1003

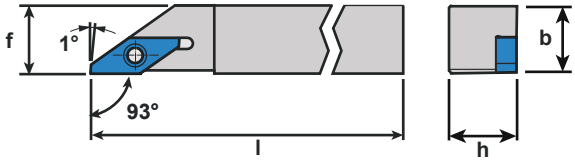






ISO Coolant-Thru Holder SVJP

Type: 93°
Coolant-Thru: Rear & Side Ports

Repeatability <10µm

Left Hand		Right Hand		Dimensions & Features							Coolant Fittings	
Item No.	Description	Item No.	Description	h	b	l	x_1	d	f	Inserts	Side	Rear
Call For Details	SVJPL 0810 H10 IC	Call For Details	SVJPR 0810 H10 IC	8	10	100	11.5	M5	10	VP.. 1003	4005-000111	4005-000111
Call For Details	SVJPL 1010 H10 IC	7005-146042A	SVJPR 1010 H10 IC	10	10	100	13.5	M5	10	VP.. 1003	4005-000111	4005-000111
Call For Details	SVJPL 1212 H10 IC	7005-146036A	SVJPR 1212 H10 IC	12	12	100	15.5	M5	12	VP.. 1003	4005-000111	4005-000111
Call For Details	SVJPL 1616 K10 IC	7005-146047A	SVJPR 1616 K10 IC	16	16	125	19.5	G1/8"	16	VP.. 1003	4005-000111	4005-000104
Call For Details	SVJPL 2020 K10 IC	Call For Details	SVJPR 2020 K10 IC	20	20	125	23.5	G1/8"	20	VP.. 1003	4005-000111	4005-000104
Call For Details	SVJPL 3/8" H10 IC	Call For Details	SVJPR 3/8" H10 IC	9.525	9.525	100	13	M5	9.525	VP.. 1003	4005-000111	4005-000111
Call For Details	SVJPL 1/2" H10 IC	7005-146050A	SVJPR 1/2" H10 IC	12.7	12.7	100	16.2	M5	12.7	VP.. 1003	4005-000111	4005-000111
Call For Details	SVJPL 5/8" K10 IC	7005-146051A	SVJPR 5/8" K10 IC	15.875	15.875	125	19.4	G1/8"	15.875	VP.. 1003	4005-000111	4005-000104
Call For Details	SVJPL 3/4" K10 IC	7005-146334A	SVJPR 3/4" K10 IC	19.05	19.05	125	22.6	G1/8"	19.05	VP.. 1003	4005-000111	4005-000104


Features (5) connection ports for simple connection to your oil delivery system. (4) Side ports and (1) one end port making connection possible on most machine tool positions.

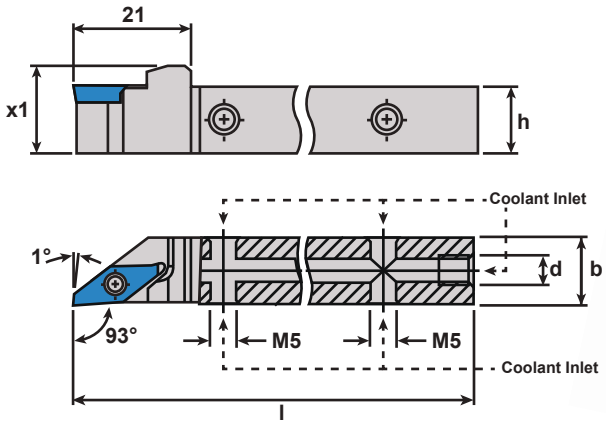



4005-000111
Connects to side ports on ALL shank sizes
0° Male Union - M5-0.8 to 1/4 JIC Flare Fitting
Included With All Coolant-Thru Shanks

4005-000104
Connects to end port on 5/8" and larger shanks
0° Male Union - 1/8 BSPP to 1/4 JIC Flare Fitting
Fits Position (d) On Tool Holders Sold Separately




ISO Holder SVJP Reinforced


Type: 93°
Coolant-Thru: None

Repeatability <20µm

Left Hand		Right Hand		Dimensions & Features				
Item No.	Description	Item No.	Description	h	b	l	f	Inserts
7005-148839	SVJPL 0810 F10 V	7005-148837	SVJPR 0810 F10 V	8	10	80	10	VP.. 1003
7005-114945	SVJPL 0810 H10 V	7005-114944	SVJPR 0810 H10 V	8	10	100	10	VP.. 1003
7005-148840	SVJPL 1010 F10 V	7005-148838	SVJPR 1010 F10 V	10	10	80	10	VP.. 1003
7005-114019	SVJPL 1010 H10 V	7005-114022	SVJPR 1010 H10 V	10	10	100	10	VP.. 1003
7005-045208	SVJPL 1212 H10 V	7005-045207	SVJPR 1212 H10 V	12	12	100	12	VP.. 1003
7005-114020	SVJPL 1616 K10 V	7005-114023	SVJPR 1616 K10 V	16	16	125	16	VP.. 1003
7005-114021	SVJPL 2020 K10 V	7005-114024	SVJPR 2020 K10 V	20	20	125	20	VP.. 1003
7005-148842	SVJPL 3/8" F10 V	7005-148841	SVJPR 3/8" F10 V	9.525	9.525	80	9.525	VP.. 1003
7005-114027	SVJPL 3/8" H10 V	7005-114025	SVJPR 3/8" H10 V	9.525	9.525	100	9.525	VP.. 1003
7005-114028	SVJPL 1/2" H10 V	7005-114026	SVJPR 1/2" H10 V	12.7	12.7	100	12.7	VP.. 1003
7005-113737	SVJPL 5/8" K10 V	7005-113736	SVJPR 5/8" K10 V	15.875	15.875	125	15.875	VP.. 1003
7005-113739	SVJPL 3/4" K10 V	7005-113738	SVJPR 3/4" K10 V	19.05	19.05	125	19.05	VP.. 1003

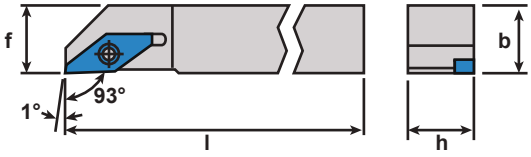






ISO Coolant-Thru Holder SVJP Reinforced

Type: 93°
Coolant-Thru: Rear & Side Ports

Repeatability <10µm

Left Hand		Right Hand		Dimensions & Features							Coolant Fittings	
Item No.	Description	Item No.	Description	h	b	l	x_1	d	f	Inserts	Side	Rear
7005-146456	SVJPL 0810 H10 V IC	7005-146451	SVJPR 0810 H10 V IC	8	10	100	11.5	M5	10	VP.. 1003	4005-000111	4005-000111
7005-146457	SVJPL 1010 H10 V IC	7005-146452	SVJPR 1010 H10 V IC	10	10	100	13.5	M5	10	VP.. 1003	4005-000111	4005-000111
7005-146458	SVJPL 1212 H10 V IC	7005-146453	SVJPR 1212 H10 V IC	12	12	100	15.5	M5	12	VP.. 1003	4005-000111	4005-000111
7005-146459	SVJPL 1616 K10 V IC	7005-146454	SVJPR 1616 K10 V IC	16	16	125	19.5	G1/8"	16	VP.. 1003	4005-000111	4005-000104
7005-146460	SVJPL 2020 K10 V IC	7005-146455	SVJPR 2020 K10 V IC	20	20	125	23.5	G1/8"	20	VP.. 1003	4005-000111	4005-000104
7005-146465	SVJPL 3/8" H10 V IC	7005-146461	SVJPR 3/8" H10 V IC	9.525	9.525	100	13	M5	9.525	VP.. 1003	4005-000111	4005-000111
7005-146466	SVJPL 1/2" H10 V IC	7005-146462	SVJPR 1/2" H10 V IC	12.7	12.7	100	16.2	M5	12.7	VP.. 1003	4005-000111	4005-000111
7005-146467	SVJPL 5/8" K10 V IC	7005-146463	SVJPR 5/8" K10 V IC	15.875	15.875	125	19.4	G1/8"	15.875	VP.. 1003	4005-000111	4005-000104
7005-146468	SVJPL 3/4" K10 V IC	7005-146464	SVJPR 3/4" K10 V IC	19.05	19.05	125	22.6	G1/8"	19.05	VP.. 1003	4005-000111	4005-000104

Features (5) connection ports for simple connection to your oil delivery system. (4) Side ports and (1) one end port making connection possible on most machine tool positions.

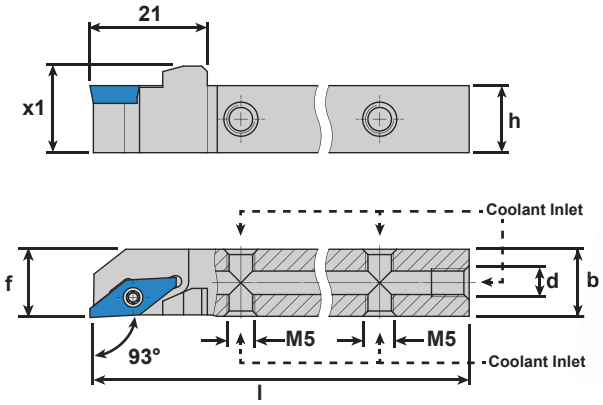






4005-000111
Connects to side ports on ALL shank sizes
0° Male Union - M5-0.8 to 1/4 JIC Flare Fitting
Included With All Coolant-Thru Shanks



4005-000104
Connects to end port on 5/8" and larger shanks
0° Male Union - 1/8 BSPP to 1/4 JIC Flare Fitting
Fits Position (d) On Tool Holders Sold Separately




ISO Holder SVJP Fast Change


Type: 93°
Coolant-Thru: None

Repeatability <20µm

Left Hand		Right Hand		Dimensions & Features				
Item No.	Description	Item No.	Description	h	b	l	f	Inserts
Call For Details	SVJPL 1212 H10 FC	Call For Details	SVJPR 1212 H10 FC	12	12	100	12	VP.. 1003
Call For Details	SVJPL 1616 K10 FC	Call For Details	SVJPR 1616 K10 FC	16	16	125	16	VP.. 1003
Call For Details	SVJPL 1/2" H10 FC	Call For Details	SVJPR 1/2" H10 FC	12.7	12.7	100	12.7	VP.. 1003
Call For Details	SVJPL 5/8" K10 FC	Call For Details	SVJPR 5/8" K10 FC	15.875	15.875	125	15.875	VP.. 1003

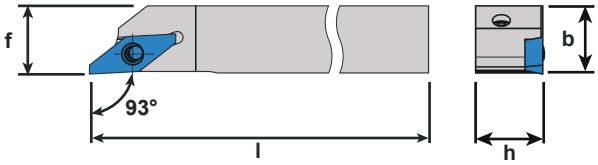






ISO Coolant-Thru Holder SVJP Fast Change

Type: 93°
Coolant-Thru: Rear & Side Ports

Repeatability <10µm

Left Hand		Right Hand		Dimensions & Features							Coolant Fittings	
Item No.	Description	Item No.	Description	h	b	l	x_1	d	f	Inserts	Side	Rear
Call For Details	SVJPL 1212 H10 FC IC	Call For Details	SVJPR 1212 H10 FC IC	12	12	100	15.5	M5	12	VP.. 1003	4005-000111	4005-000111
Call For Details	SVJPL 1616 K10 FC IC	Call For Details	SVJPR 1616 K10 FC IC	16	16	125	19.5	G1/8"	16	VP.. 1003	4005-000111	4005-000104
Call For Details	SVJPL 1/2" H10 FC IC	Call For Details	SVJPR 1/2" H10 FC IC	12.7	12.7	100	16.2	M5	12.7	VP.. 1003	4005-000111	4005-000111
Call For Details	SVJPL 5/8" K10 FC IC	Call For Details	SVJPR 5/8" K10 FC IC	15.875	15.875	125	19.4	G1/8"	15.875	VP.. 1003	4005-000111	4005-000104

Features (5) connection ports for simple connection to your oil delivery system. (4) Side ports and (1) one end port making connection possible on most machine tool positions.

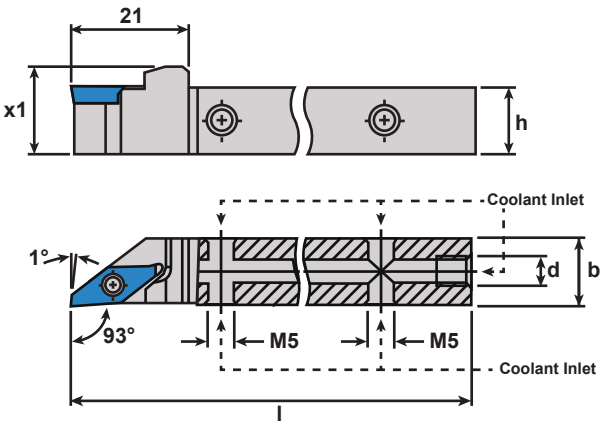






4005-000111
Connects to side ports on ALL shank sizes
0° Male Union - M5-0.8 to 1/4 JIC Flare Fitting
Included With All Coolant-Thru Shanks



4005-000104
Connects to end port on 5/8" and larger shanks
0° Male Union - 1/8 BSPP to 1/4 JIC Flare Fitting
Fits Position (d) On Tool Holders Sold Separately




ISO Holder SVJP Reinforced Fast Change


Type: 93°
Coolant-Thru: None

Repeatability <20µm

Left Hand		Right Hand		Dimensions & Features				
Item No.	Description	Item No.	Description	h	b	l	f	Inserts
Call For Details	SVJPL 1212 H10 V FC	Call For Details	SVJPR 1212 H10 V FC	12	12	100	12	VP.. 1003
Call For Details	SVJPL 1616 K10 V FC	Call For Details	SVJPR 1616 K10 V FC	16	16	125	16	VP.. 1003
Call For Details	SVJPL 1/2" H10 V FC	Call For Details	SVJPR 1/2" H10 V FC	12.7	12.7	100	12.7	VP.. 1003
Call For Details	SVJPL 5/8" K10 V FC	Call For Details	SVJPR 5/8" K10 V FC	15.875	15.875	125	15.875	VP.. 1003

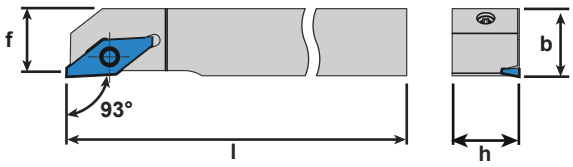






ISO Coolant-Thru Holder SVJP Reinforced Fast Change

Type: 93°
Coolant-Thru: Rear & Side Ports

Repeatability <10µm

Left Hand		Right Hand		Dimensions & Features							Coolant Fittings	
Item No.	Description	Item No.	Description	h	b	l	x_1	d	f	Inserts	Side	Rear
Call For Details	SVJPL 1212 H10 V FC IC	Call For Details	SVJPR 1212 H10 V FC IC	12	12	100	15.5	M5	12	VP.. 1003	4005-000111	4005-000111
Call For Details	SVJPL 1616 K10 V FC IC	Call For Details	SVJPR 1616 K10 V FC IC	16	16	125	19.5	G1/8"	16	VP.. 1003	4005-000111	4005-000104
Call For Details	SVJPL 1/2" H10 V FC IC	Call For Details	SVJPR 1/2" H10 V FC IC	12.7	12.7	100	16.2	M5	12.7	VP.. 1003	4005-000111	4005-000111
Call For Details	SVJPL 5/8" K10 V FC IC	Call For Details	SVJPR 5/8" K10 V FC IC	15.875	15.875	125	19.4	G1/8"	15.875	VP.. 1003	4005-000111	4005-000104

Features (5) connection ports for simple connection to your oil delivery system: (4) Side ports and (1) one end port making connection possible on most machine tool positions.

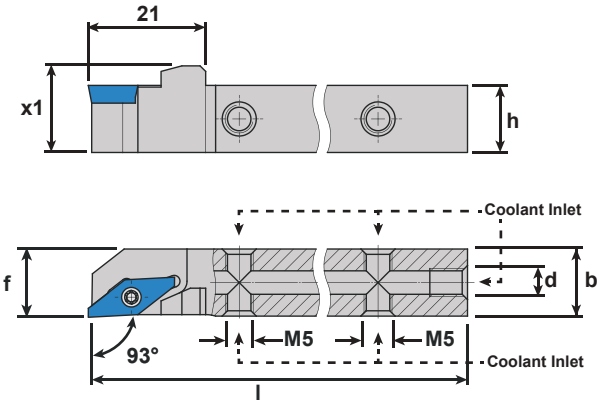






4005-000111
Connects to side ports on ALL shank sizes
0° Male Union - M5-0.8 to 1/4 JIC Flare Fitting
Included With All Coolant-Thru Shanks



4005-000104
Connects to end port on 5/8" and larger shanks
0° Male Union - 1/8 BSPP to 1/4 JIC Flare Fitting
Fits Position (d) On Tool Holders Sold Separately




ISO Holder SVXP


Type: 91°
Coolant-Thru: None

Repeatability <20µm

Left Hand		Right Hand		Dimensions & Features				
Item No.	Description	Item No.	Description	h	b	l	f	Inserts
Call For Details	SVXPL 0810 F10	Call For Details	SVXPR 0810 F10	8	10	80	1	VP.. 1003
Call For Details	SVXPL 0810 H10	Call For Details	SVXPR 0810 H10	8	10	100	1	VP.. 1003
7005-148846	SVXPL 1010 F10	7005-148844	SVXPR 1010 F10	10	10	80	3	VP.. 1003
7005-044081	SVXPL 1010 H10	7005-044082	SVXPR 1010 H10	10	10	100	3	VP.. 1003
7005-044083	SVXPL 1212 H10	7005-044084	SVXPR 1212 H10	12	12	100	5	VP.. 1003
7005-044097	SVXPL 1616 K10	7005-044098	SVXPR 1616 K10	16	16	125	9	VP.. 1003
7005-044099	SVXPL 2020 K10	Call For Details	SVXPR 2020 K10	20	20	125	13	VP.. 1003
7005-148848	SVXPL 3/8" F10	7005-148847	SVXPR 3/8" F10	9.525	9.525	80	2.5	VP.. 1003
7005-114033	SVXPL 3/8" H10	7005-114035	SVXPR 3/8" H10	9.525	9.525	100	2.5	VP.. 1003
7005-114034	SVXPL 1/2" H10	7005-114036	SVXPR 1/2" H10	12.7	12.7	100	5.7	VP.. 1003
7005-113741	SVXPL 5/8" K10	7005-113740	SVXPR 5/8" K10	15.875	15.875	125	8.8	VP.. 1003
7005-113743	SVXPL 3/4" K10	7005-113742	SVXPR 3/4" K10	19.05	19.05	125	12	VP.. 1003

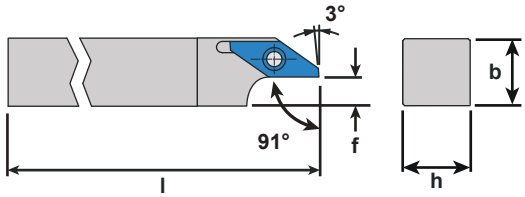






ISO Coolant-Thru Holder SVXP

Type: 93°
Coolant-Thru: Rear & Side Ports

Repeatability <10µm

Left Hand		Right Hand		Dimensions & Features							Coolant Fittings	
Item No.	Description	Item No.	Description	h	b	l	x_1	d	f	Inserts	Side	Rear
Call For Details	SVXPL 0808 H10 IC	Call For Details	SVXPR 0808 H10 IC	8	8	100	11.5	M5	1	VP.. 1003	4005-000111	4005-000111
Call For Details	SVXPL 1010 H10 IC	Call For Details	SVXPR 1010 H10 IC	10	10	100	13.5	M5	3	VP.. 1003	4005-000111	4005-000111
7005-146331A	SVXPL 1212 H10 IC	Call For Details	SVXPR 1212 H10 IC	12	12	100	15.5	M5	5	VP.. 1003	4005-000111	4005-000111
Call For Details	SVXPL 1616 K10 IC	Call For Details	SVXPR 1616 K10 IC	16	16	125	19.5	G1/8"	9	VP.. 1003	4005-000111	4005-000104
Call For Details	SVXPL 2020 K10 IC	Call For Details	SVXPR 2020 K10 IC	20	20	125	23.5	G1/8"	13	VP.. 1003	4005-000111	4005-000104
Call For Details	SVXPL 3/8" H10 IC	Call For Details	SVXPR 3/8" H10 IC	9.525	9.525	100	13	M5	2.5	VP.. 1003	4005-000111	4005-000111
7005-146405A	SVXPL 1/2" H10 IC	Call For Details	SVXPR 1/2" H10 IC	12.7	12.7	100	16.2	M5	5.7	VP.. 1003	4005-000111	4005-000111
7005-146408A	SVXPL 5/8" K10 IC	7005-146402A	SVXPR 5/8" K10 IC	15.875	15.875	125	19.4	G1/8"	8.8	VP.. 1003	4005-000111	4005-000104
Call For Details	SVXPL 3/4" K10 IC	Call For Details	SVXPR 3/4" K10 IC	19.05	19.05	125	22.6	G1/8"	12	VP.. 1003	4005-000111	4005-000104

Features (5) connection ports for simple connection to your oil delivery system: (4) Side ports and (1) one end port making connection possible on most machine tool positions.

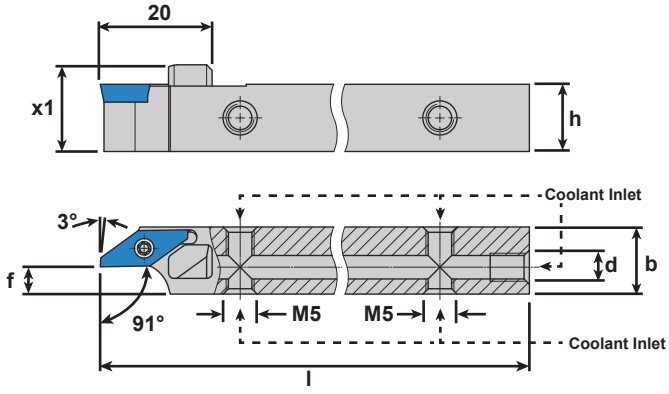






4005-000111
Connects to side ports on ALL shank sizes
0° Male Union - M5-0.8 to 1/4 JIC Flare Fitting
Included With All Coolant-Thru Shanks



4005-000104
Connects to end port on 5/8" and larger shanks
0° Male Union - 1/8 BSPP to 1/4 JIC Flare Fitting
Fits Position (d) On Tool Holders Sold Separately

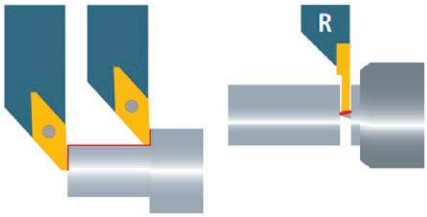


ISO TWIN Holder SVJP


Type: 93°, VP ISO / 1600 Inserts (R-R)
Coolant-Thru: None

Repeatability <20µm

Right - Right		Dimensions & Features								
Item No.	Description	h	b	l	x_1	x_2	x_3	d_{max}	Inserts	
Call For Details	SVJPR/1600R-0810 H10 Twin	8	10	100	16	4	8	23	VP.. 1003	16...R
Call For Details	SVJPR/1600R-1010 H10 Twin	10	10	100	16	5	8	23	VP.. 1003	16...R
Call For Details	SVJPR/1600R-1212 H10 Twin	12	12	100	16	6	8	23	VP.. 1003	16...R
Call For Details	SVJPR/1600R-1616 K10 Twin	16	16	125	20	8	10	34	VP.. 1003	16...R
Call For Details	SVJPR/1600R-2020 K10 Twin	20	20	125	24	8	14	63	VP.. 1003	16...R
Call For Details	SVJPR/1600R-3/8" H10 Twin	9.525	9.525	100	16	4.76	8	23	VP.. 1003	16...R
Call For Details	SVJPR/1600R-1/2" H10 Twin	12.7	12.7	100	16	6.35	8	23	VP.. 1003	16...R
Call For Details	SVJPR/1600R-5/8" K10 Twin	15.875	15.875	125	20	7.94	10	34	VP.. 1003	16...R
Call For Details	SVJPR/1600R-3/4" K10 Twin	19.05	19.05	125	24	7.53	14	63	VP.. 1003	16...R

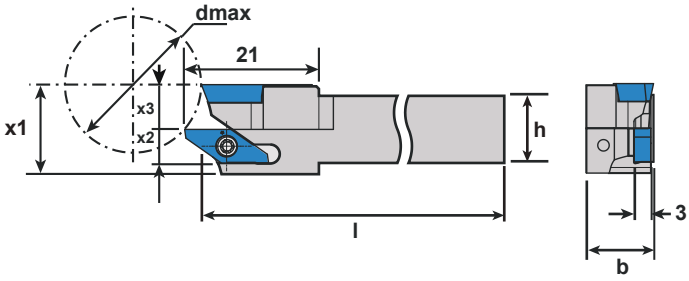



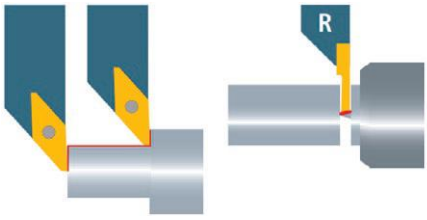


Coolant-Thru ISO TWIN Holder SVJP

Type: 93°, VP ISO / 1600 Inserts (R-R)
Coolant-Thru: Rear & Side Ports

Repeatability <10µm

Right - Right		Dimensions & Features									Coolant Fittings	
Item No.	Description	h	b	l	x_1	x_2	x_3	d	d_{max}	Inserts	Side	Rear
Call For Details	SVJPR/1600R-0810 H10 Twin IC	8	10	100	16	4	8	M5	23	VP.. 1003 16...R	4005-000111	4005-000111
Call For Details	SVJPR/1600R-1010 H10 Twin IC	10	10	100	16	5	8	M5	23	VP.. 1003 16...R	4005-000111	4005-000111
Call For Details	SVJPR/1600R-1212 H10 Twin IC	12	12	100	16	6	8	M5	23	VP.. 1003 16...R	4005-000111	4005-000111
Call For Details	SVJPR/1600R-1616 K10 Twin IC	16	16	125	20	8	10	G1/8"	34	VP.. 1003 16...R	4005-000111	4005-000104
Call For Details	SVJPR/1600R-2020 K10 Twin IC	20	20	125	24	8	14	G1/8"	63	VP.. 1003 16...R	4005-000111	4005-000104
Call For Details	SVJPR/1600R-3/8" H10 Twin IC	9.525	9.525	100	16	4.76	8	M5	23	VP.. 1003 16...R	4005-000111	4005-000111
Call For Details	SVJPR/1600R-1/2" H10 Twin IC	12.7	12.7	100	16	6.35	8	M5	23	VP.. 1003 16...R	4005-000111	4005-000111
Call For Details	SVJPR/1600R-5/8" K10 Twin IC	15.875	15.875	125	20	7.94	10	G1/8"	34	VP.. 1003 16...R	4005-000111	4005-000104
Call For Details	SVJPR/1600R-3/4" K10 Twin IC	19.05	19.05	125	24	7.53	14	G1/8"	63	VP.. 1003 16...R	4005-000111	4005-000104

Features (5) connection ports for simple connection to your oil delivery system: (4) Side ports and (1) one end port making connection possible on most machine tool positions.

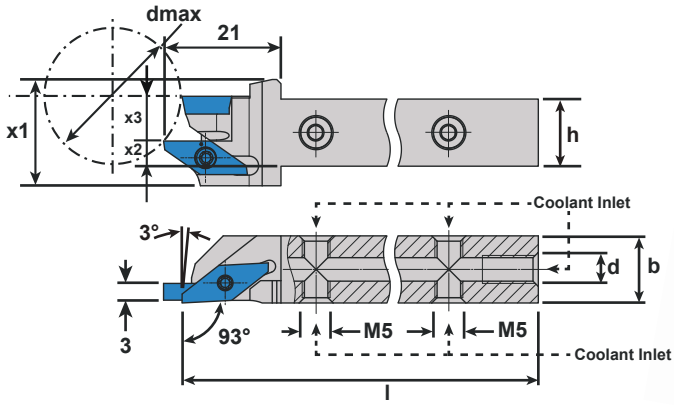






4005-000111
Connects to side ports on ALL shank sizes
0° Male Union - M5-0.8 to 1/4 JIC Flare Fitting
Included With All Coolant-Thru Shanks



4005-000104
Connects to end port on 5/8" and larger shanks
0° Male Union - 1/8 BSPP to 1/4 JIC Flare Fitting
Fits Position (d) On Tool Holders Sold Separately

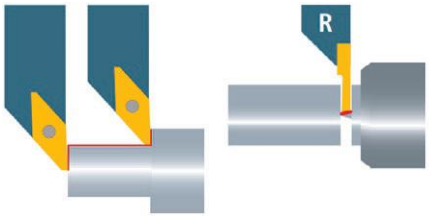


ISO TWIN Holder SVJP


Type: 93°, VP ISO / 1600 Inserts (R-L)
Coolant-Thru: None

Repeatability <20µm

Right - Left		Dimensions & Features								
Item No.	Description	h	b	l	x_1	x_2	x_3	d_{max}	Inserts	
Call For Details	SVJPR/1600L-0810 H10 Twin	8	10	100	16	4	8	23	VP.. 1003	16...L
Call For Details	SVJPR/1600L-1010 H10 Twin	10	10	100	16	5	8	23	VP.. 1003	16...L
Call For Details	SVJPR/1600L-1212 H10 Twin	12	12	100	16	6	8	23	VP.. 1003	16...L
Call For Details	SVJPR/1600L-1616 K10 Twin	16	16	125	20	8	12	33	VP.. 1003	16...L
Call For Details	SVJPR/1600L-2020 K10 Twin	20	20	125	24	8	14	63	VP.. 1003	16...L
Call For Details	SVJPR/1600L-3/8" H10 Twin	9.525	9.525	100	16	4.76	8	23	VP.. 1003	16...L
Call For Details	SVJPR/1600L-1/2" H10 Twin	12.7	12.7	100	16	6.35	8	23	VP.. 1003	16...L
Call For Details	SVJPR/1600L-5/8" K10 Twin	15.875	15.875	125	20	7.94	10	33	VP.. 1003	16...L
Call For Details	SVJPR/1600L-3/4" K10 Twin	19.05	19.05	125	24	7.53	14	63	VP.. 1003	16...L

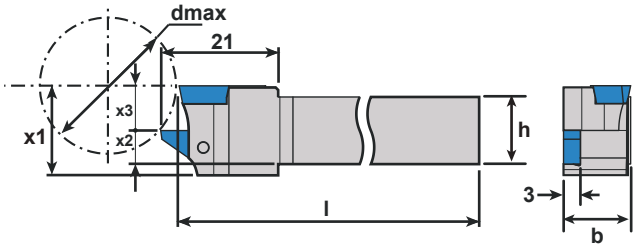



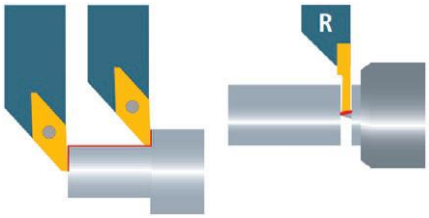


Coolant-Thru ISO TWIN Holder SVJP

Type: 93°, VP ISO / 1600 Inserts (R-L)
Coolant-Thru: Rear & Side Ports

Repeatability <10µm

Right - Left		Dimensions & Features									Coolant Fittings	
Item No.	Description	h	b	l	x_1	x_2	x_3	d	d_{max}	Inserts	Side	Rear
Call For Details	SVJPR/1600L-0810 H10 Twin IC	8	10	100	19	2.5	8	M5	23	VP.. 1003 16...L	4005-000111	4005-000111
Call For Details	SVJPR/1600L-1010 H10 Twin IC	10	10	100	19	3.5	8	M5	23	VP.. 1003 16...L	4005-000111	4005-000111
Call For Details	SVJPR/1600L-1212 H10 Twin IC	12	12	100	19	4.5	8	M5	23	VP.. 1003 16...L	4005-000111	4005-000111
Call For Details	SVJPR/1600L-1616 K10 Twin IC	16	16	125	23	6.5	10	G1/8"	34	VP.. 1003 16...L	4005-000111	4005-000104
Call For Details	SVJPR/1600L-2020 K10 Twin IC	20	20	125	27	6.5	14	G1/8"	63	VP.. 1003 16...L	4005-000111	4005-000104
Call For Details	SVJPR/1600L-3/8" H10 Twin IC	9.525	9.525	100	19	3.26	8	M5	23	VP.. 1003 16...L	4005-000111	4005-000111
Call For Details	SVJPR/1600L-1/2" H10 Twin IC	12.7	12.7	100	19	4.85	8	M5	23	VP.. 1003 16...L	4005-000111	4005-000111
Call For Details	SVJPR/1600L-5/8" K10 Twin IC	15.875	15.875	125	23	6.44	10	G1/8"	34	VP.. 1003 16...L	4005-000111	4005-000104
Call For Details	SVJPR/1600L-3/4" K10 Twin IC	19.05	19.05	125	27	6.03	14	G1/8"	63	VP.. 1003 16...L	4005-000111	4005-000104


Features (5) connection ports for simple connection to your oil delivery system: (4) Side ports and (1) one end port making connection possible on most machine tool positions.

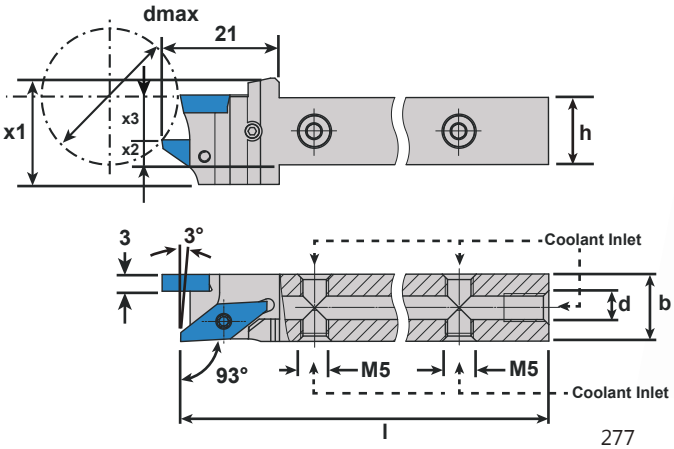



4005-000111
Connects to side ports on ALL shank sizes
0° Male Union - M5-0.8 to 1/4 JIC Flare Fitting
Included With All Coolant-Thru Shanks

4005-000104
Connects to end port on 5/8" and larger shanks
0° Male Union - 1/8 BSPP to 1/4 JIC Flare Fitting
Fits Position (d) On Tool Holders Sold Separately




Coolant-Thru ISO Y-Axis Holder

Type: 93°, VP ISO Inserts
Coolant-Thru: Rear & Side Ports

Repeatability <10µm

Right Hand		Dimensions & Features							Coolant Fittings	
Item No.	Description	h	b	l	z_1	x_1	d	Inserts	Side	Rear
Call For Details	SVJPR YA-1212 H10-20 IC	12	12	100	20	19.5	M5	VP.. 1003	4005-000111	4005-000111
Call For Details	SVJPR YA-1212 H10-25 IC	12	12	100	25	19.5	M5	VP.. 1003	4005-000111	4005-000111
Call For Details	SVJPR YA-1212 H10-30 IC	12	12	100	30	19.5	M5	VP.. 1003	4005-000111	4005-000111
Call For Details	SVJPR YA-1616 K10-20 IC	16	16	125	20	19.5	G1/8	VP.. 1003	4005-000111	4005-000104
Call For Details	SVJPR YA-1616 K10-25 IC	16	16	125	25	19.5	G1/8	VP.. 1003	4005-000111	4005-000104
Call For Details	SVJPR YA-1616 K10-30 IC	16	16	125	30	19.5	G1/8	VP.. 1003	4005-000111	4005-000104
Call For Details	SVJPR YA-1/2" H10-20 IC	1/2"	1/2"	100	20	19.5	M5	VP.. 1003	4005-000111	4005-000111
Call For Details	SVJPR YA-1/2" H10-25 IC	1/2"	1/2"	100	25	19.5	M5	VP.. 1003	4005-000111	4005-000111
Call For Details	SVJPR YA-1/2" H10-30 IC	1/2"	1/2"	100	30	19.5	M5	VP.. 1003	4005-000111	4005-000111
Call For Details	SVJPR YA-5/8" K10-20 IC	5/8"	5/8"	125	20	19.5	G1/8	VP.. 1003	4005-000111	4005-000104
Call For Details	SVJPR YA-5/8" K10-25 IC	5/8"	5/8"	125	25	19.5	G1/8	VP.. 1003	4005-000111	4005-000104
Call For Details	SVJPR YA-5/8" K10-30 IC	5/8"	5/8"	125	30	19.5	G1/8	VP.. 1003	4005-000111	4005-000104

Features (5) connection ports for simple connection to your oil delivery system. (4) Side ports and (1) one end port making connection possible on most machine tool positions.

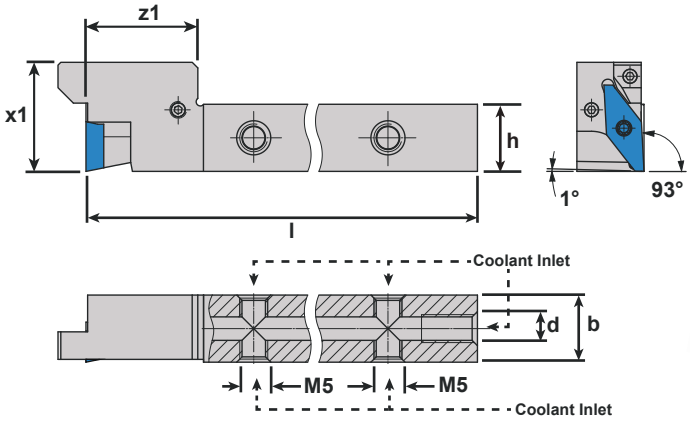






4005-000111
Connects to side ports on ALL shank sizes
0° Male Union - M5-0.8 to 1/4 JIC Flare Fitting
Included With All Coolant-Thru Shanks




4005-000104
Connects to end port on 5/8" and larger shanks
0° Male Union - 1/8 BSPP to 1/4 JIC Flare Fitting
Fits Position (d) On Tool Holders Sold Separately


Usage notes:



To avoid problems, two Y-AXIS holders must not be mounted directly next to each other.



Mount a standard tool holder between the Y-AXIS holders.



To prevent collisions, move back the holder in accordance with the overhanging length before changing the tool position.


multidec® SHORT

multidec® SHORT coolant-thru holders enable the use of multidec® turning inserts on commonly available quick change tooling systems. **multidec® 1600, 3000, ISO VC, & ISO VP** series inserts are currently available.

See Pg. 302 For Full Details



3000 Series Insert Shown




ISO Holder SVJP


Type: 92°
Coolant-Thru: None

Repeatability <20µm

Left Hand		Right Hand		Dimensions & Features						
Item No.	Description	Item No.	Description	h	b	l	l_2	f	D_{min}	Inserts
7005-043108	SVJPL 1212 XH10	7005-043109	SVJPR 1212 XH10	12	12	100	12	12.2	16	VP.. 1003
7005-043210	SVJPL 1616 XK10	7005-043211	SVJPR 1616 XK10	16	16	125	12	16.2	16	VP.. 1003

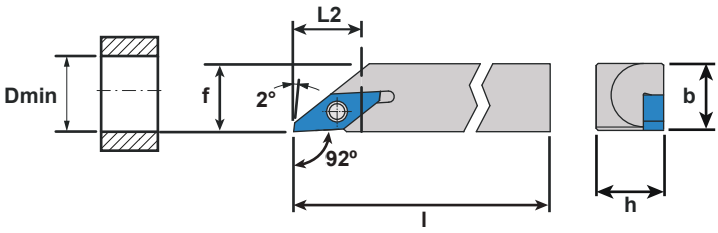






ISO Round Shank Holder SVOP


Type: 92°
Coolant-Thru: None

Repeatability <20µm

Left Hand		Right Hand		Dimensions & Features					
Item No.	Description	Item No.	Description	d	h	l	f	D_{min}	Inserts
7005-044348	A16M SVOPL 10	7005-044349	A16M SVOPR 10	16	15.3	150	8.3	16	VP.. 1003

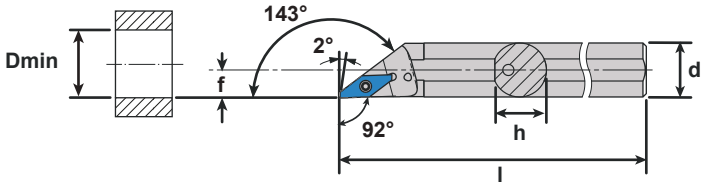






ISO Holder SVQP


Type: 92°
Coolant-Thru: None

Repeatability <20µm

Left Hand		Right Hand		Dimensions & Features								
Item No.	Description	Item No.	Description	h	b	l	l_2	l_3	f	D_{min}	Inserts
7005-044061	SVQPL 1212 XH10	7005-044062	SVQPR 1212 XH10	12	12	100	12	7.7	15.7	16	VP.. 1003
7005-044063	SVQPL 1616 XK10	7005-044064	SVQPR 1616 XK10	16	16	125	12	7.7	15.7	16	VP.. 1003

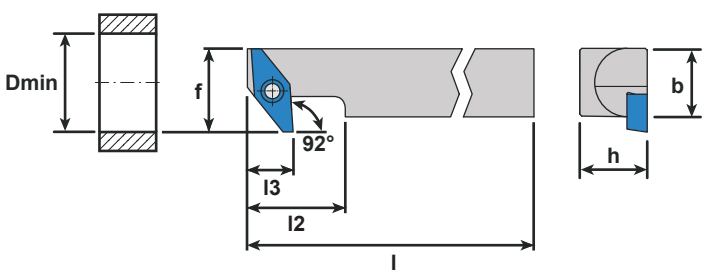






ISO Holder SVUP

Type: 92°
Coolant-Thru: None

Repeatability <20µm

Left Hand		Right Hand		Dimensions & Features						
Item No.	Description	Item No.	Description	h	b	l	l_2	f	D_{min}	Inserts
7005-044057	SVUPL 1212 XH10	7005-044058	SVUPR 1212 XH10	12	12	100	12	15.7	17	VP.. 1003
7005-044059	SVUPL 1616 XK10	7005-044060	SVUPR 1616 XK10	16	16	125	12	15.7	17	VP.. 1003

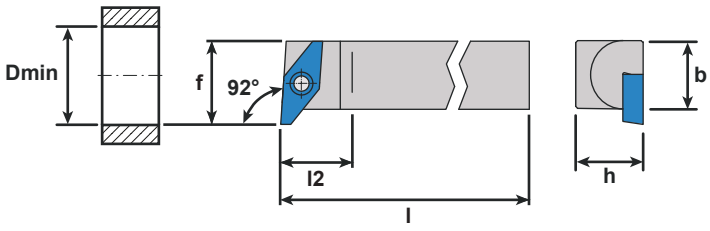



ISO Series - Spare Parts

Spare Part	Item No.	Despcription	Type	Dimension	Fits Holders...
SCREWS	7005-127518	MSP 25060 T08	Torx T8 Screw	M2x6 T08	SC...06 / SD...07 / SV...11
	7005-127527	MSP 35110 T15	Torx T15 Screw	M3.5x11 T15	SC...09 / SD...11 / SV...16
	7005-127481	MSP 40110 TP15	TorxPLUS 15 Screw	M4x11 TP15	SDJN...11
	7005-127528	MSP 45120 T15	Torx T15 Screw	M4.5x12 T15	SC...12
TORX SCREW DRIVERS	7510-000100	WTF-T08-S	T8 Torx Driver	T8	SC...06 / SD...07 / SV...11
	7510-000101	WTF-T15-S	T15 Torx Driver	T15	SC...09 / SC...12 / SD...11 / SV...16
	7005-127904	MSP TXP15	TorxPLUS Driver	TP15	SDJN...11
PRECISION CALIBRATED TORQUE DRIVERS	7510-000109	WTD-T08-D	(1.3nm) .95 ft lb. Torque Driver	T8	SC...06 / SD...07 / SV...11
	7510-000112	WTD-T15-D	(3nm) 2.2 ft lb. Torque Driver	T15	SC...09 / SC...12 /SD...11 / SV...16
FITTINGS FOR COOLANT-THRU HOLDERS	4005-000111	M5 Fitting	Side & End Ports	M5 Male to 1/4" JIC Male	All M5 Coolant Ports
	4005-000104	G1/8 Fitting	End Ports	G1/8 to 1/4" JIC Male	All G1/8" Coolant Ports



SCREWS



TORX SCREW DRIVERS



PRECISION CALIBRATED TORQUE DRIVERS



FITTINGS

Speeds And Feeds Multidec TOP

TOP	Unalloyed Steel			Low-Alloy Steel			High-Alloy Steel		
Hardness (HB)-(HRC)	125-300 HB			180-250 HB			200-350 HB		
Category	I			II			III		
Machining Method	▼ Roughing	▼▼ Medium Cut	▼▼▼ Micro Finishing	▼ Roughing	▼▼ Medium Cut	▼▼▼ Micro Finishing	▼ Roughing	▼▼ Medium Cut	▼▼▼ Micro Finishing
Cutting speeds	vc(ft/min)								
Carbide grade									
UHM 10	130-360	200-390	200-460	200-330	200-390	200-430	40-300	200-360	200-390
UHM 10 HX	200-590	200-720	200-850	200-560	200-660	200-790	160-520	200-590	200-720
UHM 10 TX+	-	-	-	260-490	330-590	520-720	230-330	300-490	390-590
UHM 10 MZ	590-980	720-1310	820-1640	490-920	660-1050	820-1310	390-920	590-1050	590-1050
UHM 20 HPX	490-660	590-720	660-850	260-490	330-590	520-720	230-330	300-490	390-590
UHM 20 TX +	-	-	-	260-430	330-490	520-620	230-300	300-430	390-490
UHM 20 MZ	430-590	520-720	590-850	330-520	360-590	430-720	230-490	160-520	430-620
UHM 30	100-230	160-260	160-330	100-200	130-260	130-300	100-160	100-230	100-260
UHM 30 HX	160-460	160-590	160-720	160-430	160-520	160-660	130-390	160-460	160-590
UHM 30 TX+	160-390	160-460	160-490	160-330	160-390	160-460	130-260	160-330	160-360
UHM 30 MZ	390-520	490-660	560-790	300-460	330-520	390-660	200-430	300-460	360-520
UHM 30 SX	160-390	160-590	50-660	160-330	160-460	160-590	130-300	160-390	160-520

Speeds And Feeds Multidec TOP

TOP	Stainless Steel			Stainless Steel			Titanium		
Hardness (HB)-(HRC)	180-220 HB			220-330 HB			-		
Category	V			VI			IV		
Machining Method	▼ Roughing	▼▼ Medium Cut	▼▼▼ Micro Finishing	▼ Roughing	▼▼ Medium Cut	▼▼▼ Micro Finishing	▼ Roughing	▼▼ Medium Cut	▼▼▼ Micro Finishing
Cutting Speeds	vc(ft/min)								
Carbide Grade									
UHM 10	130-330	130-360	130-390	100-230	100-260	100-260	130-200	160-230	200-260
UHM 10 HX	160-460	160-590	160-720	130-330	160-360	160-430	130-390	160-430	160-490
UHM 10 TX+	300-490	130-590	520-660	230-300	300-390	360-490	160-330	200-390	200-460
UHM 10 MZ	330-590	590-820	720-980	-	-	-	-	-	-
UHM 20 HPX	300-490	360-590	520-660	230-300	300-390	360-490	160-330	200-390	200-460
UHM 20 TX +	300-430	360-520	520-590	230-300	300-390	360-490	160-330	200-390	200-460
UHM 20 MZ	300-490	360-520	430-590	160-260	100-160	130-230	-	-	-
UHM 30	100-200	100-230	100-260	70-100	70-130	70-130	130-160	80-200	100-230
UHM 30 HX	130-330	130-460	130-590	100-200	130-230	130-300	100-300	130-330	130-390
UHM 30 TX+	-	-	-	-	-	-	-	-	-
UHM 30 MZ	260-430	330-460	360-520	130-260	160-300	300-360	-	-	-
UHM 30 SX	100-300	130-390	130-520	70-160	100-200	100-260	-	-	-

Speeds And Feeds Multidec TOP


TOP	Aluminum			Brass			Hard Materials		
Hardness (HB)-(HRC)	60-130 HB			-			45-70 HRC		
Category	VII			VIII			X		
Machining Method	▼ Roughing	▼▼ Medium Cut	▼▼▼ Micro Finishing	▼ Roughing	▼▼ Medium Cut	▼▼▼ Micro Finishing	▼ Roughing	▼▼ Medium Cut	▼▼▼ Micro Finishing
Cutting Speeds	vc(ft/min)								
Carbide Grade									
UHM 10	330-4920	390-6560	520-8200	260-980	330-1310	390-1640	-	-	-
UHM 10 HX	460-8200	520-9840	660-9840	330-1480	330-1970	330-2460	-	-	-
UHM 10 TX+	-	-	-	-	-	-	50-100	50-130	50-260
UHM 10 MZ	-	-	-	-	-	-	-	-	-
UHM 20 HPX	-	-	-	-	-	-	-	-	-
UHM 20 TX +	-	-	-	-	-	-	-	-	-
UHM 20 MZ	-	-	-	-	-	-	-	-	-
UHM 30	160-3280	200-3940	260-4920	130-330	160-460	160-50	-	-	-
UHM 30 HX	230-4920	260-6560	330-9840	160-490	160-660	160-820	-	-	-
UHM 30 TX+	-	-	-	-	-	-	-	-	-
UHM 30 MZ	-	-	-	-	-	-	-	-	-
UHM 30 SX	200-3940	260-6560	330-9840	160-390	160-590	160-660	-	-	-




Coatings vs Material Type

Carbide												Cermet		Diamond			Materials
UHM 10	UHM 10 HX	UHM 10 TX+	UHM 10 MZ	UHM 20 HPX	UHM 20 TX+	UHM 20 MZ	UHM 30	UHM 30 HX	UHM 30 TX+	UHM 30 MZ	UHM 30 SX	UCM 10	UCM 10 HX	UCVD 08	UPCD 15	UPCD 20	
-	-	■	■	■	■	■	□	□	■	■	□	■	■	-	-	-	**Steel**
-	■	■	-	■	■	□	□	■	■	■	■	□	■	-	-	-	Stainless Steel
□	■	■	-	□	■	-	□	■	■	-	-	-	-	-	-	-	Titanium & Ti-Alloys
■	□	-	-	-	-	-	□	□	-	-	□	-	-	■	■	■	Non-Ferrous Metals
-	-	■	-	-	-	-	-	-	-	-	-	-	-	-	-	-	Mard Materials

Material Class								
I	II	III	IV	V	VI	VII	VIII	IX
Unalloyed Steel	Low-Alloy Steel	High-Alloy Steel	Titanium	Stainless Steel (HB<220)	Stainless Steel (HB≥220)	Aluminum	Brass	Synthetics / Composits

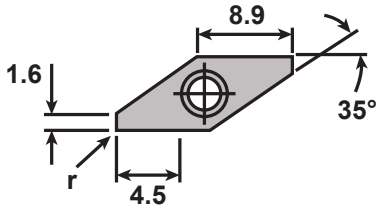




β: 12°
C: <0.002
s: ±0.025 (VPET)
±0.13 (VPGT)
±0.1 (VPXT)



VPET Carbide TOP Wiper (S: ±0.025)


Cut: Standard
Chip Breaker: TOP Wiper, Polished Rake, Sharp Cutting Edge





VPGT Carbide TOP Wiper (S: ±0.13)


Cut: Standard
Chip Breaker: TOP Wiper, Polished Rake, Sharp Cutting Edge





VPXT Carbide TOP Wiper (S: ±0.1)

Cut: Standard
Chip Breaker: TOP Wiper, Honed Cutting Edge



Coatings vs Material Type

Carbide												Cermet		Diamond			Materials
-	-	■	■	■	■	■	□	□	■	■	□	■	■	-	-	-	**Steel**
-	■	■	-	■	■	□	□	■	■	■	■	□	■	-	-	-	Stainless Steel
□	■	■	-	□	■	-	□	■	■	-	-	-	-	-	-	-	Titanium & Ti-Alloys
■	□	-	-	-	-	-	□	□	-	-	□	-	-	■	■	■	Non-Ferrous Metals
-	-	■	-	-	-	-	-	-	-	-	-	-	-	-	-	-	Mard Materials
UHM 10	UHM 10 HX	UHM 10 TX+	UHM 10 MZ	UHM 20 HPX	UHM 20 TX+	UHM 20 MZ	UHM 30	UHM 30 HX	UHM 30 TX+	UHM 30 MZ	UHM 30 SX	UCM 10	UCM 10 HX	UCVD 08	UPCD 15	UPCD 20	



VC...07 inserts: d =.250"
VC...10 inserts: d =.250"
VC...11 inserts: d =.250"
VC...16 inserts: d =.375"


Material Class								
I	II	III	IV	V	VI	VII	VIII	IX
Unalloyed Steel	Low-Alloy Steel	High-Alloy Steel	Titanium	Stainless Steel (HB<220)	Stainless Steel (HB≥220)	Aluminum	Brass	Synthetics / Composits




VCMT Carbide PM25

Cut: Neutral
Chip Breaker: PM25, Honed Cutting Edge

Application	Material Class I	II	III	IV	V	VI	VII	VIII	IX
Roughing	-	-	-	-	-	-	-	-	-
Finishing	□	□	□	-	■	■	-	-	-
Micro Finishing	-	-	-	-	-	-	-	-	-







VCMT Carbide PM55

Cut: Neutral
Chip Breaker: PM55, Honed Cutting Edge

Application	Material Class I	II	III	IV	V	VI	VII	VIII	IX
Roughing	□	□	□	-	■	■	-	-	-
Finishing	-	-	-	-	-	-	-	-	-
Micro Finishing	-	-	-	-	-	-	-	-	-







VCGT Diamond

Cut: Neutral
Chip Breaker: Sharp Cutting Edge

Application	Material Class I	II	III	IV	V	VI	VII	VIII	IX
Roughing	-	-	-	-	-	-	-	-	-
Finishing	-	-	-	-	-	-	■	■	■
Micro Finishing	-	-	-	-	-	-	■	■	■






VCGT Diamond UWS


Cut: Neutral
Chip Breaker: UWS, Sharp Cutting Edge

Application	Material Class I	II	III	IV	V	VI	VII	VIII	IX
Roughing	-	-	-	-	-	-	-	-	-
Finishing	-	-	-	-	-	-	□	□	□
Micro Finishing	-	-	-	-	-	-	■	■	■



Coatings vs Material Type

Carbide												Cermet		Diamond			Materials
-	-	■	■	■	■	■	□	□	■	■	□	■	■	-	-	-	**Steel**
-	■	■	-	■	■	□	□	■	■	■	■	□	■	-	-	-	Stainless Steel
□	■	■	-	□	■	-	□	■	■	-	-	-	-	-	-	-	Titanium & Ti-Alloys
■	□	-	-	-	-	-	□	□	-	-	□	-	-	■	■	■	Non-Ferrous Metals
-	-	■	-	-	-	-	-	-	-	-	-	-	-	-	-	-	Mard Materials
UHM 10	UHM 10 HX	UHM 10 TX+	UHM 10 MZ	UHM 20 HPX	UHM 20 TX+	UHM 20 MZ	UHM 30	UHM 30 HX	UHM 30 TX+	UHM 30 MZ	UHM 30 SX	UCM 10	UCM 10 HX	UCVD 08	UPCD 15	UPCD 20	



CC...06 inserts: d =.250"
CC...09 inserts: d =.375"
CC...12 inserts: d =.500"


Material Class								
I	II	III	IV	V	VI	VII	VIII	IX
Unalloyed Steel	Low-Alloy Steel	High-Alloy Steel	Titanium	Stainless Steel (HB<220)	Stainless Steel (HB≥220)	Aluminum	Brass	Synthetics / Composits




CCGT Carbide PA3

Cut: Neutral
Chip Breaker: PA3, Polished Rake, Sharp Cutting Edge

Application	Material Class I	II	III	IV	V	VI	VII	VIII	IX
Roughing	-	-	-	-	-	-	□	-	□
Finishing	□	□	□	□	□	■	■	-	■
Micro Finishing	■	■	■	■	■	■	■	-	■






CCGT Carbide PA7

Cut: Neutral
Chip Breaker: PA7, Sharp Cutting Edge

Application	Material Class I	II	III	IV	V	VI	VII	VIII	IX
Roughing	-	-	-	-	-	-	□	-	□
Finishing	□	□	□	□	□	□	■	-	■
Micro Finishing	■	■	■	□	■	■	■	-	■







CCGT Carbide PA5

Cut: Neutral
Chip Breaker: PA5, Polished Rake, Sharp Cutting Edge

Application	Material Class I	II	III	IV	V	VI	VII	VIII	IX
Roughing	-	-	-	-	-	-	□	-	□
Finishing	■	■	■	□	■	■	■	-	■
Micro Finishing	■	■	■	□	■	■	■	-	■






CCXT Carbide PA9

Cut: Neutral
Chip Breaker: PA9, Honed Cutting Edge

Application	Material Class I	II	III	IV	V	VI	VII	VIII	IX
Roughing	□	□	□	□	□	□	■	-	-
Finishing	■	■	■	■	■	■	□	-	-
Micro Finishing	□	□	□	-	□	□	-	-	-



Coatings vs Material Type

Carbide												Cermet		Diamond			Materials
UHM 10	UHM 10 HX	UHM 10 TX+	UHM 10 MZ	UHM 20 HPX	UHM 20 TX+	UHM 20 MZ	UHM 30	UHM 30 HX	UHM 30 TX+	UHM 30 MZ	UHM 30 SX	UCM 10	UCM 10 HX	UCVD 08	UPCD 15	UPCD 20	
-	-	■	■	■	■	■	□	□	■	■	□	■	■	-	-	-	**Steel**
-	■	■	-	■	■	□	□	■	■	■	■	□	■	-	-	-	Stainless Steel
□	■	■	-	□	■	-	□	■	■	-	-	-	-	-	-	-	Titanium & Ti-Alloys
■	□	-	-	-	-	-	□	□	-	-	□	-	-	■	■	■	Non-Ferrous Metals
-	-	■	-	-	-	-	-	-	-	-	-	-	-	-	-	-	Mard Materials



CC...06 inserts: d =.250"
CC...09 inserts: d =.375"
CC...12 inserts: d =.500"


Material Class								
I	II	III	IV	V	VI	VII	VIII	IX
Unalloyed Steel	Low-Alloy Steel	High-Alloy Steel	Titanium	Stainless Steel (HB<220)	Stainless Steel (HB≥220)	Aluminum	Brass	Synthetics / Composits



CCGT Carbide PF

Cut: Neutral
Chip Breaker: PF, Honed Cutting Edge

Application	Material Class I	II	III	IV	V	VI	VII	VIII	IX
Roughing	□	□	□	-	□	□	-	-	-
Finishing	■	■	■	-	■	■	-	-	-
Micro Finishing	■	■	■	-	■	■	-	-	-






CCMT Carbide PF43

Cut: Neutral
Chip Breaker: PF43, Honed Cutting Edge

Application	Material Class I	II	III	IV	V	VI	VII	VIII	IX
Roughing	■	■	■	-	■	■	-	-	-
Finishing	■	■	■	-	■	■	-	-	-
Micro Finishing	-	-	-	-	-	-	-	-	-






CCGT Carbide PF23

Cut: Neutral
Chip Breaker: PF23, Polished Rake, Sharp Cutting Edge

Application	Material Class I	II	III	IV	V	VI	VII	VIII	IX
Roughing	-	-	-	-	-	-	-	-	-
Finishing	□	□	□	□	□	□	□	-	-
Micro Finishing	■	■	■	□	■	■	□	-	□






CCMT Carbide PM


Cut: Neutral
Chip Breaker: PM, Honed Cutting Edge

Application	Material Class I	II	III	IV	V	VI	VII	VIII	IX
Roughing	■	■	■	-	■	■	-	-	-
Finishing	□	□	□	-	□	□	-	-	-
Micro Finishing	-	-	-	-	-	-	-	-	-



Coatings vs Material Type

Carbide												Cermet		Diamond			Materials
-	-	■	■	■	■	■	□	□	■	■	□	■	■	-	-	-	**Steel**
-	■	■	-	■	■	□	□	■	■	■	■	□	■	-	-	-	Stainless Steel
□	■	■	-	□	■	-	□	■	■	-	-	-	-	-	-	-	Titanium & Ti-Alloys
■	□	-	-	-	-	-	□	□	-	-	□	-	-	■	■	■	Non-Ferrous Metals
-	-	■	-	-	-	-	-	-	-	-	-	-	-	-	-	-	Mard Materials
UHM 10	UHM 10 HX	UHM 10 TX+	UHM 10 MZ	UHM 20 HPX	UHM 20 TX+	UHM 20 MZ	UHM 30	UHM 30 HX	UHM 30 TX+	UHM 30 MZ	UHM 30 SX	UCM 10	UCM 10 HX	UCVD 08	UPCD 15	UPCD 20	



CC...06 inserts: d =.250"
CC...09 inserts: d =.375"
CC...12 inserts: d =.500"


Material Class								
I	II	III	IV	V	VI	VII	VIII	IX
Unalloyed Steel	Low-Alloy Steel	High-Alloy Steel	Titanium	Stainless Steel (HB<220)	Stainless Steel (HB≥220)	Aluminum	Brass	Synthetics / Composits



CCMT Cermet PMF

Cut: Neutral
Chip Breaker: PMF, Honed Cutting Edge

Application	Material Class I	II	III	IV	V	VI	VII	VIII	IX
Roughing	■	■	■	-	■	■	-	-	-
Finishing	■	■	■	-	■	■	-	-	-
Micro Finishing	-	-	-	-	-	-	-	-	-

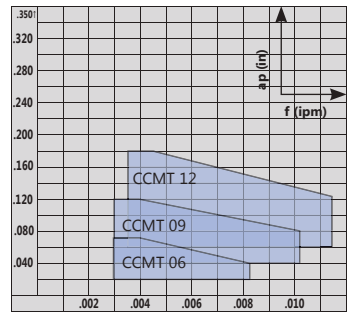





CCMT Carbide PM55

Cut: Neutral
Chip Breaker: PM55, Honed Cutting Edge

Application	Material Class I	II	III	IV	V	VI	VII	VIII	IX
Roughing	□	□	□	-	■	■	-	-	-
Finishing	-	-	-	-	-	-	-	-	-
Micro Finishing	-	-	-	-	-	-	-	-	-

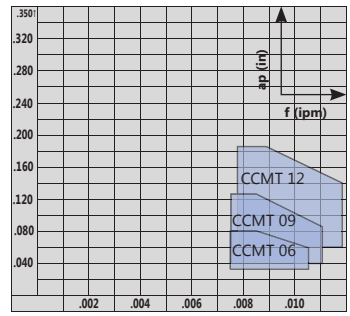




CCMT Carbide PM25

Cut: Neutral
Chip Breaker: PM25, Honed Cutting Edge

Application	Material Class I	II	III	IV	V	VI	VII	VIII	IX
Roughing	-	-	-	-	-	-	-	-	-
Finishing	□	□	□	-	■	■	-	-	-
Micro Finishing	-	-	-	-	-	-	-	-	-

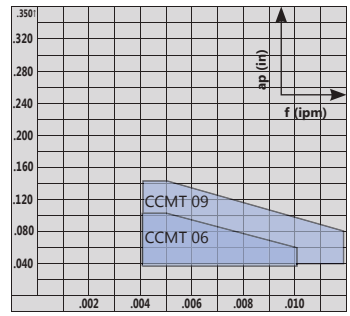




CCET Carbide -U

Cut: Neutral
Chip Breaker: -U, Ground Rake, Sharp Cutting Edge

Application	Material Class I	II	III	IV	V	VI	VII	VIII	IX
Roughing	-	-	-	-	-	-	-	-	-
Finishing	□	□	□	-	□	□	-	-	-
Micro Finishing	■	■	■	□	■	■	□	-	□

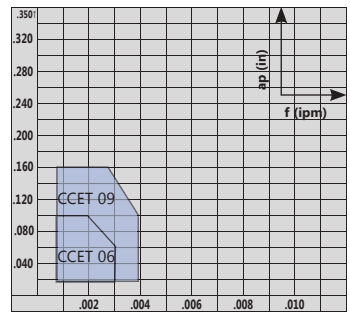

Coatings vs Material Type

Carbide												Cermet		Diamond			Materials
UHM 10	UHM 10 HX	UHM 10 TX+	UHM 10 MZ	UHM 20 HPX	UHM 20 TX+	UHM 20 MZ	UHM 30	UHM 30 HX	UHM 30 TX+	UHM 30 MZ	UHM 30 SX	UCM 10	UCM 10 HX	UCVD 08	UPCD 15	UPCD 20	
-	-	■	■	■	■	■	□	□	■	■	□	■	■	-	-	-	**Steel**
-	■	■	-	■	■	□	□	■	■	■	■	□	■	-	-	-	Stainless Steel
□	■	■	-	□	■	-	□	■	■	-	-	-	-	-	-	-	Titanium & Ti-Alloys
■	□	-	-	-	-	-	□	□	-	-	□	-	-	■	■	■	Non-Ferrous Metals
-	-	■	-	-	-	-	-	-	-	-	-	-	-	-	-	-	Mard Materials



CC...06 inserts: d =.250"
CC...09 inserts: d =.375"
CC...12 inserts: d =.500"


Material Class								
I	II	III	IV	V	VI	VII	VIII	IX
Unalloyed Steel	Low-Alloy Steel	High-Alloy Steel	Titanium	Stainless Steel (HB<220)	Stainless Steel (HB≥220)	Aluminum	Brass	Synthetics / Composits



CCGT Diamond

Cut: Neutral
Chip Breaker: Sharp Cutting Edge

Application	Material Class I	II	III	IV	V	VI	VII	VIII	IX
Roughing	-	-	-	-	-	-	□	□	□
Finishing	-	-	-	-	-	-	■	■	■
Micro Finishing	-	-	-	-	-	-	■	■	■






CCGT Diamond TOP Wiper

Cut: Neutral
Chip Breaker: TOP Wiper, Sharp Cutting Edge

Application	Material Class I	II	III	IV	V	VI	VII	VIII	IX
Roughing	-	-	-	-	-	-	□	□	□
Finishing	-	-	-	-	-	-	■	■	■
Micro Finishing	-	-	-	-	-	-	■	■	■






CCGT Diamond -UWS

Cut: Neutral
Chip Breaker: -UWS, Sharp Cutting Edge

Application	Material Class I	II	III	IV	V	VI	VII	VIII	IX
Roughing	-	-	-	-	-	-	-	-	-
Finishing	-	-	-	-	-	-	□	□	□
Micro Finishing	-	-	-	-	-	-	■	■	■






CCGT Diamond -UWS TOP Wiper


Cut: Neutral
Chip Breaker: -UWS, TOP Wiper, Sharp Cutting Edge

Application	Material Class I	II	III	IV	V	VI	VII	VIII	IX
Roughing	-	-	-	-	-	-	-	-	-
Finishing	-	-	-	-	-	-	□	□	□
Micro Finishing	-	-	-	-	-	-	■	■	■




Coatings vs Material Type

Carbide												Cermet		Diamond			Materials
-	-	■	■	■	■	■	□	□	■	■	□	■	■	-	-	-	**Steel**
-	■	■	-	■	■	□	□	■	■	■	■	□	■	-	-	-	Stainless Steel
□	■	■	-	□	■	-	□	■	■	-	-	-	-	-	-	-	Titanium & Ti-Alloys
■	□	-	-	-	-	-	□	□	-	-	□	-	-	■	■	■	Non-Ferrous Metals
-	-	■	-	-	-	-	-	-	-	-	-	-	-	-	-	-	Mard Materials
UHM 10	UHM 10 HX	UHM 10 TX+	UHM 10 MZ	UHM 20 HPX	UHM 20 TX+	UHM 20 MZ	UHM 30	UHM 30 HX	UHM 30 TX+	UHM 30 MZ	UHM 30 SX	UCM 10	UCM 10 HX	UCVD 08	UPCD 15	UPCD 20	



CC...06 inserts: d =.250"
CC...09 inserts: d =.375"
CC...12 inserts: d =.500"


Material Class								
I	II	III	IV	V	VI	VII	VIII	IX
Unalloyed Steel	Low-Alloy Steel	High-Alloy Steel	Titanium	Stainless Steel (HB<220)	Stainless Steel (HB≥220)	Aluminum	Brass	Synthetics / Composits




CCGT Diamond -UWN

Cut: Neutral
Chip Breaker: -UWN, Sharp Cutting Edge

Application	Material Class I	II	III	IV	V	VI	VII	VIII	IX
Roughing	-	-	-	-	-	-	□	□	□
Finishing	-	-	-	-	-	-	■	■	■
Micro Finishing	-	-	-	-	-	-	-	-	-






CCGT Diamond -UWN TOP Wiper

Cut: Neutral
Chip Breaker: -UWN, TOP Wiper, Sharp Cutting Edge

Application	Material Class I	II	III	IV	V	VI	VII	VIII	IX
Roughing	-	-	-	-	-	-	□	□	□
Finishing	-	-	-	-	-	-	■	■	■
Micro Finishing	-	-	-	-	-	-	-	-	-

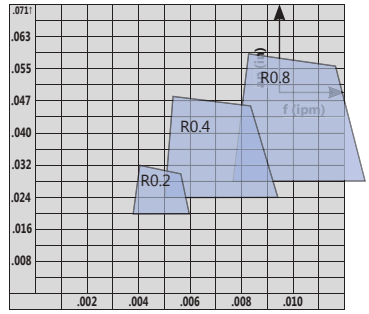





CCGT Diamond -UWR

Cut: Neutral
Chip Breaker: -UWR, Sharp Cutting Edge

Application	Material Class I	II	III	IV	V	VI	VII	VIII	IX
Roughing	-	-	-	-	-	-	□	□	□
Finishing	-	-	-	-	-	-	■	■	■
Micro Finishing	-	-	-	-	-	-	-	-	-






CCGW Diamond


Cut: Neutral
Chip Breaker: Sharp Cutting Edge

Application	Material Class I	II	III	IV	V	VI	VII	VIII	IX
Roughing	-	-	-	-	-	-	□	□	□
Finishing	-	-	-	-	-	-	■	■	■
Micro Finishing	-	-	-	-	-	-	-	-	-



Coatings vs Material Type

Carbide												Cermet		Diamond			Materials
UHM 10	UHM 10 HX	UHM 10 TX+	UHM 10 MZ	UHM 20 HPX	UHM 20 TX+	UHM 20 MZ	UHM 30	UHM 30 HX	UHM 30 TX+	UHM 30 MZ	UHM 30 SX	UCM 10	UCM 10 HX	UCVD 08	UPCD 15	UPCD 20	
-	-	■	■	■	■	■	□	□	■	■	□	■	■	-	-	-	**Steel**
-	■	■	-	■	■	□	□	■	■	■	■	□	■	-	-	-	Stainless Steel
□	■	■	-	□	■	-	□	■	■	-	-	-	-	-	-	-	Titanium & Ti-Alloys
■	□	-	-	-	-	-	□	□	-	-	□	-	-	■	■	■	Non-Ferrous Metals
-	-	■	-	-	-	-	-	-	-	-	-	-	-	-	-	-	Mard Materials



CC...06 inserts: d =.250"
CC...09 inserts: d =.375"
CC...12 inserts: d =.500"

Material Class								
I	II	III	IV	V	VI	VII	VIII	IX
Unalloyed Steel	Low-Alloy Steel	High-Alloy Steel	Titanium	Stainless Steel (HB<220)	Stainless Steel (HB≥220)	Aluminum	Brass	Synthetics / Composits




CCGW Diamond TOP Wiper

Cut: Neutral


Chip Breaker: TOP Wiper, Sharp Cutting Edge

Application	Material Class I	II	III	IV	V	VI	VII	VIII	IX
Roughing	-	-	-	-	-	-	□	□	□
Finishing	-	-	-	-	-	-	■	■	■
Micro Finishing	-	-	-	-	-	-	■	■	■




Coatings vs Material Type

Carbide												Cermet		Diamond			Materials
UHM 10	UHM 10 HX	UHM 10 TX+	UHM 10 MZ	UHM 20 HPX	UHM 20 TX+	UHM 20 MZ	UHM 30	UHM 30 HX	UHM 30 TX+	UHM 30 MZ	UHM 30 SX	UCM 10	UCM 10 HX	UCVD 08	UPCD 15	UPCD 20	
-	-	■	■	■	■	■	□	□	■	■	□	■	■	-	-	-	**Steel**
-	■	■	-	■	■	□	□	■	■	■	■	□	■	-	-	-	Stainless Steel
□	■	■	-	□	■	-	□	■	■	-	-	-	-	-	-	-	Titanium & Ti-Alloys
■	□	-	-	-	-	-	□	□	-	-	□	-	-	■	■	■	Non-Ferrous Metals
-	-	■	-	-	-	-	-	-	-	-	-	-	-	-	-	-	Mard Materials



DC...07 inserts: d =.250"
DC...11 inserts: d =.375"


Material Class								
I	II	III	IV	V	VI	VII	VIII	IX
Unalloyed Steel	Low-Alloy Steel	High-Alloy Steel	Titanium	Stainless Steel (HB<220)	Stainless Steel (HB≥220)	Aluminum	Brass	Synthetics / Composits




DCGT Carbide A3

Cut: Neutral
Chip Breaker: A3, Polished Rake, Sharp Cutting Edge

Application	Material Class I	II	III	IV	V	VI	VII	VIII	IX
Roughing	-	-	-	-	-	-	-	-	-
Finishing	□	□	□	□	□	□	■	-	■
Micro Finishing	■	■	■	■	■	■	■	-	■







DCGT Carbide PA3

Cut: Neutral
Chip Breaker: PA3, Polished Rake, Sharp Cutting Edge

Application	Material Class I	II	III	IV	V	VI	VII	VIII	IX
Roughing	-	-	-	-	-	-	□	-	□
Finishing	□	□	□	□	□	□	■	-	■
Micro Finishing	■	■	■	■	■	■	■	-	■






DCGT Carbide PA5

Cut: Neutral
Chip Breaker: PA5, Polished Rake, Sharp Cutting Edge

Application	Material Class I	II	III	IV	V	VI	VII	VIII	IX
Roughing	-	-	-	-	-	-	□	-	□
Finishing	■	■	■	□	■	■	■	-	■
Micro Finishing	■	■	■	□	■	■	■	-	■






DCGT Carbide TOP5


Cut: Neutral
Chip Breaker: TOP5, Polished Rake, Sharp Cutting Edge

Application	Material Class I	II	III	IV	V	VI	VII	VIII	IX
Roughing	□	□	□	□	□	□	□	-	□
Finishing	■	■	■	□	■	■	■	-	■
Micro Finishing	□	□	□	□	□	□	□	-	□




Coatings vs Material Type

Carbide												Cermet		Diamond			Materials
UHM 10	UHM 10 HX	UHM 10 TX+	UHM 10 MZ	UHM 20 HPX	UHM 20 TX+	UHM 20 MZ	UHM 30	UHM 30 HX	UHM 30 TX+	UHM 30 MZ	UHM 30 SX	UCM 10	UCM 10 HX	UCVD 08	UPCD 15	UPCD 20	
-	-	■	■	■	■	■	□	□	■	■	□	■	■	-	-	-	**Steel**
-	■	■	-	■	■	□	□	■	■	■	■	□	■	-	-	-	Stainless Steel
□	■	■	-	□	■	-	□	■	■	-	-	-	-	-	-	-	Titanium & Ti-Alloys
■	□	-	-	-	-	-	□	□	-	-	□	-	-	■	■	■	Non-Ferrous Metals
-	-	■	-	-	-	-	-	-	-	-	-	-	-	-	-	-	Mard Materials



DC...07 inserts: d =.250"
DC...11 inserts: d =.375"


Material Class								
I	II	III	IV	V	VI	VII	VIII	IX
Unalloyed Steel	Low-Alloy Steel	High-Alloy Steel	Titanium	Stainless Steel (HB<220)	Stainless Steel (HB≥220)	Aluminum	Brass	Synthetics / Composits



DCGT Carbide PA7

Cut: Neutral
Chip Breaker: PA7, Sharp Cutting Edge

Application	Material Class I	II	III	IV	V	VI	VII	VIII	IX
Roughing	-	-	-	-	-	-	□	-	□
Finishing	□	□	□	□	□	□	■	-	■
Micro Finishing	■	■	■	□	■	■	■	-	■






DCXT Carbide PA9

Cut: Neutral
Chip Breaker: PA9, Honed Cutting Edge

Application	Material Class I	II	III	IV	V	VI	VII	VIII	IX
Roughing	□	□	□	□	□	□	■	-	-
Finishing	■	■	■	■	■	■	□	-	-
Micro Finishing	□	□	□	-	□	□	-	-	-






DCGT Carbide/Cermet PF

Cut: Neutral
Chip Breaker: PF, Sharp Or Honed Cutting Edge

Application	Material Class I	II	III	IV	V	VI	VII	VIII	IX
Roughing	□	□	□	-	□	□	-	-	-
Finishing	■	■	■	-	■	■	-	-	-
Micro Finishing	■	■	■	-	■	■	-	-	-






DCMT Carbide PF


Cut: Neutral
Chip Breaker: PF, Honed Cutting Edge

Application	Material Class I	II	III	IV	V	VI	VII	VIII	IX
Roughing	■	■	■	-	■	■	-	-	-
Finishing	□	□	□	-	□	□	-	-	-
Micro Finishing	-	-	-	-	-	-	-	-	-



Coatings vs Material Type

Carbide												Cermet		Diamond			Materials
UHM 10	UHM 10 HX	UHM 10 TX+	UHM 10 MZ	UHM 20 HPX	UHM 20 TX+	UHM 20 MZ	UHM 30	UHM 30 HX	UHM 30 TX+	UHM 30 MZ	UHM 30 SX	UCM 10	UCM 10 HX	UCVD 08	UPCD 15	UPCD 20	
-	-	■	■	■	■	■	□	□	■	■	□	■	■	-	-	-	**Steel**
-	■	■	-	■	■	□	□	■	■	■	■	□	■	-	-	-	Stainless Steel
□	■	■	-	□	■	-	□	■	■	-	-	-	-	-	-	-	Titanium & Ti-Alloys
■	□	-	-	-	-	-	□	□	-	-	□	-	-	■	■	■	Non-Ferrous Metals
-	-	■	-	-	-	-	-	-	-	-	-	-	-	-	-	-	Mard Materials



DC...07 inserts: d =.250"
DC...11 inserts: d =.375"


Material Class								
I	II	III	IV	V	VI	VII	VIII	IX
Unalloyed Steel	Low-Alloy Steel	High-Alloy Steel	Titanium	Stainless Steel (HB<220)	Stainless Steel (HB≥220)	Aluminum	Brass	Synthetics / Composits



DCGT Carbide PF23

Cut: Neutral
Chip Breaker: PF23, Polished Rake, Sharp Cutting Edge

Application	Material Class I	II	III	IV	V	VI	VII	VIII	IX
Roughing	-	-	-	-	-	-	-	-	-
Finishing	□	□	□	□	□	□	□	-	-
Micro Finishing	■	■	■	□	■	■	□	-	□






DCGT Carbide PF33

Cut: Neutral
Chip Breaker: PF33, Polished Rake, Sharp Cutting Edge

Application	Material Class I	II	III	IV	V	VI	VII	VIII	IX
Roughing	□	□	□	-	□	□	-	-	-
Finishing	■	■	■	-	■	■	-	-	-
Micro Finishing	■	■	■	-	■	■	-	-	-







DCMT Carbide PF43

Cut: Neutral
Chip Breaker: PF43, Honed Cutting Edge

Application	Material Class I	II	III	IV	V	VI	VII	VIII	IX
Roughing	■	■	■	-	■	■	-	-	-
Finishing	■	■	■	-	■	■	-	-	-
Micro Finishing	-	-	-	-	-	-	-	-	-






DCMT Carbide PM Roughing


Cut: Neutral
Chip Breaker: PM, Honed Cutting Edge

Application	Material Class I	II	III	IV	V	VI	VII	VIII	IX
Roughing	■	■	■	-	■	■	-	-	-
Finishing	□	□	□	-	□	□	-	-	-
Micro Finishing	-	-	-	-	-	-	-	-	-




Coatings vs Material Type

Carbide												Cermet		Diamond			Materials
UHM 10	UHM 10 HX	UHM 10 TX+	UHM 10 MZ	UHM 20 HPX	UHM 20 TX+	UHM 20 MZ	UHM 30	UHM 30 HX	UHM 30 TX+	UHM 30 MZ	UHM 30 SX	UCM 10	UCM 10 HX	UCVD 08	UPCD 15	UPCD 20	
-	-	■	■	■	■	■	□	□	■	■	□	■	■	-	-	-	**Steel**
-	■	■	-	■	■	□	□	■	■	■	■	□	■	-	-	-	Stainless Steel
□	■	■	-	□	■	-	□	■	■	-	-	-	-	-	-	-	Titanium & Ti-Alloys
■	□	-	-	-	-	-	□	□	-	-	□	-	-	■	■	■	Non-Ferrous Metals
-	-	■	-	-	-	-	-	-	-	-	-	-	-	-	-	-	Mard Materials



DC...07 inserts: d =.250"
DC...11 inserts: d =.375"


Material Class								
I	II	III	IV	V	VI	VII	VIII	IX
Unalloyed Steel	Low-Alloy Steel	High-Alloy Steel	Titanium	Stainless Steel (HB<220)	Stainless Steel (HB≥220)	Aluminum	Brass	Synthetics / Composits




DCMT Cermet PMF

Cut: Neutral
Chip Breaker: PMF, Honed Cutting Edge

Application	Material Class I	II	III	IV	V	VI	VII	VIII	IX
Roughing	■	■	■	-	■	■	-	-	-
Finishing	■	■	■	-	■	■	-	-	-
Micro Finishing	-	-	-	-	-	-	-	-	-







DCMT Carbide PM25

Cut: Neutral
Chip Breaker: PM25, Honed Cutting Edge

Application	Material Class I	II	III	IV	V	VI	VII	VIII	IX
Roughing	-	-	-	-	-	-	-	-	-
Finishing	□	□	□	-	■	■	-	-	-
Micro Finishing	-	-	-	-	-	-	-	-	-






DCMT Carbide PM55

Cut: Neutral
Chip Breaker: PM55, Honed Cutting Edge

Application	Material Class I	II	III	IV	V	VI	VII	VIII	IX
Roughing	□	□	□	-	■	■	-	-	-
Finishing	-	-	-	-	-	-	-	-	-
Micro Finishing	-	-	-	-	-	-	-	-	-






DCET Carbide/Cermet U


Cut: Neutral
Chip Breaker: U, Ground Rake, Sharp Cutting Edge

Application	Material Class I	II	III	IV	V	VI	VII	VIII	IX
Roughing	-	-	-	-	-	-	-	-	-
Finishing	□	□	□	-	□	□	-	-	-
Micro Finishing	■	■	■	□	■	■	□	-	□




Coatings vs Material Type

Carbide												Cermet		Diamond			Materials
-	-	■	■	■	■	■	□	□	■	■	□	■	■	-	-	-	**Steel**
-	■	■	-	■	■	□	□	■	■	■	■	□	■	-	-	-	Stainless Steel
□	■	■	-	□	■	-	□	■	■	-	-	-	-	-	-	-	Titanium & Ti-Alloys
■	□	-	-	-	-	-	□	□	-	-	□	-	-	■	■	■	Non-Ferrous Metals
-	-	■	-	-	-	-	-	-	-	-	-	-	-	-	-	-	Mard Materials
UHM 10	UHM 10 HX	UHM 10 TX+	UHM 10 MZ	UHM 20 HPX	UHM 20 TX+	UHM 20 MZ	UHM 30	UHM 30 HX	UHM 30 TX+	UHM 30 MZ	UHM 30 SX	UCM 10	UCM 10 HX	UCVD 08	UPCD 15	UPCD 20	



DC...07 inserts: d =.250"
DC...11 inserts: d =.375"


Material Class								
I	II	III	IV	V	VI	VII	VIII	IX
Unalloyed Steel	Low-Alloy Steel	High-Alloy Steel	Titanium	Stainless Steel (HB<220)	Stainless Steel (HB≥220)	Aluminum	Brass	Synthetics / Composits




DCGT Diamond

Cut: Neutral
Chip Breaker: Sharp Cutting Edge

Application	Material Class I	II	III	IV	V	VI	VII	VIII	IX
Roughing	-	-	-	-	-	-	□	□	□
Finishing	-	-	-	-	-	-	■	■	■
Micro Finishing	-	-	-	-	-	-	■	■	■







DCGT Diamond TOP

Cut: Neutral
Chip Breaker: TOP, Sharp Cutting Edge

Application	Material Class I	II	III	IV	V	VI	VII	VIII	IX
Roughing	-	-	-	-	-	-	□	□	□
Finishing	-	-	-	-	-	-	■	■	■
Micro Finishing	-	-	-	-	-	-	■	■	■






DCGT Diamond UWS Micro Finishing

Cut: Neutral
Chip Breaker: UWS, Sharp Cutting Edge

Application	Material Class I	II	III	IV	V	VI	VII	VIII	IX
Roughing	-	-	-	-	-	-	-	-	-
Finishing	-	-	-	-	-	-	□	□	□
Micro Finishing	-	-	-	-	-	-	■	■	■






DCGT Diamond UWN Micro Finishing


Cut: Neutral
Chip Breaker: UWN, Sharp Cutting Edge

Application	Material Class I	II	III	IV	V	VI	VII	VIII	IX
Roughing	-	-	-	-	-	-	□	□	□
Finishing	-	-	-	-	-	-	■	■	■
Micro Finishing	-	-	-	-	-	-	-	-	-




Coatings vs Material Type

Carbide												Cermet		Diamond			Materials
-	-	■	■	■	■	■	□	□	■	■	□	■	■	-	-	-	**Steel**
-	■	■	-	■	■	□	□	■	■	■	■	□	■	-	-	-	Stainless Steel
□	■	■	-	□	■	-	□	■	■	-	-	-	-	-	-	-	Titanium & Ti-Alloys
■	□	-	-	-	-	-	□	□	-	-	□	-	-	■	■	■	Non-Ferrous Metals
-	-	■	-	-	-	-	-	-	-	-	-	-	-	-	-	-	Mard Materials
UHM 10	UHM 10 HX	UHM 10 TX+	UHM 10 MZ	UHM 20 HPX	UHM 20 TX+	UHM 20 MZ	UHM 30	UHM 30 HX	UHM 30 TX+	UHM 30 MZ	UHM 30 SX	UCM 10	UCM 10 HX	UCVD 08	UPCD 15	UPCD 20	



DC...07 inserts: d =.250"
DC...11 inserts: d =.375"


Material Class								
I	II	III	IV	V	VI	VII	VIII	IX
Unalloyed Steel	Low-Alloy Steel	High-Alloy Steel	Titanium	Stainless Steel (HB<220)	Stainless Steel (HB≥220)	Aluminum	Brass	Synthetics / Composits




DCGT Diamond UWR

Cut: Neutral
Chip Breaker: UWR, Sharp Cutting Edge

Application	Material Class I	II	III	IV	V	VI	VII	VIII	IX
Roughing	-	-	-	-	-	-	□	□	□
Finishing	-	-	-	-	-	-	■	■	■
Micro Finishing	-	-	-	-	-	-	-	-	-







DCGW Diamond

Cut: Neutral
Chip Breaker: Sharp Cutting Edge

Application	Material Class I	II	III	IV	V	VI	VII	VIII	IX
Roughing	-	-	-	-	-	-	□	□	□
Finishing	-	-	-	-	-	-	■	■	■
Micro Finishing	-	-	-	-	-	-	■	■	■






DCGW Diamond TOP Wiper

Cut: Neutral
Chip Breaker: TOP Wiper, Sharp Cutting Edge

Application	Material Class I	II	III	IV	V	VI	VII	VIII	IX
Roughing	-	-	-	-	-	-	□	□	□
Finishing	-	-	-	-	-	-	■	■	■
Micro Finishing	-	-	-	-	-	-	■	■	■



Coatings vs Material Type

Carbide												Cermet		Diamond			Materials
UHM 10	UHM 10 HX	UHM 10 TX+	UHM 10 MZ	UHM 20 HPX	UHM 20 TX+	UHM 20 MZ	UHM 30	UHM 30 HX	UHM 30 TX+	UHM 30 MZ	UHM 30 SX	UCM 10	UCM 10 HX	UCVD 08	UPCD 15	UPCD 20	
-	-	■	■	■	■	■	□	□	■	■	□	■	■	-	-	-	**Steel**
-	■	■	-	■	■	□	□	■	■	■	■	□	■	-	-	-	Stainless Steel
□	■	■	-	□	■	-	□	■	■	-	-	-	-	-	-	-	Titanium & Ti-Alloys
■	□	-	-	-	-	-	□	□	-	-	□	-	-	■	■	■	Non-Ferrous Metals
-	-	■	-	-	-	-	-	-	-	-	-	-	-	-	-	-	Mard Materials



VC...07 inserts: d =.1562"
VC...10 inserts: d =.250"
VC...11 inserts: d =.250"
VC...16 inserts: d =.375"


Material Class								
I	II	III	IV	V	VI	VII	VIII	IX
Unalloyed Steel	Low-Alloy Steel	High-Alloy Steel	Titanium	Stainless Steel (HB<220)	Stainless Steel (HB≥220)	Aluminum	Brass	Synthetics / Composits




VCGT Carbide A3

Cut: Neutral
Chip Breaker: A3, Polished Rake, Sharp Cutting Edge

Application	Material Class I	II	III	IV	V	VI	VII	VIII	IX
Roughing	-	-	-	-	-	-	-	-	-
Finishing	□	□	□	□	□	□	■	-	■
Micro Finishing	■	■	■	■	■	■	■	-	■






VCGT Carbide PA5

Cut: Neutral
Chip Breaker: PA5, Polished Rake, Sharp Cutting Edge

Application	Material Class I	II	III	IV	V	VI	VII	VIII	IX
Roughing	-	-	-	-	-	-	□	-	□
Finishing	■	■	■	□	■	■	■	-	■
Micro Finishing	■	■	■	□	■	■	■	-	■







VCGT Carbide TOP5 Wiper

Cut: Right Hand, Left Hand
Chip Breaker: TOP5, Polished Rake, Sharp Cutting Edge

Application	Material Class I	II	III	IV	V	VI	VII	VIII	IX
Roughing	□	□	□	□	□	□	□	-	□
Finishing	■	■	■	□	■	■	■	-	■
Micro Finishing	□	□	□	□	□	□	□	-	□






VCGT Carbide PA7

Cut: Neutral
Chip Breaker: PA7, Sharp Cutting Edge

Application	Material Class I	II	III	IV	V	VI	VII	VIII	IX
Roughing	-	-	-	-	-	-	□	-	□
Finishing	□	□	□	□	□	□	■	-	■
Micro Finishing	■	■	■	□	■	■	■	-	■



Coatings vs Material Type

Carbide												Cermet		Diamond			Materials
UHM 10	UHM 10 HX	UHM 10 TX+	UHM 10 MZ	UHM 20 HPX	UHM 20 TX+	UHM 20 MZ	UHM 30	UHM 30 HX	UHM 30 TX+	UHM 30 MZ	UHM 30 SX	UCM 10	UCM 10 HX	UCVD 08	UPCD 15	UPCD 20	
-	-	■	■	■	■	■	□	□	■	■	□	■	■	-	-	-	**Steel**
-	■	■	-	■	■	□	□	■	■	■	■	□	■	-	-	-	Stainless Steel
□	■	■	-	□	■	-	□	■	■	-	-	-	-	-	-	-	Titanium & Ti-Alloys
■	□	-	-	-	-	-	□	□	-	-	□	-	-	■	■	■	Non-Ferrous Metals
-	-	■	-	-	-	-	-	-	-	-	-	-	-	-	-	-	Mard Materials



VC...07 inserts: d =.1562"
VC...10 inserts: d =.250"
VC...11 inserts: d =.250"
VC...16 inserts: d =.375"


Material Class								
I	II	III	IV	V	VI	VII	VIII	IX
Unalloyed Steel	Low-Alloy Steel	High-Alloy Steel	Titanium	Stainless Steel (HB<220)	Stainless Steel (HB≥220)	Aluminum	Brass	Synthetics / Composits




VCXT Carbide PA9

Cut: Neutral
Chip Breaker: PA9, Honed Cutting Edge

Application	Material Class I	II	III	IV	V	VI	VII	VIII	IX
Roughing	□	□	□	□	□	□	■	-	-
Finishing	■	■	■	■	■	■	□	-	-
Micro Finishing	□	□	□	-	□	□	-	-	-







VCGT Carbide/Cermet PF

Cut: Neutral
Chip Breaker: PF, Polished Rake, Sharp Cutting Edge

Application	Material Class I	II	III	IV	V	VI	VII	VIII	IX
Roughing	□	□	□	-	□	□	-	-	-
Finishing	■	■	■	-	■	■	-	-	-
Micro Finishing	■	■	■	-	■	■	-	-	-






VCMT Carbide PF

Cut: Neutral
Chip Breaker: PF, Honed Cutting Edge

Application	Material Class I	II	III	IV	V	VI	VII	VIII	IX
Roughing	■	■	■	-	■	■	-	-	-
Finishing	□	□	□	-	□	□	-	-	-
Micro Finishing	-	-	-	-	-	-	-	-	-






VCMT Carbide PF23

Cut: Neutral
Chip Breaker: PF23, Polished Rake, Sharp Cutting Edge

Application	Material Class I	II	III	IV	V	VI	VII	VIII	IX
Roughing	-	-	-	-	-	-	-	-	-
Finishing	□	□	□	□	□	□	□	-	-
Micro Finishing	■	■	■	□	■	■	□	-	□



Coatings vs Material Type

Carbide												Cermet		Diamond			Materials
UHM 10	UHM 10 HX	UHM 10 TX+	UHM 10 MZ	UHM 20 HPX	UHM 20 TX+	UHM 20 MZ	UHM 30	UHM 30 HX	UHM 30 TX+	UHM 30 MZ	UHM 30 SX	UCM 10	UCM 10 HX	UCVD 08	UPCD 15	UPCD 20	
-	-	■	■	■	■	■	□	□	■	■	□	■	■	-	-	-	**Steel**
-	■	■	-	■	■	□	□	■	■	■	■	□	■	-	-	-	Stainless Steel
□	■	■	-	□	■	-	□	■	■	-	-	-	-	-	-	-	Titanium & Ti-Alloys
■	□	-	-	-	-	-	□	□	-	-	□	-	-	■	■	■	Non-Ferrous Metals
-	-	■	-	-	-	-	-	-	-	-	-	-	-	-	-	-	Mard Materials

Material Class								
I	II	III	IV	V	VI	VII	VIII	IX
Unalloyed Steel	Low-Alloy Steel	High-Alloy Steel	Titanium	Stainless Steel (HB<220)	Stainless Steel (HB≥220)	Aluminum	Brass	Synthetics / Composits




VC...07 inserts: d =.1562"
VC...10 inserts: d =.250"
VC...11 inserts: d =.250"
VC...16 inserts: d =.375"




VCGT Carbide PF33

Cut: Neutral
Chip Breaker: PF33, Polished Rake, Sharp Cutting Edge

Application	Material Class I	II	III	IV	V	VI	VII	VIII	IX
Roughing	□	□	□	-	□	□	-	-	-
Finishing	■	■	■	-	■	■	-	-	-
Micro Finishing	■	■	■	-	■	■	-	-	-







VCMT Carbide PF43

Cut: Neutral
Chip Breaker: PF43, Honed Cutting Edge

Application	Material Class I	II	III	IV	V	VI	VII	VIII	IX
Roughing	■	■	■	-	■	■	-	-	-
Finishing	■	■	■	-	■	■	-	-	-
Micro Finishing	-	-	-	-	-	-	-	-	-






VCMT Carbide PM

Cut: Neutral
Chip Breaker: PM, Honed Cutting Edge

Application	Material Class I	II	III	IV	V	VI	VII	VIII	IX
Roughing	■	■	■	-	■	■	-	-	-
Finishing	□	□	□	-	□	□	-	-	-
Micro Finishing	-	-	-	-	-	-	-	-	-






VCMT Cermet PMF

Cut: Neutral
Chip Breaker: PMF, Honed Cutting Edge

Application	Material Class I	II	III	IV	V	VI	VII	VIII	IX
Roughing	■	■	■	-	■	■	-	-	-
Finishing	■	■	■	-	■	■	-	-	-
Micro Finishing	-	-	-	-	-	-	-	-	-



Coatings vs Material Type

Carbide												Cermet		Diamond			Materials
-	-	■	■	■	■	■	□	□	■	■	□	■	■	-	-	-	**Steel**
-	■	■	-	■	■	□	□	■	■	■	■	□	■	-	-	-	Stainless Steel
□	■	■	-	□	■	-	□	■	■	-	-	-	-	-	-	-	Titanium & Ti-Alloys
■	□	-	-	-	-	-	□	□	-	-	□	-	-	■	■	■	Non-Ferrous Metals
-	-	■	-	-	-	-	-	-	-	-	-	-	-	-	-	-	Mard Materials
UHM 10	UHM 10 HX	UHM 10 TX+	UHM 10 MZ	UHM 20 HPX	UHM 20 TX+	UHM 20 MZ	UHM 30	UHM 30 HX	UHM 30 TX+	UHM 30 MZ	UHM 30 SX	UCM 10	UCM 10 HX	UCVD 08	UPCD 15	UPCD 20	



VC...07 inserts: d =.1562"
VC...10 inserts: d =.250"
VC...11 inserts: d =.250"
VC...16 inserts: d =.375"


Material Class								
I	II	III	IV	V	VI	VII	VIII	IX
Unalloyed Steel	Low-Alloy Steel	High-Alloy Steel	Titanium	Stainless Steel (HB<220)	Stainless Steel (HB≥220)	Aluminum	Brass	Synthetics / Composits




VCGT Diamond UWR

Cut: Neutral
Chip Breaker: UWR, Sharp Cutting Edge

Application	Material Class I	II	III	IV	V	VI	VII	VIII	IX
Roughing	-	-	-	-	-	-	□	□	□
Finishing	-	-	-	-	-	-	■	■	■
Micro Finishing	-	-	-	-	-	-	-	-	-






VCGT Diamond UWN

Cut: Neutral
Chip Breaker: UWN, Sharp Cutting Edge

Application	Material Class I	II	III	IV	V	VI	VII	VIII	IX
Roughing	-	-	-	-	-	-	□	□	□
Finishing	-	-	-	-	-	-	■	■	■
Micro Finishing	-	-	-	-	-	-	-	-	-






VCGW Diamond


Cut: Neutral
Chip Breaker: UWN, Sharp Cutting Edge

Application	Material Class I	II	III	IV	V	VI	VII	VIII	IX
Roughing	-	-	-	-	-	-	□	□	□
Finishing	-	-	-	-	-	-	■	■	■
Micro Finishing	-	-	-	-	-	-	■	■	■




multidec® SHORT


multidec® SHORT coolant-thru holders enable the use of multidec® turning inserts on commonly available quick change tooling systems. multidec® 1600, 3000, ISO VC, & ISO VP series inserts are currently available.



1600 Series




3000 Series



ISO VP Series



ISO VC Series

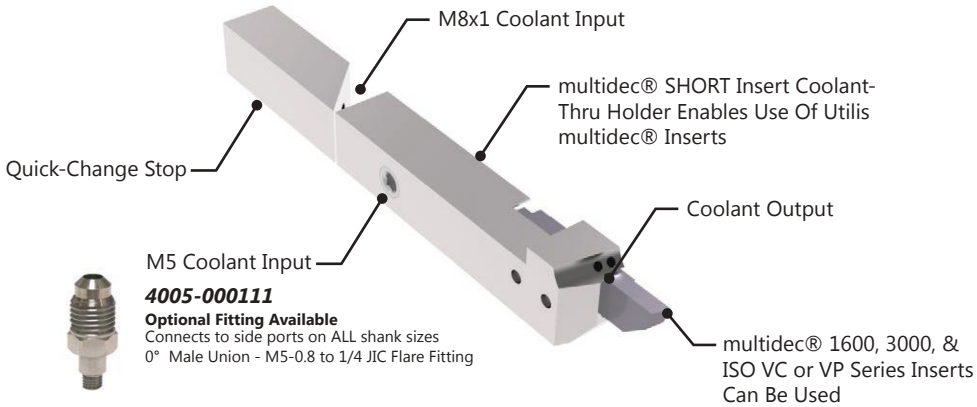

4005-000111
Optional Fitting Available
Connects to side ports on ALL shank sizes
0° Male Union - M5-0.8 to 1/4 JIC Flare Fitting




Coolant-Thru SHORT Holder 1600

Insert Type: 1600 Series Inserts
Coolant-Thru: Rear & Side Ports

Repeatability <10µm

Left Hand		Right Hand		Dimensions & Features						Coolant Fittings
Item No.	Description	Item No.	Description	h	b	l	x_1	d	Inserts	Side
Call For Details	1600-12x70 L IC-S	Call For Details	1600-12x70 R IC-S	12	12	70	15.5	M8x1	16...	4005-000111
Call For Details	1600-16x70 L IC-S	Call For Details	1600-16x70 R IC-S	16	16	70	19.5	M8x1	16...	4005-000111
Call For Details	1600-1/2"x70 L IC-S	7005-153823	1600-1/2"x70 R IC-S	12.7	12.7	70	16.2	M8x1	16...	4005-000111
Call For Details	1600-5/8"x70 L IC-S	Call For Details	1600-5/8"x70 R IC-S	15.875	15.875	70	19.375	M8x1	16...	4005-000111


Features (3) connection ports for simple connection to your oil delivery system: (2) Side ports and (1) one end port making connection possible on most machine tool positions.

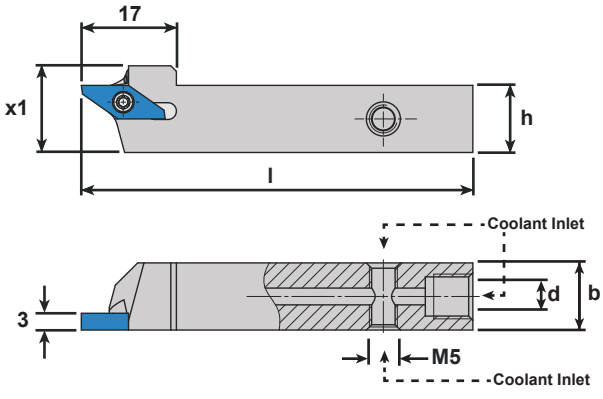





4005-000111
Connects to side ports on ALL Shank sizes
0° Male Union - M5-0.8 to 1/4 JIC Flare Fitting
Included With All Coolant-Thru Shanks




Coolant-Thru SHORT Holder 3000

Insert Type: 3000 Series Inserts
Coolant-Thru: Rear & Side Ports

Repeatability <10µm

Left Hand		Right Hand		Dimensions & Features						Coolant Fittings
Item No.	Description	Item No.	Description	h	b	l	x_1	d	Inserts	Side
Call For Details	3000-12x70 L IC-S	Call For Details	3000-12x70 R IC-S	12	12	70	16	M8x1	30...	4005-000111
Call For Details	3000-16x70 L IC-S	Call For Details	3000-16x70 R IC-S	16	16	70	20	M8x1	30...	4005-000111
7005-154819	3000-1/2"x70 L IC-S	7005-153822	3000-1/2"x70 R IC-S	12.7	12.7	70	16.7	M8x1	30...	4005-000111
7005-143568	3000-5/8"x70 L IC-S	7005-143567	3000-5/8"x70 R IC-S	15.875	15.875	70	19.875	M8x1	30...	4005-000111

Features (3) connection ports for simple connection to your oil delivery system: (2) Side ports and (1) one end port making connection possible on most machine tool positions.

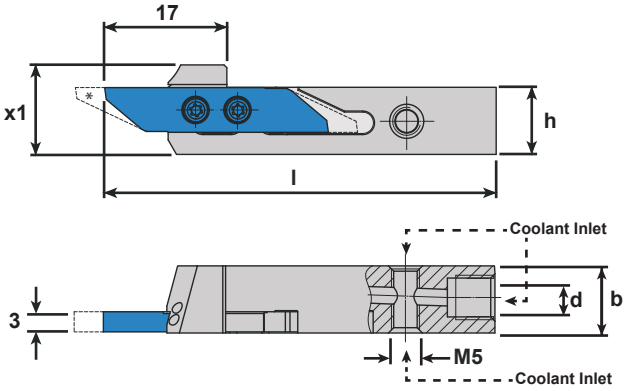





4005-000111
Connects to side ports on ALL Shank sizes
0° Male Union - M5-0.8 to 1/4 JIC Flare Fitting
Included With All Coolant-Thru Shanks




Coolant-Thru SHORT Holder SVJP

Insert Type: ISO VP Series Inserts
Coolant-Thru: Rear & Side Ports

Repeatability <10µm

Left Hand		Right Hand		Dimensions & Features						Coolant Fittings
Item No.	Description	Item No.	Description	h	b	l	x_1	d	Inserts	Side
Call For Details	SVJPL 12 E10 IC-S	Call For Details	SVJPR 12 E10 IC-S	12	12	70	15.5	M8x1	VP..1003	4005-000111
Call For Details	SVJPL 16 E10 IC-S	Call For Details	SVJPR 16 E10 IC-S	16	16	70	19.5	M8x1	VP..1003	4005-000111
Call For Details	SVJPL 1/2" E10 IC-S	Call For Details	SVJPR 1/2" E10 IC-S	12.7	12.7	70	16.2	M8x1	VP...1003	4005-000111
Call For Details	SVJPL 5/8" E10 IC-S	Call For Details	SVJPR 5/8" E10 IC-S	15.875	15.875	70	19.375	M8x1	VP...1003	4005-000111

Features (3) connection ports for simple connection to your oil delivery system: (2) Side ports and (1) one end port making connection possible on most machine tool positions.

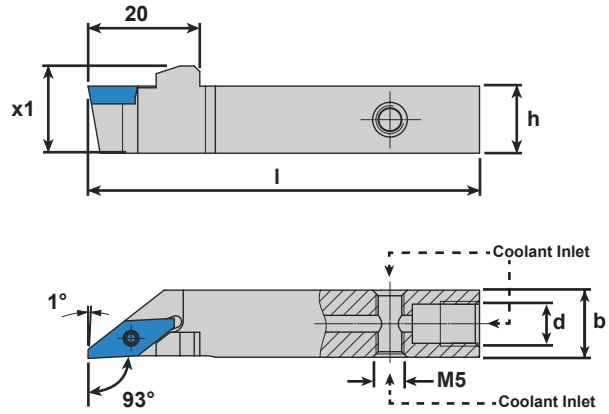





4005-000111
Connects to side ports on ALL Shank sizes
0° Male Union - M5-0.8 to 1/4 JIC Flare Fitting
Included With All Coolant-Thru Shanks




Coolant-Thru SHORT Holder SVJP Reinforced

Insert Type: ISO VP Series Inserts
Coolant-Thru: Rear & Side Ports

Repeatability <10µm

Left Hand		Right Hand		Dimensions & Features						Coolant Fittings
Item No.	Description	Item No.	Description	h	b	l	x_1	d	Inserts	Side
Call For Details	SVJPL 12 E10 V IC-S	Call For Details	SVJPR 12 E10 V IC-S	12	12	70	15.6	M8x1	VP...1003	4005-000111
Call For Details	SVJPL 16 E10 V IC-S	Call For Details	SVJPR 16 E10 V IC-S	16	16	70	19.6	M8x1	VP...1003	4005-000111
Call For Details	SVJPL 1/2" E10 V IC-S	7005-153841	SVJPR 1/2" E10 V IC-S	12.7	12.7	70	16.3	M8x1	VP...1003	4005-000111
Call For Details	SVJPL 5/8" E10 V IC-S	Call For Details	SVJPR 5/8" E10 V IC-S	15.875	15.875	70	19.475	M8x1	VP...1003	4005-000111

Features (3) connection ports for simple connection to your oil delivery system: (2) Side ports and (1) one end port making connection possible on most machine tool positions.

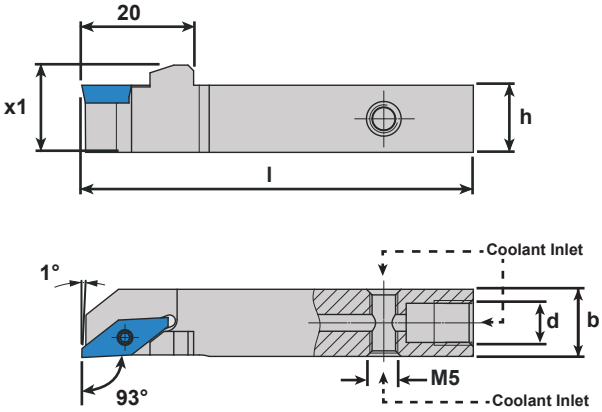





4005-000111
Connects to side ports on ALL Shank sizes
0° Male Union - M5-0.8 to 1/4 JIC Flare Fitting
Included With All Coolant-Thru Shanks




Coolant-Thru SHORT Holder SVJC

Insert Type: ISO VC Series Inserts
Coolant-Thru: Rear & Side Ports

Repeatability <10µm

Left Hand		Right Hand		Dimensions & Features						Coolant Fittings
Item No.	Description	Item No.	Description	h	b	l	x_1	d	Inserts	Side
Call For Details	SVJCL 12 E07 IC-S	Call For Details	SVJCR 12 E07 IC-S	12	12	70	15.6	M8x1	VC...0702	4005-000111
Call For Details	SVJCL 12 E11 IC-S	Call For Details	SVJCR 12 E11 IC-S	12	12	70	15.6	M8x1	VC...1103	4005-000111
Call For Details	SVJCL 16 E11 IC-S	Call For Details	SVJCR 16 E11 IC-S	16	16	70	19.6	M8x1	VC...1103	4005-000111
Call For Details	SVJCL 1/2" E07 IC-S	Call For Details	SVJCR 1/2" E07 IC-S	12.7	12.7	70	16.3	M8x1	VC...0702	4005-000111
Call For Details	SVJCL 1/2" E11 IC-S	Call For Details	SVJCR 1/2" E11 IC-S	12.7	12.7	70	16.3	M8x1	VC...1103	4005-000111
Call For Details	SVJCL 5/8" E11 IC-S	Call For Details	SVJCR 5/8" E11 IC-S	15.875	15.875	70	19.475	M8x1	VC...1103	4005-000111

Features (3) connection ports for simple connection to your oil delivery system: (2) Side ports and (1) one end port making connection possible on most machine tool positions.

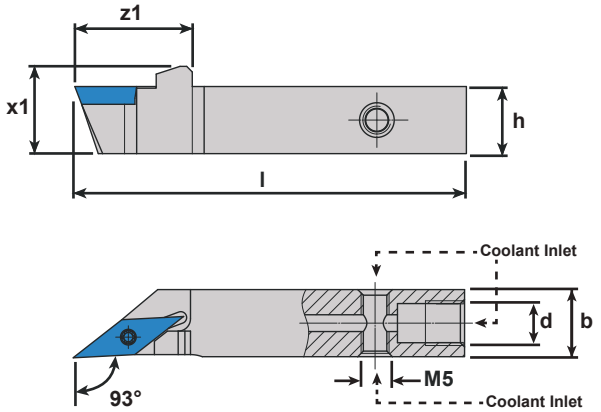






4005-000111
Connects to side ports on ALL Shank sizes
0° Male Union - M5-0.8 to 1/4 JIC Flare Fitting
Included With All Coolant-Thru Shanks


Notes:

multidec® LUBE Clamping Wedges

Introducing a revolutionary new method of delivering high pressure coolant directly to your cutting tools. Our NEW multidec® LUBE Integrated Coolant Wedge Clamps from UTILIS are specifically engineered to work with standard square shank stick tooling thereby effectively making your entire tooling inventory "coolant-thru" capable. Convert your whole gang plate or just one tool station, the choice is yours.

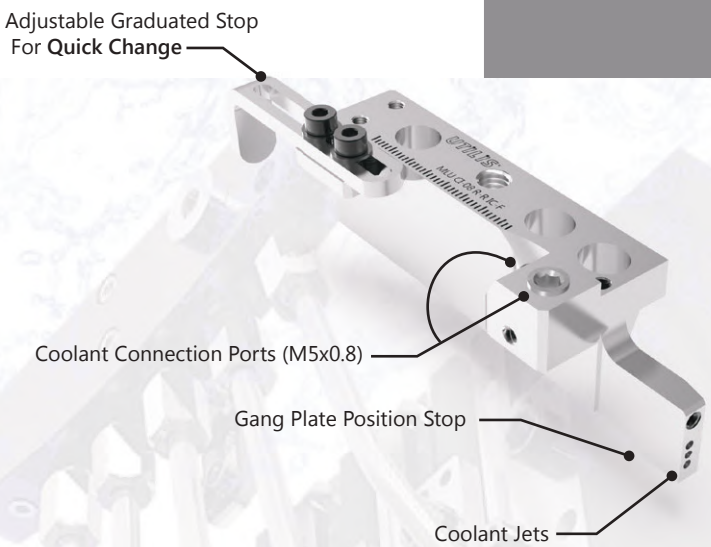



Coolant Spray Patterns

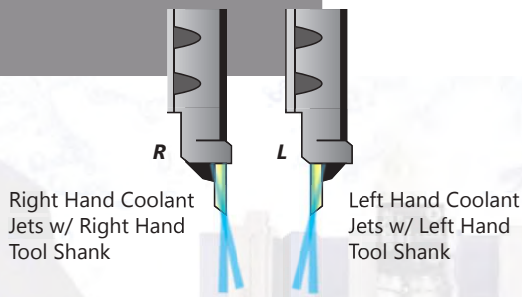

- Works with any high-quality square shank tooling
- NEVER waste time bending and aiming coolant lines again!
- Eliminates stringy chips from collecting on your cutting tools
- Replace your standard tool clamping wedge, plumb in to your oil delivery system and hit cycle start!

Coolant Manifolds & Accessories

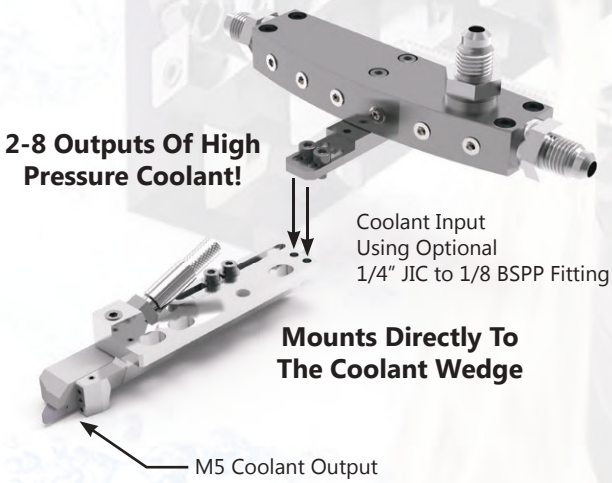

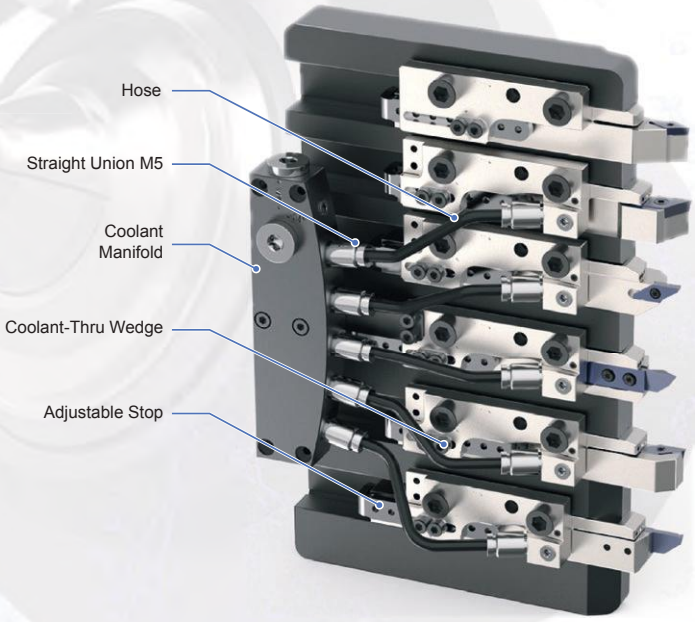

Citizen - Coolant-Thru Clamps

Machine Model	Holder	Tool Plate	Pos.	Left Hand		Right Hand	
				Item No.	Description	Item No.	Description
R07	8x8mm	QFT4308	T11-T12	Call For Details	MLU CI-12 R-L IC-F	Call For Details	MLU CI-12 R-R IC-F
L12	8x8mm	GTF7020	T1-T6	Call For Details	MLU CI-10 R-L IC-F	Call For Details	MLU CI-10 R-R IC-F
L12	3/8in (9.525mm)	GTF7010L	T1-T6	7005-117158	MLU CI-07 R-L IC-F	7005-117136	MLU CI-07 R-R IC-F
C16, K12, K16, M16	10x10mm	GTF6010, BTF1010, GTF5110, (5J003 M)	T1-T6	7005-117049	MLU CI-02 R-L IC-F	7005-117048	MLU CI-02 R-R IC-F
K12, L12	10x10mm	GTF7010	T1-T6	7005-117157	MLU CI-09 R-L IC-F	7005-117156	MLU CI-09 R-R IC-F
L16	10x10mm	GTF3110	T1-T4	Call For Details	MLU CI-14 R-L IC-F	Call For Details	MLU CI-14 R-R IC-F
A20, K12, K16, L20, M16	12x12mm	BTF1012, GTF3812	T1-T6	7005-117047	MLU CI-01 R-L IC-F	7005-117037	MLU CI-01 R-R IC-F
A20, L20	12x12mm	GTF3612, BTF2212, BTF2412	T2-T5	7005-117047	MLU CI-01 R-L IC-F	7005-117037	MLU CI-01 R-R IC-F
A20, M20	12x12mm	BTF2413, GTF2513	T1-T6	7005-117122	MLU CI-05 R-L IC-F	7005-117121	MLU CI-05 R-R IC-F
A20, L20	1/2in (12.7mm)	BTF2213, BTF2413, GTF3113	T2-T6	7005-117082	MLU CI-03 R-L IC-F	7005-117081	MLU CI-03 R-R IC-F
A32, M32	16x16mm, 5/8in	GTF5216, GTF5816	T1-T5	7005-117135	MLU CI-08 R-L IC-F	7005-117137	MLU CI-08 R-R IC-F
L25, L32	16x16mm, 5/8in	GTF4016, GTF4516	T11-T15	7005-117135	MLU CI-08 R-L IC-F	7005-117137	MLU CI-08 R-R IC-F
L20	16x16mm, 5/8in	BTF2413, GTF3612	T1 (Cut Off)	7005-117135	MLU CI-08 R-L IC-F	7005-117137	MLU CI-08 R-R IC-F

STAR - Coolant-Thru Clamps

Machine Model	Holder	Tool Plate	Pos.	Left Hand		Right Hand	
				Item No.	Description	Item No.	Description
SR-10J	8x8mm	691-01	T1-T6	7005-117056	MLU ST-01 R-L IC-F	7005-117055	MLU ST-01 R-R IC-F
SR-16R, SR-20R, RII	12x12mm	541-01	T1-T6	7005-150451	MLU ST-07 R-L IC-F	7005-150448	MLU ST-07 R-R IC-F
SR-20J, RIII, RIV, SB-16	12x12mm	0E0-62, 680-62, 0W0-62, 481-02	T2-T6	7005-150451	MLU ST-07 R-L IC-F	7005-150448	MLU ST-07 R-R IC-F
SR-20J, RIII, SB-16	12x12mm	0E0-62, 680-62, 481-02	T1 (Cut Off)	7005-150452	MLU ST-08 R-L IC-F	7005-150449	MLU ST-08 R-R IC-F
SR-20RIV	12x12mm	0W0-62	T1 (Cut Off)	7005-150450	MLU ST-09 R-L IC-F	7005-150447	MLU ST-09 R-R IC-F
SV-12, 20	12x12mm	421-01	T3-T5	Call For Details	MLU ST-10 R-L IC-F	7005-150268	MLU ST-10 R-R IC-F
SV-12, 20	12x12mm	421-01	T1 (Cut Off), T2	7005-150272	MLU ST-11 R-L IC-F	7005-150269	MLU ST-11 R-R IC-F
SV-12, 20	1/2in (12.7mm)	421-91	T3-T5	Call For Details	MLU ST-05 R-L IC-F	7005-117148	MLU ST-05 R-R IC-F
SV-12, 20	1/2in (12.7mm)	421-91	T1 (Cut Off), T2	Call For Details	MLU ST-04 R-L IC-F	7005-117147	MLU ST-04 R-R IC-F
SR-32J	16x16mm, 5/8in	670-62	T2-T6	7005-150287	MLU ST-03 R-L IC-F	7005-150286	MLU ST-03 R-R IC-F
SR-32J	16x16mm, 5/8in	670-62	T1 (Cut Off)	7005-117172	MLU ST-02 R-L IC-F	7005-117171	MLU ST-02 R-R IC-F
SV-32	16x16mm	421-04	T2-T4	Call For Details	MLU ST-13 R-L IC-F	7005-150292	MLU ST-13 R-R IC-F
SV-32	16x16mm	421-04	T1 (Cut Off)	7005-150289	MLU ST-12 R-L IC-F	7005-150288	MLU ST-12 R-R IC-F

Tsugami - Coolant-Thru Clamps

Machine Model	Holder	Tool Plate	Pos.	Left Hand		Right Hand	
				Item No.	Description	Item No.	Description
BH, BO, BS, S	12x12mm		T1-T8, T18-T24	7005-117161	MLU TS-02 R-L IC-F	7005-117130	MLU TS-02 R-R IC-F
H207, SS207, SS207-5AX	12x12mm		T1-T8, T18-T21	Call For Details	MLU TS-01 R-L IC-F	7005-117127	MLU TS-01 R-R IC-F
BH20	12x12mm		T1 (Cut Off)	7005-117168	MLU TS-04 R-L IC-F	7005-117167	MLU TS-04 R-R IC-F
HS237	16x16mm		T1-T5	Call For Details	MLU TS-06 R-L IC-F	Call For Details	MLU TS-06 R-R IC-F

Tornos - Coolant-Thru Clamps

Machine Model	Holder	Tool Plate	Pos.	Left Hand		Right Hand	
				Item No.	Description	Item No.	Description
GT13, DT13	12x12mm	390224, 390223	T1-T5	Call For Details	MLU TO-06 R-L IC-F	Call For Details	MLU TO-06 R-R IC-F
GT13, DT13	12x12mm	390224	T1 (Cut Off)	Call For Details	MLU TO-07 R-L IC-F	Call For Details	MLU TO-07 R-R IC-F
CT20/5	12x12mm	2000118	T1-T6	Call For Details	MLU TO-05 R-L IC-F	Call For Details	MLU TO-05 R-R IC-F
SWISS GT26	16x16mm	386209	T1-T5	Call For Details	MLU TO-04 R-L IC-F	7005-150807	MLU TO-04 R-R IC-F
SWISS GT26	16x16mm	386210	T2-T4	Call For Details	MLU TO-03 R-L IC-F	7005-150808	MLU TO-03 R-R IC-F
SWISS GT26	16x16mm	386210	T1, T2 (Cut Off)	Call For Details	MLU TO-02 R-L IC-F	7005-150806	MLU TO-02 R-R IC-F

Hanwha - Coolant-Thru Clamps

Machine Model	Holder	Tool Plate	Pos.	Left Hand		Right Hand	
				Item No.	Description	Item No.	Description
XD12 J, SL16 S	12x12mm		T1-T6	7005-117113	MLU HA-01 R-L IC-F	7005-117112	MLU HA-01 R-R IC-F
XD20 H, XD20 J, SL200	12x12mm		T1-T6	Call For Details	MLU HA-02 R-L IC-F	7005-117154	MLU HA-02 R-R IC-F

Coolant Accessories For True Coolant Flexibility


Compact Accessories With High Pressure Capability




Manifold With
2 Outputs Shown


Maximum 200 bar/2900 psi


Tight Bending Radius

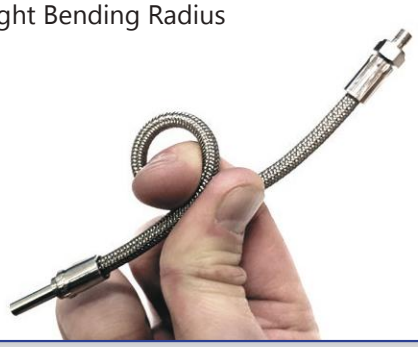

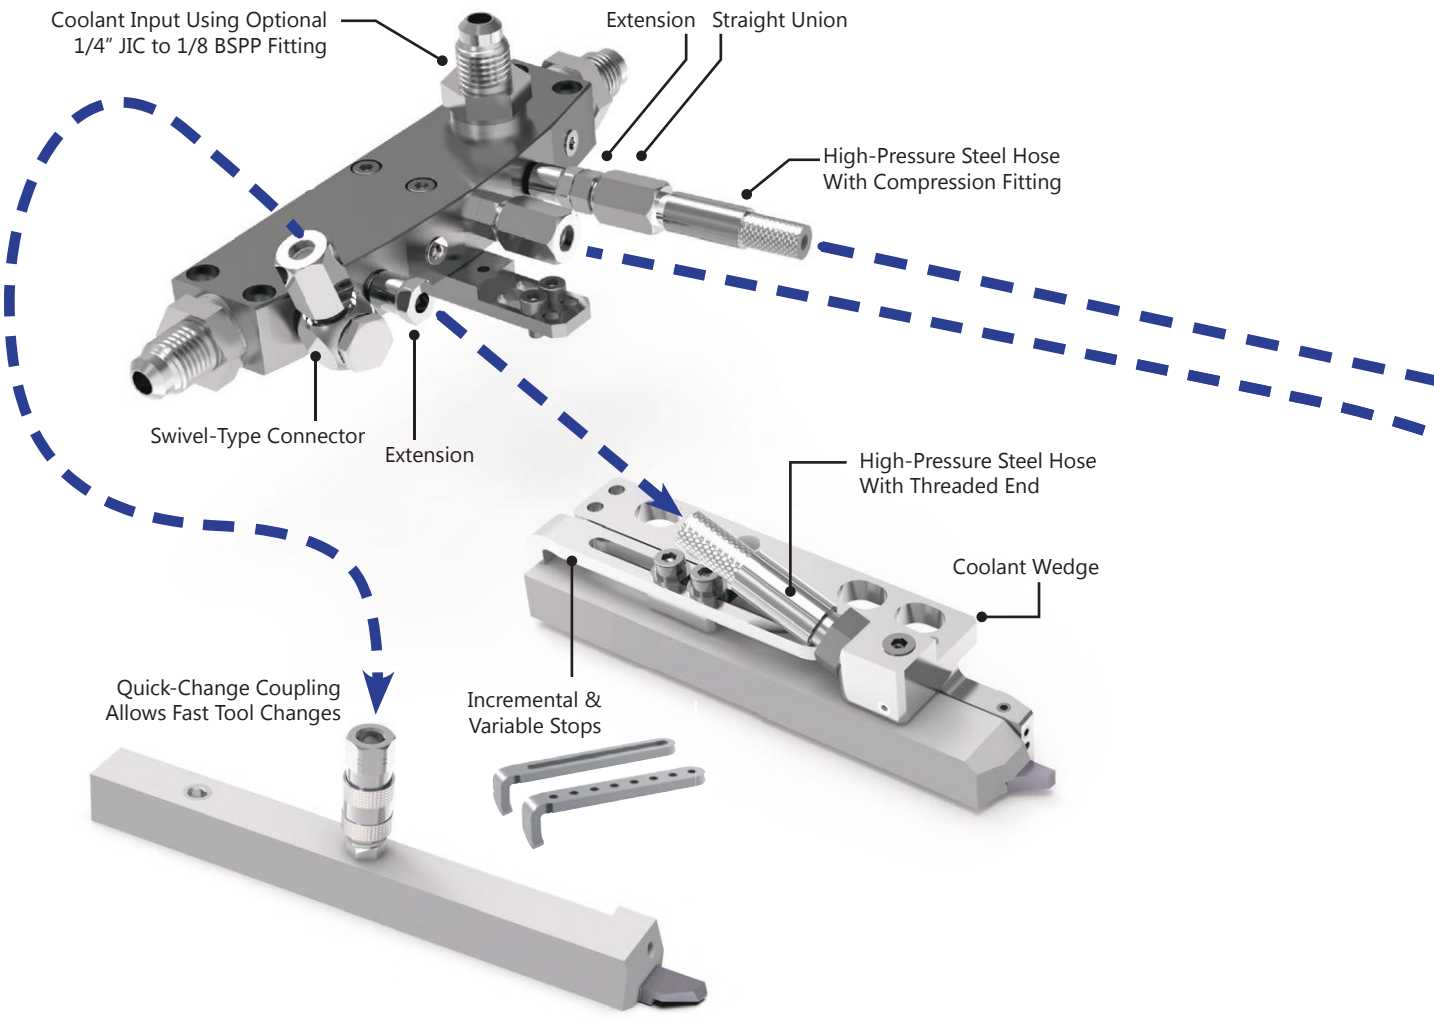

Many Connection Combinations Available...

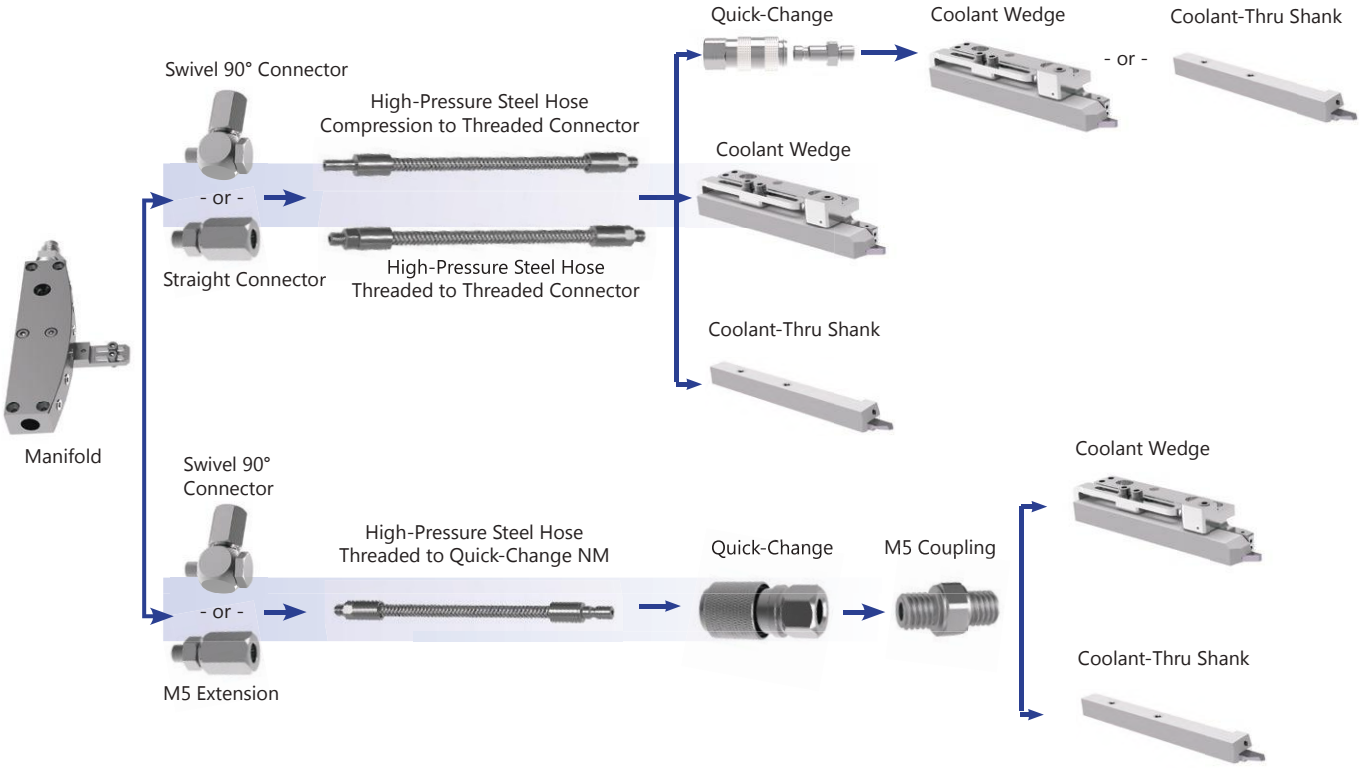


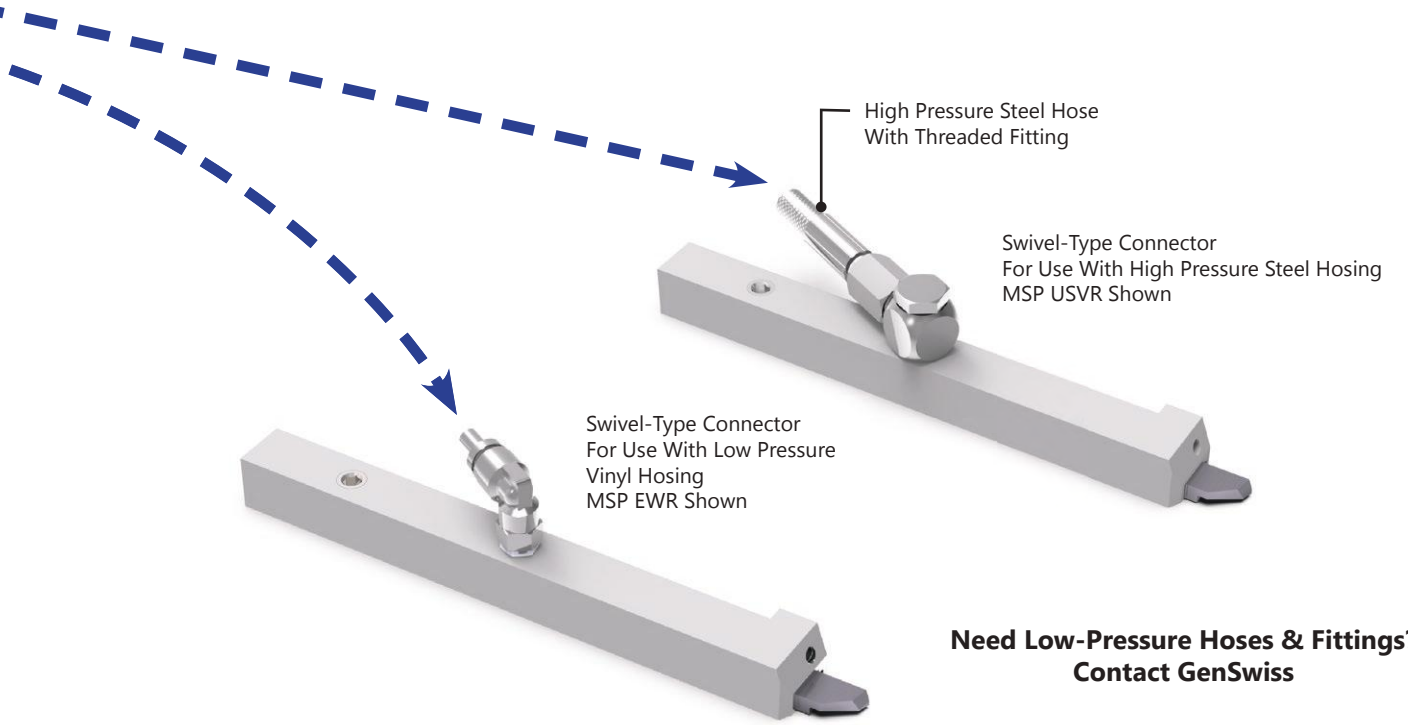

Need Low-Pressure Hoses & Fittings?
Contact GenSwiss

Manifolds — High-Pressure

Item No.	Description	G	B	d	L	Inputs (G)	Outputs (d)
7005-117164	MLU KV 2-2 S	G1/8	24mm	M5	23mm	2	2
7005-117163	MLU KV 4-3 S	G1/8	24mm	M5	45mm	3	4
7005-117149	MLU KV 6-3 S	G1/8	24mm	M5	65mm	3	6
7005-117160	MLU KV 8-3 S	G1/8	25mm	M5	85mm	3	8
Call For Details	MLU KV 2-2 L	G1/8	25mm	M5	35mm	2	2
Call For Details	MLU KV 4-3 L	G1/8	25mm	M5	68mm	3	4
Call For Details	MLU KV 6-3 L	G1/8	28mm	M5	105mm	3	6
Call For Details	MLU KV 8-3 L	G1/8	25mm	M5	138mm	3	8

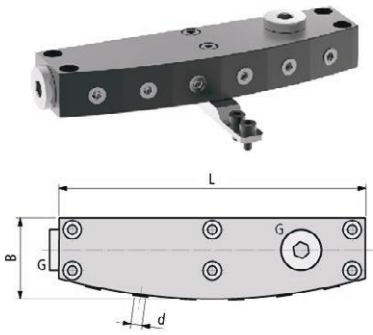


Manifold Fitting: Input — High-Pressure

Item No.	Description	Size	Manifold Pos.
4005-000104	FIT-MICRO-4x2-00	Staight 0° 1/4" JIC to 1/8 BSPP	Input
4005-000105	FIT-MICRO-4x2-45	Staight 45° 1/4" JIC to 1/8 BSPP	Input
4005-000106	FIT-MICRO-4x2-90	Staight 90° 1/4" JIC to 1/8 BSPP	Input




Straight Union — High-Pressure

Item No.	Description	g	d	L	Coolant Manifold
7005-150082	MSP UGVR M5-4	M5	4mm	27mm	MLU KV...L
7005-146214	MSP UGVR G1/8-4	G1/8	4mm	32mm	MLU KV...L
Call For Details	MSP UGVR PT1/8	PT1/8	4mm	32mm	MLU KV...L




Swivel Union — High-Pressure

Item No.	Description	g	d	L	C	Coolant Manifold
7005-150086	MSP USVR M5-4	M5	4mm	28mm	21mm	MLU KV...L
7005-146218	MSP USVR G1/8-4	G1/8	4mm	37mm	30mm	MLU KV...L

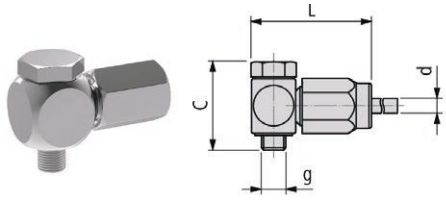


Extension — High-Pressure

Item No.	Description	G	g	L
Call For Details	MSP VL 100 M5-M5	M5	M5	10mm
Call For Details	MSP VL 200 M5-M5	M5	M5	20mm
Call For Details	MSP VL 400 M5-M5	M5	M5	40mm




Quick-Change Connection 90° Swivel — High-Pressure

Item No.	Description	g	L	C
Call For Details	MSP USNM M5	M5	22mm	16mm

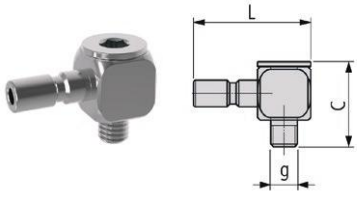

Quick-Change Connection 90° — High-Pressure


Item No.	Description	g	L	C
Call For Details	MSP UANM M5	M5	21mm	10mm



Quick-Change Connection (Plug)

Item No.	Description	g	L
7005-150091	MSP UNM M5	M5	21mm






Quick-Change Connection M5 (Coupling)

Item No.	Description	g	L
Call For Details	MSP UCF M5	M5	21mm






Quick-Change Connection PT (Coupling)

Item No.	Description	g	L
Call For Details	MSP UCF PT1/8	PT1/8	20mm






Quick-Change Connection M5 (Coupling)

Item No.	Description	g	L
Call For Details	MSP UACF M5	M5	20mm






Coolant Fitting Reduction Union

Item No.	Description	G	g	L
7005-117065	MSP RVRI 100 M5-M6	M6	M5	15mm
7005-117066	MSP RVRI 185 M5-M8x1	M8x1	M5	23mm
7005-117067	MSP RVRI 225 M5-M10x1	M10x1	M5	27mm
7005-117068	MSP RVRI 225 M5-G1/8"	G1/8"	M5	27mm






Coolant Fitting Reduction Union

Item No.	Description	G	g	L
7005-117143	MSP RVRA 100 M6-M5	M5	M6	18mm
7005-117144	MSP RVRA 70 M8x1-M5	M5	M8x1	15mm
7005-117145	MSP RVRA 70 M10x1-M5	M5	M10x1	15mm
7005-117146	MSP RVRA 70 G1/8"-M5	M5	G1/8"	15mm






M5 Coupling

Item No.	Description	g	L	C
Call For Details	MSP EVRA M5-M5	M5	12mm	M5






M5 Coupling

Item No.	Description	g	L	C
Call For Details	MSP EVRI M5-M5	M5	14mm	M5






Conversion Fittings

Item No.	Description
4005-000111	0° Male Union - M5-0.8 to 1/4 JIC Flare Fitting. Connects to side ports on all shank sizes. Included With All Coolant-Thru Shanks.



Screw Plugs

Item No.	Description	g	L
7005-146222	MSP VSR G1/8 IB5	G1/8	11mm
Call For Details	MSP VSR M5 IB2.5	M5	4.0mm
Call For Details	MSP VSR M8x1 IB4	M8x1	5.5mm




High Pressure Steel Braided Hosing

Threaded M5 to Compression

Item No.	Description	L	C	U	I
Call For Details	MSP UHPT 100 M5-4	100	4	M5	3
7005-154443	MSP UHPT 150 M5-4	150	4	M5	3
7005-150110	MSP UHPT 200 M5-4	200	4	M5	3
Call For Details	MSP UHPT 250 M5-4	250	4	M5	3
7005-150111	MSP UHPT 300 M5-4	300	4	M5	3
Call For Details	MSP UHPT 400 M5-4	400	4	M5	3
7005-150113	MSP UHPT 500 M5-4	500	4	M5	3
Call For Details	MSP UHPTB 100 M5-4	100	4	M5	3.7
Call For Details	MSP UHPTB 150 M5-4	150	4	M5	3.7
Call For Details	MSP UHPTB 200 M5-4	200	4	M5	3.7
Call For Details	MSP UHPTB 250 M5-4	250	4	M5	3.7
Call For Details	MSP UHPTB 300 M5-4	300	4	M5	3.7
Call For Details	MSP UHPTB 400 M5-4	400	4	M5	3.7
Call For Details	MSP UHPTB 500 M5-4	500	4	M5	3.7


Units of Measurement = mm

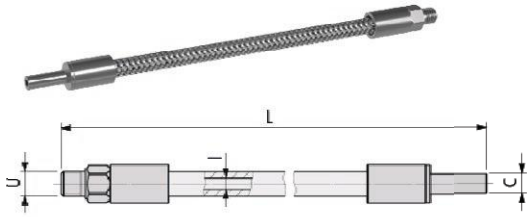

Threaded M5 to Quick Connect NM Connector

Item No.	Description	L	C	U	I
Call For Details	MSP UHPT 100 M5-NM	100	NM	M5	3
Call For Details	MSP UHPT 150 M5-NM	150	NM	M5	3
Call For Details	MSP UHPT 200 M5-NM	200	NM	M5	3
Call For Details	MSP UHPT 250 M5-NM	250	NM	M5	3
Call For Details	MSP UHPT 300 M5-NM	300	NM	M5	3
Call For Details	MSP UHPT 400 M5-NM	400	NM	M5	3
Call For Details	MSP UHPT 500 M5-NM	500	NM	M5	3
Call For Details	MSP UHPTB 100 M5-NM	100	NM	M5	3.7
Call For Details	MSP UHPTB 150 M5-NM	150	NM	M5	3.7
Call For Details	MSP UHPTB 200 M5-NM	200	NM	M5	3.7
Call For Details	MSP UHPTB 250 M5-NM	250	NM	M5	3.7
Call For Details	MSP UHPTB 300 M5-NM	300	NM	M5	3.7
Call For Details	MSP UHPTB 400 M5-NM	400	NM	M5	3.7
Call For Details	MSP UHPTB 500 M5-NM	500	NM	M5	3.7


Units of Measurement = mm

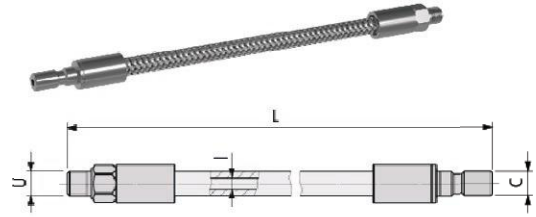

Threaded M5 to Threaded M5

Item No.	Description	L	C	U	I
Call For Details	MSP UHPT 100 M5-M5	100	M5	M5	3
Call For Details	MSP UHPT 150 M5-M5	150	M5	M5	3
Call For Details	MSP UHPT 250 M5-M5	250	M5	M5	3
Call For Details	MSP UHPT 300 M5-M5	300	M5	M5	3
Call For Details	MSP UHPT 400 M5-M5	400	M5	M5	3
Call For Details	MSP UHPT 500 M5-M5	500	M5	M5	3
Call For Details	MSP UHPTB 100 M5-M5	100	M5	M5	3.7
Call For Details	MSP UHPTB 150 M5-M5	150	M5	M5	3.7
Call For Details	MSP UHPTB 200 M5-M5	200	M5	M5	3.7
Call For Details	MSP UHPTB 250 M5-M5	250	M5	M5	3.7
Call For Details	MSP UHPTB 300 M5-M5	300	M5	M5	3.7
Call For Details	MSP UHPTB 400 M5-M5	400	M5	M5	3.7
Call For Details	MSP UHPTB 500 M5-M5	500	M5	M5	3.7


Units of Measurement = mm

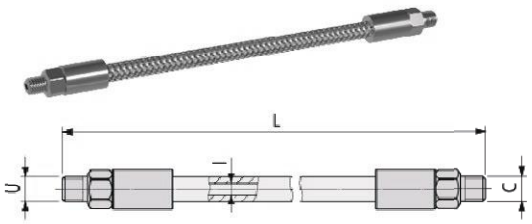


BACKTOOLS UTILIS®

multidec® BACKTOOL holders enable turning operations to be performed from an ID tool position and are ideal for performing turning operations on the sub-spindle of your machine. Each holder is center height adjustable and is modular to allow usage of a variety of 35, 55 & 80 degree ISO turning inserts; as well as multidec® TOP inserts & ALL multidec® CUT inserts.

- Center height adjustable to ensure precision setup
- Modular system uses multidec® ISO, TOP & CUT series inserts
- Perform turning operations on the subspindle
- Rigid design ensures good finish results as well as extended tool life

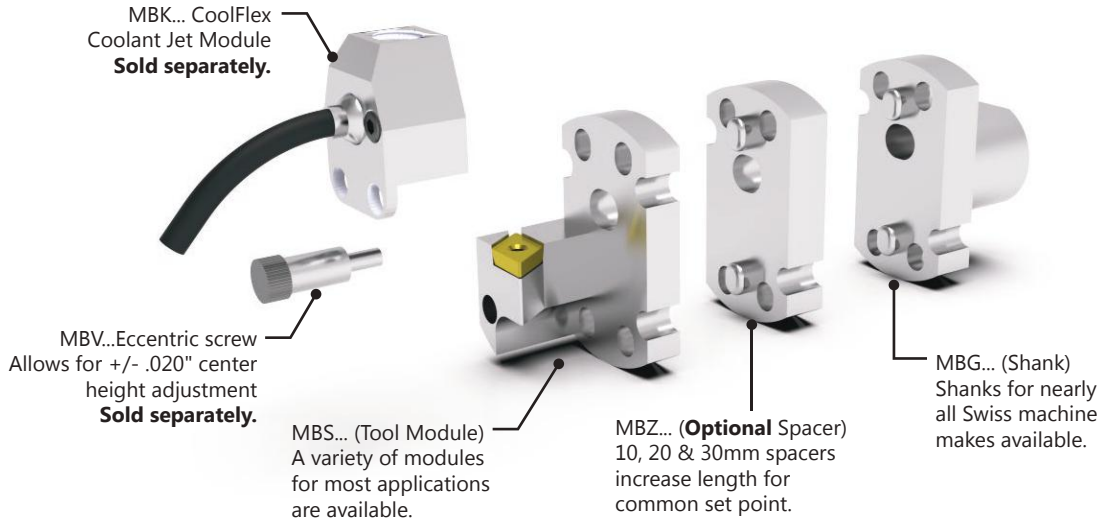

AVAILABLE MODULE TYPES

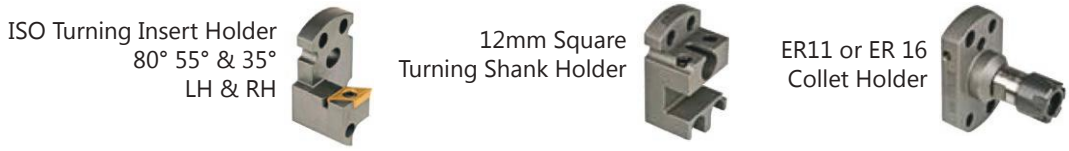

Available Backtooling for Turn-Mill Machines & Machine-Based Tool Systems...

- Interchangable inserts
- Equipped with internal cooling

Tool System For Turn-Mill Machines



multidec® Multitask

Machine-Based Tool Systems



multidec® Escomatic
For ESCOMATIC machines




multidec® Tornos Deco
For Tornos Deco Machines

MBG 01...B02 Basic Tool Holder

Machine Make	Machine Model	Item No.	Description	D	L	b	h	L_1	Spacer	Insert Holder
Star	SR10/SR20R, ECAS 12/20, SR32J	7005-137586	MBG 01 2200 025 B02	22	25	28	52	10	MBZ ST 02...	MBS...02
		Call For Details	MBG 01 2200 025 B02 IC	22	25	28	52	10	MBZ ST 02...	MBS...02
Hanwha	XD 12H	Call For Details	MBG 01 2300 019 B02	23	19	28	49	16	MBZ ST 02...	MBS...02
	XD 43	Call For Details	MBG 01 3200 025 B90	32	25	32.5	49	8	MBZ ST 90...	MBS...90




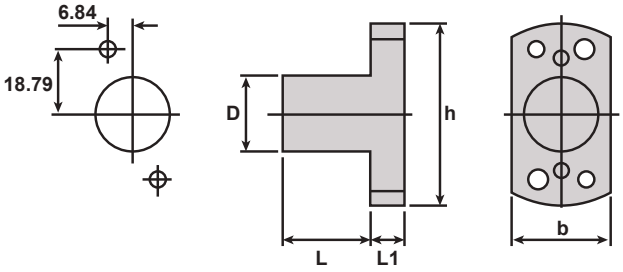

MBG 02...B02 Basic Tool Holder


Machine Make	Machine Model	Item No.	Description	D	L	b	h	L_1	Spacer	Insert Holder
Citizen	R07	7005-129545	MBG 02 1587 040 B02	5/8"	40	28	52	10	MBZ ST 02...	MBS...02
	C16, L20, M16	7005-127597	MBG 02 1905 060 B02	3/4"	60	28	52	10	MBZ ST 02...	MBS...02
	K16	7005-127629	MBG 02 2000 100 B02	20	100	28	52	10	MBZ ST 02...	MBS...02
	L20	7005-137791	MBG 02 2500 060 B02	25	60	28	52	10	MBZ ST 02...	MBS...02
	C32, L32, M32	7005-127596	MBG 02 2540 070 B02	1"	70	28	52	10	MBZ ST 02...	MBS...02
Gildemeister	Sprint20	7005-137790	MBG 02 2000 040 B02	20	40	28	52	10	MBZ ST 02...	MBS...02
Hanwha	SL 12H	7005-137790	MBG 02 2000 040 B02	20	40	28	52	10	MBZ ST 02...	MBS...02
	STL32, STL35H, STL33J, STL35J	7005-137791	MBG 02 2500 060 B02	25	60	28	52	10	MBZ ST 02...	MBS...02
	SL26HPD, SL35HPD	7005-137792	MBG 02 2800 006 B02	28	6	28	52	10	MBZ ST 02...	MBS...02
	XD20H, XD32H, XD20J, XD32J	7005-137793	MBG 02 3300 040 B02	33	40	33	52	10	MBZ ST 02...	MBS...02
	SL20HPII, SL26HPII, SL35HPII	7005-137794	MBG 02 3400 044 B02	34	44	34	52	10	MBZ ST 02...	MBS...02
Manhurin	KMX 4/13	7005-147340	MBG 02 1600 019 B02	16	19	28	52	10	MBZ ST 02...	MBS...02
	KMX 5/20, 5/26, 5/32, Swing 7/20, 7/26	7005-127598	MBG 02 2500 100 B02	25	100	28	52	10	MBZ ST 02...	MBS...02
	Swing 7-13	7005-127629	MBG 02 2000 100 B02	20	100	28	52	10	MBZ ST 02...	MBS...02
	Swing 10-20, 10-26, 10-32	7005-147353	MBG 02 2500 050 B02	25	50	28	52	10	MBZ ST 02...	MBS...02
Star	RNC 16B	7005-147649	MBG 02 1600 020 B02	16	20	28	52	10	MBZ ST 02...	MBS...02
	SA16, SB16	7005-127601	MBG 02 2200 070 B02	22	70	28	52	10	MBZ ST 02...	MBS...02
	SR10J	7005-147648	MBG 02 2200 015 B02	22	15	28	52	10	MBZ ST 02...	MBS...02
Tornos	Deco 7/10, 13, 20	7005-127629	MBG 02 2000 100 B02	20	100	28	52	10	MBZ ST 02...	MBS...02
	Delta 20, Gamma 20	7005-127601	MBG 02 2200 070 B02	22	70	28	52	10	MBZ ST 02...	MBS...02
	Delta 38-5a	7005-147296	MBG 02 3200 070 B02	32	70	32	52	10	MBZ ST 02...	MBS...02
	Gamma 20	Call For Details	MBG 02 2000 070 B02	20	70	28	52	10	MBZ ST 02...	MBS...02
Traub	TNL12	7005-147298	MBG 02 2800 040 B02	28	40	28	52	10	MBZ ST 02...	MBS...02
	TNL/C 12, TNL/C 12K	7005-137844	MBG 02 2800 078 B02	28	78	28	52	10	MBZ ST 02...	MBS...02
Tsugami	B012, B020, S205	7005-137790	MBG 02 2000 040 B02	20	40	28	52	10	MBZ ST 02...	MBS...02
	BS12, BS20	7005-147299	MBG 02 2000 060 B02	20	60	28	52	10	MBZ ST 02...	MBS...02
	BS20B	7005-129545	MBG 02 1587 040 B02	5/8"	40	28	52	10	MBZ ST 02...	MBS...02
	Piastra	7005-147300	MBG 02 2500 035 B02	25	35	28	52	10	MBZ ST 02...	MBS...02
	S205	7005-127999	MBG 02 2000 030 B02	20	30	28	52	10	MBZ ST 02...	MBS...02



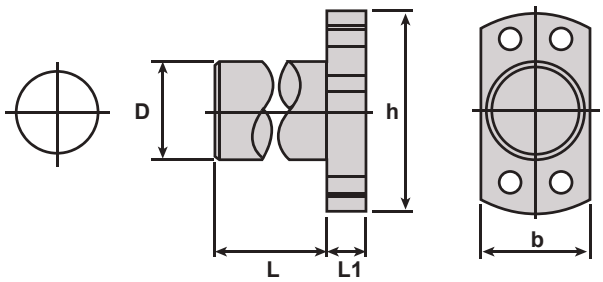


MBG 03...B02 Basic Tool Holder

Machine Make	Machine Model	Item No.	Description	D	L	b	h	L_1	Spacer	Insert Holder
Star	SR32, SR32J	7005-127091	MBG 03 2200 025 B02	22	25	38	52	10	MBZ ST 02...	MBS...02
Citizen	A32-VII	7005-150177	MBG 03 3100 015 B02	31	15	38	52	10	MBZ ST 02...	MBS...02

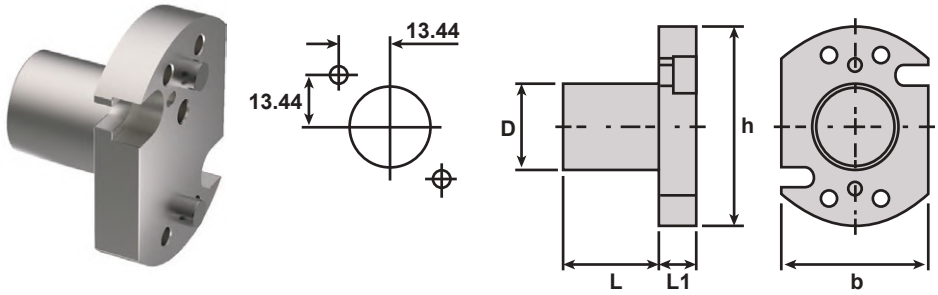


MBG 04...B02 Coolant-Thru Tool Holder

Machine Make	Machine Model	Item No.	Description	D	L	b	h	L_1	Spacer	Insert Holder
Maier	MLK DY36	7005-150072	MBG 04 3400 018 B02 IC	34	18	38	52	25	MBZ ST 02...IC	MBS...02
	ML12C, ML16C, ML16D, ML20/26/32	7005-127631	MBG 04 3400 030 B02 IC	34	30	38	52	25	MBZ ST 02...IC	MBS...02
Star	SV-38R, SR-38A/B	Call For Details	MBG 04 3400 025 B90	34	25	37.5	52	8	MBZ ST 90-	MBS...90

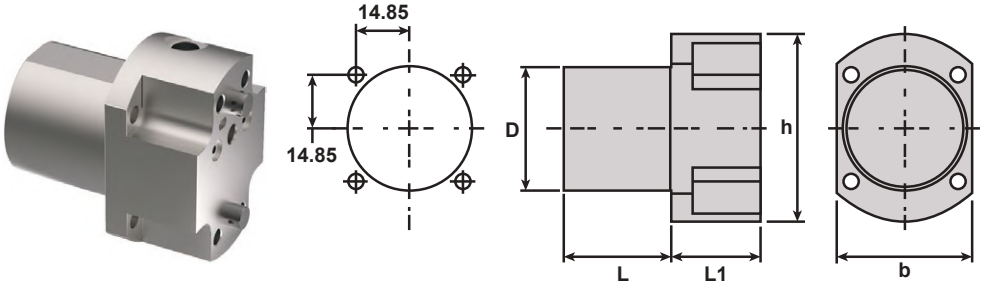


MBG 05...B05 Basic Tool Holder

Machine Make	Machine Model	Item No.	Description	D	L	b	h	L_1	Spacer	Insert Holder
Hanwha	XD12H	Call For Details	MBG 05 1500 010 B05	15	10	17	51	10	MBZ ST 05...	MBS...05
Star	SR10J	7005-137584	MBG 05 1600 010 B05	16	10	17	51	10	MBZ ST 05...	MBS...05

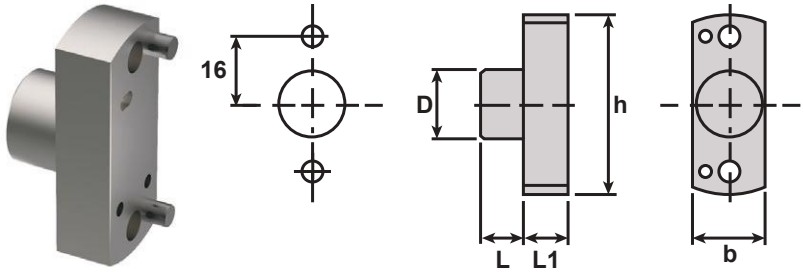


MBG 06...B06 Basic Tool Holder

Machine Make	Machine Model	Item No.	Description	D	L	b	h	L_1	Spacer	Insert Holder
Star	SR10J	Call For Details	MBG 06 2200 015 B06	22	15	28	50	20	MBZ ST 02...	MBS...02

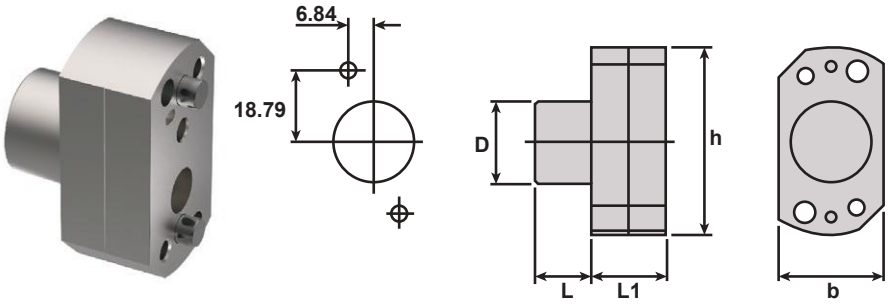


MBG 07...B02 Basic Tool Holder

Machine Make	Machine Model	Item No.	Description	D	L	b	h	L_1	Spacer	Insert Holder
Star	SR16, SR20	7005-127671	MBG 07 1600 021 B02	16	21	28	52	10	MBZ ST 02...	MBS...02

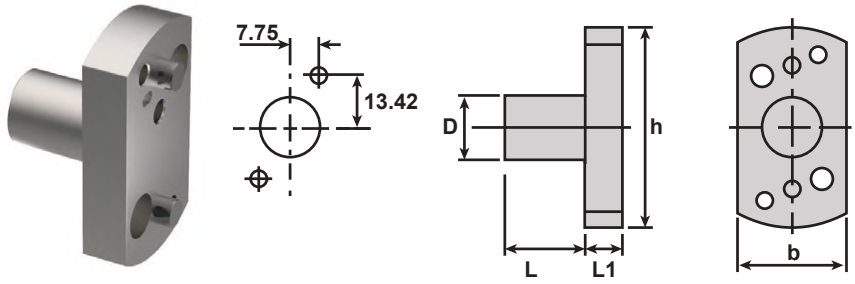


MBG 08...B02 Basic Tool Holder

Machine Make	Machine Model	Item No.	Description	D	L	b	h	L_1	Spacer	Insert Holder
Tornos	CT20	7005-169165	MBG 08 2800 028 B02	28	28	35	52	10	MBZ ST 02...	MBS...02

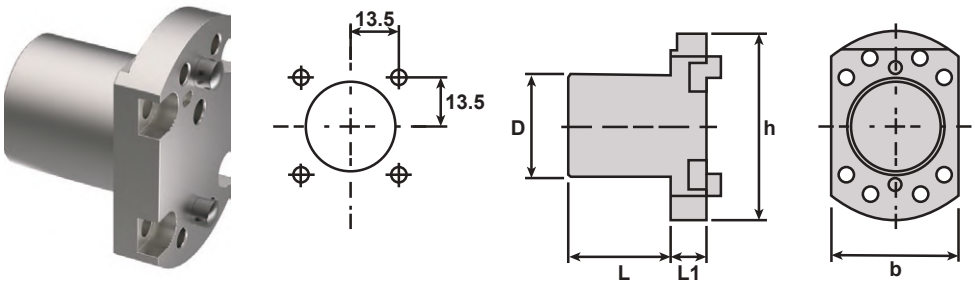


MBG 09...B90 Basic Tool Holder

Machine Make	Machine Model	Item No.	Description	D	L	b	h	L_1	Spacer	Insert Holder
Star	SW-20, SR-20W	Call For Details	MBG 09 2200 025 B90	22	25	32.5	37	8	MBZ ST 90-	MBS...90
Tsugami	BO 326 EII	7005-147786	MBG 09 2500 015 B90	25	15	32.5	37	8	MBZ ST 90-	MBS...90
Hanwha	XDI 20	Call For Details	MBG 09 2500 050 B90	25	50	32.5	37	8	MBZ ST 90-	MBS...90

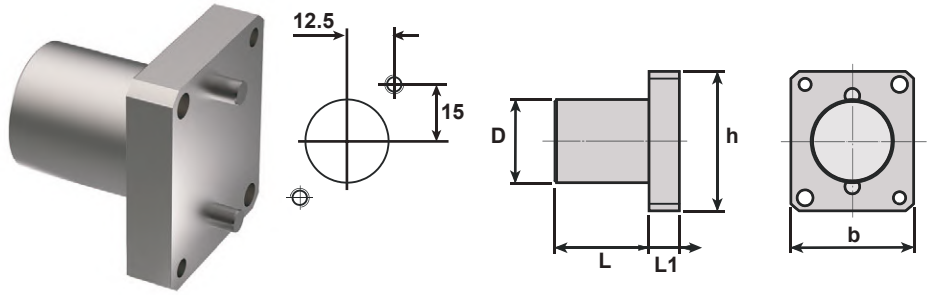


MBG 10...B02 Basic Tool Holder

Machine Make	Machine Model	Item No.	Description	D	L	b	h	L_1	Spacer	Insert Holder
Star	SR10J	Call For Details	MBG 10 2000 015 B02	20	15	28	52	10	MBZ ST 02...	MBS...02

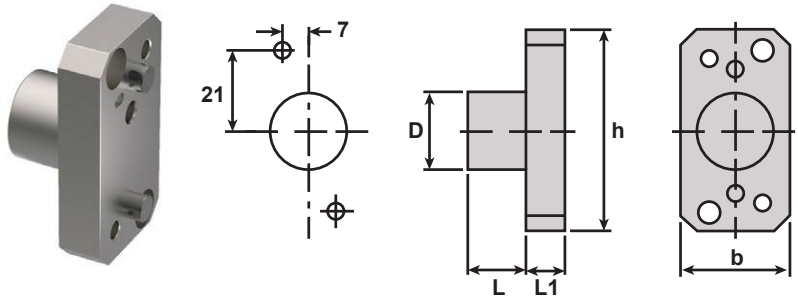


MBG 11...B02 Basic Tool Holder

Machine Make	Machine Model	Item No.	Description	D	L	b	h	L_1	Spacer	Insert Holder
Citizen	L32	Call For Details	MBG 11 3100 032 B02	31	32	32	56	10	MBZ ST 02...	MBS...02

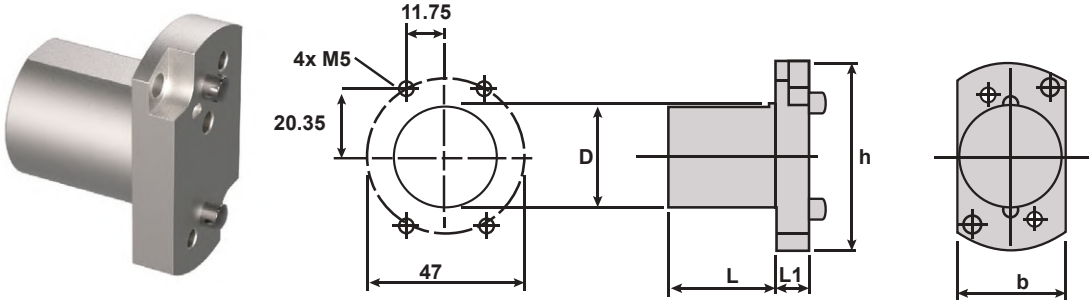


MBG 12...B90 Basic Tool Holder

Machine Make	Machine Model	Item No.	Description	D	L	b	h	L_1	Spacer	Insert Holder
Tsugami	BO 266, BO 326	Call For Details	MBG 12 2500 015 B90	25	15	44	36.9	8	MBZ ST 90...	MBS...90

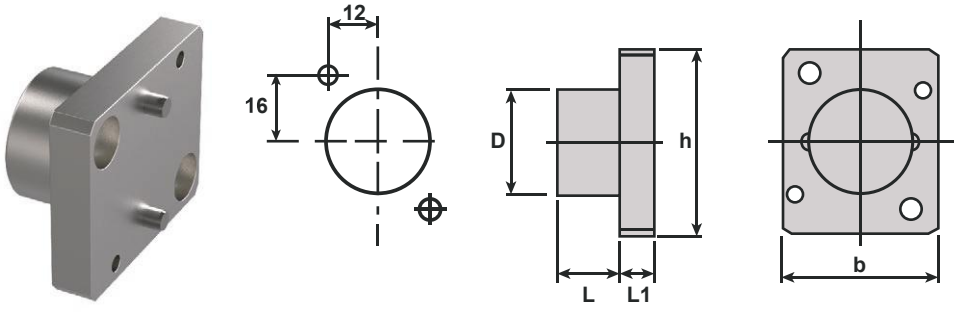

MBG 13...B90 Basic Tool Holder


Machine Make	Machine Model	Item No.	Description	D	L	b	h	L_1	Spacer	Insert Holder
Tornos	GT13, GT26	Call For Details	MBG 13 2000 025 B90	20	25	36.9	36.9	20	MBZ ST 90...	MBS..ST 90

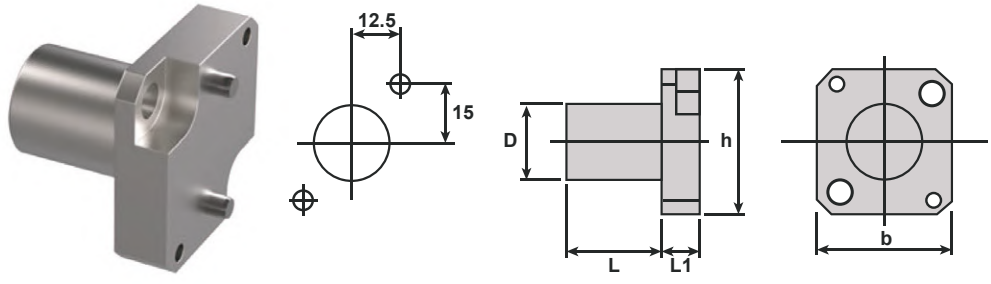

MBG 14...B90 Basic Tool Holder

Machine Make	Machine Model	Item No.	Description	D	L	b	h	L_1	Spacer	Insert Holder
Nexturn	SR20XII	Call For Details	MBG 14 2500 040 B90	25	40	35	40	10	MBZ ST 90...	MBS..ST 90
		Call For Details	MBG 14 2500 040 B90-30	25	40	35	40	30	MBZ ST 90...	MBS..ST 90




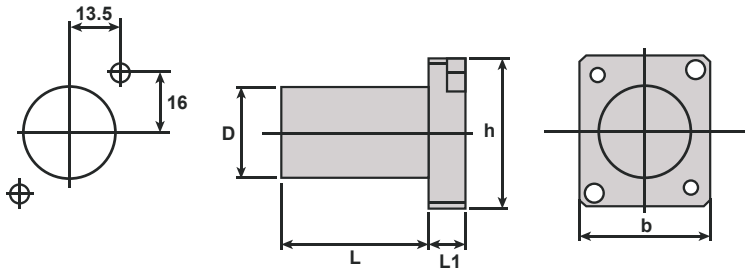

MBG 15...B90 Basic Tool Holder

Machine Make	Machine Model	Item No.	Description	D	L	b	h	L_1	Spacer	Insert Holder
Hanwha	XD 38 H	Call For Details	MBG 15 3200 025 B02	32	25	38	52	35	MBZ ST 02...	MBS..ST 02
	XD 38II Y2	Call For Details	MBG 15 3200 025 B90	32	25	37.5	52	8	MBZ ST 90...	MBS..ST 90




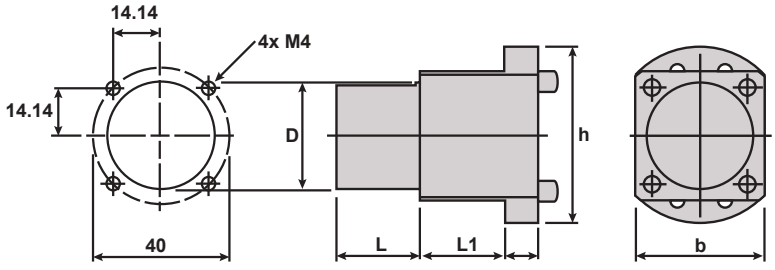

MBG 17...B02 Basic Tool Holder

Machine Make	Machine Model	Item No.	Description	D	L	b	h	L_1	Spacer	Insert Holder
TCM	Series 20s/26s/32s/38s	Call For Details	MBG 17 3600 035 B02	36	35	38	59	10	MBZ ST 02...	MBS..ST 02




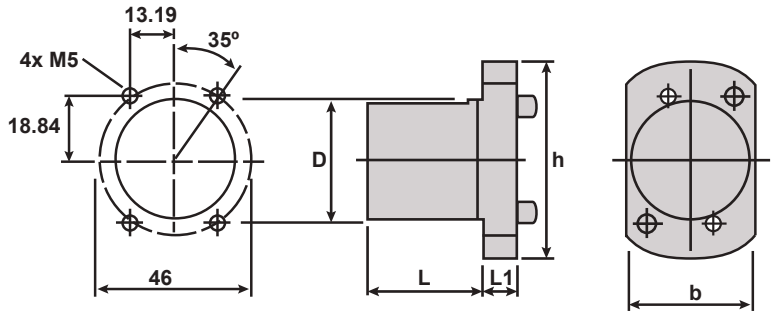


MBG 02...B02 05 Basic Tool Holder

Machine Make	Machine Model	Item No.	Description	D	L	b	h	L_1	Spacer	Insert Holder
Citizen	L720VII	Call For Details	MBG 02 1905 040 B02 05	3/4"	40	46	52	10	MBZ ST 02/05...	MBS...02/05
		Call For Details	MBG 02 2000 040 B02 05	20	40	46	52	10	MBZ ST 02/05...	MBS...02/05
Star	SR20R, SR20 RiV, SR32J	7005-146960	MBG 02 2200 025 B02 05	22	25	46	52	10	MBZ ST 02/05...	MBS...02/05
		Call For Details	MBG 02 2540 025 B02 05	1"	25	46	52	10	MBZ ST 02/05...	MBS...02/05






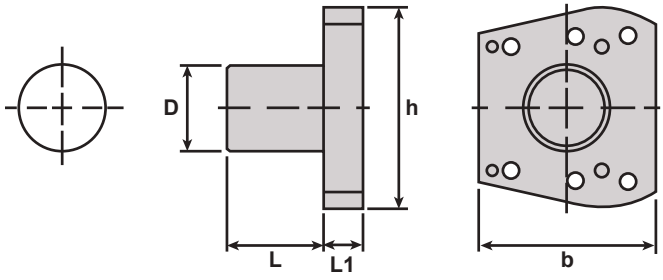


MBG T... Basic Tool Holder

Machine Make	Machine Model	Item No.	Description	D	L	d	b	h	L_1
Star	SA16, SB16, SR10J	Call For Details	MBG-T 10 2200 025 B01	22	25	10	28	52	15
		7005-147337	MBG-T 16 2200 025 B01	22	25	16	28	52	15

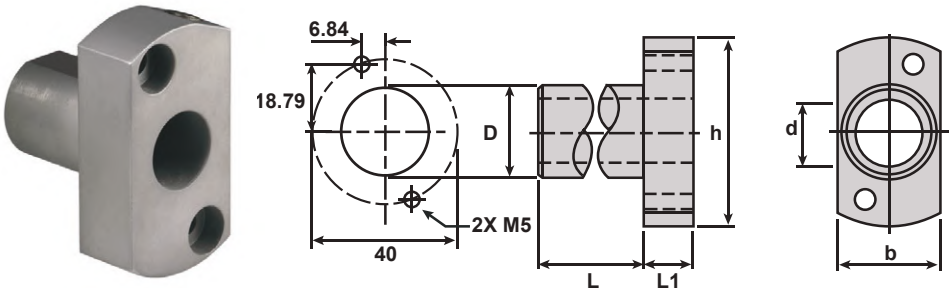


MBG T... Basic Tool Holder

Machine Make	Machine Model	Item No.	Description	D	L	d	b	h	L_1
Star	SA16, SB16, SR10J	7005-147337	MBG-T 16 2200 025 B09	22	25	16	33	52	15

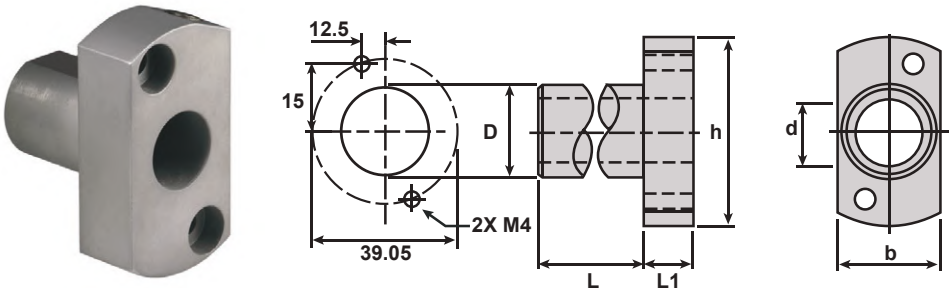


MBS...CC 80° ISO-Insert Modules

Left Hand		Right Hand		Dimensions & Features						
Item No.	Description	Item No.	Description	α	f	L	L_1	Tool Holder	Spacer	Insert
7005-127667	MBS 090-CC L 06 I02	7005-127666	MBS 090-CC R 06 I02	90°		20	8	MBG...B02	MBZ ST 02...	CC.. 0602...
Call For Details	MBS 093-CC L 06 I02	7005-147916	MBS 093-CC R 06 I02	93°		20	8	MBG...B02	MBZ ST 02...	CC.. 0602...
		Call For Details	MBS 093-CC R 06 I02-30	93°		30	8	MBG...B02	MBZ ST 02...	CC.. 0602...
7005-127669	MBS 090-CC L 09 I02	7005-127668	MBS 090-CC R 09 I02	90°		20	8	MBG...B02	MBZ ST 02...	CC.. 09T3...
		Call For Details	MBS 090-CC R 09 I02 IC	90°		20	8	MBG...B02 IC	MBZ ST 02...IC	CC.. 09T3...
7005-137826	MBS 093-CC L 09 I02	7005-137827	MBS 093-CC R 09 I02	93°		20	8	MBG...B02	MBZ ST 02...	CC.. 09T3...
7005-147327	MBS 093-CC L 09 I02-30	7005-147326	MBS 093-CC R 09 I02-30	93°		30	8	MBG...B02	MBZ ST 02...	CC.. 09T3...
Call For Details	MBS 095-CC L 09 I02	7005-192860	MBS 095-CC R 09 I02	95°		20	8	MBG...B02	MBZ ST 02...	CC.. 09T3...
7005-147329	MBS 093-CC L 06 I05	7005-147328	MBS 093-CC R 06 I05	93°		20	8	MBG...B05	MBZ ST 05...	CC.. 0602...
Call For Details	MBS 095-CC L 09 I05	Call For Details	MBS 095-CC R 09 I05	95°		20	8	MBG...B05	MBZ ST 05...	CC.. 09T3...
		Call For Details	MBS 090-CC R 06 I90	90°	-5	20	7	MBG...B90	MBZ ST 02...	CC.. 0602...
		7005-169225	MBS 090-CC R 09 I90	90°		20	7	MBG...B90	MBZ ST 02...	CC.. 09T3...
		Call For Details	MBS 090-CC R 09 I90-30	90°		30	7	MBG...B90	MBZ ST 02...	CC.. 09T3...

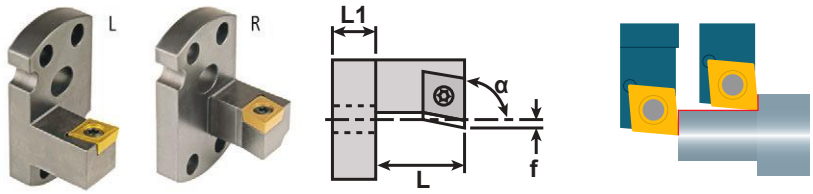


MBS...CC A 80° ISO-Insert Modules

Left Hand		Right Hand		Dimensions & Features						
Item No.	Description	Item No.	Description	α	f	L	L_1	Tool Holder	Spacer	Insert
Call For Details	MBS 090-CC LA 06 I02	Call For Details	MBS 090-CC RA 06 I02	90°	18	20	8	MBG...B02	MBZ ST 02...	CC.. 0602...
Call For Details	MBS 090-CC LA 09 I02	Call For Details	MBS 090-CC RA 09 I02	90°	18	20	8	MBG...B02	MBZ ST 02...	CC.. 09T3...
Call For Details	MBS 093-CC LA 06 I02	Call For Details	MBS 093-CC RA 06 I02	93°	18	20	8	MBG...B02	MBZ ST 02...	CC.. 0602...
Call For Details	MBS 093-CC LA 09 I02	Call For Details	MBS 093-CC RA 09 I02	93°	18	20	8	MBG...B02	MBZ ST 02...	CC.. 09T3...
Call For Details	MBS 093-CC LA 09 I02-30	Call For Details	MBS 093-CC RA 09 I02-30	93°	18	30	8	MBG...B02	MBZ ST 02...	CC.. 09T3...
7005-127630	MBS 095-CC LA 09 I02	7005-137354	MBS 095-CC RA 09 I02	95°	18	20	8	MBG...B02	MBZ ST 02...	CC.. 09T3...
Call For Details	MBS 093-CC LA 06 I05	Call For Details	MBS 093-CC RA 06 I05	93°	12.5	20	8	MBG...B05	MBZ ST 05...	CC.. 0602...
Call For Details	MBS 095-CC LA 09 I05	Call For Details	MBS 095-CC RA 09 I05	95°	12.5	20	8	MBG...B05	MBZ ST 05...	CC.. 09T3...
		Call For Details	MBS 095-CC RA 09 I90	90°	17	20	7	MBG...B90	MBZ ST 90...	CC.. 09T3...
Call For Details	MBS 095-CC LA 09 I90			95°	16.25	20	7	MBG...B90	MBZ ST 90...	CC.. 09T3...

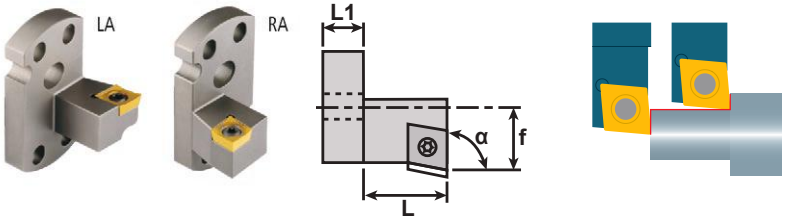

MBS...DC 55° ISO-Insert Modules

Left Hand		Right Hand		Dimensions & Features						
Item No.	Description	Item No.	Description	α	f	L	L_1	Tool Holder	Spacer	Insert
7005-127655	MBS 093-DC L 07 I02	7005-127654	MBS 093-DC R 07 I02	93°		20	8	MBG...B02	MBZ ST 02...	DC.. 0702...
Call For Details	MBS 093-DC L 0703 I02	Call For Details	MBS 093-DC R 0703 I02	93°		20	8	MBG...B02	MBZ ST 02...	DC.. 0703...
7005-127606	MBS 093-DC L 11 I02	7005-127605	MBS 093-DC R 11 I02	93°		20	8	MBG...B02	MBZ ST 02...	DC.. 11T3...
		7005-192882	MBS 093-DC R 11 I02 IC	93°		20	8	MBG...B02 IC	MBZ ST 02...IC	DC.. 11T3...
7005-147305	MBS 093-DC L 11 I02 30	7005-147304	MBS 093-DC R 11 I02 30	93°		30	8	MBG...B02	MBZ ST 02...	DC.. 11T3...
Call For Details	MBS 093-DC L 11 I02 40	7005-169850	MBS 093-DC R 11 I02 40	93°		40	8	MBG...B02	MBZ ST 02...	DC.. 11T3...
Call For Details	MBS 093-DC L 07 I05	7005-147306	MBS 093-DC R 07 I05	93°		20	8	MBG...B05	MBZ ST 05...	DC.. 0702...
Call For Details	MBS 093-DC L 11 I06	Call For Details	MBS 093-DC R 11 I06	93°		20	8	MBG...B06	MBZ ST 06...	DC.. 11T3...
Call For Details	MBS 093-DC L 07 I90	7005-147312	MBS 093-DC R 07 I90	93°	-2.25	20	7	MBG...B90	MBZ ST 90...	DC.. 0702...
7005-147314	MBS 093-DC L 11 I90	7005-127693	MBS 093-DC R 11 I90	93°		20	7	MBG...B90	MBZ ST 90...	DC.. 11T3...
Call For Details	MBS 093-DC L 11 I90 30	7005-147313	MBS 093-DC R 11 I90 30	93°		30	7	MBG...B90	MBZ ST 90...	DC.. 0702...
		Call For Details	MBS 093-DC R 11 I90 40	93°		40	7	MBG...B90	MBZ ST 90...	DC.. 0702...

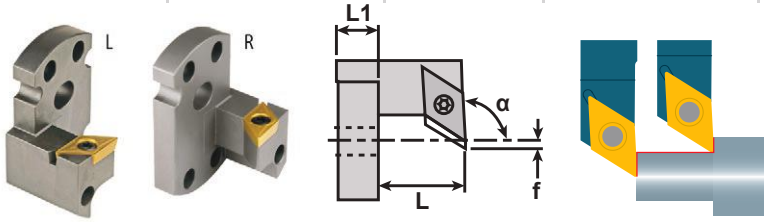



MBS...DC A 55° ISO-Insert Modules

Left Hand		Right Hand		Dimensions & Features						
Item No.	Description	Item No.	Description	α	f	L	L_1	Tool Holder	Spacer	Insert
Call For Details	MBS 093-DC LA 07 I02	Call For Details	MBS 093-DC RA 07 I02	93°	18	20	8	MBG...B02	MBZ ST 02...	DC.. 0702...
Call For Details	MBS 093-DC LA 0703 I02	Call For Details	MBS 093-DC RA 0703 I02	93°	18	20	8	MBG...B02	MBZ ST 02...	DC.. 0702...
7005-127673	MBS 093-DC LA 11 I02	7005-127672	MBS 093-DC RA 11 I02	93°	18	20	8	MBG...B02	MBZ ST 02...	DC.. 11T3...
Call For Details	MBS 093-DC LA 11 I02-30	Call For Details	MBS 093-DC RA 11 I02-30	93°	18	30	8	MBG...B02	MBZ ST 02...	DC.. 11T3...
Call For Details	MBS 093-DC LA 11 I02-40	Call For Details	MBS 093-DC RA 11 I02-40	93°	18	40	8	MBG...B02	MBZ ST 02...	DC.. 11T3...
Call For Details	MBS 095-DC LA 11 I02			95°	18	20	8	MBG...B02	MBZ ST 02...	DC.. 11T3...
7005-154946	MBS 093-DC LA 07 I05	7005-154950	MBS 093-DC RA 07 I05	93°	8.5	20	8	MBG...B05	MBZ ST 05...	DC.. 0702...
Call For Details	MBS 093-DC LA 11 I06	Call For Details	MBS 093-DC RA 11 I06	93°	18	20	8	MBG...B06	MBZ ST 06...	DC.. 11T3...
Call For Details	MBS 093-DC LA 07 I90	Call For Details	MBS 093-DC RA 07 I90	93°	17	20	7	MBG...B90	MBZ ST 90...	DC.. 0702...
Call For Details	MBS 093-DC LA 07 I90-30	Call For Details	MBS 093-DC RA 07 I90-30	93°	17	30	7	MBG...B90	MBZ ST 90...	DC.. 0702...
Call For Details	MBS 093-DC LA 11 I90	Call For Details	MBS 093-DC RA 11 I90	93°	17	20	7	MBG...B90	MBZ ST 90...	DC.. 11T3...
Call For Details	MBS 093-DC LA 11 I90-30	Call For Details	MBS 093-DC RA 11 I90-30	93°	17	30	7	MBG...B90	MBZ ST 90...	DC.. 11T3...
		Call For Details	MBS 093-DC RA 11 I90-40	93°	17	40	7	MBG...B90	MBZ ST 90...	DC.. 11T3...











MBS...VC 35° ISO-Insert Modules

Left Hand		Right Hand		Dimensions & Features						
Item No.	Description	Item No.	Description	α	f	L	L_1	Tool Holder	Spacer	Insert
Call For Details	MBS 110-VB L 11 I02	Call For Details	MBS 110-VB R 11 I02	110°		20	8	MBG...B02	MBZ ST 02...	VC.. 1102...
Call For Details	MBS 0725-VC L 11 I02	7005-147315	MBS 0725-VC R 11 I02	72.5°		20	8	MBG...B02	MBZ ST 02...	VC.. 1103...
Call For Details	MBS 093-VC L 07 I02	Call For Details	MBS 093-VC R 07 I02	93°		20	8	MBG...B02	MBZ ST 02...	VC... 0702
Call For Details	MBS 093-VC L 11 I02	7005-192898	MBS 093-VC R 11 I02	93°		20	8	MBG...B02	MBZ ST 02...	VC.. 1103...
Call For Details	MBS 093-VC L 11 I02-30	Call For Details	MBS 093-VC R 11 I02-30	93°		30	8	MBG...B02	MBZ ST 02...	VC.. 1103...
		7005-192894	MBS 095-VC R 11 I02-40	95°		40	8	MBG...B02	MBZ ST 02...	VC.. 1103...
Call For Details	MBS 093-VC L 12 I02	Call For Details	MBS 093-VC R 12 I02	93°		20	8	MBG...B02	MBZ ST 02...	VC.. 1203...
Call For Details	MBS 093-VC L 13 I02	Call For Details	MBS 093-VC R 13 I02	93°		20	8	MBG...B02	MBZ ST 02...	VC.. 1303...
Call For Details	MBS 095-VC L 07 I02	Call For Details	MBS 095-VC R 07 I02	95°		20	8	MBG...B02	MBZ ST 02...	VC.. 0702...
7005-127609	MBS 095-VC L 11 I02	7005-127608	MBS 095-VC R 11 I02	95°		20	8	MBG...B02	MBZ ST 02...	VC.. 1103...
Call For Details	MBS 095-VC L 11 I02-40	Call For Details	MBS 095-VC R 11 I02-40	95°		40	8	MBG...B02	MBZ ST 02...	VC.. 1103...
7005-127611	MBS 110-VC L 11 I02	7005-127610	MBS 110-VC R 11 I02	110°		20	8	MBG...B02	MBZ ST 02...	VC.. 1103...
Call For Details	MBS 1175-VC L 11 I02	Call For Details	MBS 1175-VC R 11 I02	117.5°		20	8	MBG...B02	MBZ ST 02...	VC.. 1103...
Call For Details	MBS 1175-VC L 12 I02	Call For Details	MBS 1175-VC R 12 I02	117.5°		20	8	MBG...B02	MBZ ST 02...	VC.. 1203...
Call For Details	MBS 1175-VC L 13 I02	Call For Details	MBS 1175-VC R 13 I02	117.5°		23	8	MBG...B02	MBZ ST 02...	VC.. 1303...
Call For Details	MBS 140-VC L 11 I02	Call For Details	MBS 140-VC R 11 I02	140°		23	8	MBG...B02	MBZ ST 02...	VC.. 1103...
		Call For Details	MBS 1625-VC N 11 I02	162.5°		25	8	MBG...B02	MBZ ST 02...	VC.. 1103...
Call For Details	MBS 093-VC L 07 I05	7005-192890	MBS 093-VC R 07 I05	93°		20	8	MBG...B05	MBZ ST 05...	VC... 0702
Call For Details	MBS 093-VC L 07 I90	Call For Details	MBS 093-VC R 07 I90	93°		20	7	MBG...B90	MBZ ST 90...	VC... 0702
Call For Details	MBS 093-VC L 11 I90	7005-154711	MBS 093-VC R 11 I90	93°	2.25	20	8	MBG...B90	MBZ ST 90...	VC.. 1103...
Call For Details	MBS 093-VC L 12 I90	Call For Details	MBS 093-VC R 12 I90	93°	6	20	7	MBG...B90	MBZ ST 90...	VC.. 1203...
7005-147323	MBS 095-VC L 11 I90	7005-147322	MBS 095-VC R 11 I90	95°	2.25	20	7	MBG...B90	MBZ ST 90...	VC.. 1103...
Call For Details	MBS 095-VC L 11 I90-30	Call For Details	MBS 095-VC R 11 I90-30	95°		30	7	MBG...B90	MBZ ST 02...	VC.. 1103...
Call For Details	MBS 095-VC L 11 I90 IC	Call For Details	MBS 095-VC R 11 I90 IC	95°	2.25	20	7	MBG...B90	MBZ ST 90...IC	VC.. 1103...
Call For Details	MBS 095-VC L 12 I90	Call For Details	MBS 095-VC R 12 I90	95°	6	20	7	MBG...B90	MBZ ST 90...	VC.. 1203...
		Call For Details	MBS 110-VC R 11 I90	110°		20	7	MBG...B90	MBZ ST 02...	VC.. 1103...
		7005-147321	MBS 1625-VC N 11 I90	162.5°		24	7	MBG...B90	MBZ ST 90...	VC.. 1103...











MBS...VC A 35° ISO-Insert Modules

Left Hand		Right Hand		Dimensions & Features						
Item No.	Description	Item No.	Description	α	f	L	L_1	Tool Holder	Spacer	Insert
Call For Details	MBS 110-VB LA 11 I02	Call For Details	MBS 110-VB RA 11 I02	110°	18	20	8	MBG...B02	MBZ ST 02...	VC.. 1102...
Call For Details	MBS 0725-VC LA 11 I02	Call For Details	MBS 0725-VC RA 11 I02	72.5°	18	25	8	MBG...B02	MBZ ST 02...	VC.. 1103...
7005-147316	MBS 093-VC LA 11 I02	7005-127683	MBS 093-VC RA 11 I02	93°	18	20	8	MBG...B02	MBZ ST 02...	VC.. 1103...
Call For Details	MBS 093-VC LA 11 I02-30	Call For Details	MBS 093-VC RA 11 I02-30	93°	18	30	8	MBG...B02	MBZ ST 02...	VC.. 1103...
Call For Details	MBS 093-VC LA 11 I02-40			93°	18	40	8	MBG...B02	MBZ ST 02...	VC.. 1103...
Call For Details	MBS 093-VC LA 12 I02	Call For Details	MBS 093-VC RA 12 I02	93°	18	20	8	MBG...B02	MBZ ST 02...	VC.. 1203...
Call For Details	MBS 093-VC LA 13 I02	Call For Details	MBS 093-VC RA 13 I02	93°	18	20	8	MBG...B02	MBZ ST 02...	VC.. 1303...
Call For Details	MBS 095-VC LA 07 I02			95°	18	20	8	MBG...B02	MBZ ST 02...	VC.. 0702...
Call For Details	MBS 095-VC LA 11 I02	Call For Details	MBS 095-VC RA 11 I02	95°	18	20	8	MBG...B02	MBZ ST 02...	VC.. 1103...
Call For Details	MBS 095-VC LA 11 I02-40	Call For Details	MBS 095-VC RA 11 I02-40	95°	18	40	8	MBG...B02	MBZ ST 02...	VC.. 1103...
Call For Details	MBS 110-VC LA 11 I02	Call For Details	MBS 110-VC RA 11 I02	110°	18	20	8	MBG...B02	MBZ ST 02...	VC.. 1103...
Call For Details	MBS 1175-VC LA 11 I02	Call For Details	MBS 1175-VC RA 11 I02	117.5°	18	20	8	MBG...B02	MBZ ST 02...	VC.. 1103...
Call For Details	MBS 1175-VC LA 12 I02	Call For Details	MBS 1175-VC RA 12 I02	117.5°	18	20	8	MBG...B02	MBZ ST 02...	VC.. 1203...
Call For Details	MBS 1175-VC LA 13 I02	Call For Details	MBS 1175-VC RA 13 I02	117.5°	18	23	8	MBG...B02	MBZ ST 02...	VC.. 1303...
Call For Details	MBS 140-VC LA 11 I02	Call For Details	MBS 140-VC RA 11 I02	140°	18	23	8	MBG...B02	MBZ ST 02...	VC.. 1103...
Call For Details	MBS 093-VC LA 07 I90	Call For Details	MBS 093-VC RA 07 I90	93°	17	20	7	MBG...B90	MBZ ST 02...	VC.. 0702...
Call For Details	MBS 093-VC LA 11 I90	7005-154928	MBS 093-VC RA 11 I90	93°	17	20	7	MBG...B90	MBZ ST 02...	VC.. 1103...
Call For Details	MBS 093-VC LA 13 I90			93°	17	20	7	MBG...B90	MBZ ST 02...	VC.. 1303...

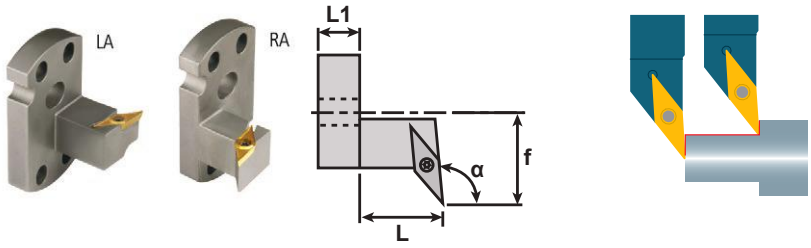


MBS...VP 35° TOP-Insert Modules

Left Hand		Right Hand		Dimensions & Features					
Item No.	Description	Item No.	Description	α	L	L_1	Tool Holder	Spacer	Insert
7005-127659	MBS 093-VP L 10 I02	7005-127658	MBS 093-VP R 10 I02	93°	20	8	MBG...B02	MBZ ST 02...	VP.. 1003...
7005-147763	MBS 093-VP L 10 I90	7005-147762	MBS 093-VP R 10 I90	93°	20	7	MBG...B90	MBZ ST 90...	VP.. 1003...

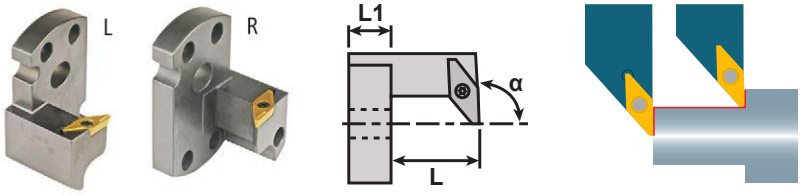

MBS...VP A 35° TOP-Insert Modules

Left Hand		Right Hand		Dimensions & Features						
Item No.	Description	Item No.	Description	α	f	L	L_1	Tool Holder	Spacer	Insert
Call For Details	MBS 093-VP LA 10 I02	7005-185290	MBS 093-VP RA 10 I02	93°	28	20	8	MBG...B02	MBZ ST 02...	VP.. 1003...
Call For Details	MBS 093-VP LA 10 I90	Call For Details	MBS 093-VP RA 10 I90	93°	17	20	7	MBG...B90	MBZ ST 90...	VP.. 1003...

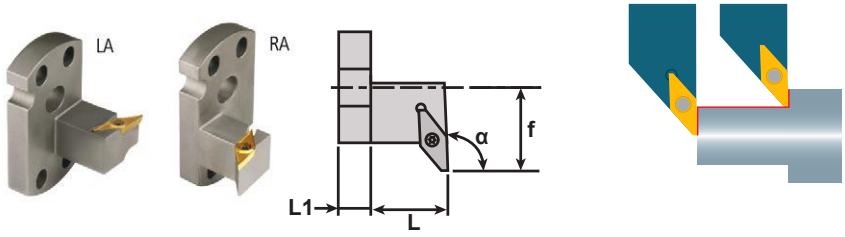



MBS...TC -Insert Modules

Left Hand		Right Hand		Dimensions & Features						
Item No.	Description	Item No.	Description	α	f	L	L_1	Tool Holder	Spacer	Insert
7005-127613	MBS 090-TC L 11 I02	7005-127612	MBS 090-TC R 11 I02	90°		20	8	MBG...B02	MBZ ST 02...	TC.. 1102...
Call For Details	MBS 090-TP L 11 I02	Call For Details	MBS 090-TP R 11 I02	90°		20	8	MBG...B02	MBZ ST 02...	TP... 1102...
		Call For Details	MBS 093-TC R 11 I02	93°	15	20	8	MBG...B02	MBZ ST 02...	TC.. 1102...
		Call For Details	MBS 090-TC R 11 I90	90°		20	7	MBG...B90	MBZ ST 90...	TC.. 1102...











MBS...TC A -Insert Modules

Left Hand		Right Hand		Dimensions & Features						
Item No.	Description	Item No.	Description	α	f	L	L_1	Tool Holder	Spacer	Insert
Call For Details	MBS 090-TC LA 11 I02	Call For Details	MBS 090-TC RA 11 I02	90°	15	20	8	MBG...B02	MBZ ST 02...	TC.. 1102...
Call For Details	MBS 090-TP LA 11 I02	Call For Details	MBS 090-TP RA 11 I02	90°	15	20	8	MBG...B02	MBZ ST 02...	TP... 1102...











MBS...W0134 -Insert Modules

Left Hand		Right Hand		Dimensions & Features					
Item No.	Description	Item No.	Description	α	L	L_1	Tool Holder	Spacer	Insert
Call For Details	MBS 093-W0134 L I02	Call For Details	MBS 093-W0134 R I02	93°	20	8	MBG...B02	MBZ ST 02...	W0134
	MBS 093-W0134 L I02 IC	Call For Details	MBS 093-W0134 R I02 IC	93°	20	8	MBG...B02	MBZ ST 02...	W0134





MBS...W0134 -Insert Modules

Left Hand		Right Hand		Dimensions & Features						
Item No.	Description	Item No.	Description	α	f	L	L_1	Tool Holder	Spacer	Insert
Call For Details	MBS 093-W0134 LA I02	Call For Details	MBS 093-W0134 RA I02	93°	18	20	8	MBG...B02	MBZ ST 02...	W0134











MBS...16 ER -Thread Insert Modules

Left Hand		Right Hand		Dimensions & Features					
Item No.	Description	Item No.	Description	α	L	L_1	Tool Holder	Spacer	Insert
Call For Details	MBS 090-16 EL L I02			90°	20	8	MBG...B02	MBZ ST 02...	16EL
Call For Details	MBS 090-16 EL L I02-30			90°	30	8	MBG...B02	MBZ ST 02...	16EL
Call For Details	MBS 090-16 EL L I02-40			90°	40	8	MBG...B02	MBZ ST 02...	16EL
		7005-127616	MBS 090-16 ER R I02	90°	20	8	MBG...B02	MBZ ST 02...	16ER
		7005-147330	MBS 090-16 ER R I02-30	90°	30	8	MBG...B02	MBZ ST 02...	16ER
		Call For Details	MBS 090-16 ER R I02-40	90°	40	8	MBG...B02	MBZ ST 02...	16ER
		7005-127691	MBS 090-16 ER R I90	90°	20	7	MBG...B90	MBZ ST 90...	16ER
		Call For Details	MBS 090-16 ER R I90-30	90°	30	7	MBG...B90	MBZ ST 90...	16ER









MBS...16 ER A -Thread Insert Modules

Left Hand		Right Hand		Dimensions & Features						
Item No.	Description	Item No.	Description	α	f	L	L_1	Tool Holder	Spacer	Insert
Call For Details	MBS 090-16 EL LA I02			90°	17.66	20	8	MBG...B02	MBZ ST 02...	16EL
Call For Details	MBS 090-16 EL LA I02-30			90°	17.66	30	8	MBG...B02	MBZ ST 02...	16EL
Call For Details	MBS 090-16 EL LA I02-40			90°	17.66	40	8	MBG...B02	MBZ ST 02...	16EL
		7005-147331	MBS 090-16 ER RA I02	90°	17.66	20	8	MBG...B02	MBZ ST 02...	16ER
		Call For Details	MBS 090-16 ER RA I02-30	90°	17.66	30	8	MBG...B02	MBZ ST 02...	16ER
		7005-169694	MBS 090-16 ER RA I02-40	90°	17.66	40	8	MBG...B02	MBZ ST 02...	16ER
		Call For Details	MBS 090-16 ER RA I90-30	90°	18.75	30	7	MBG...B90	MBZ ST 90...	16ER
		Call For Details	MBS 090-16 ER RA I90-40	90°	18.75	40	7	MBG...B90	MBZ ST 90...	16ER









MBS...CUT 90 - 1600 Series Insert Modules

Left Hand		Right Hand		Dimensions & Features					
Item No.	Description	Item No.	Description	α	L	L_1	Tool Holder	Spacer	Insert
7005-127615	MBS 090-CUT L 16 I02	7005-127614	MBS 090-CUT R 16 I02	90°	23	8	MBG...B02	MBZ ST 02...	16
Call For Details	MBS 135-CUT L 16 I02	Call For Details	MBS 135-CUT R 16 I02	135°	23	8	MBG...B02	MBZ ST 02...	16
7005-147970	MBS 090-CUT L 16 I05	7005-147969	MBS 090-CUT R 16 I05	90°	23	8	MBG...B05	MBZ ST 05...	16
7005-147975	MBS 090-CUT L 16 I90	7005-147974	MBS 090-CUT R 16 I90	90°	23	7	MBG...B90	MBZ ST 90...	16








MBS...CUT A - 1600 Series Insert Modules

Left Hand		Right Hand		Dimensions & Features						
Item No.	Description	Item No.	Description	α	f	L	L_1	Tool Holder	Spacer	Insert
7005-138041	MBS 090-CUT LA 16 I02	7005-138042	MBS 090-CUT RA 16 I02	90°	18.6	23	8	MBG...B02	MBZ ST 02...	16
Call For Details	MBS 135-CUT LA 16 I02	Call For Details	MBS 135-CUT RA 16 I02	135°	18.5	23	8	MBG...B02	MBZ ST 02...	16
7005-147350	MBS 090-CUT LA 16 I05	7005-147349	MBS 090-CUT RA 16 I05	90°	13	23	8	MBG...B05	MBZ ST 05...	16
7005-147976	MBS 090-CUT LA 16 I90	7005-147971	MBS 090-CUT RA 16 I90	90°	20.75	23	7	MBG...B90	MBZ ST 90...	16











MBS...CUT 180 - 1600 Insert Modules

Right Hand		Dimensions & Features						
Item No.	Description	α	f	L	L_1	Tool Holder	Spacer	Insert
7005-138043	MBS 180-CUT 16 I02	180°	1.5	20	8	MBG...B02	MBZ ST 02...	16
7005-147351	MBS 180-CUT 16 I05	180°	1.5	20	8	MBG...B05	MBZ ST 05...	16
7005-147978	MBS 180-CUT 16 I90	180°	1.5	20	7	MBG...B90	MBZ ST 90...	16









MBS...TWIN CUT 180 - 1600 Insert Modules

Neutral		Dimensions & Features						
Item No.	Description	f_1	f_2	L	L_1	Tool Holder	Spacer	Insert
7005-147275	MBS 180-CUT 16 I02 twin N	-4.5	4.5	20	8	MBG...B02	MBZ ST 02...	16
Call For Details	MBS 180-CUT 16 I02 twin R	3	11	20	8	MBG...B02	MBZ ST 02...	16






Use One Module For All multidec® 1600 Series Insert Geometries!



MBS...CUT N - 3000 Series Insert Modules

Neutral		Dimensions & Features						
Item No.	Description	f	f_1	L	L_1	Tool Holder	Spacer	Insert
7005-127686	MBS 090-CUT N 30 I02	27	33	20	8	MBG...B02	MBZ ST 02...	30
7005-147979	MBS 090-CUT N 30 I90	29	35	20	7	MBG...B90	MBZ ST 90...	30






Use One Module For All multidec® 3000 Series Insert Geometries!



MBS...SDA - Boring Bar Tool Holder

Item No.	Description	d_1	d_2	L_1	L_2	Tool Holder	Spacer	Inserts
Call For Details	MBS SDA4 IT02 IC	12	4	35	8	MBG...B02	MBZ ST 02...	SD. 4... / SX. 4...
Call For Details	MBS SDA6 IT02 IC	15	6	38	8	MBG...B02	MBZ ST 02...	SD. 6... / SX. 6...
Call For Details	MBS SDA8 IT02 IC	18	8	40	8	MBG...B02	MBZ ST 02...	SD. 8... / SX. 8...
Call For Details	MBS SDA4 IT05 IC	12	4	35	8	MBG...B05	MBZ ST 05...	SD. 4... / SX. 4...
Call For Details	MBS SDA4 IT90 IC	12	4	35	7	MBG...B90	MBZ ST 90...	SD. 4... /SX. 4...
Call For Details	MBS SDA6 IT90 IC	15	6	38	7	MBG...B90	MBZ ST 90...	SD. 6... / SX. 6...
Call For Details	MBS SDA8 IT90 IC	18	8	40	7	MBG...B90	MBZ ST 90...	SD. 8... / SX. 8...





$l = l_0 + 11$

$l_g = l - L_2$


MBS...E - Collet Holders

Item No.	Description	L	L_1	Shank	Spacer	ER Collet
Call For Details	MBS E08 20 C02	20	8	MBG...B02	MBZ ST 02...	ER08
Call For Details	MBS E08 30 C02	30	8	MBG...B02	MBZ ST 02...	ER08
7005-137599	MBS E11 25 C02	25	8	MBG...B02	MBZ ST 02...	ER11
Call For Details	MBS E11 35 C02	35	8	MBG...B02	MBZ ST 02...	ER11
Call For Details	MBS E16 25 C02	25	8	MBG...B02	MBZ ST 02...	ER16
7005-137775	MBS E16 35 C02	35	8	MBG...B02	MBZ ST 02...	ER16
7005-192962	MBS E20 35 C02	35	8	MBG...B02	MBZ ST 02...	ER20
7005-138840	MBS E20 45 C02	45	8	MBG...B02	MBZ ST 02...	ER20
Call For Details	MBS E08 20 C05	20	8	MBG...B05	MBZ ST 05...	ER08
Call For Details	MBS E08 30 C05	30	8	MBG...B05	MBZ ST 05...	ER08
Call For Details	MBS E11 25 C05	25	8	MBG...B05	MBZ ST 05...	ER11
Call For Details	MBS E11 35 C05	35	8	MBG...B05	MBZ ST 05...	ER11
Call For Details	MBS E08 20 C06	20	8	MBG...B06	MBZ ST 06...	ER08
Call For Details	MBS E08 30 C06	30	8	MBG...B06	MBZ ST 06...	ER08
Call For Details	MBS E11 25 C06	25	8	MBG...B06	MBZ ST 06...	ER11
Call For Details	MBS E11 35 C06	35	8	MBG...B06	MBZ ST 06...	ER11
Call For Details	MBS E16 25 C06	25	8	MBG...B06	MBZ ST 06...	ER16
Call For Details	MBS E16 35 C06	35	8	MBG...B06	MBZ ST 06...	ER16
Call For Details	MBS E08 20 C90	20	7	MBG...B90	MBZ ST 90...	ER08
Call For Details	MBS E08 30 C90	30	7	MBG...B90	MBZ ST 90...	ER08
Call For Details	MBS E11 25 C90	25	7	MBG...B90	MBZ ST 90...	ER11
Call For Details	MBS E11 35 C90	35	7	MBG...B90	MBZ ST 90...	ER11
Call For Details	MBS E16 25 C90	25	7	MBG...B90	MBZ ST 90...	ER16
Call For Details	MBS E16 35 C90	35	7	MBG...B90	MBZ ST 90...	ER16
Call For Details	MBS E20 25 C90	25	7	MBG...B90	MBZ ST 90...	ER20
Call For Details	MBS E20 35 C90	35	7	MBG...B90	MBZ ST 90...	ER20


MBR...Reduction Sleeve

Item No.	Description	D	d	L
Call For Details	MBR D10-02	10	2	22
Call For Details	MBR D10-03	10	3	22
Call For Details	MBR D10-04	10	4	22
Call For Details	MBR D10-05	10	5	22
Call For Details	MBR D10-06	10	6	22
Call For Details	MBR D10-07	10	7	22
Call For Details	MBR D10-08	10	8	22
Call For Details	MBR D12-04	12	4	22
Call For Details	MBR D12-05	12	5	22
Call For Details	MBR D12-06	12	6	22
Call For Details	MBR D12-07	12	7	22
Call For Details	MBR D12-08	12	8	22
Call For Details	MBR D12-09	12	9	22
Call For Details	MBR D12-10	12	10	22
Call For Details	MBR D12-06	12	6	30.85
Call For Details	MBR D12-08	12	8	30.85
Call For Details	MBR D12-10	12	10	30.85
Call For Details	MBR D16-10	16	10	30.85
Call For Details	MBR D16-12	16	12	30.85
Call For Details	MBR D16-14	16	14	30.85










Perfectly center tools on machines without Y-axis adjustability!

MBS... - OD Turning Tool Holders

Item No.	Description	L	Tool Holder	Spacer	Type
7005-137591	MBS 090 1212 T02	35	MBG...B02	MBZ ST 02...	12x12
7005-147336	MBS 090 1212 T90	35	MBG...B90	MBZ ST 90...	12x12






MBS...IT - ID Turning Tool Holders

Item No.	Description	d	L	L_1	Tool Holder	Spacer
7005-147354	MBS 10 IT02	10	13	8	MBG...B02	MBZ ST 02...
Call For Details	MBS 12 IT02	12	13	8	MBG...B02	MBZ ST 02...
Call For Details	MBS 14 IT02	14	13	8	MBG...B02	MBZ ST 02...
Call For Details	MBS 10 IT05	10	13	8	MBG...B05	MBZ ST 05...
7005-147341	MBS 10 IT90	10	14	7	MBG...B90	MBZ ST 90...
Call For Details	MBS 12 IT90	12	14	7	MBG...B90	MBZ ST 90...
Call For Details	MBS 14 IT90	14	14	7	MBG...B90	MBZ ST 90...
Call For Details	MBS 16 IT90	16	14	7	MBG...B90	MBZ ST 90...






MBK... - CoolFlex Coolant Jet

Item No.	Description	B	Tool Holder	Spacer	Insert Module	Coolant Fittings
7005-129791	MBK Cool Flex	22.3	MBG...B02	MBZ ST 02...	MBS...02	0°: P/N 4005-000104 45°: P/N 4005-000105 90°: P/N 4005-000106








MBK... - CoolFix

Left Hand		Right Hand		Dimensions & Features				
Item No.	Description	Item No.	Description	B	Tool Holder	Spacer	Insert Module	Coolant Fittings
Call For Details	MBK Cool Fix L	Call For Details	MBK Cool Fix R	28	MBG...B02	MBZ ST 02...	MBS...02	0°: P/N 4005-000104 45°: P/N 4005-000105 90°: P/N 4005-000106





Fixed Coolant Jet
Pair with appropriate L or R tool holder

MBZ... - Spacer Module

Item No.	Description	L_1	Tool Holder	Insert Module
7005-127602	MBZ ST 02-10	10	MBG...B02	MBS...02
7005-127603	MBZ ST 02-20	20	MBG...B02	MBS...02
7005-169702	MBZ ST 02-20 IC	20	MBG...B02	MBS...02 IC
7005-127694	MBZ ST 02-25	25	MBG...B02	MBS...02
Call For Details	MBZ ST 02-25 IC	25	MBG...B02	MBS...02 IC
7005-127604	MBZ ST 02-30	30	MBG...B02	MBS...02
Call For Details	MBZ ST 02-30 IC	30	MBG...B02	MBS...02 IC
7005-137587	MBZ ST 05-10	10	MBG...B05	MBS...05
7005-137588	MBZ ST 05-20	20	MBG...B05	MBS...05
7005-147352	MBZ ST 90-10	10	MBG...B90	MBS...90
7005-147356	MBZ ST 90-20	20	MBG...B90	MBS...90
Call For Details	MBZ ST 90-20 IC	20	MBG...B90	MBS...90 IC
Call For Details	MBZ ST 90-25 IC	25	MBG...B90	MBS...90 IC
7005-147357	MBZ ST 90-30	30	MBG...B90	MBS...90






MBA... - Adjuster Sheet

Item No.	Description	L_1	Tool Holder	Insert Module
7005-147302	MBA 02-05	10	MBG...B02	MBS...05
7005-119991	MBA 06-02 *	10	MBG...B06	MBS...02

* Included with basic holders MBG...B06





Torx Screws



Item No.	Description	Fits Holders...	Description	Dimension
7005-127518	MSP 25060 T08	CC06, DC07, TC11, VC11, VP10, 1600	Torx T8 Screw	M2x6 T08
7005-129060	MSP 25070 T08	1600...4	Torx T8 Screw	M2.5x7 T08
7005-126197	MSP 25090 T08	1600...6, 1600...8	Torx T8 Screw	M2.5x9 T08
7005-127530	MSP 30073 T08	3000-08..., 3000...A	Torx T8 Screw	M3x7.3 T08
7005-043902	MSP 30090 T08	3000	Torx T8 Screw	M3x9 T08
7005-127527	MSP 35110 T15	CC09, DC11	Torx T15 Screw	M3.5x11 T15
7005-127592	MSP UNC 540120 T10	16ER	Torx T10 Screw	M3x12 T10

L-Bracket



Item No.	Description	Dimension	Description
7005-147359	MSP A0808 T02	8x8	L-Piece for MBS 090 1212 T02
7005-137592	MSP A1010 T02	10x10	L-Piece for MBS 090 1212 T02

Clamping Screw



Item No.	Description	Dimension	Description
7005-129886	MSP 60100 IB3	M6x10 DIN913	Clamping Screw For MBS 090 1212 T02

Shim Screw



Item No.	Description	Inserts
7005-127593	MSP UNC 540070 T10	16ER

Eccentric Height Adjustment Bolt



Item No.	Description	Description
7005-127509	MBV E04	Eccentric Adjustment Bolt

Anvil



Item No.	Description	Inserts
Call For Details	YE3	16ER/EL

Mini Height Adjustment Bolt



Item No.	Description	Description
7005-147363	MBV E05	Mini Adjustment Bolt

Flat-Head Socket Cap Screw



Item No.	Description	Dimension
7005-147366	MSP M306	M3x6 DIN7991
7005-147759	MSP M308	M3x8 DIN7991

Socket Head Screw



Item No.	Description	Dimension
7005-147364	MSP M412	M4x12 DIN912
7005-147365	MSP M420	M4x20 DIN912
7005-147361	MSP M435	M4x35 DIN912
7005-147360	MSP M440	M4x40 DIN912
7005-147760	MSP M445	M4x45 DIN912
7005-147761	MSP M450	M4x50 DIN912
7005-127513	MSP M516	M5x16 DIN912
7005-127510	MSP M525	M5x25 DIN912
7005-127511	MSP M535	M5x35 DIN912
7005-127512	MSP M545	M5x45 DIN912

Elastic Washer



Item No.	Description	Dimension
7005-147362	MSP US-4	M4/4.3/10/0.6
7005-127514	MSP US-5	M5/5.3/9.2/0.45

Cylindrical Pin



Item No.	Description	Dimension	Description
7005-127515	MSP ZS612	Ø6_{h6}x12 DIN6325	Cylindrical Pin w/o Spacer
7005-127516	MSP ZS625	Ø6_{h6}x25 DIN6325	For Spacer MBZ ST 02-10
7005-127590	MSP ZS635	Ø6_{h6}x35 DIN6325	For Spacer MBZ ST 02-20
7005-127591	MSP ZS645	Ø6_{h6}x45 DIN6325	For Spacer MBZ ST 02-30

Coolant Fittings - MBK CoolFlex Adaptor



Item No.	Description	Size	Manifold Pos.
4005-000104	FIT-MICRO-4x2-00	Staight 0° 1/4" JIC to 1/8 BSPP	Input
4005-000105	FIT-MICRO-4x2-45	Staight 45° 1/4" JIC to 1/8 BSPP	Input
4005-000106	FIT-MICRO-4x2-90	Staight 90° 1/4" JIC to 1/8 BSPP	Input

UTILIS®
Tooling for High Technology



High Performance Thread Whirling

Thread whirling is a fast & accurate method of producing long threaded parts on a Swiss-type machine. By employing more cutting teeth, the GenSwiss/UTILIS whirling system greatly enhances productivity by allowing increased speeds and feeds while maintaining rigid finish qualities required by the medical implant industry.

- **Whirling Rings**
- **Whirling Inserts**
- **Whirling Attachments**
  - **Available In Live Tooling**





TYPE-A
xModular-System
- Whirling ring reduces setup time
- ±0.005mm guaranteed concentricity
- Interchangeable 2-part system




TYPE-B
Mono-System
- Compact single component Sytem
- ±0.005mm guaranteed concentricity



TYPE-C
Quick-Change System
- Similar to type-A, but ring is rotated to insert or remove
- ±0.005mm guaranteed concentricity




High-pressure coolant required for adequate chip evacuation in 12 insert configuration.

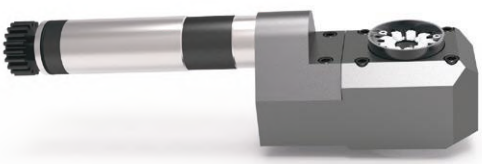

For Whirling Attachments
See Live Tooling Pg. 410 - 411






Optional Whirling Rings with advanced or recessed center position are available.
Visit genswiss.com or call us for details.

Double-edge indexable inserts provide excellent tool life


Inserts repeat within .0004"

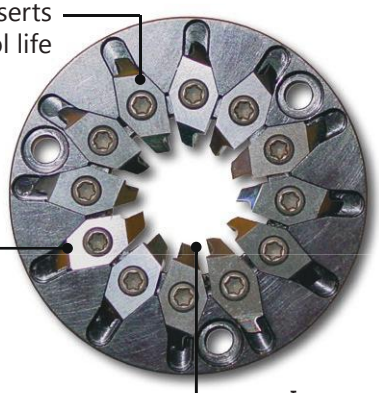

Custom precision thread forms can be generated in a single pass from barstock diameter

Available in several pocket configurations witht up to 12 inserts

Increased surface finish and improved thread quality can be achieved by minimizing cut interruption and vibration

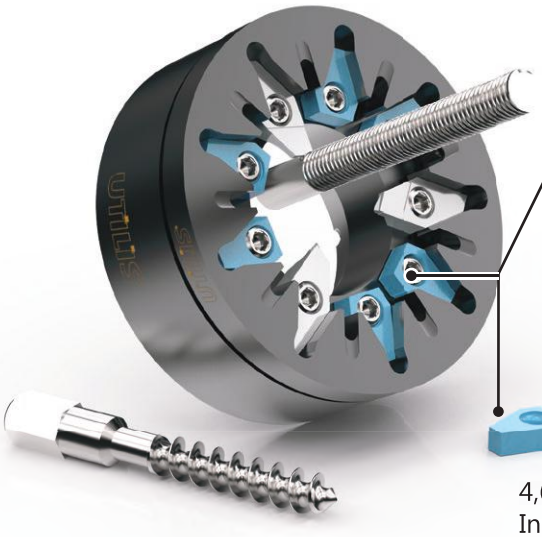

Dummy inserts protect the unused insert slots, keeping them particle free and maintaining accuracy when occupied by a threading insert

Whirling Inserts
Pg. 337 - 341



4,6, and 8mm Insert Widths







Keep Your Whirling Ring On Center

Centering Device

Item No.	Description	DF	d	d_b	z
7005-127516	MWV06 07 402000	6	4	6,8,10	7
Call For Details	MWV06 00 402000	6	4	6,8,10	9, 12
Call For Details	MWV12 00 402000	12	4	6,8,10	9, 12
Call For Details	MWV15 00 402000	15	4	6,8,10	9, 12
Call For Details	MWV25 00 402000	25	4	6,8,10	9, 12

DF Flight Circle
d Needle Diameter
d_b Guide Bushing Diameter
z Number Of Whirling Ring Pockets





Type-A Thread Whirling Rings



Cutter Rings for PCM Thread Whirling Attachments

Live Tool Manufacturer	Spindle Model	Machine Make	Flight Circle	# of Insert Pockets	Ring OD	Whirling Rings	Item No.
PCM **All PCM Live Tools Are Available From GenSwiss**	TOR-DE10-W15	TORNOS	6mm	7	42mm	MWT06 164 4242 115 07	6510-119103
			6mm	9	42mm	MWT06 164 4242 115 09	6510-139860
	TOR-DE20-W15-II	TORNOS	6mm	9	57mm	MWT06 164 4057 105 09	6510-149484
			8mm	9	57mm	MWT08 164 4057 105 09	Call For Details
			12mm	9	57mm	MWT12 164 4057 105 09	6510-139454
			15mm	9	57mm	MWT15 164 4057 105 09	6510-139898
			15mm	12	57mm	MWT15 164 4057 105 12	6510-119023
	TOR-DE13-W15 TOR-DE20-W15 TOR-GW-TDM-D13 CIT-LSW-101 CIT-GSW-261-000	TORNOS TORNOS TORNOS CITIZEN CITIZEN	6mm	9	55mm	MWT06 164 4055 103 09	Call For Details
			8mm	9	55mm	MWT08 164 4055 103 09	Call For Details
			12mm	9	55mm	MWT12 164 4055 103 09	6510-139823
			12mm	12	55mm	MWT12 164 4055 103 12	6510-139822
			15mm	9	55mm	MWT15 164 4055 103 09	Call For Details
			15mm	12	55mm	MWT15 164 4055 103 12	Call For Details
	CIT-KSW-101-000 CIT-LSW-101-L20-000 CIT-LSW-215-000 CIT-LSW-424-15 CIT-LSW-424-II CIT-MSW-101-000 CIT-SPW-1220	CITIZEN CITIZEN CITIZEN CITIZEN CITIZEN CITIZEN CITIZEN	12mm	3	46mm	MWT12 164 4046 115 03	Call For Details
			12mm	9	46mm	MWT12 164 4046 115 09	6510-119397
			12mm	12	46mm	MWT12 164 4046 115 12	6510-119398
			15mm	9	46mm	MWT15 164 4046 115 09	Call For Details
	CIT-GSW-251-PR- 1-A SR20J-W20-3D	CITIZEN STAR	6mm	9	40mm	MWT06 164 4040 111 09	Call For Details
			12mm	9	40mm	MWT12 164 4040 111 09	Call For Details
			12mm	12	40mm	MWT12 164 4040 111 12	Call For Details
			15mm	9	40mm	MWT15 164 4040 111 09	Call For Details
			6mm	9	45mm	MWT06 164 4045 120 09	Call For Details
	SR20J-W20-3D	STAR	8mm	9	45mm	MWT08 164 4045 120 09	Call For Details
			12mm	9	45mm	MWT12 164 4045 120 09	6510-138887
			12mm	12	45mm	MWT12 164 4045 120 12	6510-138888
			15mm	9	45mm	MWT15 164 4045 120 09	6510-219892
	CIT-LSW-420	CITIZEN	12mm	3	46mm	MWT12 164 4546 155 03	Call For Details
			12mm	9	46mm	MWT12 164 4546 155 09	Call For Details
			12mm	12	46mm	MWT12 164 4546 155 12	Call For Details
			15mm	9	46mm	MWT15 164 4546 155 09	Call For Details
	CIT-LSW-424-000	CITIZEN	12mm	3	46mm	MWT12 164 3546 169 03	6505-149047
			12mm	9	46mm	MWT12 164 3546 169 09	6510-137876
			12mm	12	46mm	MWT12 164 3546 169 12	6510-137568
			15mm	9	46mm	MWT15 164 3546 169 09	Call For Details
	SV20-W15	STAR	8mm	9	55mm	MWT08 164 4555 130 09	Call For Details
			12mm	9	55mm	MWT12 164 4555 130 09	Call For Details
			12mm	12	55mm	MWT12 164 4555 130 12	Call For Details
			12mm	9	55mm	MWT15 164 4555 130 09	Call For Details
			15mm	12	55mm	MWT15 164 4555 130 12	Call For Details
	CIT-BSW-215 NEX-NESA-32-000	CITIZEN NEXT TURN	6mm	9	46mm	MWT06 164 4046 172 09	Call For Details
			8mm	9	46mm	MWT08 164 4046 172 09	Call For Details
			12mm	9	46mm	MWT12 164 4046 172 09	6510-139491
			12mm	12	46mm	MWT12 164 4046 172 12	6510-139452
			15mm	9	46mm	MWT15 164 4046 172 09	6510-119214
			15mm	12	46mm	MWT15 164 4046 172 12	6510-119215

Type-A Thread Whirling Rings



Cutter Rings for OEM Machine Tool Attachments

Live Tool Manufacturer	Spindle Model	Machine Make	Flight Circle	# of Insert Pockets	Ring OD	Whirling Rings	Item No.
STAR	10159-00	STAR	6mm	9	46mm	MWT06 164 3346 165 09	Call For Details
			8mm	9	46mm	MWT08 164 3346 165 09	Call For Details
			12mm	9	46mm	MWT12 164 3346 165 09	6510-149746
			12mm	12	46mm	MWT12 164 3346 165 12	Call For Details
			15mm	09	46mm	MWT15 164 3346 165 09	Call For Details
			15mm	12	46mm	MWT15 164 3346 165 12	Call For Details
	0M171-00 101-72-00 421-73-00 431-72-00 541-78-00 581-71 591-72-00 661-72-00 681-72-00 7.074.191 7.076.225 7.170.882	STAR	6mm	9	40mm	MWT06 164 4040 111 09	Call For Details
			12mm	9	40mm	MWT12 164 4040 111 09	Call For Details
			12mm	12	40mm	MWT12 164 4040 111 12	Call For Details
			15mm	9	40mm	MWT15 164 4040 111 09	Call For Details
			6mm	9	45mm	MWT06 164 4045 120 09	Call For Details
			8mm	9	45mm	MWT08 164 4045 120 09	Call For Details
			12mm	9	45mm	MWT12 164 4045 120 09	6510-138887
			12mm	12	45mm	MWT12 164 4045 120 12	6510-138888
			15mm	9	45mm	MWT15 164 4045 120 09	6510-219892
	7.073.586 7.073.590 7.073.671 7.073.765	STAR	12mm	9	44mm	MWT12 164 4044 135 09	Call For Details
			12mm	12	44mm	MWT12 164 4044 135 12	6510-139177
			15mm	12	44mm	MWT15 164 4044 135 12	6510-139178
TSUGAMI	3268-Y271 3263-Y480 3234-Y342 UZ 3234-Y342 GUZ	TSUGAMI	6mm	9	65mm	MWT06 164 5265 166 09	Call For Details
			8mm	9	65mm	MWT08 164 5265 166 09	Call For Details
			15mm	9	65mm	MWT15 164 5265 166 09	Call For Details
			15mm	12	65mm	MWT15 164 5265 166 12	Call For Details
	3281-Y451 3268-Y452 3268-Y453 3268-Y454 3268-Y455	TSUGAMI	6mm	9	52mm	MWT06 164 5252 160 09	Call For Details
			8mm	9	52mm	MWT08 164 5252 160 09	Call For Details
			12mm	9	52mm	MWT12 164 5252 160 09	6510-119430
			12mm	12	52mm	MWT12 164 5252 160 12	6510-119431
			15mm	9	52mm	MWT15 164 5252 160 09	Call For Details
			15mm	12	52mm	MWT15 164 5252 160 12	Call For Details
TORNOS	260448	TORNOS	12mm	12	M50	MWT12 164 44M50 120 12	6510-119145
	305217 305218	TORNOS	6mm	7	42mm	MWT06 164 4242 115 07	6510-119103
			6mm	9	42mm	MWT06 164 4242 115 09	6510-139860
	199223, 306101, 306432, 307087, 398541, 418302, 472088, 992381, 1013013, 3281-Y691, 462-2365, 462-2370	TORNOS	6mm	9	57mm	MWT06 164 4057 105 09	6510-149484
			8mm	9	57mm	MTW08 164 4057 105 09	Call For Details
			12mm	9	57mm	MWT12 164 4057 105 09	6510-139454
			15mm	9	57mm	MWT15 164 4057 105 09	6510-139898
			15mm	12	57mm	MWT15 164 4057 105 12	6510-119023
	306279 306281 417627	TORNOS	6mm	9	67mm	MWT06 164 5067 120 09	Call For Details
			8mm	9	67mm	MWT08 164 5067 120 09	Call For Details
			15mm	9	67mm	MWT15 164 5067 120 09	Call For Details
			15mm	12	67mm	MWT15 164 5067 120 12	Call For Details
	462-2360	TORNOS	6mm	9	50mm	MWT06 164 4050 105 09	Call For Details
			8mm	9	50mm	MWT08 164 4050 105 09	Call For Details
			12mm	9	50mm	MWT12 164 4050 105 09	6510-119244
			12mm	12	50mm	MWT12 164 4050 105 12	6510-119245
			15mm	9	50mm	MWT15 164 4050 105 09	6510-119246
			15mm	12	50mm	MWT15 164 4050 105 12	6510-119247

Additional thread whirling rings available. Visit www.genswiss.com for more information.

Type-A Thread Whirling Rings



Cutter Rings for After Market Machine Tool Attachments

Live Tool Manufacturer	Spindle Model	Machine Make	Flight Circle	# of Insert Pockets	Ring OD	Whirling Rings	Item No.
MADAULA	CZ.035.C16	CITIZEN	12mm	3	46mm	MWT12 164 3546 169 03	6505-149047
			12mm	9	46mm	MWT12 164 3546 169 09	6510-137876
			12mm	12	46mm	MWT12 164 3546 169 12	6510-137568
			15mm	9	46mm	MWT15 164 3546 169 09	Call For Details
	ST.035.34 P.035.00049 1110.00037	STAR	6mm	9	40mm	MWT06 164 4040 111 09	Call For Details
			12mm	9	40mm	MWT12 164 4040 111 09	Call For Details
			12mm	12	40mm	MWT12 164 4040 111 12	Call For Details
			15mm	9	40mm	MWT15 164 4040 111 09	Call For Details
			6mm	9	45mm	MWT06 164 4045 120 09	Call For Details
	1110.00037	STAR	8mm	9	45mm	MWT08 164 4045 120 09	Call For Details
			12mm	9	45mm	MWT12 164 4045 120 09	6510-138887
			12mm	12	45mm	MWT12 164 4045 120 12	6510-138888
			15mm	9	45mm	MWT15 164 4045 120 09	6510-219892
	P.035.00064 1110.00054	STAR	6mm	9	50mm	MWT06 164 4050 135 09	Call For Details
			8mm	9	50mm	MWT08 164 4050 135 09	Call For Details
			12mm	9	50mm	MWT12 164 4050 135 09	Call For Details
			12mm	12	50mm	MWT12 164 4050 135 12	6510-119756
			15mm	9	50mm	MWT15 164 4050 135 09	Call For Details
			15mm	12	50mm	MWT15 164 4050 135 12	Call For Details
	P.035.00022	STAR	6mm	9	67mm	MWT06 164 5067 120 09	Call For Details
			8mm	9	67mm	MWT08 164 5067 120 09	Call For Details
			15mm	9	67mm	MWT15 164 5067 120 09	Call For Details
			15mm	12	67mm	MWT15 164 5067 120 12	Call For Details
	999.00444 CZ.035.L16/L20 CZ.035.L25/L35 DE.035.13/15 P.035.00002 P.035.00004 P.035.00010 P.035.00014 P.035.00023 P.035.00062 P.035.00067 TS.035.S205-15	CITIZEN CITIZEN TORNOS HANWHA HANWHA HANWHA HANWHA HANWHA HANWHA HANWHA TSUGAMI	6mm	9	55mm	MWT06 164 4055 103 09	Call For Details
			8mm	9	55mm	MWT08 164 4055 103 09	Call For Details
			12mm	9	55mm	MWT12 164 4055 103 09	6510-139823
			12mm	12	55mm	MWT12 164 4055 103 12	6510-139822
			15mm	9	55mm	MWT15 164 4055 103 09	Call For Details
			15mm	12	55mm	MWT15 164 4055 103 12	Call For Details
	DE.035.S20 HW.035.STL HW.035.XD2 P.035.00010 P.035.00014	TORNOS HANWHA HANWHA HANWHA HANWHA	12mm	9	48mm	MWT12 164 4548 145 09	6510-119287
			15mm	9	48mm	MWT15 164 4548 145 09	6510-119434
			15mm	12	48mm	MWT15 164 4548 145 12	6510-119435
	CZ.035.M12/M16 CZ.035.M20/M32T P.035.00063 1110.00055	CITIZEN CITIZEN HANWHA	12mm	3	46mm	MWT12 164 4046 130 03	Call For Details
			12mm	9	46mm	MWT12 164 4046 130 09	6510-000116
			12mm	12	46mm	MWT12 164 4046 130 12	6510-000109
			15mm	12	46mm	MWT15 164 4046 130 12	Call For Details

Additional thread whirling rings available. Visit www.genswiss.com for more information.

Type-A Thread Whirling Rings



Cutter Rings for After Market Machine Tool Attachments

Live Tool Manufacturer	*Spindle Model*	*Machine Make*	Flight Circle	# of Insert Pockets	Ring OD	Whirling Rings	Item No.
JARVIS	LTR0128 LTR0132 LTR0139 LTR0168 LTR0183 CHS-1B6	CITIZEN CITIZEN CITIZEN CITIZEN CITIZEN	6mm	9	53mm	MWT06 164 4053 121 09	Call For Details
			8mm	9	53mm	MWT08 164 4053 121 09	Call For Details
			12mm	9	53mm	MWT12 164 4053 121 09	6510-137869
			12mm	12	53mm	MWT12 164 4053 121 12	6510-137868
			15mm	09	53mm	MWT15 164 4053 121 09	Call For Details
			15mm	12	53mm	MWT15 164 4053 121 12	Call For Details
	LTR0131 LTR0169 LTR0170 CHS-2B6	CITIZEN CITIZEN CITIZEN	6mm	9	46mm	MWT06 164 3746 121 09	Call For Details
			8mm	9	46mm	MWT08 164 3746 121 09	Call For Details
			12mm	9	46mm	MWT12 164 3746 121 09	6510-137744
			12mm	12	46mm	MWT12 164 3746 121 12	6510-119191
			15mm	09	46mm	MWT15 164 3746 121 09	Call For Details
			15mm	12	46mm	MWT15 164 3746 121 12	Call For Details
WTO	419900001-44 419900002-44 419900005-44	STAR STAR STAR	12mm	9	44mm	MWT12 164 4044 135 09	Call For Details
			12mm	12	44mm	MWT12 164 4044 135 12	6510-139177
			15mm	12	44mm	MWT15 164 4044 135 12	6510-139178
	419900001-44	STAR	6mm	9	46mm	MWT06 164 4046 240 09	Call For Details
			6mm	9	46mm	MWT06 164 4046 300 09	Call For Details
			12mm	9	46mm	MWT12 164 4046 240 09	6510-139891
			12mm	9	46mm	MWT12 164 4046 300 09	Call For Details
			12mm	12	46mm	MWT12 164 4046 240 12	6510-139890
			12mm	12	46mm	MWT12 164 4046 300 12	Call For Details
			15mm	15	46mm	MWT15 164 4046 240 09	6510-149328
			15mm	15	46mm	MWT15 164 4046 300 09	Call For Details
			15mm	15	46mm	MWT15 164 4046 240 12	6510-149364
			15mm	15	46mm	MWT15 164 4046 300 12	Call For Details

Additional thread whirling rings available. Visit www.genswiss.com for more information.

Type-B Thread Whirling Rings



Cutter Rings for PCM Thread Whirling Attachments

Live Tool Manufacturer	Spindle Model	Machine Make	Flight Circle	# of Insert Pockets	Ring OD	Whirling Rings	Item No.
PCM All PCM Live Tools Are Available From GenSwiss	STA-E20-WI-000	STAR	6mm	7	35	MWT06 164 2035 165 07	6510-119007
	CIT-GSW-101-000 CIT-LSW-515-000	CITIZEN CITIZEN	6mm	9	35	MWT06 164 2035 165 09	6510-138657
	CIT-LSW-515-PR	CITIZEN	12mm	9	45	MWT12 164 4045 100 09	Call For Details

Cutter Rings for OEM Machine Tool Attachments

Live Tool Manufacturer	Spindle Model	Machine Make	Flight Circle	# of Insert Pockets	Ring OD	Whirling Rings	Item No.
Citizen	BTW-1000 BTW-2000 BTW-5000 BTW-6000 BTW-3000 BTW-3100 BTW-4000	CITIZEN	12mm	9	47mm	MWT12 164 3347 145 09	6510-000115
			12mm	9	47mm	MWT12 164 3347 145 12	6510-138034
			12mm	12	47mm	MWT12 166 3347 145 09	6510-219591
			12mm	9	47mm	MWT12 166 3347 145 12	Call For Details
			12mm	12	47mm	MWT12 168 3347 145 09	6510-149537
			12mm	9	46mm	MWT12 164 2546 070 09	6510-119980
			12mm	12	46mm	MTW12 164 2546 070 12	Call For Details
STAR	7.073.590	STAR	12mm	9	44mm	MWT12 164 4044 100 09	6510-119460
			12mm	12	44mm	MWT12 164 4044 100 12	6510-119463
	7.074.260 7.079.555	STAR	12mm	9	53mm	MWT12 164 4253 310 09	6510-119900
			12mm	12	53mm	MWT12 164 4253 310 12	6510-119901
TORNOS	307232 386251 398856 417165 417174	TORNOS	6mm	7	51mm	MWT06 164 3151 200 07	6510-149100
			6mm	9	51mm	MWT06 164 3151 200 09	6510-149101
	418212 570952	TORNOS	12mm	9	41mm	MWT12 164 M1441 440 09	6510-149750
DMG	2123031 2647002 2723028 2858071	DMG	12mm	9	49mm	MWT12 164 4249 120 09	6510-119676

Cutter Rings for After Market Machine Tool Attachments

Live Tool Manufacturer	Spindle Model	Machine Make	Flight Circle	# of Insert Pockets	Ring OD	Whirling Rings	Item No.
Madaula	CZ.035.K12/K16	CITIZEN	6mm	7	35mm	MWT06 164 2035 165 07	6510-119007
			6mm	9	35mm	MWT06 164 2035 165 09	6510-138657
WTO	419900000-00/-25/-32/-35/-39 /-40/-46/-50/-55/ 419900001-00/-32/-35 419900002-30/-32/-34/-55 419900003-30/-32/-50 419900004-30/-32 419900005-30/44 419900006-30 419900007-30/-44 419900008-44 419900009-30		12mm	9	44mm	MWT12 164 4244 105 09	6510-119351
			12mm	12	44mm	MWT12 164 4244 105 12	6510-119012
	419900000-45, 419900001-46 419900002-35, 419900003-34, 419900003-35, 419900005-32, 419900006-32, 419900007-32, 419900010-30, 419900010-44, 419900011-30, 419900011-44, 419900012-30, 419900013-30, TN762006		6mm	7	56mm	MWT06 164 5456 125 07	6510-149501
			6mm	9	56mm	MWT06 164 5456 125 09	6510-149502
			12mm	9	56mm	MWT12 164 5456 125 09	6510-149503
			12mm	12	56mm	MWT12 164 5456 125 12	6510-149504
			15mm	9	56mm	MWT15 164 5456 125 09	6510-149505
			15mm	12	56mm	MWT15 164 5456 125 12	6510-149506
			25mm	9	56mm	MWT25 164 5456 125 09	6510-149507
			25mm	12	56mm	MWT25 164 5456 125 12	6510-149508

Type-C Thread Whirling Rings



Cutter Rings for PCM Thread Whirling Attachments

Live Tool Manufacturer	Spindle Model	Machine Make	Flight Circle	# of Insert Pockets	Ring OD	Whirling Rings	Item No.
PCM All PCM Live Tools Are Available From GenSwiss	LSW-215-000	CITIZEN	12mm	9	60mm	MWT12 164 4060 130 09 QC	Call For Details
			12mm	12	60mm	MWT12 164 4060 130 12 QC	6510-119986
	LSW-424-000	CITIZEN	12mm	3	46mm	MWT12 164 3546 169 03 QC	Call For Details
	GSW-210	CITIZEN	6mm	7	38mm	MWT06 164 252838 120 07	Call For Details
			6mm	9	38mm	MWT06 164 252838 120 09	6510-219374
	SR-10J-GSW-010	STAR	6mm	7	36mm	MWT06 164 2536 126 07	Call For Details
			6mm	9	36mm	MWT06 164 2536 126 09	6510-149654

Cutter Rings for OEM Machine Tool Attachments

Live Tool Manufacturer	Spindle Model	Machine Make	Flight Circle	# of Insert Pockets	Ring OD	Whirling Rings	Item No.
TORNOS	306101	TORNOS	6mm	7	57mm	MWT06 164 4057 105 07 QC	Call For Details
			6mm	9	57mm	MWT06 164 4057 105 09 QC	Call For Details
			8mm	9	57mm	MWT08 164 4057 105 09 QC	Call For Details
			12mm	9	57mm	MWT12 164 4057 105 09 QC	Call For Details
			12mm	12	57mm	MWT12 164 4057 105 12 QC	Call For Details
			15mm	9	57mm	MWT15 164 4057 105 09 QC	Call For Details
			15mm	12	57mm	MWT15 164 4057 105 12 QC	Call For Details

Special Thread Whirling Holders For Non Swiss Machines


Whirling Tool For ER Style Live Spindles


Item No.	Description	D_F	D_A	D_K	z*	L_T	L_1
6510-119512	MWT06 164 0400 07	6	M8	35	7	44	32.5


z*: Number of Teeth

Threaded Solid ER Style Collets

Threaded ER Collets	ER	Thread
ER16 EF M8	16	M8
ER20 EF M8	20	M8
ER25 EF M8	25	M8

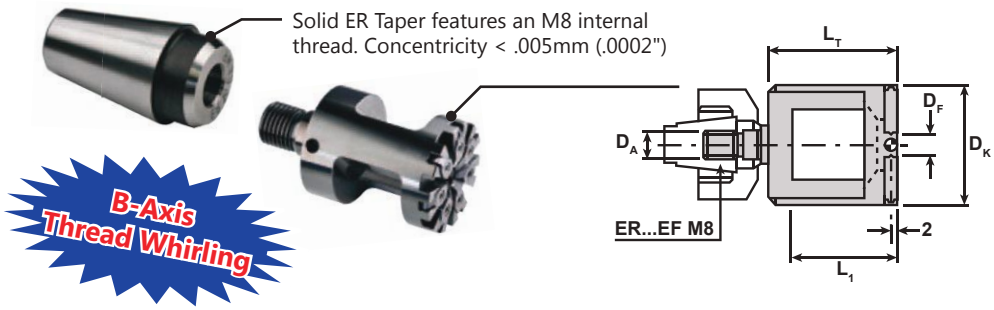




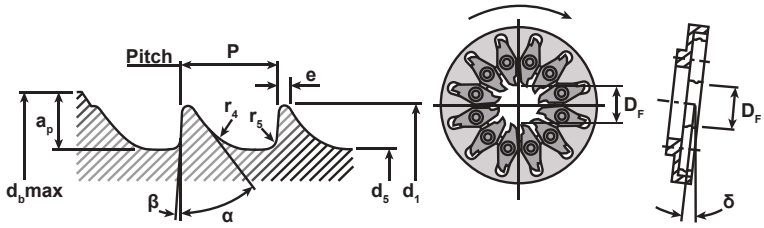



ISO Spec. Buttress Thread Form (MWI... HA/HB... VP)

D_F = Flight Circle

Item No.	Description	ISO 5835	D_F	d_1	d_5	tol	P	δ	e	r_4	r_5	a	β	a_p	d_bMax Stock Ø	Coating
Call For Details	MWI06 164 HA1.5 VP UHM20 HPX	HA1.5	6	1.5	1.1	0/-0.1	0.5	7.3°	0.1	0.3	0.1	35°	3°	3	7	UHM 20 HPX
Call For Details	MWI06 164 HA1.5 VP UHM20 TX+	HA1.5	6	1.5	1.1	0/-0.1	0.5	7.3°	0.1	0.3	0.1	35°	3°	3	7	UHM 20 TX+
Call For Details	MWI06 164 HA2.0 VP UHM20 HPX	HA2.0	6	2	1.3	0/-0.1	0.6	6.9°	0.1	0.4	0.2	35°	3°	3	7	UHM 20 HPX
Call For Details	MWI06 164 HA2.0 VP UHM20 TX+	HA2.0	6	2	1.3	0/-0.1	0.6	6.9°	0.1	0.4	0.2	35°	3°	3	7	UHM 20 TX+
Call For Details	MWI06 164 HA2.7 VP UHM20 HPX	HA2.7	6	2.7	1.9	0/-0.1	1	8.1°	0.1	0.6	0.2	35°	3°	3	7.5	UHM 20 HPX
Call For Details	MWI06 164 HA2.7 VP UHM20 TX+	HA2.7	6	2.7	1.9	0/-0.1	1	8.1°	0.1	0.6	0.2	35°	3°	3	7.5	UHM 20 TX+
Call For Details	MWI12 164 HA1.5 VP UHM20 HPX	HA1.5	12	1.5	1.1	0/-0.1	0.5	7.3°	0.1	0.3	0.1	35°	3°	4	9	UHM 20 HPX
Call For Details	MWI12 164 HA1.5 VP UHM20 TX+	HA1.5	12	1.5	1.1	0/-0.1	0.5	7.3°	0.1	0.3	0.1	35°	3°	4	9	UHM 20 TX+
Call For Details	MWI12 164 HA2.0 VP UHM20 HPX	HA2.0	12	2	1.3	0/-0.1	0.6	6.9°	0.1	0.4	0.1	35°	3°	4	9	UHM 20 HPX
Call For Details	MWI12 164 HA2.0 VP UHM20 TX+	HA2.0	12	2	1.3	0/-0.1	0.6	6.9°	0.1	0.4	0.1	35°	3°	4	9	UHM 20 TX+
Call For Details	MWI12 164 HA2.7 VP UHM20 HPX	HA2.7	12	2.7	1.9	0/-0.15	1	8.1°	0.1	0.6	0.2	35°	3°	4	9.5	UHM 20 HPX
Call For Details	MWI12 164 HA2.7 VP UHM20 TX+	HA2.7	12	2.7	1.9	0/-0.15	1	8.1°	0.1	0.6	0.2	35°	3°	4	9.5	UHM 20 TX+
6505-149150	MWI12 164 HA3.5 VP UHM20 HPX	HA3.5	12	3.5	2.4	0/-0.15	1.25	7.9°	0.1	0.8	0.2	35°	3°	4	10	UHM 20 HPX
Call For Details	MWI12 164 HA3.5 VP UHM20 TX+	HA3.5	12	3.5	2.4	0/-0.15	1.25	7.9°	0.1	0.8	0.2	35°	3°	4	10	UHM 20 TX+
Call For Details	MWI12 164 HA4.0 VP UHM20 HPX	HA4.0	12	4	2.9	0/-0.15	1.5	8.1°	0.1	0.8	0.2	35°	3°	4	10.5	UHM 20 HPX
Call For Details	MWI12 164 HA4.0 VP UHM20 TX+	HA4.0	12	4	2.9	0/-0.15	1.5	8.1°	0.1	0.8	0.2	35°	3°	4	10.5	UHM 20 TX+
Call For Details	MWI12 164 HA4.5 VP UHM20 HPX	HA4.5	12	4.5	3	0/-0.15	1.75	8.6°	0.1	1	0.3	35°	3°	4	11	UHM 20 HPX
Call For Details	MWI12 164 HA4.5 VP UHM20 TX+	HA4.5	12	4.5	3	0/-0.15	1.75	8.6°	0.1	1	0.3	35°	3°	4	11	UHM 20 TX+
Call For Details	MWI12 164 HA5.0 VP UHM20 HPX	HA5.0	12	5	3.5	0/-0.15	1.75	7.6°	0.2	1	0.3	35°	3°	4	11	UHM 20 HPX
Call For Details	MWI12 164 HA5.0 VP UHM20 TX+	HA5.0	12	5	3.5	0/-0.15	1.75	7.6°	0.2	1	0.3	35°	3°	4	11	UHM 20 TX+
6505-219339	MWI12 164 HB4.0 VP UHM20 HPX	HB4.0	12	4	1.9	0/-0.15	1.75	11.0°	0.1	0.8	0.3	25°	5°	4	9.5	UHM 20 HPX
Call For Details	MWI12 164 HB4.0 VP UHM20 TX+	HB4.0	12	4	1.9	0/-0.15	1.75	11.0°	0.1	0.8	0.3	25°	5°	4	9.5	UHM 20 TX+
Call For Details	MWI12 164 HB6.5 VP UHM20 HPX	HB6.5	12	6.5	3	0/-0.15	2.75	10.6°	0.2	1.2	0.8	25°	5°	4	11	UHM 20 HPX
Call For Details	MWI12 164 HB6.5 VP UHM20 TX+	HB6.5	12	6.5	3	0/-0.15	2.75	10.6°	0.2	1.2	0.8	25°	5°	4	11	UHM 20 TX+



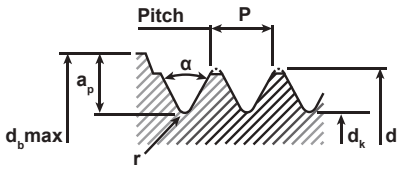






ISO 9268 Profile Spec. Buttress Thread Form (MWI... HC... VP)

D_F = Flight Circle

Item No.	Description	ISO 9268	D_F	d_1 min.	d_1 max.	d_5 min.	d_5 max.	P	δ	C	r	α	a_p	d_bMax Stock Ø	Coating
Call For Details	MWI06 164 HC2.9 VP UHM 20 HPX	HC2.9	6	2.79	2.9	2.03	2.18	1.06	7.76°	0.1	0.05	60°	3	8.5	UHM 20 HPX
Call For Details	MWI06 164 HC2.9 VP UHM 20 TX+	HC2.9	6	2.79	2.9	2.03	2.18	1.06	7.76°	0.1	0.05	60°	3	8.5	UHM 20 TX+
Call For Details	MWI06 164 HC3.5 VP UHM 20 HPX	HC3.5	6	3.43	3.53	2.51	2.64	1.27	7.61°	0.1	0.05	60°	3	9	UHM 20 HPX
Call For Details	MWI06 164 HC3.5 VP UHM 20 TX+	HC3.5	6	3.43	3.53	2.51	2.64	1.27	7.61°	0.1	0.05	60°	3	9	UHM 20 TX+
Call For Details	MWI06 164 HC3.9 VP UHM 20 HPX	HC3.9	6	3.78	3.91	2.77	2.92	1.27	6.89°	0.1	0.05	60°	3	9.5	UHM 20 HPX
Call For Details	MWI06 164 HC3.9 VP UHM 20 TX+	HC3.9	6	3.78	3.91	2.77	2.92	1.27	6.89°	0.1	0.05	60°	3	9.5	UHM 20 TX+
Call For Details	MWI06 164 HC4.2 VP UHM 20 HPX	HC4.2	6	4.09	4.22	2.95	3.25	1.27	6.36°	0.1	0.05	60°	3	10	UHM 20 HPX
Call For Details	MWI06 164 HC4.2 VP UHM 20 TX+	HC4.2	6	4.09	4.22	2.95	3.25	1.27	6.36°	0.1	0.05	60°	3	10	UHM 20 TX+
Call For Details	MWI12 164 HC2.9 VP UHM 20 HPX	HC2.9	12	2.79	2.9	2.03	2.18	1.06	7.76°	0.1	0.05	60°	4	10.5	UHM 20 HPX
Call For Details	MWI12 164 HC2.9 VP UHM 20 TX+	HC2.9	12	2.79	2.9	2.03	2.18	1.06	7.76°	0.1	0.05	60°	4	10.5	UHM 20 TX+
Call For Details	MWI12 164 HC3.5 VP UHM 20 HPX	HC3.5	12	3.43	3.53	2.51	2.64	1.27	7.61°	0.1	0.05	60°	4	11	UHM 20 HPX
Call For Details	MWI12 164 HC3.5 VP UHM 20 TX+	HC3.5	12	3.43	3.53	2.51	2.64	1.27	7.61°	0.1	0.05	60°	4	11	UHM 20 TX+
Call For Details	MWI12 164 HC3.9 VP UHM 20 HPX	HC3.9	12	3.78	3.91	2.77	2.92	1.27	6.89°	0.1	0.05	60°	4	11.5	UHM 20 HPX
Call For Details	MWI12 164 HC3.9 VP UHM 20 TX+	HC3.9	12	3.78	3.91	2.77	2.92	1.27	6.89°	0.1	0.05	60°	4	11.5	UHM 20 TX+
Call For Details	MWI12 164 HC4.2 VP UHM 20 HPX	HC4.2	12	4.09	4.22	2.95	3.25	1.27	6.36°	0.1	0.05	60°	4	12	UHM 20 HPX
Call For Details	MWI12 164 HC4.2 VP UHM 20 TX+	HC4.2	12	4.09	4.22	2.95	3.25	1.27	6.36°	0.1	0.05	60°	4	12	UHM 20 TX+



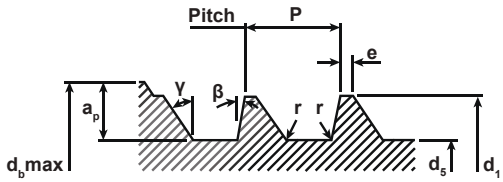






ISO 9268 Profile Spec. Buttress Thread Form (MWI... HD... VP)

D_F = Flight Circle

Item No.	Description	ISO 9268	D_F	d_1	d_5	P	δ	e	r	γ	β	a_p	d_bMax Stock Ø	Coating
Call For Details	MWI06 164 HD4.0 VP UHM 20 HPX	HD4.0	6	4	2.92	1.59	8.36°	0.1	0.01	45°	10°	3	9.5	UHM 20 HPX
Call For Details	MWI06 164 HD4.0 VP UHM 20 TX+	HD4.0	6	4	2.92	1.59	8.36°	0.1	0.01	45°	10°	3	9.5	UHM 20 TX+
Call For Details	MWI06 164 HD4.5 VP UHM 20 HPX	HD4.5	6	4.5	2.92	2.18	10.64°	0.1	0.01	45°	10°	3	10	UHM 20 HPX
Call For Details	MWI06 164 HD4.5 VP UHM 20 TX+	HD4.5	6	4.5	2.92	2.18	10.64°	0.1	0.01	45°	10°	3	10	UHM 20 TX+
Call For Details	MWI12 164 HD4.0 VP UHM 20 HPX	HD4.0	12	4	2.92	1.59	8.36°	0.1	0.01	45°	10°	4	11.5	UHM 20 HPX
Call For Details	MWI12 164 HD4.0 VP UHM 20 TX+	HD4.0	12	4	2.92	1.59	8.36°	0.1	0.01	45°	10°	4	11.5	UHM 20 TX+
Call For Details	MWI12 164 HD4.5 VP UHM 20 HPX	HD4.5	12	4.5	2.92	2.18	10.64°	0.1	0.01	45°	10°	4	12	UHM 20 HPX
Call For Details	MWI12 164 HD4.5 VP UHM 20 TX+	HD4.5	12	4.5	2.92	2.18	10.64°	0.1	0.01	45°	10°	4	12	UHM 20 TX+










Cylindrical Whirling Threads

D_F = Flight Circle

Item No.	Description	D_{F*}	a	r	a_p	d_bMax Stock Ø	Coating
Call For Details	MWI06 164 HD4.0 VP UHM 20 HPX	12	4	0.05	4	d+(2 × ap)	UHM 20 HPX
Call For Details	MWI06 164 HD4.0 VP UHM 20 TX+	12	4	0.05	4	d+(2 × ap)	UHM 20 TX+
Call For Details	MWI06 164 HD4.5 VP UHM 20 HPX	12	3.5	0.05	4	d+(2 × ap)	UHM 20 HPX
Call For Details	MWI06 164 HD4.5 VP UHM 20 TX+	12	3.5	0.05	4	d+(2 × ap)	UHM 20 TX+



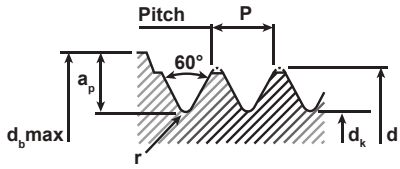






ISO / DIN Spec Metric Threads

D_F = Flight Circle

Item No.	Description	ISO DIN13	D_F	d	d_k	P	δ	r	a_p	d_bMax Stock Ø	Coating
Call For Details	MWI06 164 M1.4 VP UHM20 HPX	M1.4	6	1.4	1.012	0.3	4.53°	0.033	3	6.5	UHM 20 HPX
Call For Details	MWI06 164 M1.4 VP UHM 20 TX+	M1.4	6	1.4	1.012	0.3	4.53°	0.033	3	6.5	UHM 20 TX+
Call For Details	MWI06 164 M1.6 VP UHM20 HPX	M1.6	6	1.6	1.151	0.35	4.63°	0.041	3	7	UHM 20 HPX
Call For Details	MWI06 164 M1.6 VP UHM 20 TX+	M1.6	6	1.6	1.151	0.35	4.63°	0.041	3	7	UHM 20 TX+
Call For Details	MWI06 164 M2x0.25 VP UHM20 HPX	M2x0.25	6	2	1.693	0.25	2.50°	0.036	3	7.5	UHM 20 HPX
Call For Details	MWI06 164 M2x0.25 VP UHM 20 TX+	M2x0.25	6	2	1.693	0.25	2.50°	0.036	3	7.5	UHM 20 TX+
Call For Details	MWI06 164 M2 VP UHM20 HPX	M2	6	2	1.509	0.4	4.17°	0.048	3	7	UHM 20 HPX
Call For Details	MWI06 164 M2 VP UHM 20 TX+	M2	6	2	1.509	0.4	4.17°	0.048	3	7	UHM 20 TX+
Call For Details	MWI06 164 M3x0.35 VP UHM20 HPX	M3x0.35	6	3	2.571	0.35	2.30°	0.051	3	8.5	UHM 20 HPX
Call For Details	MWI06 164 M3x0.35 VP UHM 20 TX+	M3x0.35	6	3	2.571	0.35	2.30°	0.051	3	8.5	UHM 20 TX+
Call For Details	MWI06 164 M3 VP UHM20 HPX	M3	6	3	2.387	0.5	3.39°	0.062	3	8	UHM 20 HPX
Call For Details	MWI06 164 M3 VP UHM 20 TX+	M3	6	3	2.387	0.5	3.39°	0.062	3	8	UHM 20 TX+
Call For Details	MWI12 164 M1.6 VP UHM20 HPX	M1.6	12	1.6	1.151	0.35	4.63°	0.041	4	9	UHM 20 HPX
Call For Details	MWI12 164 M1.6 VP UHM 20 TX+	M1.6	12	1.6	1.151	0.35	4.63°	0.041	4	9	UHM 20 TX+
Call For Details	MWI12 164 M2x0.25 VP UHM20 HPX	M2x0.25	12	2	1.693	0.25	2.50°	0.036	4	9.5	UHM 20 HPX
Call For Details	MWI12 164 M2x0.25 VP UHM 20 TX+	M2x0.25	12	2	1.693	0.25	2.50°	0.036	4	9.5	UHM 20 TX+
Call For Details	MWI12 164 M2 VP UHM20 HPX	M2	12	2	1.509	0.4	4.17°	0.048	4	9	UHM 20 HPX
Call For Details	MWI12 164 M2 VP UHM 20 TX+	M2	12	2	1.509	0.4	4.17°	0.048	4	9	UHM 20 TX+
Call For Details	MWI12 164 M2.5 VP UHM20 HPX	M2.5	12	2.5	1.928	0.45	3.70°	0.055	4	9.5	UHM 20 HPX
Call For Details	MWI12 164 M2.5 VP UHM 20 TX+	M2.5	12	2.5	1.928	0.45	3.70°	0.055	4	9.5	UHM 20 TX+
Call For Details	MWI12 164 M3x0.35 VP UHM20 HPX	M3x0.35	12	3	2.571	0.35	2.30°	0.051	4	10.5	UHM 20 HPX
Call For Details	MWI12 164 M3x0.35 VP UHM 20 TX+	M3x0.35	12	3	2.571	0.35	2.30°	0.051	4	10.5	UHM 20 TX+
Call For Details	MWI12 164 M3 VP UHM20 HPX	M3	12	3	2.387	0.5	3.39°	0.062	4	10	UHM 20 HPX
Call For Details	MWI12 164 M3 VP UHM 20 TX+	M3	12	3	2.387	0.5	3.39°	0.062	4	10	UHM 20 TX+
Call For Details	MWI12 164 M3.5 VP UHM20 HPX	M3.5	12	3.5	2.744	0.6	3.50°	0.077	4	8.5	UHM 20 HPX
Call For Details	MWI12 164 M3.5 VP UHM 20 TX+	M3.5	12	3.5	2.744	0.6	3.50°	0.077	4	8.5	UHM 20 TX+
Call For Details	MWI12 164 M4x0.35 VP UHM20 HPX	M4x0.35	12	4	3.387	0.35	2.50°	0.072	4	11	UHM 20 HPX
Call For Details	MWI12 164 M4x0.35 VP UHM 20 TX+	M4x0.35	12	4	3.387	0.35	2.50°	0.072	4	11	UHM 20 TX+
Call For Details	MWI12 164 M4 VP UHM20 HPX	M4	12	4	3.141	0.7	3.58°	0.091	4	11	UHM 20 HPX
Call For Details	MWI12 164 M4 VP UHM 20 TX+	M4	12	4	3.141	0.7	3.58°	0.091	4	11	UHM 20 TX+
Call For Details	MWI12 164 M5x0.5 VP UHM20 HPX	M5x0.5	12	5	4.387	0.5	1.90°	0.072	4	12	UHM 20 HPX
Call For Details	MWI12 164 M5x0.5 VP UHM 20 TX+	M5x0.5	12	5	4.387	0.5	1.90°	0.072	4	12	UHM 20 TX+
Call For Details	MWI12 164 M5 VP UHM20 HPX	M5	12	5	4.019	0.8	3.24°	0.105	4	11.5	UHM 20 HPX
Call For Details	MWI12 164 M5 VP UHM 20 TX+	M5	12	5	4.019	0.8	3.24°	0.105	4	11.5	UHM 20 TX+
Call For Details	MWI12 164 M6x0.75 VP UHM20 HPX	M6x.075	12	6	5.08	0.75	2.50°	0.108	4	13	UHM 20 HPX
Call For Details	MWI12 164 M6x0.75 VP UHM 20 TX+	M6x.075	12	6	5.08	0.75	2.50°	0.108	4	13	UHM 20 TX+
Call For Details	MWI12 164 M6 VP UHM20 HPX	M6	12	6	4.773	1	3.39°	0.134	4	12.5	UHM 20 HPX
Call For Details	MWI12 164 M6 VP UHM 20 TX+	M6	12	6	4.773	1	3.39°	0.134	4	12.5	UHM 20 TX+
Call For Details	MWI12 164 M7 VP UHM20 HPX	M7	12	7	5.753	1	2.86°	0.134	4	13.5	UHM 20 HPX
Call For Details	MWI12 164 M7 VP UHM 20 TX+	M7	12	7	5.753	1	2.86°	0.134	4	13.5	UHM 20 TX+
Call For Details	MWI12 164 M8x0.75 VP UHM20 HPX	M8x0.75	12	8	7.08	0.75	1.80°	0.108	4	15	UHM 20 HPX
Call For Details	MWI12 164 M8x0.75 VP UHM 20 TX+	M8x0.75	12	8	7.08	0.75	1.80°	0.108	4	15	UHM 20 TX+
Call For Details	MWI12 164 M8 VP UHM20 HPX	M8	12	8	6.466	1.3	3.15°	0.17	4	14	UHM 20 HPX
Call For Details	MWI12 164 M8 VP UHM 20 TX+	M8	12	8	6.466	1.3	3.15°	0.17	4	14	UHM 20 TX+
Call For Details	MWI12 164 M8x1.0 VP UHM20 HPX	M8x1	12	8	6.773	1	2.50°	0.144	4	14.5	UHM 20 HPX
Call For Details	MWI12 164 M8x1.0 VP UHM 20 TX+	M8x1	12	8	6.773	1	2.50°	0.144	4	14.5	UHM 20 TX+
Call For Details	MWI12 164 M10x0.75 VP UHM20 HPX	M10x0.75	12	10	9.08	0.75	1.40°	0.108	4	17	UHM 20 HPX
Call For Details	MWI12 164 M10x0.75 VP UHM 20 TX+	M10x0.75	12	10	9.08	0.75	1.40°	0.108	4	17	UHM 20 TX+
Call For Details	MWI12 164 M10x1.0 VP UHM20 HPX	M10x1.0	12	10	8.773	1	1.90°	0.144	4	16.5	UHM 20 HPX
Call For Details	MWI12 164 M10x1.0 VP UHM 20 TX+	M10x1.0	12	10	8.773	1	1.90°	0.144	4	16.5	UHM 20 TX+
Call For Details	MWI12 164 M10x1.25 VP UHM20 HPX	M10x1.25	12	10	8.466	1.25	2.50°	0.18	4	16	UHM 20 HPX
Call For Details	MWI12 164 M10x1.25 VP UHM 20 TX+	M10x1.25	12	10	8.466	1.25	2.50°	0.18	4	16	UHM 20 TX+
Call For Details	MWI12 164 M10 VP UHM20 HPX	M10	12	10	8.16	1.5	3.01°	0.207	4	16	UHM 20 HPX
Call For Details	MWI12 164 M10 VP UHM 20 TX+	M10	12	10	8.16	1.5	3.01°	0.207	4	16	UHM 20 TX+



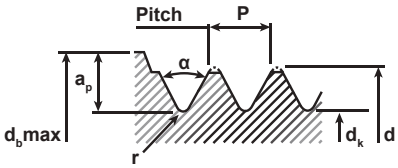




UNC & UNF Threads

D_F = Flight Circle

TPI (P)	Item No.	Description	D_F	d	d_k	δ	r	a	a_p	d_bMax Stock Ø	Coating
16 TPI	Call For Details	MWI12 164 3/8-16UNC VP UHM20 HPX	12	.375in	.298in	3.39°	.0086in	60°	4	17	UHM 20 HPX
16 TPI	Call For Details	MWI12 164 3/8-16UNC VP UHM30 TX+	12	.375in	.298in	3.39°	.0086in	60°	4	17	UHM 20 TX+
18 TPI	Call For Details	MWI12 164 5/16-18UNC VP UHM20 HPX	12	.313in	.244in	3.63°	.0076in	60°	4	15.5	UHM 20 HPX
18 TPI	Call For Details	MWI12 164 5/16-18UNC VP UHM20 TX+	12	.313in	.244in	3.63°	.0076in	60°	4	15.5	UHM 20 TX+
20 TPI	Call For Details	MWI12 164 1/4-20UNC VP UHM20 HPX	12	.250in	.188in	4.16°	.0068in	60°	4	14	UHM 20 HPX
20 TPI	Call For Details	MWI12 164 1/4-20UNC VP UHM20 TX+	12	.250in	.188in	4.16°	.0068in	60°	4	14	UHM 20 TX+
24 TPI	Call For Details	MWI12 164 10-24UNC VP UHM20 HPX	12	.190in	.138in	4.62°	.0056in	60°	4	12.5	UHM 20 HPX
24 TPI	Call For Details	MWI12 164 10-24UNC VP UHM20 TX+	12	.190in	.138in	4.62°	.0056in	60°	4	12.5	UHM 20 TX+
24 TPI	Call For Details	MWI12 164 12-24UNC VP UHM20 HPX	12	.216in	.164in	3.99°	.0056in	60°	4	13	UHM 20 HPX
24 TPI	Call For Details	MWI12 164 12-24UNC VP UHM20 TX+	12	.216in	.164in	3.99°	.0056in	60°	4	13	UHM 20 TX+
24 TPI	Call For Details	MWI12 164 5/16-24UNF VP UHM20 HPX	12	.312in	.261in	2.65°	.0056in	60°	4	15.5	UHM 20 HPX
24 TPI	Call For Details	MWI12 164 5/16-24UNF VP UHM20 TX+	12	.312in	.261in	2.65°	.0056in	60°	4	15.5	UHM 20 TX+
24 TPI	Call For Details	MWI12 164 3/8-24UNF VP UHM20 HPX	12	.375in	.323in	2.18°	.0056in	60°	4	17.5	UHM 20 HPX
24 TPI	Call For Details	MWI12 164 3/8-24UNF VP UHM20 TX+	12	.375in	.323in	2.18°	.0056in	60°	4	17.5	UHM 20 TX+
28 TPI	Call For Details	MWI12 164 1/4-28UNF VP UHM20 HPX	12	.250in	.205in	2.86°	.0047in	60°	4	14	UHM 20 HPX
28 TPI	Call For Details	MWI12 164 1/4-28UNF VP UHM20 TX+	12	.250in	.205in	2.86°	.0047in	60°	4	14	UHM 20 TX+
28 TPI	Call For Details	MWI12 164 12-28UNF VP UHM20 HPX	12	.216in	.171in	3.36°	.0047in	60°	4	11	UHM 20 HPX
28 TPI	Call For Details	MWI12 164 12-28UNF VP UHM20 TX+	12	.216in	.171in	3.36°	.0047in	60°	4	11	UHM 20 TX+
32 TPI	Call For Details	MWI12 164 06-32UNC VP UHM20 HPX	12	.138in	.099in	4.8°	.0041in	60°	4	11	UHM 20 HPX
32 TPI	Call For Details	MWI12 164 06-32UNC VP UHM20 TX+	12	.138in	.099in	4.8°	.0041in	60°	4	11	UHM 20 TX+
32 TPI	Call For Details	MWI12 164 08-32UNC VP UHM20 HPX	12	.164in	.125in	3.94°	.0041in	60°	4	12	UHM 20 HPX
32 TPI	Call For Details	MWI12 164 08-32UNC VP UHM20 TX+	12	.164in	.125in	3.94°	.0041in	60°	4	12	UHM 20 TX+
32 TPI	Call For Details	MWI12 164 10-32UNF VP UHM20 HPX	12	.190in	.151in	3.34°	.0041in	60°	4	10.5	UHM 20 HPX
32 TPI	Call For Details	MWI12 164 10-32UNF VP UHM20 TX+	12	.190in	.151in	3.34°	.0041in	60°	4	10.5	UHM 20 TX+
36 TPI	Call For Details	MWI12 164 08-36UNF VP UHM20 HPX	12	.164in	.129in	3.45°	.0036in	60°	4	12	UHM 20 HPX
36 TPI	Call For Details	MWI12 164 08-36UNF VP UHM20 TX+	12	.164in	.129in	3.45°	.0036in	60°	4	12	UHM 20 TX+
40 TPI	Call For Details	MWI12 164 04-40UNC VP UHM20 HPX	12	.112in	.081in	4.73°	.0032in	60°	4	10.5	UHM 20 HPX
40 TPI	Call For Details	MWI12 164 04-40UNC VP UHM20 TX+	12	.112in	.081in	4.73°	.0032in	60°	4	10.5	UHM 20 TX+
40 TPI	Call For Details	MWI12 164 05-40UNC VP UHM20 HPX	12	.125in	.094in	4.17°	.0032in	60°	4	11	UHM 20 HPX
40 TPI	Call For Details	MWI12 164 05-40UNC VP UHM20 TX+	12	.125in	.094in	4.17°	.0032in	60°	4	11	UHM 20 TX+
40 TPI	Call For Details	MWI12 164 06-40UNF VP UHM20 HPX	12	.138in	.106in	3.72°	.0032in	60°	4	11	UHM 20 HPX
40 TPI	Call For Details	MWI12 164 06-40UNF VP UHM20 TX+	12	.138in	.106in	3.72°	.0032in	60°	4	11	UHM 20 TX+
44 TPI	Call For Details	MWI12 164 05-44UNF VP UHM20 HPX	12	.125in	.096in	3.74°	.0028in	60°	4	11	UHM 20 HPX
44 TPI	Call For Details	MWI12 164 05-44UNF VP UHM20 TX+	12	.125in	.096in	3.74°	.0028in	60°	4	11	UHM 20 TX+
48 TPI	Call For Details	MWI12 164 03-48UNC VP UHM20 HPX	12	.099in	.073in	4.42°	.0026in	60°	4	10	UHM 20 HPX
48 TPI	Call For Details	MWI12 164 03-48UNC VP UHM20 TX+	12	.099in	.073in	4.42°	.0026in	60°	4	10	UHM 20 TX+
48 TPI	Call For Details	MWI12 164 04-48UNF VP UHM20 HPX	12	.112in	.085in	3.84°	.0025in	60°	4	10.5	UHM 20 HPX
48 TPI	Call For Details	MWI12 164 04-48UNF VP UHM20 TX+	12	.112in	.085in	3.84°	.0025in	60°	4	10.5	UHM 20 TX+
56 TPI	Call For Details	MWI12 164 02-56UNC VP UHM20 HPX	12	.086in	.063in	4.35°	.0022in	60°	4	10	UHM 20 HPX
56 TPI	Call For Details	MWI12 164 02-56UNC VP UHM20 TX+	12	.086in	.063in	4.35°	.0022in	60°	4	10	UHM 20 TX+
56 TPI	Call For Details	MWI12 164 03-56UNF VP UHM20 HPX	12	.099in	.076in	3.71°	.0021in	60°	4	10	UHM 20 HPX
56 TPI	Call For Details	MWI12 164 03-56UNF VP UHM20 TX+	12	.099in	.076in	3.71°	.0021in	60°	4	10	UHM 20 TX+
64 TPI	Call For Details	MWI12 164 01-64UNC VP UHM20 HPX	12	.073in	.053in	4.51°	.0019in	60°	4	9.5	UHM 20 HPX
64 TPI	Call For Details	MWI12 164 01-64UNC VP UHM20 TX+	12	.073in	.053in	4.51°	.0019in	60°	4	9.5	UHM 20 TX+
64 TPI	Call For Details	MWI12 164 02-64UNF VP UHM20 HPX	12	.086in	.066in	4.90°	.0018in	60°	4	9.5	UHM 20 HPX
64 TPI	Call For Details	MWI12 164 02-64UNF VP UHM20 TX+	12	.086in	.066in	4.90°	.0018in	60°	4	9.5	UHM 20 TX+
72 TPI	Call For Details	MWI12 164 01-72UNF VP UHM20 HPX	12	.072in	.055in	3.95°	.0016in	60°	4	9.5	UHM 20 HPX
72 TPI	Call For Details	MWI12 164 01-72UNF VP UHM20 TX+	12	.072in	.055in	3.95°	.0016in	60°	4	9.5	UHM 20 TX+
80 TPI	Call For Details	MWI12 164 00-80UNF VP UHM20 HPX	12	.060in	.044in	4.38°	.0014in	60°	4	9	UHM 20 HPX
80 TPI	Call For Details	MWI12 164 00-80UNF VP UHM30 TX+	12	.060in	.044in	4.38°	.0014in	60°	4	9	UHM 20 TX+

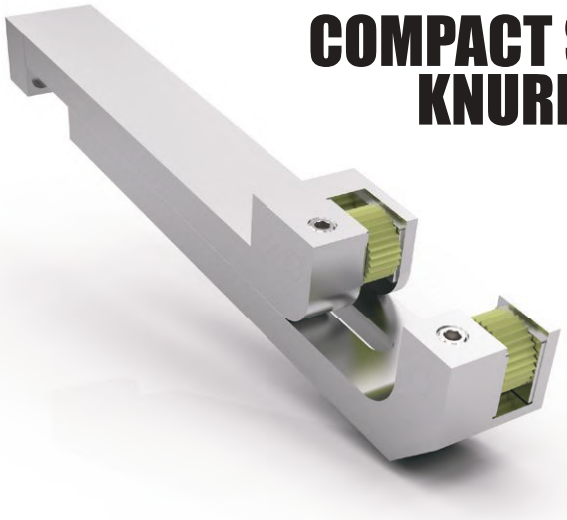



COMPACT STRADDLE KNURL HOLDERS
for small parts

- Create perfect knurls
- Eliminates workpiece deflection
- Low interference

Specifically designed for Swiss-type machines; our low profile straddle knurl holders keep interference to a minimum within the tooling envelope of most machines while ensuring adjacent tool positions are available to maximize tooling capacity.

Item No.	Description	Shank	L	R	Wheel Dimensions
2040-000107	KHS-2BPR-375.1	.375in	2.7in	.0-.394in	5/16in x 1/8in x 5/32in
2040-000110	KHS-2EPR-500.3	.500in	3.24in	0-.750in	1/2in x 3/16in x 3/16in
2040-000111	KHS-2EPR-625.3	.625in	3.24in	0-.750in	1/2in x 3/16in x 3/16in

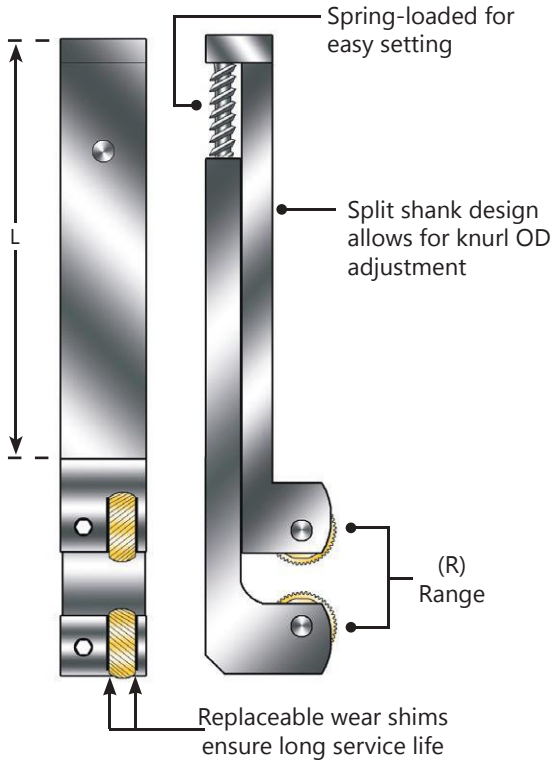

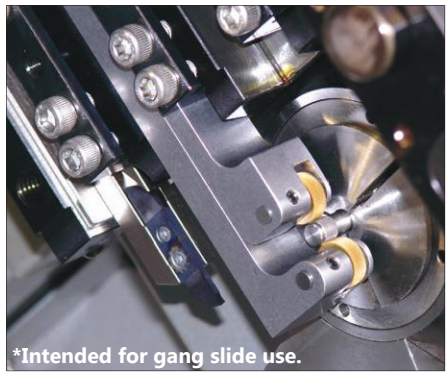
*Intended for gang slide use.

AXIAL FEED KNURL HOLDERS


- Ideal for long knurled parts
- Produce straight or diamond patterns
- Adjustable for a range of part diameters





Compact design makes it ideal for use on screw machines and CNC lathes when axial feed knurling from the turret. Parts are self supported and they can extend through the shank for long jobs. We recommend using CONVEX Knurl Dies with this style Knurl Holder. Can also be adapted for burnishing and internal knurling

Item No.	Description	Knurl Series	Knurl Range	A	B	C	D	E
2035-000100	KHE-3DBP-625	BP	.060 - .475	.625	1.25	3.855	1.75	.390
2035-000101	KHE-3DBP-750			.750	1.25	3.855	1.75	.475
2035-000105	KHE-3DEP-625	EP	.090 - .475	.625	1.25	3.855	1.75	.390
2035-000102	KHE-3DEP-750			.750	1.25	3.855	1.75	.475
2035-000104	KHE-3DGK-750	GK	.140 - .940	.750	1.60	4.90	3.00	.475
2035-000103	KHE-3DGK-1000			1.00	1.60	4.90	3.00	.718

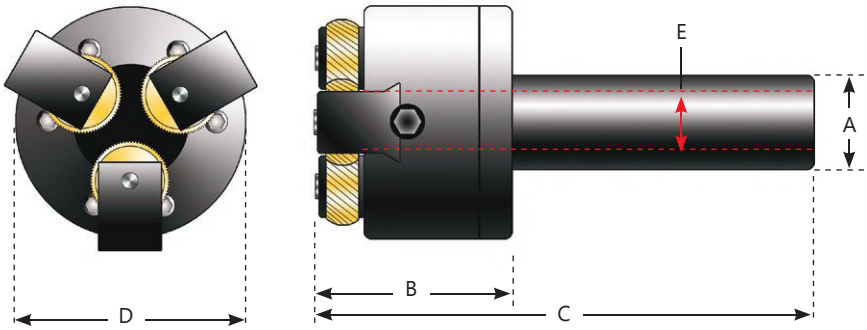


Compact Self-Centering Three Die Holder with Synchronized Adjustment

- Ideal for lcomplex knurling
- Fitted with three jaws arranged at 120º
- Self-centering mechinism



Compact Self-Centering Three Die Holder Diagram



Fitted with three jaws arranged at 120º which can be adjusted simultaneously by means of a synchronizing ring. This tool has a built-in mechanism that compensates any misalignment between the chuck and turret centerlines.

Item No.	Description	Knurl Series	Knurl Range	A	B	C	D
Call for details	KHE-3DMR-1000	MR / MRV	Ø .16-1.20	5.31	2.36	2.76	1.00"
Call for details	KHE-3DMR-750			5.31	2.36	2.76	0.75"
Call for details	KHE-3DMM-500	MM	Ø .08 - .40	2.97	1.00	1.73	0.50"


BUMP-STYLE KNURL HOLDERS



Conventional "bump" knurling is a cost effective way to produce knurled features on the outer diameter of parts.

- Carbide axles
- Ground shanks
- Left handed available
- Cost effective


Item No.	Description	Knurl Series	A	B	C	D	E
2025-000100	KHB-1BPR-312	BP	.312	.500	4.0	.312	.050
2025-000101	KHB-1BPR-375		.375	.562	4.0	.375	.050
2025-000103	KHB-1EPR-500	EP	.500	.750	3.5	.500	.090
2025-000105	KHB-1GKR-625	GK	.625	.937	4.0	.625	.090

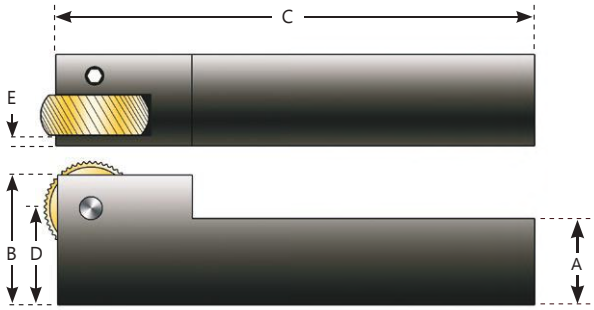

DOUBLE-DIE BUMP-STYLE KNURL HOLDERS


Cost effective solution for producing diamond pattern knurls on Swiss-type machines.

- Carbide axles
- Ground shanks
- Axial feed capability
- Cost effective

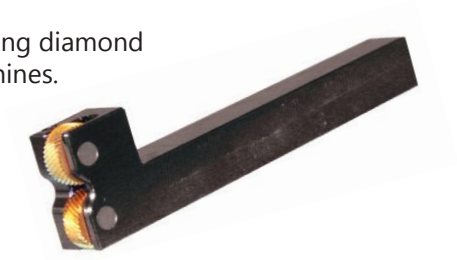


Compact Double-Die Bump-Style Knurl Holders

Item No.	Description	Knurl Series	A	B	C	E	F
2025-000106	KHB-2EPR-500	EP	.500	1.0	4.0	.075	.540
2025-000107	KHB-2EPR-625		.625	1.0	4.0	.075	.540

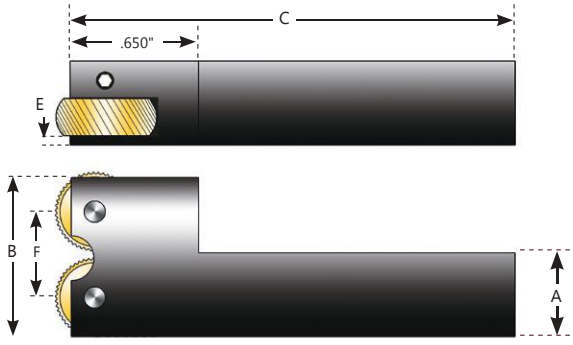

KNURLING WHEELS

Genevieve Swiss offers a full line of precision knurling tools for Swiss-type applications. Optional wheel geometries are available to suit your specific needs. More options are available in addition to what is listed below. Call for details or to discuss applications.

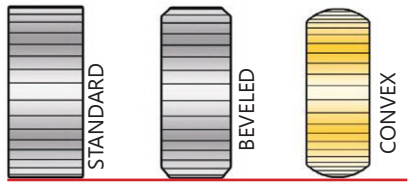


Standard Knurl Dies For Bump Knurling

Knurl Series	Wheel Dimensions	Straight Tooth	30° Right Hand	30° Left Hand	30° Male	30° Female	Available Pitch Teeth Per Inch (TPI)
	OD x ID x Width						
BP	5/16 x 1/8 x 5/32	KDS-BPS0-	KDR-BPR0-	KDL-BPL0-	KDD-BPM0-	KDD-BPF0-	20, 25, 30, 35, 40, 50, 60, 70, 80, 90, 100
EP	1/2 x 3/16 x 3/16	KDS-EPS0-	KDR-EPR0-	KDL-EPL0-	KDD-EPM0-	KDD-EPF0-	16, 20, 25, 30, 32, 35, 40, 50, 80
GK	5/8 x 1/4 x 1/4	KDS-GKS0-	KDR-GKR0-	KDL-GKL0-	KDD-GKM0-	KDD-GKF0-	12, 16, 20, 25, 30, 32, 35, 40, 50, 80
KN	3/4 x 1/4 x 1/4	KDS-KNS0-	KDR-KNR0-	KDL-KNL0-	KDD-KNM0-	KDD-KNF0-	16, 20, 25, 30, 32, 35, 40, 50, 80
KP	3/4 x 3/8 x 1/4	KDS-KPS0-	KDS-KPR0-	KDS-KPL0-	KDD-KPM0	KDD-KPF0	8, 10, 12, 14, 16, 20, 21, 25, 30, 33, 35, 40, 50, 60, 70, 80, 100

All Wheels Also Available in DIAMETRAL PITCH Configurations: 64DP, 96DP, 128DP, 160DP



- Precision lapped tooth forms provide superior knurled surfaces
- HSS vacuum hardened to approximately 63 Rockwell C
- Sides and Bore are Finish Ground to Maintain Close Tolerances
- Available Coated on Request



CONVEX Series Knurl Dies For Axial Feeding - Inch

Knurl Series	Wheel Dimensions	Straight Tooth	30° Right Hand	30° Left Hand	Available Pitch Teeth Per Inch (TPI)
	OD x ID x Width				
EPV	1/2 x 3/16 x 3/16	KDS-EPSV-	KDR-EPRV-	KDL-EPLV-	16, 20, 25, 30, 32, 35, 40, 50, 80
GKV	5/8 x 1/4 x 1/4	KDS-GKSV-	KDR-GKRV-	KDL-GKLV-	12, 16, 20, 25, 30, 32, 35, 40, 50, 80
KNV	3/4 x 1/4 x 1/4	KDS-KNSV-	KDR-KNRV-	KDL-KNLV-	16, 20, 25, 30, 32, 35, 40, 50, 80
KPV	3/4 x 3/8 x 1/4	KDS-KPSV-	KDR-KPRV-	KDL-KPLV-	8, 10, 12, 14, 16, 20, 21, 25, 30, 32, 33, 35, 40, 50, 60, 80

All Wheels Also Available in DIAMETRAL PITCH Configurations: 64DP, 96DP, 128DP, 160DP


CONVEX Series Knurl Dies For Axial Feeding - Metric

Knurl Series	Wheel Dimensions	Straight Tooth	30° Right Hand	30° Left Hand	45° Right Hand	45° Left Hand	Available Pitch Metric (mm)
	OD x ID x Width						
MRV	20 x 6 x 6mm	KDS-MRSV-	KDR-MRRV-	KDL-MRLV-	KDR-MRCV-	KDL-MRDV	0.4, 0.5, 0.6, 0.7, 0.8, 1.0, 1.2, 1.5, 1.6, 2.0

Other Coatings Are Available



- Hi-Cobalt HSS treated with ferritic nitrocarburizing is standard on all CONVEX Knurls.
- Full-form convex relief spreads out forces providing smoother finish
- The ULTIMATE knurling die for Swiss-type straddle knurling

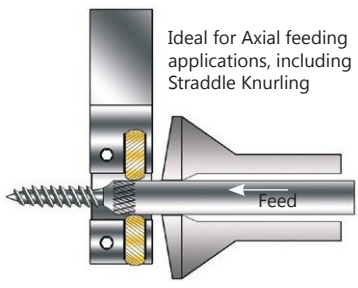


W2 SERIES BUMP-STYLE KNURL HOLDERS (Up To The Shoulder)

The W2 series bump-style knurl tools are manufactured to extremely high standards from premium alloys. Many are available with a lapped tooth form to give longer life and impart a smooth, clean surface to the knurled part. Both sides and the bore of the knurl are finish ground to maintain close tolerance on diameter and side runout. Our standard material is a high-quality grade of high-speed steel which is vacuum hardened, and tempered at least 2 times to a hardness of about 63 Rockwell C.

For severe knurling operations, such as rolling on 303 stainless or semi-hardened steels, we also offer knurls in a premium grade of high-cobalt steel. These knurling tools are slightly harder and, in most applications, deliver a substantial increase in tool life. Multiple coatings such as "TiN" and "Ferritic Nitrocarburizing" are also available if necessary. Our sales representatives will be happy to discuss any aspect of your knurling application and make recommendations on maximizing tool life versus cost for any type of knurling operation.

In addition to the stock knurling die shown above, we can manufacture virtually any size and pitch special knurling tools for standard knurl tooth forms.

Item No.	Description	Vendor	Knurl Series	A	B	C	D	E	F
2025-000129	KHB-1W2R-500	OR BW2R08	W2	0.500in	0.625in	4.535in	3.75in	0.875in	0.188in
2025-000130	KHB-1W2R-625	OR BW2R10	W2	0.625in	0.625in	4.535in	3.75in	0.875in	0.188in

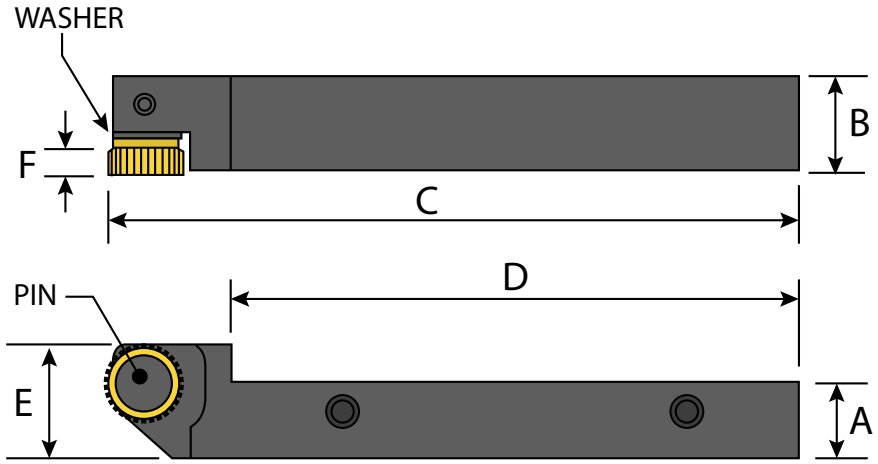


KHB-1W2R-500: Single Bump Knurling Holder for Shoulder
Clearence- .500"x.625"
Shank- .875 Head Height

KHB-1W2R-625: Single Bump Knurling Holder for Shoulder
Clearence- .625"x.625"
Shank- .875 Head Height

DOUBLE-DIE W2 SERIES BUMP-STYLE KNURL HOLDERS (Up To The Shoulder)

Item No.	Description	Vendor	Knurl Series	A	B	C	D	E	F
2025-000131	KHB-2W2R-500	OR 2W2R08	W2	0.500in	0.625in	4.535in	3.75in	1.150in	0.188in
2025-000132	KHB-2W2R-625	OR 2W2R10	W2	0.625in	0.625in	4.535in	3.75in	1.150in	0.188in

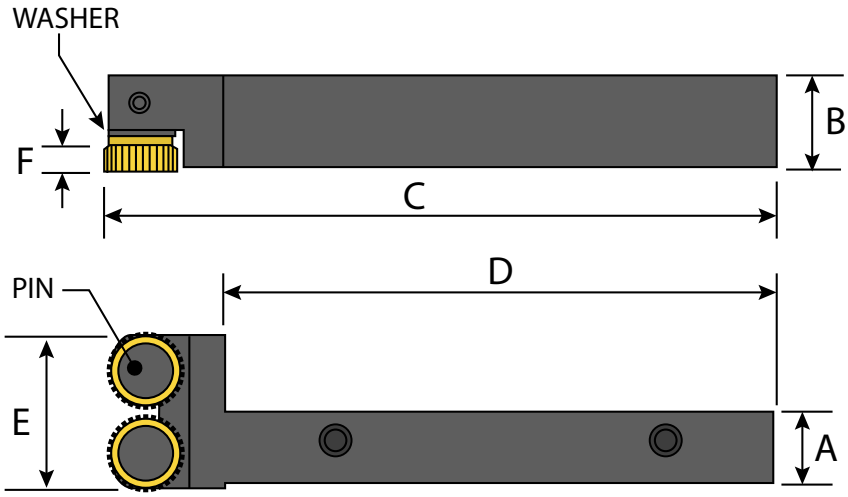

KHB-2W2R-500: Single Bump Knurling Holder for Shoulder
Clearence- .500"x.625"
Shank- .875 Head Height


KHB-2W2R-625: Single Bump Knurling Holder for Shoulder
Clearence- .625"x.625"
Shank- .875 Head Height

W2 Series Knurl Die For Axial Feeding - Inch

Knurl Series	Wheel Dimensions	Straight Tooth	30° Right Hand	30° Left Hand	Available Pitch Teeth Per Inch (TPI)
	OD x ID x Width				
W2	1/2 x 1/4 x 1/4	KDS-W2SX	KDR-W2RX	KDL-W2LX	TPI: 16, 20, 25, 30, 35, 40, 50, 80
All Wheels Also Available in DIAMETRAL PITCH Configurations: 64DP, 96DP, 128DP, 160DP					

Knurling Speeds and Feeds

For convenience, knurling is often performed at the same speeds used for turning operations when using high speed steel tool bits. But to prevent seizing of the rolls on the pin, we recommend a maximum surfacespeed of about 150 SFPM (Feet/Min) or 50 m/min. You may find you get longer knurl life and improved appearance by slowing down the spindle to about 50 SFPM (15 m/min) for harder steels and stainless. CARBIDE knurl pins are strongly recommended for all high speed knurl applications. DOWEL pins with a plus tolerance SHOULD NOT be used because of the possibility of the knurls seizing up and breaking.

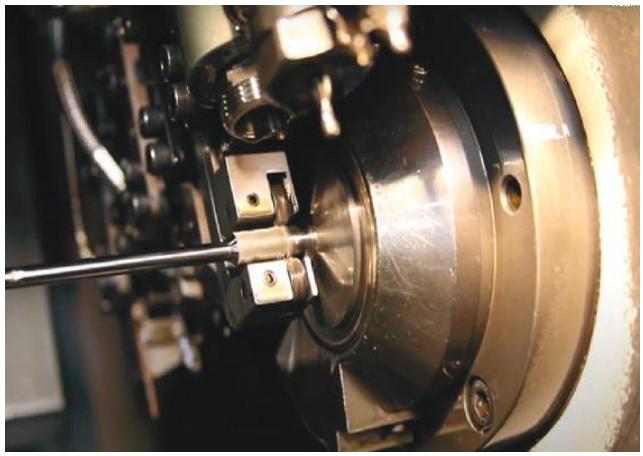

For BUMP knurling with a SINGLE TOOL HOLDER from the cross-slide, the infeed would normally be .001-.004"/rev (.025 - .1mm) to roll the part complete 5/20 revolutions. When knurling stainless steels, it is important not to roll any longer than necessary as this material work hardens as it is formed. The total amount the tool penetrates into the workpiece is approximately 50% of the tooth depth of the wheel. You may have to travel more than this amount to allow for the flexing of the part or holder due to rolling pressure. Some trial and error will be required.





If you are using a two die STRADDLE HOLDER, the infeed rate should be 5 or 10 times faster because the wheels are coming in tangentially instead of head on. Before knurling, the holder should be set so that the distance between the two wheels is smaller than the workpiece diameter by approximately the depth of the knurl tooth. Then to knurl, move the holder so that the two wheels are as close to the centerline as possible to minimize the knurling pressure on work spindle and cross slide.





Knurling Speeds and Feeds


Material	Recommended SFPM [ft/Min]
Acetal (Delrin)	90-130 SFM [27-40] M/MIN
Aluminum and its alloys	90-130 SFM [27-40] M/MIN
Brass (360 high machining)	90-130 SFM [27-40] M/MIN
Bronze (high tensile)	90-130 SFM [27-40] M/MIN
Hastelloy	35-50 SFM [10-15 M/MIN]
Inconel	35-50 SFM [10-15 M/MIN]
Monel	35-50 SFM [10-15 M/MIN]
High nickel steel	35-50 SFM [10-15 M/MIN]
Mild steel (.2-.3 C)	50-70 SFM [15-21 M/MIN]
Steel (.4-.5 C)	50-70 SFM [15-21 M/MIN]
Tool steel	35-50 SFM [10-15 M/MIN]
Steel alloys (300-400 Brinell)	35-50 SFM [10-15 M/MIN]
Stainless steel (free machining)	50-70 SFM [15-21 M/MIN]
Stainless (work hardening)	35-50 SFM [10-15 M/MIN]
Titanium alloys	50-70 SFM [15-21 M/MIN]
Heat Treated Steels	
35-40 Rockwell C	35-50 SFM [10-15 M/MIN]
40-45 Rockwell C	35-50 SFM [10-15 M/MIN]
45-50 Rockwell C	35-50 SFM [10-15 M/MIN]
50-55 Rockwell C	35-50 SFM [10-15 M/MIN]

Material	Recommended Feed per Rev [in/Rev]
Acetal (Delrin)	.008 to .020
Aluminum and its alloys	.008 to .020
Brass (360 high machining)	.008 to .020
Bronze (high tensile)	.008 to .020
Hastelloy	.004 to .009
Inconel	.004 to .009
Monel	.004 to .009
High nickel steel	.004 to .009
Mild steel (.2-.3 C)	.006 to .012
Steel (.4-.5 C)	.006 to .012
Tool steel	.004 to .009
Steel alloys (300-400 Brinell)	.004 to .009
Stainless steel (free machining)	.008 to .020
Stainless steel (work hardening)	.004 to .009
Titanium alloys	.004 to .009
Heat Treated Steels	
35-40 Rockwell C	.004 to .009
40-45 Rockwell C	.004 to .009
45-50 Rockwell C	.004 to .009
50-55 Rockwell C	.004 to .009


In-Feed approximate Rev			
T.P.I.	ALUMINUM & BRASS	MILD STEEL	ALLOY STEEL
12	12	15	25
16-20	10	13	22
25-35	8	11	20

End-Feed approximate Feed Per Rev			
T.P.I.	ALUMINUM & BRASS	MILD STEEL	ALLOY STEEL
12	.008	.006	.004
16-20	.010	.008	.005
25-35	.013	.010	.007


Beveled wheel

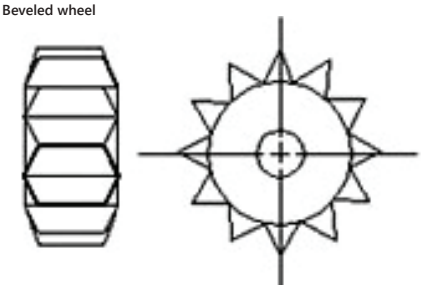

Straight wheel

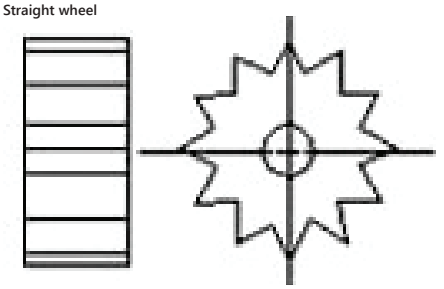

Convex wheel

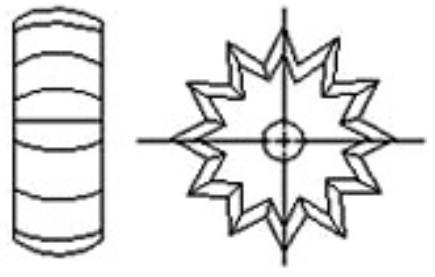

Thread Rolling Holders & Dies

Create Rapid Thread Forms At Industry Standards

Thread rolling is a quick way to create standard right hand and left hand metric, UNC, and UNF thread forms. This new line of product compliments bar stocks up to 17mm and come in styles supporting both 2 and 3 dies. VDI, HSK, and straight shank types are available and come in several sizes.





Medical • Automotive • Aerospace

Thread Rolling Die Holders

Part No.	Max Bar Stock Ø	Head Ø	Head Length	Thread Type	Tool Type	# Of Thread Dies	Available Shanks
F001	7.0mm	40mm	65.4mm	Right Hand	Static	3	**Straight Shank: 16mm, 20mm, .625in, .75in**
F001L	7.0mm	40mm	65.4mm	Left Hand	Static	3	
F0	11.5mm	50mm	46.0mm	Right Hand	Static	2	**Straight Shank: 20mm, 25mm, .75in, 1.0in, 1.25in** **VDI Shanks: 20mm, 25mm, 30mm** **HSK Shanks: HSK-A63**
F0L C1	11.5mm	50mm	46.0mm	Left Hand	Static	2	
K0 C1	11.5mm	55mm	46.0mm	Right Hand	Static/Rotating	2	
K0L C1	11.5mm	55mm	46.0mm	Left Hand	Static/Rotating	2	
F1 EVO	17.0mm	64mm	61.0mm	Right Hand	Static	3	
F1L EVO	17.0mm	64mm	61.0mm	Left Hand	Static	3	
K1 EVO	17.0mm	64mm	61.0mm	Right Hand	Static/Rotating	3	
K1L EVO	17.0mm	64mm	61.0mm	Left Hand	Static/Rotating	3	



Thread Rolling Dies


Thread Roll Die Standard	Size Range	# Of Leads
Metric	1.4x0.3 to 10.0x1.5	1 or 2
Metric Fine Pitch	8.0x0.75 to 11.0x1.25	1 or 2
UNC	1-64 to 12-24	1 or 2
UNF	0-80 to 7/16-20	1 or 2

Left & Right Hand Forms Are Available

High Precision Gun Drills

For Applications That Require Holes Of Extreme Length

When your application requires a precision drilled deep hole up to 256x's the diameter, gun drills are the tool for the job. GenSwiss provides both solid carbide and standard steel standard sized drills with diameters down to 5/64in and OAL's as long as 48in. Custom drills can be ordred and designed with the proper material intended for the application. Gun drills are available with coolant-thru holes for high pressure coolant.

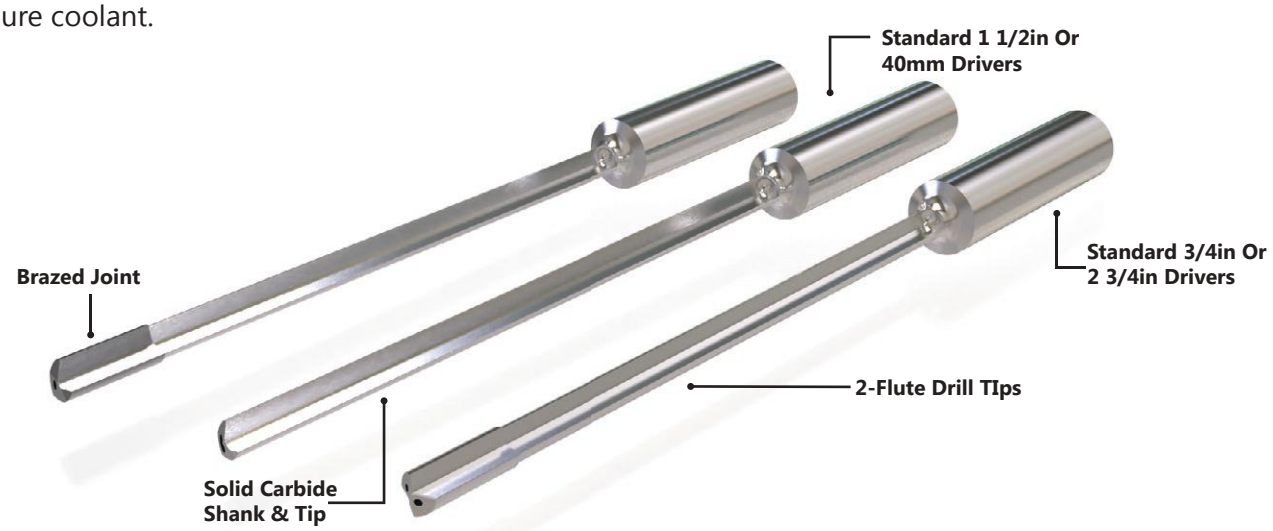


Dental • Defense • Energy

Standard 1-Flute

Diameter (in)	OALs (in)
5/64	6, 10
3/32	6, 10, 16
7/64	6, 10, 16, 28
1/8	10, 16, 22
9/64	10, 16, 22
5/32	10, 16, 22
11/64	10, 16, 22
3/16	10, 16, 22, 28, 36, 48
13/64	10, 16, 22, 28, 36
7/32	10, 16, 22, 28, 36
15/64	10, 16, 22, 28, 36
1/4	10, 16, 22, 28, 36, 48


- **Brazed Joint**

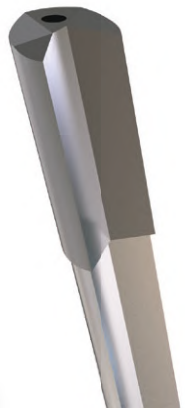

Solid Carbide, Standard 1-Flute

Diameter Range (in)	OAL Range (in)
.0450-.0619	4.0 - 6.5
.0530-.0619	4.0 - 7.8
.0620-.0759	4.0 - 11.5
.0760-.0849	5.0 - 11.5
.0850-.1059	5.0 - 11.5
.1060-.1399	6.0 - 11.5


- **No Brazed Joint**
- **Increased Strength & Rigidity**
- **Maximum Feed Rates**
- **Better Tool Life**

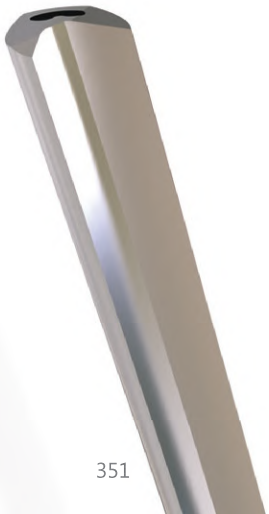

Custom TWINMASTER 2-Flute

Diameter Range (in)	OAL (in)
.197-.500	To Order
.501-.750	To Order

- **Faster Feed Rates**
- **Double the Coolant For Chip Evacuation**

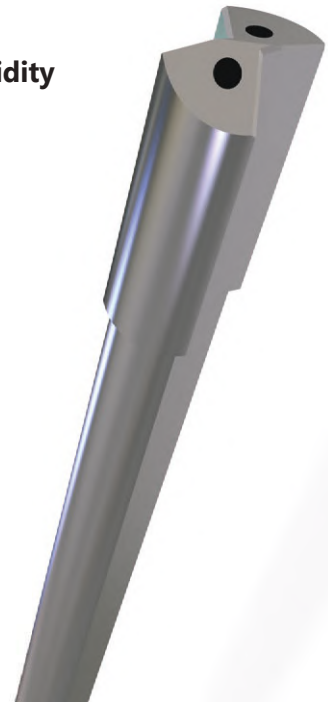

Ti-Loc® Saw Arbors




Taper-integrated small tooling provides unparalleled ease of use for advanced productivity!

A BETTER Solution for Slitting Saw Holding.





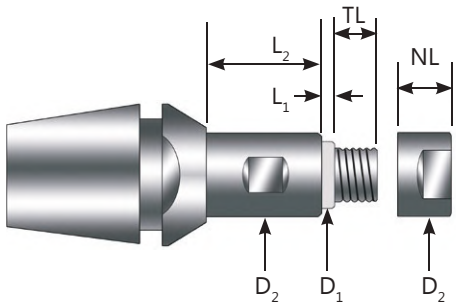

TIR Held to .0002" or Better
Repeatable Positioning of Saw Edge
Ground ER Taper and Saw Journal
Integrated ER Taper For Maximum Rigidity

ER11 Saw Arbors

Item No.	Description	D_1	D_2	L_1	L_2	NL	TL
4800-000205	SAT-11-3.00-064100	3	6.4	1.27	10	5	5
4800-000206	SAT-11-3.00-064140	3	6.4	1.27	14	5	5
4800-000207	SAT-11-3.00-064190	3	6.4	1.27	19	5	5
4800-000223	SAT-11-3.00-064250	3	6.4	1.27	25	5	5
4800-000208	SAT-11-3.18-064100	.125"	6.4	1.27	10	5	5
4800-000209	SAT-11-3.18-064140	.125"	6.4	1.27	14	5	5
4800-000210	SAT-11-3.18-064190	.125"	6.4	1.27	19	5	5
4800-000224	SAT-11-3.18-064250	.125"	6.4	1.27	25	5	5
4800-000212	SAT-11-4.76-080100	.187"	8	1.27	10	5	6.35
4800-000213	SAT-11-4.76-080140	.187"	8	1.27	14	5	6.35
4800-000214	SAT-11-4.76-080190	.187"	8	1.27	19	5	6.35
4800-000225	SAT-11-4.76-080250	.187"	8	1.27	25	5	6.35
4800-000216	SAT-11-5.00-080100	5	8	1.27	10	5	6.35
4800-000217	SAT-11-5.00-080140	5	8	1.27	14	5	6.35
4800-000218	SAT-11-5.00-080190	5	8	1.27	19	5	6.35
4800-000226	SAT-11-5.00-080250	5	8	1.27	25	5	6.35
4800-000220	SAT-11-6.00-080100	6	8	1.27	10	6.35	8
4800-000221	SAT-11-6.00-080140	6	8	1.27	14	6.35	8
4800-000222	SAT-11-6.00-080190	6	8	1.27	19	6.35	8

ER16 Saw Arbors

Item No.	Description	D_1	D_2	L_1	L_2	NL	TL
4800-000146	SAT-16-3.00-064180	3	6.35	1.27	18	6.35	6.5
4800-000147	SAT-16-3.00-064240	3	6.35	1.27	24	6.35	6.5
4800-000148	SAT-16-3.18-064180	.125"	6.35	1.27	18	6.35	6.5
4800-000149	SAT-16-3.18-064240	.125"	6.35	1.27	24	6.35	6.5
4800-000151	SAT-16-4.76-095180	.187"	9.53	1.27	18	6.35	6.5
4800-000154	SAT-16-4.76-095240	.187"	9.53	1.27	24	6.35	6.5
4800-000152	SAT-16-5.00-095180	5	9.5	1.27	18	6.35	6.5
4800-000185	SAT-16-5.00-095240	5	9.5	1.27	24	6.35	6.5
4800-000156	SAT-16-6.00-095180	6	9.53	1.27	18	6.35	6.5
4800-000159	SAT-16-6.00-095240	6	9.53	1.27	24	6.35	6.5
4800-000158	SAT-16-6.35-095180	.250"	9.53	1.27	18	6.35	6.5
4800-000162	SAT-16-6.35-095240	.250"	9.53	1.27	24	6.35	6.5
4800-000190	SAT-16-7.94-100180	.312"	10	1.27	18	6.35	6.5
4800-000168	SAT-16-7.94-100240	.312"	10	1.27	24	6.35	6.5
4800-000191	SAT-16-8.00-100180	8	10	1.27	18	6.35	6.5
4800-000186	SAT-16-8.00-100240	8	10	1.27	24	6.35	6.5

ER20 Saw Arbors

Item No.	Description	D_1	D_2	L_1	L_2	NL	TL
4800-000232	SAT-20-3.00-064180	3	6.35	1.27	18	6.35	6.5
4800-000233	SAT-20-3.00-064300	3	6.35	1.27	30	6.35	6.5
4800-000236	SAT-20-3.18-064180	.125"	6.35	1.27	18	6.35	6.5
4800-000237	SAT-20-3.18-064300	.125"	6.35	1.27	30	6.35	6.5
4800-000242	SAT-20-4.76-095180	.187"	9.53	1.27	18	6.35	7.75
4800-000243	SAT-20-4.76-095300	.187"	9.53	1.27	30	6.35	7.75
4800-000246	SAT-20-5.00-095180	5	9.53	1.27	18	6.35	7.75
4800-000247	SAT-20-5.00-095300	5	9.53	1.27	30	6.35	7.75
4800-000252	SAT-20-6.00-095180	6	9.53	1.27	18	6.35	8.5
4800-000253	SAT-20-6.00-095300	6	9.53	1.27	30	6.35	8.5
4800-000257	SAT-20-6.35-095180	.250"	9.53	1.27	18	6.35	7.75
4800-000258	SAT-20-6.35-095300	.250"	9.53	1.27	30	6.35	7.75
4800-000262	SAT-20-7.94-100180	.312"	9.53	1.27	18	6.35	7.75
4800-000263	SAT-20-7.94-100300	.312"	9.53	1.27	30	6.35	7.75
4800-000266	SAT-20-8.00-100180	8	10	1.27	18	6.35	7.75
4800-000267	SAT-20-8.00-100300	8	10	1.27	30	6.35	7.75
4800-000270	SAT-20-9.52-125180	.375"	12.5	1.27	18	7	9
4800-000271	SAT-20-9.52-125300	.375"	12.5	1.27	30	7	9
4800-000274	SAT-20-10.0-125180	10	12.5	1.27	18	7	9
4800-000275	SAT-20-10.0-125300	10	12.5	1.27	30	7	9

All Ti-Loc Saw Arbors Include
(2) Saw Clamping Nuts



Nut With Smaller Width For Clamping Thicker Saws

Standard Nut For Clamping Standard Saws

Call For Replacement Parts


Signature Series
Saw Arbors





High-Precision Combination Saw Arbors - 5015 Series

GenSwiss high-precision combination arbors are made from pre hardened material and exemplify what it means to be called "Swiss Precision". The addition of the combined mill or center drill provides additional tool capacity and setup flexibility . TIR measured at less than .0002". Made in the USA.

Tool Bore (B)	Hub		Body		Shaft		Nut			
	D1	L1	D2	L2	D3	L3	D4	L4	Item No.	Description
3mm	.2500in	.125in	.375in	.625in	.250in	1.375in	.375in	.375in	5015-000109	SAC-N250-250118
	.3120in	.125in	.375in	.625in	.312in	1.375in	.375in	.375in	5015-000111	SAC-N312-312118
	.3748in	.115in	.500in	.625in	.375in	1.375in	.500in	.374in	5015-000114	SAC-N375-375118
	8mm	3mm	9.5mm	16mm	8mm	35mm	9.5mm	9.5mm	5015-000113	SAC-N315-315118
	10mm	3mm	12.7mm	16mm	10mm	35mm	12.7mm	9.5mm	5015-000115	SAC-N394-394118
.1250in	.2500in	.125in	.375in	.625in	.250in	1.375in	.375in	.375in	5015-000108	SAC-N250-250125
	.3120in	.125in	.375in	.625in	.312in	1.375in	.375in	.375in	5015-000110	SAC-N312-312125
	.3748in	.125in	.500in	.625in	.375in	1.375in	.500in	.374in	5015-000101	SAC-N375-375125
	8mm	3mm	9.5mm	16mm	8mm	35mm	9.5mm	9.5mm	5015-000105	SAC-N315-315125
	10mm	3mm	12.7mm	16mm	10mm	35mm	12.7mm	9.5mm	5015-000106	SAC-N394-394125
.1875in	.3120in	.125in	.375in	.625in	.312in	1.375in	.375in	.375in	5015-000112	SAC-N312-312187
	.3748in	.125in	.500in	.625in	.375in	1.375in	.500in	.374in	5015-000102	SAC-N375-375187
	8mm	3mm	9.5mm	16mm	8mm	35mm	9.5mm	9.5mm	5015-000100	SAC-N315-315187
	10mm	3mm	12.7mm	16mm	10mm	35mm	12.7mm	9.5mm	5015-000103	SAC-N394-394187

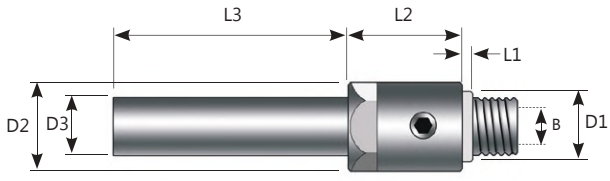




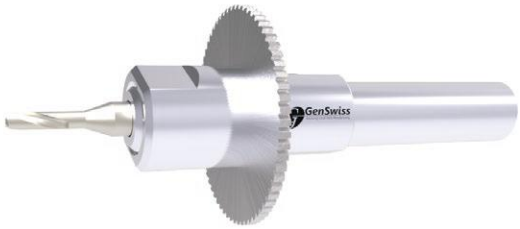

Flange Mount Metric Saw Arbors - 5020

These metric flanged saw arbors provide maximum saw balance and stability with the flange mount design. The unique design applies pressure to the outward edge of the flange ensuring the greatest gripping power at the outer most edge to prevent slipping. Uses countersunk screw and flange washer to apply holding force. Measured TIR is less than .0004".

Item No.	Description	D1	L1	D2	L2	D3	L3
5020-000100	SAF-050010-503809-M4F	5.00mm	1.00mm	9.00mm	12.00mm	5.00mm	38.0mm
5020-000101	SAF-050010-703812-M4F	5.00mm	1.00mm	12.00mm	12.00mm	7.00mm	38.0mm
5020-000103	SAF-080016-703818-M5F	8.00mm	1.60mm	18.00mm	13.00mm	7.00mm	38.0mm
5020-000104	SAF-080016-104514-M5F	8.00mm	1.60mm	14.00mm	14.00mm	10.00mm	45.0mm
5020-000105	SAF-080040-104514-M5F	8.00mm	4.00mm	14.00mm	14.00mm	10.00mm	45.0mm
5020-000106	SAF-130025-134522-M6F	13.00mm	2.50mm	22.00mm	16.00mm	13.00mm	45.0mm
5020-000107	SAF-160025-134525-M6F	16.00mm	2.50mm	25.00mm	16.00mm	13.00mm	45.0mm
5021-000002	SAF-095011-042511-C11	9.50mm	1.10mm	11.40mm	19.10mm	4.00mm	25.4mm
5021-000001	SAF-100025-071918-C15	10.00mm	2.50mm	19.00mm	14.00mm	7.00mm	19.0mm
5021-000004	SAF-100025-071918-C18	10.00mm	2.50mm	19.00mm	14.00mm	7.00mm	19.0mm
5021-000005	SAF-130025-071919-C19	13.00mm	2.50mm	19.00mm	14.00mm	7.00mm	19.0mm
5021-000006	SAF-047013-473895-M3F	4.76mm	1.30mm	9.50mm	11.96mm	4.76mm	38.0mm
5021-000007	SAF-063013-633811-M4F	6.35mm	1.30mm	11.40mm	11.96mm	6.35mm	38.0mm
5021-000008	SAF-079016-793816-M5F	7.94mm	1.65mm	15.90mm	13.60mm	7.94mm	38.0mm
5021-000009	SAF-095025-953816-M6F	9.53mm	2.49mm	15.90mm	13.80mm	9.53mm	38.0mm

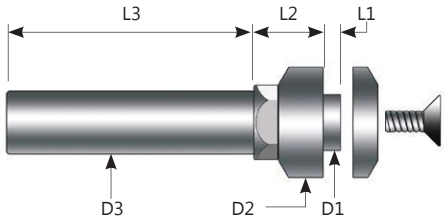




Basic Metric Saw Arbors - 5030 Series

Economical and ready for use, these pre hardened standard saw arbors provide the average application with a cost effective solution to hold small saws with TIR less than .0005". Made in the USA.

Item No.	Description	D1	L1	D2	L2	D3	L3	D4	L4
5030-000101	SAS-N1970-1970	5mm	3mm	7mm	16mm	5mm	35mm	7mm	8.3mm
5030-000100	SAS-N0507-0738	5mm	3mm	N/A	N/A	7mm	35mm	7mm	8.3mm

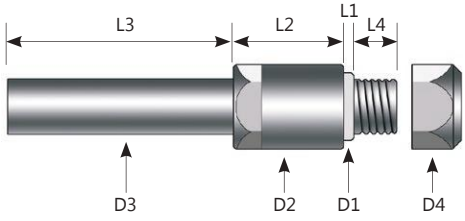




Precision Saw Arbors - 5025 Series

When ULTRA Precision is required, our most popular SAP (under .0001" TIR) grade arbors are suggested as they are held to stringent quality standards required by discerning Swiss-type machinists. SAPE arbors offer multi saw configurations. Made in the USA.

ULTRA Precision TIR<.0001"		D1	L1	D2	L2	D3	L3	D4	L4	Includes Spacer?
5025-000102	SAP-N1250-1250	.1248in	.025in	.197in	.500in	.125in	1.0in	.197in	.185in	No
5025-000103	SAP-N1875-1875	.1874in	.045in	.315in	.500in	.187in	1.4in	.316in	.305in	No
5025-000104	SAP-N2500-2500	.2498in	.045in	.394in	.500in	.250in	1.4in	.394in	.305in	No
5025-000105	SAP-N3125-3125	.3124in	.045in	.451in	.500in	.312in	1.4in	.451in	.305in	No
5025-000106	SAP-N3750-3750	.3749in	.045in	.500in	.500in	.375in	1.4in	.500in	.305in	No
5025-000107	SAP-N5000-5000	.4999in	.052in	.625in	.500in	.500in	1.4in	.625in	.305in	No
5025-000113	SAPE-N2500-2500-6.0	.2500in	.049in	.453in	.500in	.250in	1.4in	.394in	.349in	Yes

Metric Shanks TIR<.0001"		D1	L1	D2	L2	D3	L3	D4	L4	Includes Spacer?
5025-000100	SAP-N0500-0500	5mm	1.0mm	8.0mm	11.5mm	5mm	38.0mm	8.0mm	6.35mm	No
5025-000101	SAP-N0800-0800	8mm	1.2mm	11.5mm	11.3mm	8mm	35.0mm	11.5mm	8.0mm	No
5025-000109	SAP-N1000-1000	10mm	1.2mm	13.5mm	16.6mm	10mm	30.0mm	13.5mm	8.0mm	No
5025-000111	SAPE-N0500-0500-6.0	5mm	1.2mm	8.0mm	12.7mm	5mm	35.6mm	8.0mm	8.85mm	Yes
5025-000112	SAPE-N0800-0800-6.0	8mm	1.2mm	10.0mm	12.7mm	8mm	35.6mm	11.5mm	8.85mm	Yes

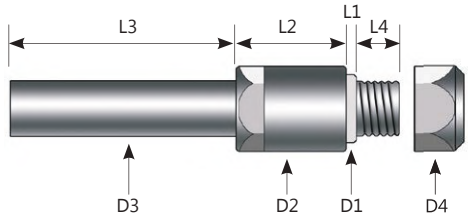



SAPE Arbor Shown.
Included Spacers Allow For
Double Saw Configuration.



Custom Slitting Saw Arbors

GenSwiss has the capability to assist with the engineering and manufacture of special gang slotting arbors that also feature the option of holding an end mill, spot drill or other small round shank rotary tool.

Some features we can provide:

- Spacers for gang slotting with multiple blades.
- Custom hub widths (L1 dim.) for oversize blade thicknesses.
- Optional shank sizes for special applications.




SOLID CARBIDE SAW BLADES

Genevieve Swiss Industries carries a full line of solid carbide slitting saws directly imported from Switzerland. Available from stock in fine and extra-fine tooth configurations with tooth counts ranging from 40-120 teeth per saw.

Our Solid Carbide Saws Feature:

- **Precision ground accuracy**
- **Superior surface finish**
- **High tooth count for cutting hard metals**
- **Hollow ground side clearance**
- **Full radius, V-cutter, & staggered versions available**
- **Designed and manufactured to the highest quality & standards**



Saw Blade Nomenclature Example:

25mm OD — 1.00mm wide

SSM-2508-100048G

Slitting Saw Metric — 8mm ID — 48 teeth



Width

Metric Carbide Saws Fine Tooth Configuration							
OD / ID	15mm 5mm	20mm 5mm	25mm 5mm	25mm 8mm	30mm 5mm	30mm 8mm	40mm 10mm
0.10mm (.0039in)	64-80	80-100	80-120	80-120	100-160	100-160	100-160
0.15mm (.0059in)	64-80	80-100	80-120	80-120	100-160	100-160	100-160
0.20mm (.0078in)	64-80	80-100	80-120	80-120	100-160	100-160	100-160
0.25mm (.0098in)	64-80	80-100	80-120	80-120	100-160	100-160	100-160
0.30mm (.0118in)	64-80	80-100	80-120	80-120	100-120	100-120	100-160
0.35mm (.0137in)	64-80	80-100	80-120	80-120	100-120	100-120	100-160
0.40mm (.0157in)	80	80-100	80-120	80-120	100-120	100-120	100-160
0.50mm (.0196in)	80	80-100	80-120	80-120	100-120	100-120	100-160
0.55mm (.0216in)	80	80-100	80-120	80-120	100-120	100-120	100-160
0.60mm (.0236in)	80	80-100	80-120	80-120	100-120	100-120	100-160
0.70mm (.0275in)	80	80-100	80-120	80-120	100-120	100-120	100-160
0.80mm (.0314in)	80	80-100	80-100	80-100	100-120	100-120	100-160
0.85mm (.0334in)	80	80-100	80-100	80-100	100-120	100-120	100-160
0.90mm (.0354in)	80	80-100	80-100	80-100	100-120	100-120	100-160
1.00mm (.0393in)	80	80-100	80-100	80-100	100-120	100-120	100-160
1.05mm (.0413in)	80	80-100	80-100	80-100	100-120	100-120	100-160
1.125mm (.0442in)	80	80-100	80-100	80-100	100-120	100-120	100-160
1.15mm (.0452in)	80	80-100	80-100	80-100	100-120	100-120	100-160
1.20mm (.0472in)	80	80-100	80-100	80-100	100-120	100-120	100-160
1.25mm (.0492in)	80	80-100	80-100	80-100	100-120	100-120	100-160
1.30mm (.0511in)	80	80-100	80-100	80-100	100-120	100-120	100-160
1.40mm (.0551in)	80	80-100	80-100	80-100	100-120	100-120	100-160
1.50mm (.0590in)	80	80-100	80-100	80-100	100-120	100-120	100-160
1.60mm (.0629in)	80	80	80-100	80-100	100-120	100-120	100-160
1.70mm (.0669in)	80	80	80-100	80-100	100-120	100-120	100-160
2.00mm (.0787in)	80	80	80-100	80-100	100-120	100-120	100-160
2.20mm (.0866in)	80	80	80-100	80-100	100-120	100-120	100-160
2.50mm (.0984in)	80	80	80-100	80-100	100-120	100-120	100-160
3.00mm (.1181in)	80	80	80-100	80-100	100-120	100-120	100-160
	NUMBER OF TEETH Typical Width Tolerance: +/- .0002in (.005mm)						

Metric Carbide Saws Standard Tooth Configuration							
OD / ID	15mm 5mm	20mm 5mm	25mm 5mm	25mm 8mm	30mm 5mm	30mm 8mm	40mm 10mm
	16-48	20-64	20-80	20-80	30-100	30-100	40-100
	16-48	20-64	20-80	20-80	30-100	30-100	40-100
	16-48	20-64	20-80	20-80	30-100	30-100	40-100
	16-48	20-64	20-80	20-80	30-100	30-100	40-100
	16-48	20-64	20-80	20-80	30-100	30-100	40-100
	16-48	20-64	20-80	20-80	30-100	30-100	40-100
	16-48	20-64	20-64	20-64	30-100	30-100	40-80
	16-48	20-60	20-64	20-64	30-100	30-100	40-80
	16-48	20-60	20-64	20-64	30-100	30-100	40-80
	16-48	20-60	20-64	20-64	30-100	30-100	40-80
	16-48	20-60	20-48	20-48	30-100	30-100	40-80
	16-40	20-48	20-48	20-48	30-100	30-100	40-80
	16-40	20-48	20-48	20-48	30-100	30-100	32-70
	16-40	20-48	20-48	20-48	30-100	30-100	32-70
	16-40	20-48	20-48	20-48	30-100	30-100	32-70
	16-40	20-48	20-48	20-48	30-100	30-100	32-70
	16-40	20-48	20-48	20-48	30-100	30-100	32-70
	16-40	20-48	20-48	20-48	30-100	30-100	32-64
	16-40	20-48	20-40	20-40	30-100	30-100	32-64
	16-32	20-40	20-48	20-48	30-100	30-100	32-64
	16-32	20-32	20-48	20-48	30-100	30-100	32-64
	16-32	20-32	20-48	20-48	30-100	30-100	32-64
	16-32	20-32	20-40	20-40	30-100	30-100	32-64
	16-32	20-32	20-40	20-40	30-100	30-100	32-64
	16-32	20-32	20-40	20-40	30-100	30-100	24-48
	16-32	20-32	20-40	20-40	30-100	30-100	24-48
	16-32	20-32	20-40	20-40	30-100	30-100	24-48
	16-32	20-32	20-40	20-40	30-100	30-100	24-48
	16-32	20-32	20-40	20-40	24-100	24-100	24-48
	NUMBER OF TEETH Typical Width Tolerance: +/- .0002in (.005mm)						


Inch Sized Carbide Saws Coarse Tooth Configuration						
OD / ID	1/4in 1/8in	1/2in 1/8in, 3/16in	5/8in 1/4in	3/4in 1/4in or 5/16in	1.00in 1/4in or 3/8in	1-1/4in 5/16in or 3/8in
TEETH	12	14	16	18	20	22
Width Range = .010" - .065"						

Application Selection Guide

Genswiss Signature Series Saw Arbors

Signature Series Saw Arbors/Advantadges

- Signature series saw arbors come in 5 different styles. SAP, SAPE, SAC, SAF & SAT. We can also provide custom solutions as well.
- **SAP = Precision Saw Arbor** is our most popular style of slitting arbor. When ULTRA Precision is required, (under .0001 TIR) the SAP grade is suggested as they are held to stringent quality standards required by discerning Swiss-type machinists. Shank & journal are ground.
- **SAPE = Precision Saw Arbor "Extended Journal"** is the same as the SAP but with an extended journal and included spacer to accomodate 2 blades. Shank & journal are ground.
- **SAC = Saw Arbor Combo** comes with 3 bore sizes to accomodate an additional tool with bore sizes (3MM, .125 & .1875). wide journal for thicker saws. Has a TIR of under .0002 & is not ground.
- **SAF = Saw Arbor Flange Mount** These metric flanged saw arbors provide maximum saw balance & stability with the flange mount design. The unique design applies pressure to the outward edge of the flange ensuring the greatest gripping power at the outer most edge to prevent slipping. Uses counter-sunk screw & flange washer to apply holding force. Measured TIR is less than .0004". Journal & flange are ground. Can be ordered with different shank & journal diameter combinations.
- **SAT = Saw Arbor Ti-Loc (Saw Arbor Taper)** Prevents stacked tolorances, tool change repeatability, Journal, ER taper are ground. Comes with 2 nuts, 1 for thin blades and 1 for thicker blades. Ti-Loc saw arbors are also cost effective. you do not require and extra ER collet to use this.

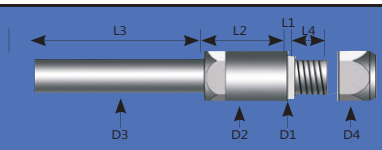


SAP-N1250-1250

Precision Saw Arbor | Journal Ø | Shank Ø

SAP = Precision Saw Arbor SAPE = Extended Journal SAC = Saw Arbor Combo SAF = Flange mount SAT = Ti-Loc Saw Arbor	**N125** = Journal Ø (.125)
1250 = Shank Ø (.125)	**How to calculate DOC (Depth Of Cut)** Take the diameter of the saw (20mm for example) divide by 2 (10mm). Then divide the D2 dim on the arbor by 2 (5mm for example = 2.5). Take the 1/2 diameter of the saw and subtract 1/2 of the D2 dim. (10mm - 2.5mm = 7.5mm DOC).

Precision Saw Arbors - 5025 Series (SAP) (SAP-E Extended journal)

Our most popular style of slitting saw arbor is now available in guaranteed TIR grade SAP (under .0001" TIR). When ULTRA Precision is required, the SAP grade is suggested as they are held to stringent quality standards required by discerning Swiss-type machinists. Made in the USA.

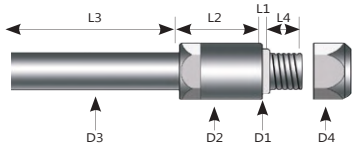





Application Selection Guide
Genswiss Signature Series Saw Arbors

Ultra Precision Combination Saw Arbors - 5015 Series (SAC)

GenSwiss ultra precision combination arbors are made from pre hardened material and exemplify what it means to be called "Swiss Precision". The addition of the combined mill or center drill provides additional tool capacity and setup flexibility . TIR measured at less than .0002". Made in the USA.








Flange Mount Metric Saw Arbors - 5020 (SAF)


These metric flanged saw arbors provide maximum saw balance and stability with the flange mount design. The unique design applies pressure to the outward edge of the flange ensuring the greatest gripping power at the outer most edge to prevent slipping. Uses countersunk screw and flange washer to apply holding force. Measured TIR is less than .0004".





Ti - Loc Saw Arbors

- Taper-integrated small tooling provides unparalleled ease of use for advanced productivity
- Maintains exceptional TIR at extended length
- Solves deflection and chatter issues
- TIR <.0002in at full extension

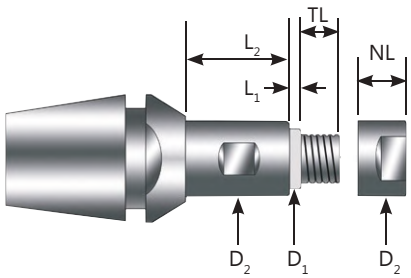

TIR Held to .0002" or Better
Repeatable Positioning of Saw Edge
Ground ER Taper and Saw Journal
Integrated ER Taper For Maximum Rigidity

All Ti-Loc Saw Arbors Include
(2) Saw Clamping Nuts



Nut With Smaller Width For Clamping Thicker Saws

Standard Nut For Clamping Standard Saws

Custom Slitting Saw Arbors

GenSwiss has the capability to assist with the engineering and manufacture of special gang slotting arbors that also feature the option of holding an end mill, spot drill or other small round shank rotary tool.

Some features we can provide:

- Spacers for gang slotting with multiple blades.
- Custom hub widths (L1 dim.) for oversize blade thicknesses.
- Optional shank sizes for special applications.








Application Selection Guide


Genswiss Signature Series Saw Arbors


YES	NO
When using a slitting saw, 2 to 3 teeth cutting in the material with the proper feedrate is ideal.	You do not want to have too many teeth engaging the workpiece. There will be chip clearing issues. Not having enough teeth on the work piece will cause vibration and will add premature wear to the saw blade.

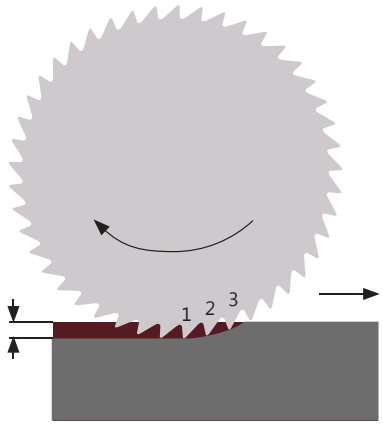


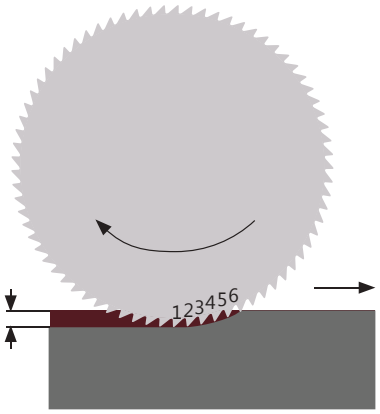

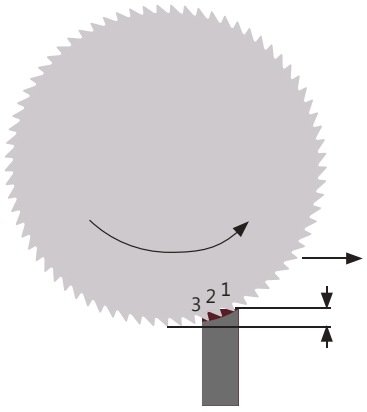

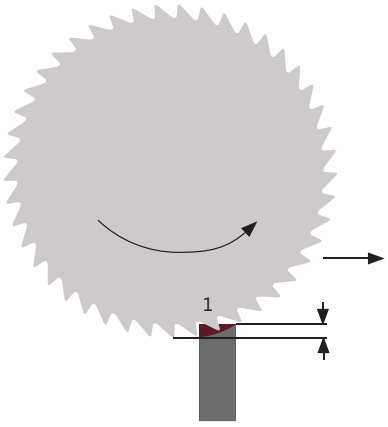

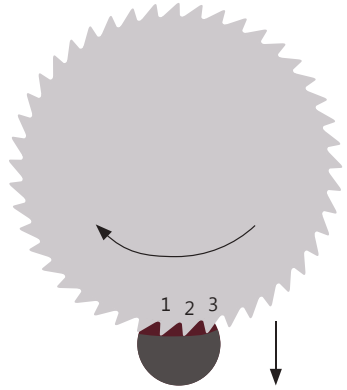

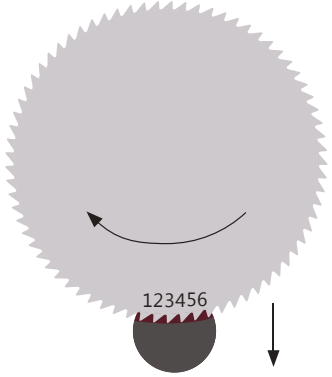



GenGrip

Drill Bushings & Hydraulic Clamping

GenSwiss® coolant-thru drill bushings and precision hydraulic clamping ID tool holders feature rigid holding at multiple price points. GenSwiss® drill and boring sleeves feature precision ground inch and metric shanks and are a robust method for holding drills and boring bars to tight tolerances.

The GenSwiss® hydraulic clamping system is perfect for micro tools, extending tool life with vibration dampening and exceptional TIRs down to .00004in. An array of coolant-thru reduction sleeves further increases the compatibility of this rigid tool holding system and fits shank sizes down to 3mm.

- **Set Screws For Large Tool Bores & Economy**
- **Easy Clamping Hydraulic System For Micro Tools**
- **Maintains Exceptional TIR Down To (.00004in)**
- **Activate Clamping From Front Or Rear Of Tool Block**
- **Extended Tool Life With Vibration Dampening**
- **High Boring Bar Positioning Accuracy**
- **Coolant-Thru**



GenGrip Kee




Ultra Precision
Hydro Grip

Coolant-Thru Input


Oil Safety Access

Hydraulic Clamp Adjustment



Hydraulic Clamp
Adjustment

High Precision
Hydro Grip

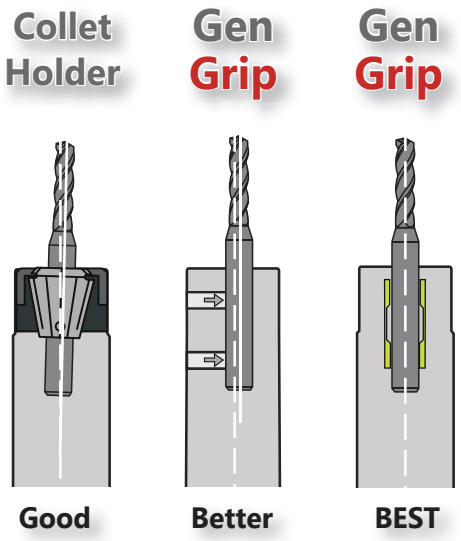


GenGrip - Drill Sleeves (Economy)

GenSwiss drill sleeves are a new product designed and manufactured by GenSwiss. These sleeves have precision ground inch and metric shanks and are a robust method for holding drills to tight tolerances. Each GenSwiss drill sleeve features coolant-thru holes, enabling coolant delivery to your coolant-thru drills. Standard tool bore sizes range from 3-8mm, but drill sleeves can be made to order.



- **1/8-28 BSPP Coolant Fitting**
- **Precision Ground Shanks**
- **3mm - 8mm Tool Bore Sizes**

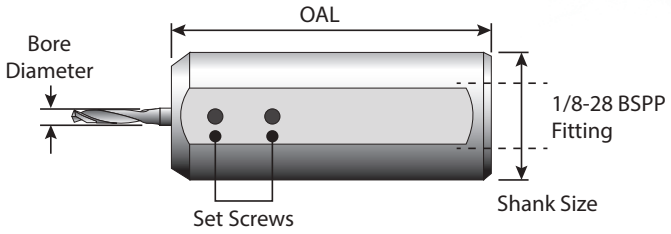


Drill Sleeves

Item No.	Description	Shank Size	OAL	Set Screw	Bore Diameter
1027-000100	CTS-3.00-158760	5/8in	3in	M4	3mm
1027-000101	CTS-3.18-158760		3in	M4	1/8in
1027-000102	CTS-4.00-158760		3in	M4	4mm
1027-000103	CTS-4.76-158760		3in	M4	3/16in
1027-000104	CTS-6.00-158760		3in	M6	6mm
1027-000105	CTS-6.35-158760		3in	M6	1/4in
1027-000106	CTS-7.94-158760		3in	M6	5/16in
1027-000107	CTS-8.00-158760		3in	M6	8mm
1027-000108	CTS-3.00-190760	3/4in	3in	M4	3mm
1027-000109	CTS-3.18-190760		3in	M4	1/8in
1027-000110	CTS-4.00-190760		3in	M4	4mm
1027-000111	CTS-4.76-190760		3in	M4	3/16in
1027-000112	CTS-6.00-190760		3in	M6	6mm
1027-000113	CTS-6.35-190760		3in	M6	1/4in
1027-000114	CTS-7.94-190760		3in	M6	5/16in
1027-000115	CTS-8.00-190760		3in	M6	8mm
1027-000116	CTS-3.00-200760	20mm	3in	M4	3mm
1027-000117	CTS-3.18-200760		3in	M4	1/8in
1027-000118	CTS-4.00-200760		3in	M4	4mm
1027-000119	CTS-4.76-200760		3in	M4	3/16in
1027-000120	CTS-6.00-200760		3in	M6	6mm
1027-000121	CTS-6.35-200760		3in	M6	1/4in
1027-000122	CTS-7.94-200760		3in	M6	5/16in
1027-000123	CTS-8.00-200760		3in	M6	8mm
1027-000124	CTS-3.00-220760	22mm	3in	M4	3mm
1027-000125	CTS-3.18-220760		3in	M4	1/8in
1027-000126	CTS-4.00-220760		3in	M4	4mm
1027-000127	CTS-4.76-220760		3in	M4	3/16in
1027-000128	CTS-6.00-220760		3in	M6	6mm
1027-000129	CTS-6.35-220760		3in	M6	1/4in
1027-000130	CTS-7.94-220760		3in	M6	5/16in
1027-000131	CTS-8.00-220760		3in	M6	8mm
1027-000132	CTS-3.00-254760	1in	3in	M4	3mm
1027-000133	CTS-3.18-254760		3in	M4	1/8in
1027-000134	CTS-4.00-254760		3in	M4	4mm
1027-000135	CTS-4.76-254760		3in	M4	3/16in
1027-000136	CTS-6.00-254760		3in	M6	6mm
1027-000137	CTS-6.35-254760		3in	M6	1/4in
1027-000138	CTS-7.94-254760		3in	M6	5/16in
1027-000139	CTS-8.00-254760		3in	M6	8mm

GenGrip - Front Activated (High Precision)

Hydraulic Clamps Activated From Font Of Tool Block



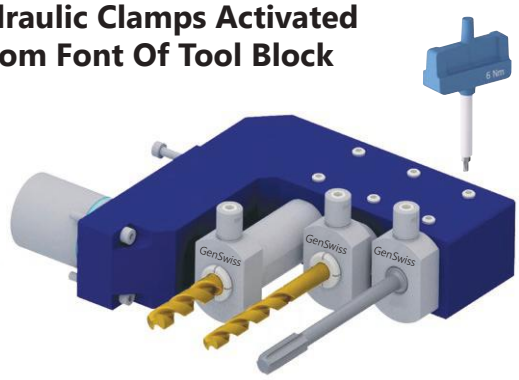




Set screws are used to clamp on the milled flat, after adjusting the length of the assembly.

Hydraulic Clamping - Front Activated

Dimensions (mm)

Item No.	Description	D1	D2	D3	D4	L1	L2	L3	L4	L5	L6	Depth	Thread
Call For Details	HYC-12-1905-064F	12	19.05	40	12	64	50	21.5	33	18.05	7	40	M5x0.8 - 6H
Call For Details	HYC-12-1905-089F	12	19.05	40	12	89	75	21.5	33	18.05	16	40	M5x0.8 - 6H
Call For Details	HYC-12-2000-089F	12	20	40	12	89	75	24.5	33	19	16	40	M5x0.8 - 6H
1033-000109	HYC-12-2500-164F	12	25	40	12	164	150	27.5	33	24	16	40	M5x0.8 - 6H
Call For Details	HYC-12-2504-069F	12	25.4	40	12	69	55	27.5	33	24.4	12	40	M5x0.8 - 6H
Call For Details	HYC-12-2504-114F	12	25.4	40	12	114	100	27.5	33	24.4	16	40	M5x0.8 - 6H


NOTE: Use with torque wrench 1033-000132

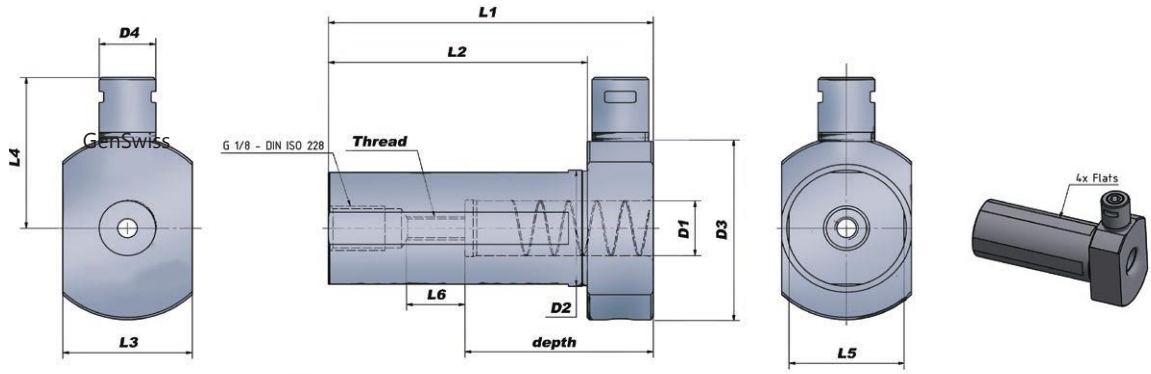




Torque Wrench:

Use preset Torque Wrench to ensure correct mounting of tools.
6 Nm - Part no. **1033-000132**



Adapters:

Male G 1/8" to Female 1/8" NPT
Part no. **1033-000154**



Male G 1/8" to Male 1/4" JIC
Part no. **1033-000153**

Reduction Sleeves

GenGrip (high precision) can be used with reduction sleeves, providing a wide range of tool sizes for hydraulic clamping. GenGrip does not utilize ER collets.

Minimal Flex
High Acuracy
3mm - 10mm Bore Sizes



Item No.	Description	Tool Size	Coolint Type
1033-000133	HYCS-12-3.00	3mm	Internal
1033-000134	HYCS-12-3.00-CF	3mm	External
1033-000135	HYCS-12-3.17	3.17mm	Internal
1033-000136	HYCS-12-4.00	4mm	Internal
1033-000137	HYCS-12-4.00-CF	4mm	External
1033-000138	HYCS-12-4.76	4.76mm	Internal
1033-000139	HYCS-12-5.00	5mm	Internal
1033-000140	HYCS-12-5.00-CF	5mm	External
1033-000141	HYCS-12-6.00	6mm	Internal
1033-000142	HYCS-12-6.00-CF	6mm	External
1033-000143	HYCS-12-6.35	6.35mm	Internal
1033-000144	HYCS-12-7.00	7mm	Internal
1033-000145	HYCS-12-7.94	7.94mm	Internal
1033-000146	HYCS-12-8.00	8mm	Internal
1033-000147	HYCS-12-8.00-CF	8mm	External
1033-000148	HYCS-12-9.00	9mm	Internal
1033-000149	HYCS-12-9.52	9.52mm	Internal
1033-000150	HYCS-12-10.0	10mm	Internal


CAUTION

To prevent damage to the holder, round tool shanks without flats and with H6 tolerance MUST be used. Tool MUST be in the holder when clamping. Torque wrench REQUIRED.

GenGrip - Dual Action (High Precision)



Holder Clamps Both Tool & Tool Block!

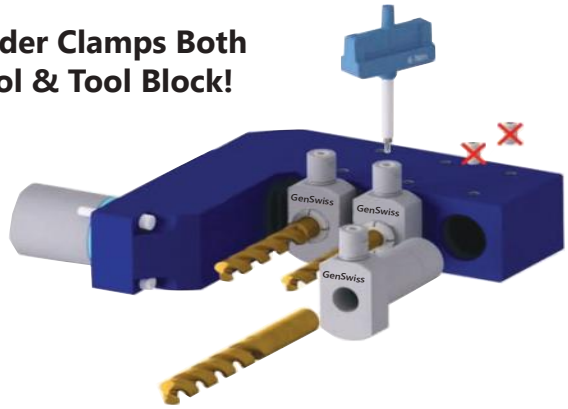



Block/holder set screws are NOT used!


Hydraulic Clamping - Dual Action

Dimensions (mm)

Item No.	Description	D1	D2	D3	D4	L1	L2	L3	L4	Dimensions With Back Stop / Coolant Port L5	D5	Back Stop / Coolant Port Compatible
1033-000100	HYC-12-1905-045D	12	19.05	40	12	45	31	21.5	33	61	18.85	Yes
1033-000101	HYC-12-2000-045D	12	20	40	12	45	31	24.5	33	61	18.85	Yes
1033-000102	HYC-12-2200-045D	12	22	40	12	45	31	24.5	33	61	18.85	Yes
1033-000103	HYC-12-2500-045D	12	25	40	12	45	31	27.5	33	61	18.85	Yes
1033-000104	HYC-12-2504-045D	12	25.4	40	12	45	31	27.5	33	61	18.85	Yes
1033-000105	HYC-20-2500-044D	20	25	44	12	44	30	27.5	35			
1033-000106	HYC-20-2504-044D	20	25.4	44	12	44	30	27.5	35			
Call For Details	HYC-25-3175-048D	25	31.75	50	12	48	34	34.5	38			
1033-000107	HYC-25-3200-048D	25	32	50	12	48	34	34.5	38			



NOTE: Use with torque wrench 1033-000132

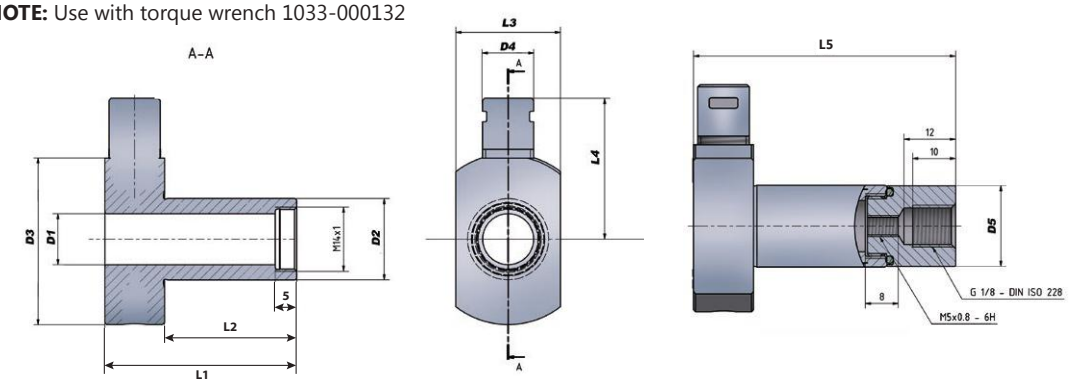




Torque Wrench:

Use preset Torque Wrench to ensure correct mounting of tools. 6 Nm - Part no. **1033-000132**




Coolant Port:

Coolant Port G 1/8", Backstop screw M5x0.8-16, Part no. **1033-000151**



Adapters:

Male G 1/8" to Female 1/8" NPT
Part no. **1033-000154**



Male G 1/8" to Male 1/4" JIC
Part no. **1033-000153**

CAUTION

To prevent damage to the holder, round tool shanks without flats and with H6 tolerance MUST be used. Tool MUST be in the holder when clamping. Torque wrench REQUIRED.

Reduction Sleeves

GenGrip (High Precision) can be used with reduction sleeves, providing a wide range of tool sizes for hydraulic clamping. GenGrip does not utilize ER-Collets.


Minimal Flex
High Acuracy
3mm - 10mm Bore Sizes



Item No.	Description	Tool Size	Coolint Type
1033-000133	HYCS-12-3.00	3mm	Internal
1033-000134	HYCS-12-3.00-CF	3mm	External
1033-000135	HYCS-12-3.17	3.17mm	Internal
1033-000136	HYCS-12-4.00	4mm	Internal
1033-000137	HYCS-12-4.00-CF	4mm	External
1033-000138	HYCS-12-4.76	4.76mm	Internal
1033-000139	HYCS-12-5.00	5mm	Internal
1033-000140	HYCS-12-5.00-CF	5mm	External
1033-000141	HYCS-12-6.00	6mm	Internal
1033-000142	HYCS-12-6.00-CF	6mm	External
1033-000143	HYCS-12-6.35	6.35mm	Internal
1033-000144	HYCS-12-7.00	7mm	Internal
1033-000145	HYCS-12-7.94	7.94mm	Internal
1033-000146	HYCS-12-8.00	8mm	Internal
1033-000147	HYCS-12-8.00-CF	8mm	External
1033-000148	HYCS-12-9.00	9mm	Internal
1033-000149	HYCS-12-9.52	9.52mm	Internal
1033-000150	HYCS-12-10.0	10mm	Internal

GenGrip - Rear Activated (High Precision)

Hydraulic Clamps Activated From Back Of Tool Block

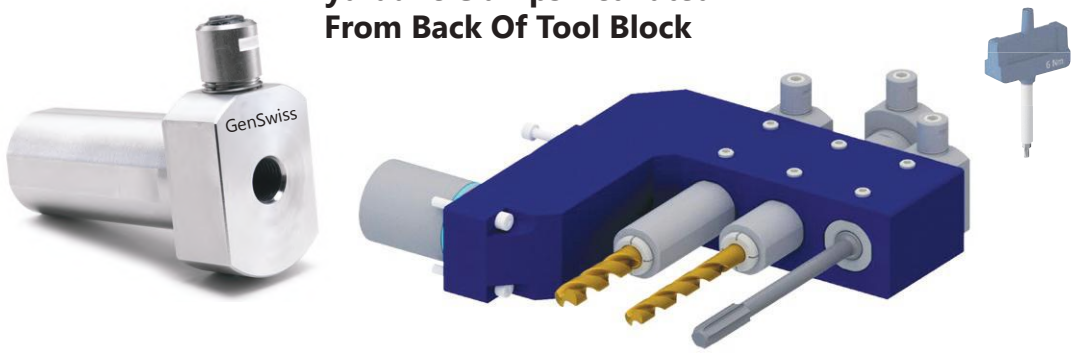




Set screws are used to clamp on the milled flat, after adjusting the length of the assembly.

Hydraulic Clamping - Rear Activated

Dimensions (mm)

Item No.	Description	D1	D2	D3	D4	L1	L2	L3	L4	L5	L6	Depth	Thread
1033-000110	HYC-12-1905-064B	12	19.05	40	12	64	50	21.5	33	21	9	40	M5x0.8 - 6H
1033-000111	HYC-12-1905-089B	12	19.05	40	12	89	75	21.5	33	21	10	40	M5x0.8 - 6H
1033-000112	HYC-12-1905-114B	12	19.05	40	12	114	100	21.5	33	21	10	40	M5x0.8 - 6H
1033-000113	HYC-12-2000-089B	12	20	40	12	89	75	24.5	33	21	10	40	M5x0.8 - 6H
1033-000114	HYC-12-2000-114B	12	20	40	12	114	100	24.5	33	21	10	40	M5x0.8 - 6H
1033-000115	HYC-12-2200-064B	12	22	40	12	64	50	24.5	33	21	9	40	M5x0.8 - 6H
1033-000116	HYC-12-2200-089B	12	22	40	12	89	75	24.5	33	21	10	40	M5x0.8 - 6H
1033-000117	HYC-12-2200-114B	12	22	40	12	114	100	24.5	33	21	10	40	M5x0.8 - 6H
1033-000118	HYC-12-2200-129B	12	22	40	12	129	115	24.5	33	21	10	40	M5x0.8 - 6H
1033-000119	HYC-12-2500-064B	12	25	40	12	64	50	27.5	33	24	9	40	M5x0.8 - 6H
1033-000120	HYC-12-2500-089B	12	25	40	12	89	75	27.5	33	24	10	40	M5x0.8 - 6H
1033-000121	HYC-12-2500-114B	12	25	40	12	114	100	27.5	33	24	10	40	M5x0.8 - 6H
1033-000122	HYC-12-2504-064B	12	25..4	40	12	64	50	27.5	33	24	9	40	M5x0.8 - 6H
1033-000123	HYC-12-2504-089B	12	25.4	40	12	89	75	27.5	33	24	10	40	M5x0.8 - 6H
1033-000124	HYC-12-2504-114B	12	25.4	40	12	114	100	27.5	33	24	10	40	M5x0.8 - 6H
Call For Details	HYC-20-3200-064B	20	32	40	12	64	50	34.5	33	30.8	9	52	M5x0.8 - 6H
Call For Details	HYC-20-3200-089B	20	32	40	12	89	75	34.5	33	30.8	10	52	M5x0.8 - 6H
Call For Details	HYC-20-3200-114B	20	32	40	12	114	100	34.5	33	30.8	10	52	M5x0.8 - 6H


NOTE: Use with torque wrench 1033-000132
HYC-20-3200-064B uses fitting 4005-000111 for coolant-thru capbility

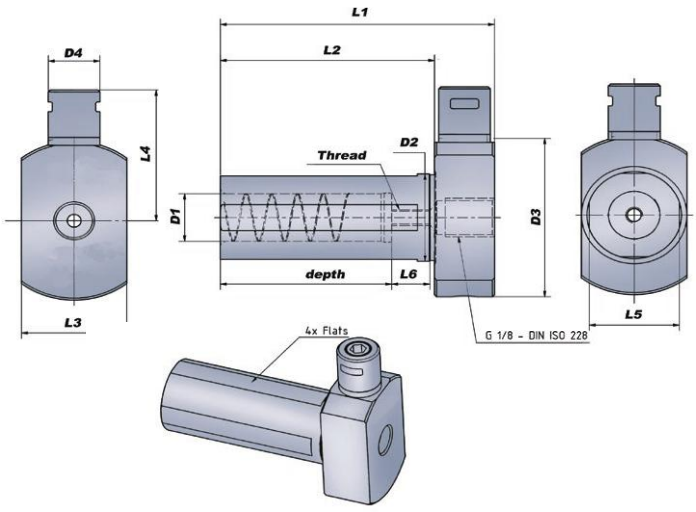




Torque Wrench:

Use preset Torque Wrench to ensure correct mounting of tools.
6 Nm - Part no. **1033-000132**



Adapters:

Male G 1/8" to Female 1/8" NPT
Part no. **1033-000154**



Male G 1/8" to Male 1/4" JIC
Part no. **1033-000153**



Male M5 to Male 1/4" JIC
For HYC-20-3200-064B only
Part no. **4005-000111**




Reduction Sleeves


CAUTION

To prevent damage to the holder, round tool shanks without flats and with H6 tolerance MUST be used. Tool MUST be in the holder when clamping. Torque wrench REQUIRED.

GenGrip - Rear Activated (High Precision)



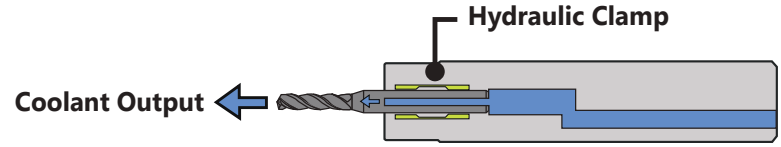

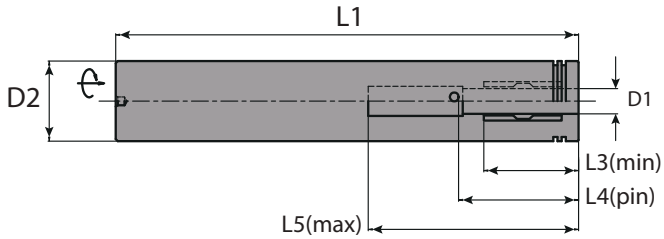

- **Coolant-Thru Ready**
- **h6 Tool Shanks ONLY**
- **Torque Wrench REQUIRED!**
- **Pair High-Precision Holders With High-Precision Micro Sleeves To Enable The Use Of Smaller Shank Tools**

Citizen

Shank Size (D2)	Bore Size (D1)	L1	L3	L4	L5	Description	Wrench No.
19.05	3	110	17.5	24	40	GRI-3.00-190110	1032-000229
	4	110	21	26	40	GRI-4.00-190110	1032-000229
	6	110	23	29	52	GRI-6.00-190110	1032-000229
	8	110	28	34	55	GRI-8.00-190110	1032-000229
25.4	3	110	17.5	24	40	GRI-3.00-254110	1032-000229
	4	110	21	26	40	GRI-4.00-254110	1032-000229
	6	110	23	29	52	GRI-4.00-254110	1032-000229
	8	110	28	34	55	GRI-8.00-254110	1032-000229
	10	110	29.5	36	55	GRI-10.0-254110	1032-000229
	12	110	31.5	38	58	GRI-12.0-250110	1032-000229

Tornos

Shank Size (D2)	Bore Size (D1)	L1	L3	L4	L5	Description	Wrench No.
16	3	50	17.5	24	28	GRI-3.00-160500	1032-000229
	3.175	50	17.5	24	28	GRI-3.17-160500	1032-000229
	4	50	21	26	28	GRI-4.00-160500	1032-000229
	3	90	17.5	24	40	GRI-3.00-160090	1032-000229
	3.175	90	17.5	24	40	GRI-3.17-160090	1032-000229
	4	90	21	26	40	GRI-4.00-160090	1032-000229
	6	90	23	29	52	GRI-6.00-160090	1032-000229
20	3	110	17.5	24	40	GRI-3.00-200110	1032-000229
	4	110	21	26	40	GRI-4.00-200110	1032-000229
	6	110	23	29	52	GRI-6.00-200110	1032-000229
	8	110	28	34	55	GRI-8.00-200110	1032-000229
22	3	110	17.5	24	40	GRI-3.00-220110	1032-000230
	4	110	21	26	40	GRI-4.00-220110	1032-000230
	6	110	23	29	52	GRI-6.00-220110	1032-000230
	8	110	28	34	55	GRI-8.00-220110	1032-000230
	10	110	29.5	36	55	GRI-10.0-220110	1032-000230
25	3	110	17.5	24	40	GRI-3.00-250110	1032-000230
	4	110	21	26	40	GRI-4.00-250110	1032-000230
	6	110	23	29	52	GRI-6.00-250110	1032-000230
	8	110	28	34	55	GRI-8.00-250110	1032-000230
	10	110	29.5	36	55	GRI-10.0-250110	1032-000230
	12	110	31.5	38	58	GRI-12.0-250110	1032-000230

CAUTION To prevent damage to the holder, round tool shanks without flats and with H6 tolerance MUST be used. Tool MUST be in the holder when clamping. Torque wrench REQUIRED.

Star

Shank Size (D2)	Bore Size (D1)	L1	L3	L4	L5	Description	Wrench No.
16	3	90	17.5	24	40	GRI-3.00-160090	1032-000229
	3.175	90	17.5	24	40	GRI-3.17-160090	1032-000229
	4	90	21	26	40	GRI-4.00-160090	1032-000229
	6	90	23	29	52	GRI-6.00-160090	1032-000229
22	3	110	17.5	24	40	GRI-3.00-220110	1032-000230
	4	110	21	26	40	GRI-4.00-220110	1032-000230
	6	110	23	29	52	GRI-6.00-220110	1032-000230
	8	110	28	34	55	GRI-8.00-220110	1032-000230
	10	110	29.5	36	55	GRI-10.0-220110	1032-000230
32	3	110	17.5	24	40	GRI-3.00-320110	1032-000230
	4	110	21	26	40	GRI-4.00-320110	1032-000230
	6	110	23	29	52	GRI-6.00-320110	1032-000230
	8	110	28	34	55	GRI-8.00-320120	1032-000230
	10	110	29.5	36	55	GRI-10.0-320120	1032-000230
	12	110	31.5	38	58	GRI-12.0-320120	1032-000230

Tsugami

Shank Size (D2)	Bore Size (D1)	L1	L3	L4	L5	Description	Wrench No.
16	3	50	17.5	24	28	GRI-3.00-160500	1032-000229
	3.175	50	17.5	24	28	GRI-3.17-160500	1032-000229
	4	50	21	26	28	GRI-4.00-160500	1032-000229
20	3	110	17.5	24	40	GRI-3.00-200110	1032-000229
	4	110	21	26	40	GRI-4.00-200110	1032-000229
	6	110	23	29	52	GRI-6.00-200110	1032-000229
	8	110	28	34	55	GRI-8.00-200110	1032-000229
25	3	110	17.5	24	40	GRI-3.00-250110	1032-000230
	4	110	21	26	40	GRI-4.00-250110	1032-000230
	6	110	23	29	52	GRI-6.00-250110	1032-000230
	8	110	28	34	55	GRI-8.00-250110	1032-000230
	10	110	29.5	36	55	GRI-10.0-250110	1032-000230
	12	110	31.5	38	58	GRI-12.0-250110	1032-000230

Torque Wrench

Description	Hex Size	Force	Fits Shank Size
WTD-H03-3.0NM	3mm	3NM	16mm, 20mm, 3/4in
WTD-H04-3.0NM	4mm	3NM	22mm, 25mm, 32mm, 1in




STAR, TORNOS, & TSUGAMI Continued On Next Page

GenGrip - Front Activated (High Precision)






- **Coolant-Thru Ready**
- **h6 Tool Shanks ONLY**
- **Torque Wrench REQUIRED!**
- **Pair High-Precision Holders With High-Precision Micro Sleeves To Enable The Use Of Smaller Shank Tools**

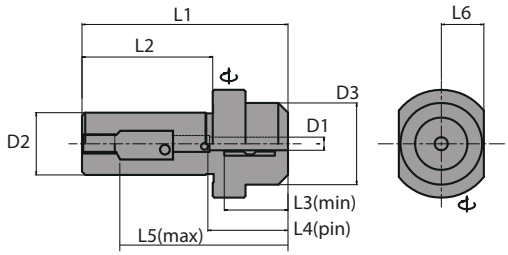

Citizen — 3/4in Shank

Description	D1	D2	D3	L1	L2	L3	L4	L5	L6
GRI-3.00-190-40/63 CIT	3	19.05	20	63	40	17.5	24	53	13.5
GRI-4.00-190-40/63 CIT	4	19.05	22	63	40	21	26	53	14
GRI-6.00-190-40/63 CIT	6	19.05	24	63	40	23	29	53	15
GRI-8.00-190-40/63 CIT	8	19.05	26	63	40	28	34	53	16
GRI-10.0-190-40/63 CIT	10	19.05	28	63	40	29.5	36	53	17


NOTE: Use with torque wrench 1032-000230

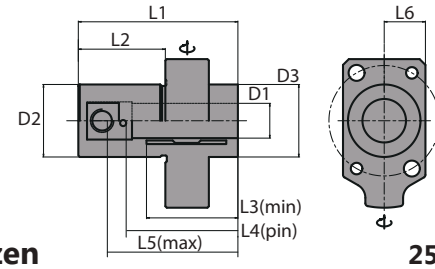

Citizen — 25mm Shank

Description	D1	D2	D3	L1	L2	L3	L4	L5	L6
GRI-4.00-250-30/55 CIT	4	25	25	55	30	21	26	45	14.2
GRI-6.00-250-30/55 CIT	6	25	25	55	30	23	29	45	14.2
GRI-8.00-250-30/55 CIT	8	25	25	55	30	28	34	45	14.2
GRI-10.0-250-30/55 CIT	10	25	25	55	30	29.5	36	45	14.2
GRI-12.0-250-30/55 CIT	12	25	25	55	30	31.5	38	45	14.2


NOTE: Use with torque wrench 1032-000230

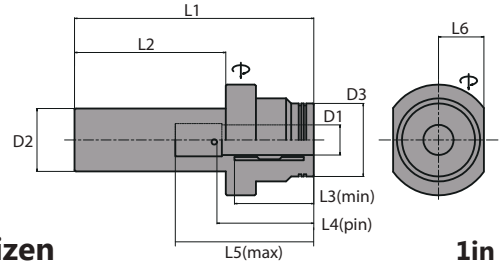

Citizen — 1in Shank

Description	D1	D2	D3	L1	L2	L3	L4	L5	L6
GRI-4.00-254-40/75 CIT	4	25.4	19	75	30	21	26	46	14
GRI-6.00-254-40/75 CIT	6	25.4	20	75	30	23	29	51	15
GRI-8.00-254-40/75 CIT	8	25.4	23	75	30	28	36	51	16
GRI-10.0-254-40/75 CIT	10	25.4	27	75	30	29.5	36	56	17
GRI-12.0-254-40/75 CIT	12	25.4	29	75	30	31.5	38	56	18

NOTE: Use with torque wrench 1032-000230

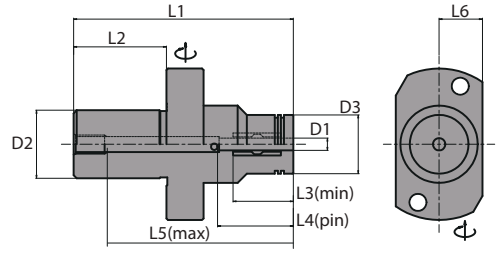

Star — Type-A


Description	D1	D2	D3	L1	L2	L3	L4	L5	L6
GRI-4.00-220-25/66A STA	4	22	19	66	25	21	26	56	14
GRI-6.00-220-25/66A STA	6	22	20	66	25	23	30	56	14
GRI-8.00-220-25/66A STA	8	22	23	66	25	28	34	56	15
GRI-10.0-220-25/66A STA	10	22	27	66	25	29.5	36	56	16
GRI-12.0-220-25/66A STA	12	22	29	66	25	31.5	42	56	17.25

NOTE: Use with torque wrench 1032-000230

CAUTION To prevent damage to the holder, round tool shanks without flats and with H6 tolerance MUST be used. Tool MUST be in the holder when clamping. Torque wrench REQUIRED.

STAR, TORNOS, & TSUGAMI Continued On Next Page


Gen Grip - Sub Spindle (High Precision)

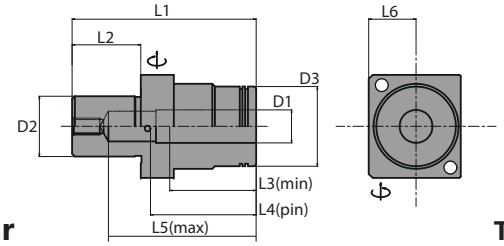

Star — Type-B

Description	D1	D2	D3	L1	L2	L3	L4	L5	L6
GRI-4.00-220-25/66B	4	22	19	66	25	21	26	56	16.25
GRI-6.00-220-25/66B	6	22	20	66	25	23	30	56	16.25
GRI-8.00-220-25/66B	8	22	23	66	25	28	34	56	16.25
GRI-10.0-220-25/66B	10	22	27	66	25	29.5	36	56	16.25
GRI-12.0-220-25/66B	12	22	29	66	25	31.5	42	56	17.25


NOTE: Use with torque wrench 1032-000230

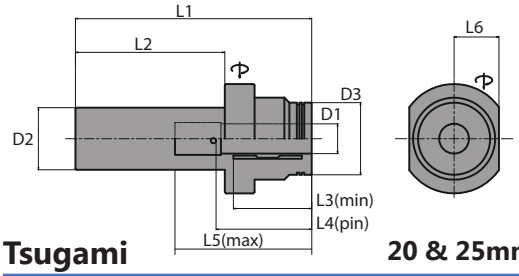

Tsugami — 20 & 25mm Shank

Description	D1	D2	D3	L1	L2	L3	L4	L5	L6
GRI-4.00-200-40/75	4	20	19	75	40	21	26	46	14
GRI-6.00-200-40/75	6	20	20	75	40	23	29	51	15
GRI-8.00-200-40/75	8	20	23	75	40	28	36	51	16
GRI-10.0-200-40/75	10	20	27	75	40	29.5	36	56	17
GRI-4.00-250-60/95	4	25	19	95	60	21	26	46	14
GRI-6.00-250-60/95	6	25	20	95	60	23	29	51	15
GRI-8.00-250-60/95	8	25	23	95	60	28	34	51	16
GRI-10.0-250-60/95	10	25	27	95	60	29.5	36	56	17
GRI-12.0-250-60/95	12	25	29	95	60	31.5	38	56	18

NOTE: Use with torque wrench 1032-000230

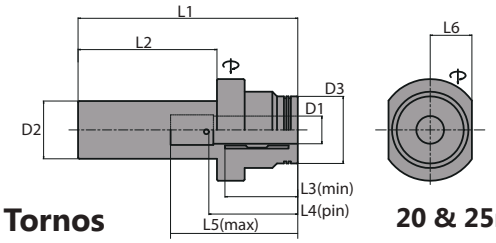

Tornos — 20 & 25mm Shank

Description	D1	D2	D3	L1	L2	L3	L4	L5	L6
GRI-4.00-200-40/75	4	20	19	75	40	21	26	46	14
GRI-6.00-200-40/75	6	20	20	75	40	23	29	51	15
GRI-8.00-200-40/75	8	20	23	75	40	28	36	51	16
GRI-10.0-200-40/75	10	20	27	75	40	29.5	36	56	17
GRI-4.00-250-60/95	4	25	19	95	60	21	26	46	14
GRI-6.00-250-60/95	6	25	20	95	60	23	29	51	15
GRI-8.00-250-60/95	8	25	23	95	60	28	34	51	16
GRI-10.0-250-60/95	10	25	27	95	60	29.5	36	56	17
GRI-12.0-250-60/95	12	25	29	95	60	31.5	38	56	18

NOTE: Use with torque wrench 1032-000230

Torque Wrench

Description	Hex Size	Force	Fits Shank Size
WTD-H03-3.0NM	3mm	3NM	16mm, 20mm, 3/4in
WTD-H04-3.0NM	4mm	3NM	22mm, 25mm, 32mm, 1in



Also Available
Hanwha & Nexturn

CAUTION To prevent damage to the holder, round tool shanks without flats and with H6 tolerance MUST be used. Tool MUST be in the holder when clamping. Torque wrench REQUIRED.


GenGrip High-Precision Micro Sleeve & Pin Positioning

Micro Sleeve Enables Use Of Small Tool Shanks

Use with 8mm & 12mm High Precision GenGrip bore sizes

8mm Shank

Description	D1	D2	D3	L1	L2
GRIS-08-3.00	3	8	12.5	35.5	2
GRIS-08-4.00	4	8	12.5	35.5	2
GRIS-08-5.00	5	8	12.5	35.5	2
GRIS-08-6.00	6	8	12.5	35.5	2
GRIS-08-3.18	1/8in	8	12.5	35.5	2
GRIS-08-4.76	3/16in	8	12.5	35.5	2
GRIS-08-6.35	1/4in	8	12.5	35.5	2

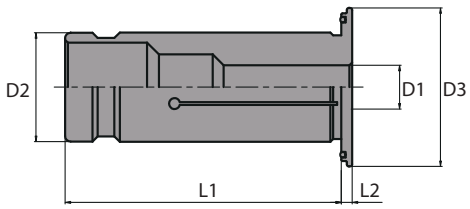

12mm Shank


Description	D1	D2	D3	L1	L2
GRIS-12-3.00	3	12	19	45	2
GRIS-12-4.00	4	12	19	45	2
GRIS-12-5.00	5	12	19	45	2
GRIS-12-6.00	6	12	19	45	2
GRIS-12-7.00	7	12	19	45	2
GRIS-12-8.00	8	12	19	45	2
GRIS-12-9.00	9	12	19	45	2
GRIS-12-10.0	10	12	19	45	2
GRIS-12-3.18	1/8in	12	19	45	2
GRIS-12-4.76	3/16in	12	19	45	2
GRIS-08-6.35	1/4in	12	19	45	2



Positioning Pin Kit

Positioning Pin Kit	Fits GenGrip Dimensions D2	D1
P2.5x8	16mm	All
	19.05mm	3-6mm
	20mm	3-6mm
P2.5x10	20mm	8-10mm
P2.5x12	19.05mm	8-10mm
	22mm	All
P2.5x16	25mm	All
	32mm	All

Kits Include: 4 Set Screws, 2 Pins, & 1 Allen Wrench




CAUTION To prevent damage to the holder, round tool shanks without flats and with H6 tolerance MUST be used. Tool MUST be in the holder when clamping. Torque wrench REQUIRED.

multidec® ESCOMATIC

The multidec® ESCOMATIC line of tool holders enables the use of multidec® 1600 & TOP/ISO series inserts with ESCOMATIC machines. These quick-change holders reduce tool changes to a few minutes. The indexable cutting inserts have two cutting edges, extending tool life.



ESCO VP
Insert Holder

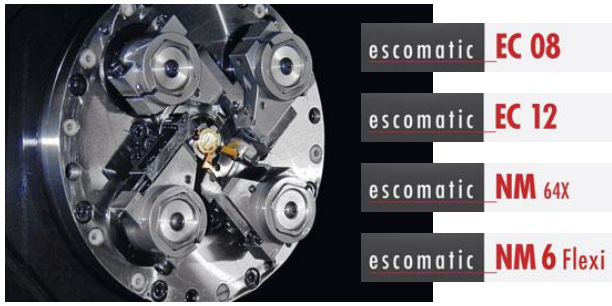




ESCO D6
Insert Holder





ESCO CUT 1600
Insert Holder

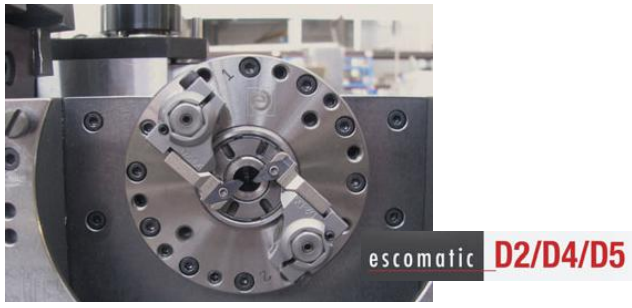


QUICK CHANGE TOOLING SYSTEM

Insert Modules For KM Quick Change Holders

KM™ Micro
QUICK-CHANGE TOOLING

- Compatible with multidec® CUT 3000 & 1600 & ISO/TOP inserts
- Coolant-thru capable

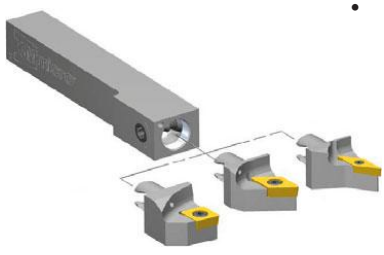

Decreased Setup Times
Increased Tool Capacity

HSK & PSC Tool Holders

Willemin Macodel, Bumotec, & Capto Compatible Machines



- Compatible with multidec® CUT 3000 & 1600, ISO/TOP inserts & micro bore tools
- Monoblock tools with interchangeable inserts
- Coolant-thru capable
- Insert positioned on center line



multidec HSK — Pg. 372 - 374
- HSK C32
- HSK T40

multidec PSC — Pg. 375 - 377
- PSC 32
- PSC 40

Bumotec Machines — Pg. 378 - 380
- HSK T32
- HSK T40
- HSK A40


Willemin Macodel — Pg. 381 - 383
- HSK E40

Multitask PSC — Pg. 384 - 386
- PSC 40

multidec HSK Cut 1600

Left Hand		Right Hand		Dimensions & Features					
Item No.	Description	Item No.	Description	HSK Form/Size	d	f	l	hmax	Insert
Call For Details	HSK-C32 CUT 1600 L	Call For Details	HSK-C32 CUT 1600 R	C32	32	22	40	5	1600 Series
Call For Details	HSK-T40 CUT 1600 L	Call For Details	HSK-T40 CUT 1600 R	A40/C40	40	27	55	5	1600 Series




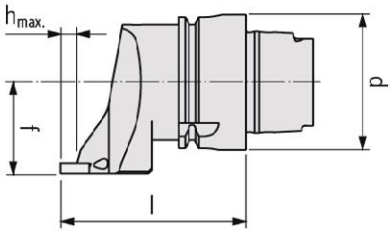

multidec HSK Cut 1600-90

Left Hand		Right Hand		Dimensions & Features					
Item No.	Description	Item No.	Description	HSK Form/Size	d	f	l	hmax	Insert
Call For Details	HSK-C32 CUT 1600-90 L	Call For Details	HSK-C32 CUT 1600-90 R	C32	32	22	40	5	1600 Series
Call For Details	HSK-T40 CUT 1600-90 L	Call For Details	HSK-T40 CUT 1600-90 R	A40/C40	40	27	55	5	1600 Series



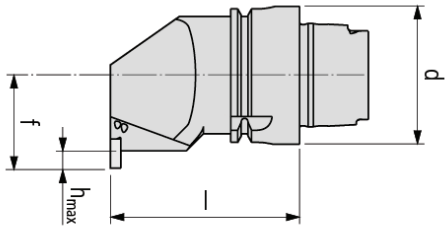


multidec HSK Cut 1600-RD

Left Hand		Dimensions & Features									
Item No.	Description	HSK Form/Size	d	f	l	Dmin	l1	l2	d1	hmax	Insert
Call For Details	HSK-C32 CUT 1600-12 RD L	C32	32	11	75	17.5	36	10	12	3	1600 Series
Call For Details	HSK-C32 CUT 1600-16 RD L	C32	32	13	75	21	48	10	16	4	1600 Series
Call For Details	HSK-C32 CUT 1600-20 RD L	C32	32	15	75	25	60	10	20	4	1600 Series
Call For Details	HSK-T40 CUT 1600-12 RD L	A40/C40	40	11	85	17.5	36	20	12	3	1600 Series
Call For Details	HSK-T40 CUT 1600-16 RD L	A40/C40	40	13	85	21	48	20	16	4	1600 Series
Call For Details	HSK-T40 CUT 1600-20 RD L	A40/C40	40	15	85	25	60	20	20	4	1600 Series

Right Hand		Dimensions & Features									
Item No.	Description	HSK Form/Size	d	f	l	Dmin	l1	l2	d1	hmax	Insert
Call For Details	HSK-C32 CUT 1600-12 RD R	C32	32	11	75	17.5	36	10	12	3	1600 Series
Call For Details	HSK-C32 CUT 1600-16 RD R	C32	32	13	75	21	48	10	16	4	1600 Series
Call For Details	HSK-C32 CUT 1600-20 RD R	C32	32	15	75	25	60	10	20	4	1600 Series
Call For Details	HSK-T40 CUT 1600-12 RD R	A40/C40	40	11	85	17.5	36	20	12	3	1600 Series
Call For Details	HSK-T40 CUT 1600-16 RD R	A40/C40	40	13	85	21	48	20	16	4	1600 Series
Call For Details	HSK-T40 CUT 1600-20 RD R	A40/C40	40	15	85	25	60	20	20	4	1600 Series




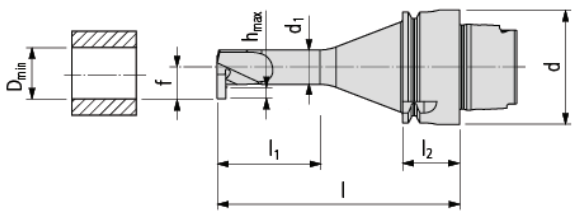

multidec HSK Cut 3000

Left Hand		Right Hand		Dimensions & Features						
Item No.	Description	Item No.	Description	HSK Form/Size	d	f	l	hmax	h1max	Insert
Call For Details	HSK-C32 CUT 3000 L	Call For Details	HSK-C32 CUT 3000 R	C32	32	22	50	10	16	3000 Series
Call For Details	HSK-T40 CUT 3000 L	Call For Details	HSK-T40 CUT 3000 R	A40/C40	40	27	73	10	16	3000 Series



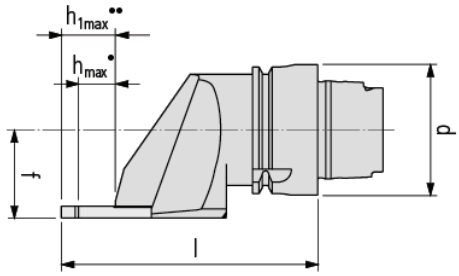


* Short Insert (hmax)
** Large Insert (h1max)

multidec HSK Cut 3000-90

Left Hand		Right Hand		Dimensions & Features							
Item No.	Description	Item No.	Description	HSK Form/Size	d	f	l	l1	hmax	h1max	Insert
Call For Details	HSK-C32 CUT 3000-90 L	Call For Details	HSK-C32 CUT 3000-90 R	C32	32	22	40	24	10	-	3000 Series
Call For Details	HSK-T40 CUT 3000-90 L	Call For Details	HSK-T40 CUT 3000-90 R	A40/C40	40	27	55	30	10	16	3000 Series



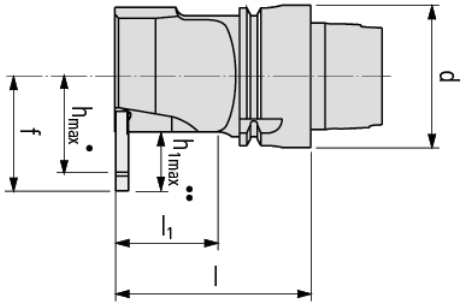


* Short Insert (hmax)
** Large Insert (h1max)

multidec HSK SVJP (93°)

Left Hand		Right Hand		Dimensions & Features				
Item No.	Description	Item No.	Description	HSK Form/Size	d	f	l	Insert
Call For Details	HSK-C32 SVJPL 10	Call For Details	HSK-C32 SVJPR 10	C32	32	22	40	VP 1003
Call For Details	HSK-T40 SVJPL 10	Call For Details	HSK-T40 SVJPR 10	A40/C40	40	27	55	VP 1003




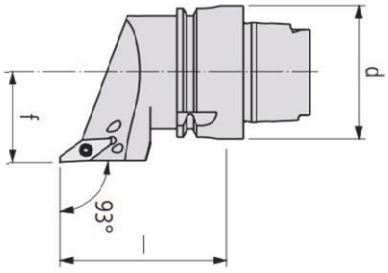

multidec HSK SVXP (91°)

Left Hand		Right Hand		Dimensions & Features						
Item No.	Description	Item No.	Description	HSK Form/Size	d	f	l	e	a	Insert
Call For Details	HSK-C32 SVXPL 10	Call For Details	HSK-C32 SVXPR 10	C32	32	15	40	22	3	VP 1003
Call For Details	HSK-T40 SVXPL 10	Call For Details	HSK-T40 SVXPR 10	A40/C40	40	20	55	27	3	VP 1003




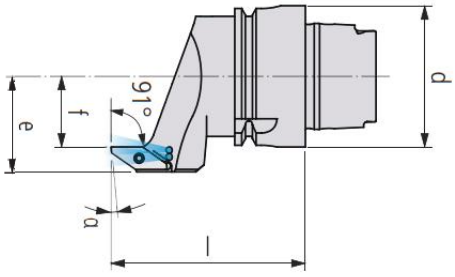

multidec HSK SDA

Dimensions & Features											
Item No.	Description	HSK Form/Size	d	l	lg	l1	l2	l3	d1	d2	Insert
Call For Details	HSK-C32 SDA-4	C32	32	l0+l1	l-l3	15	10	40.5	10	4	SD.4/SX.4
Call For Details	HSK-C32 SDA-6	C32	32	l0+l1	l-l3	15	10	44.5	15	6	SD.6/SX.6
Call For Details	HSK-C32 SDA-8	C32	32	l0+l1	l-l3	15	10	46.5	18	8	SD.8/SX.8
Call For Details	HSK-T40 SDA-4	A40/C40	40	l0+l1	l-l3	25	20	50.5	10	4	SD.4/SX.4
Call For Details	HSK-T40 SDA-6	A40/C40	40	l0+l1	l-l3	25	20	54.5	15	6	SD.6/SX.6
Call For Details	HSK-T40 SDA-8	A40/C40	40	l0+l1	l-l3	25	20	56.5	18	8	SD.8/SX.8




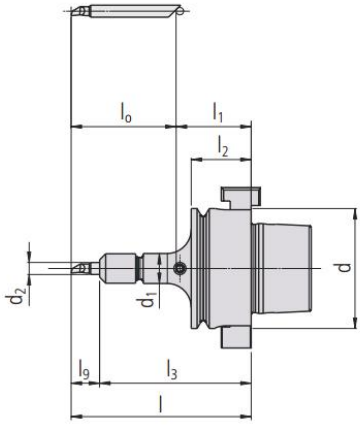

multidec HSK VS

Dimensions & Features				
Item No.	Description	HSK Form/Size	d	l
Call For Details	HSK-C32 VS	C32	32	10
Call For Details	HSK-C40 VS	C40	40	15






multidec PSC Cut 1600

Left Hand		Right Hand		Dimensions & Features					
Item No.	Description	Item No.	Description	PSC Size	d	f	l	hmax	Insert
Call For Details	PSC 32 CUT 1600 L	Call For Details	PSC 32 CUT 1600 R	32	32	22	40	5	1600 Series
Call For Details	PSC 40 CUT 1600 L	Call For Details	PSC 40 CUT 1600 R	40	40	27	55	5	1600 Series




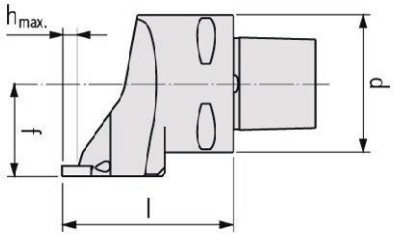

multidec PSC Cut 1600-90

Left Hand		Right Hand		Dimensions & Features					
Item No.	Description	Item No.	Description	PSC Size	d	f	l	hmax	Insert
Call For Details	PSC 32 CUT 1600-90 L	Call For Details	PSC 32 CUT 1600-90 R	32	32	22	40	5	1600 Series
Call For Details	PSC 40 CUT 1600-90 L	Call For Details	PSC 40 CUT 1600-90 R	40	40	27	55	5	1600 Series



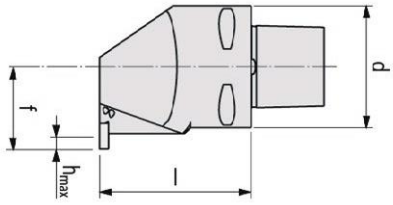


multidec PSC Cut 1600-RD

Left Hand		Dimensions & Features									
Item No.	Description	PSC Size	d	f	l	Dmin	l1	l2	d1	hmax	Insert
Call For Details	PSC 32 CUT 1600-12 RD L	32	32	11	80	17.5	36	15	12	3	1600 Series
Call For Details	PSC 32 CUT 1600-16 RD L	32	32	13	80	21	48	15	16	4	1600 Series
Call For Details	PSC 32 CUT 1600-20 RD L	32	32	15	80	25	60	15	20	4	1600 Series
Call For Details	PSC 40 CUT 1600-12 RD L	40	40	11	85	17.5	36	20	12	3	1600 Series
Call For Details	PSC 40 CUT 1600-16 RD L	40	40	13	85	21	48	20	16	4	1600 Series
Call For Details	PSC 40 CUT 1600-20 RD L	40	40	15	85	25	60	20	20	4	1600 Series

Right Hand		Dimensions & Features									
Item No.	Description	PSC Size	d	f	l	Dmin	l1	l2	d1	hmax	Insert
Call For Details	PSC 32 CUT 1600-12 RD R	32	32	11	80	17.5	36	15	12	3	1600 Series
Call For Details	PSC 32 CUT 1600-16 RD R	32	32	13	80	21	48	15	16	4	1600 Series
Call For Details	PSC 32 CUT 1600-20 RD R	32	32	15	80	25	60	15	20	4	1600 Series
Call For Details	PSC 40 CUT 1600-12 RD R	40	40	11	85	17.5	36	20	12	3	1600 Series
Call For Details	PSC 40 CUT 1600-16 RD R	40	40	13	85	21	48	20	16	4	1600 Series
Call For Details	PSC 40 CUT 1600-20 RD R	40	40	15	85	25	60	20	20	4	1600 Series




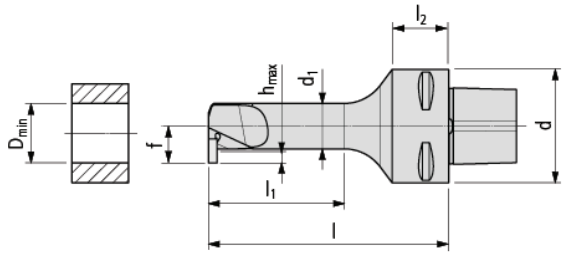

multidec PSC Cut 3000

Left Hand		Right Hand		Dimensions & Features							
Item No.	Description	Item No.	Description	PSC Size	d	f	l	l1	hmax	h1max	Insert
Call For Details	PSC 32 CUT 3000 L	Call For Details	PSC 32 CUT 3000 R	32	32	22	60	66	10	16	3000 Series
Call For Details	PSC 40 CUT 3000 L	Call For Details	PSC 40 CUT 3000 R	40	40	27	65	71	10	16	3000 Series






* Short Insert (hmax)
** Large Insert (h1max)

multidec PSC Cut 3000-90

Left Hand		Right Hand		Dimensions & Features								
Item No.	Description	Item No.	Description	PSC Size	d	f	f1	l	l1	hmax	h1max	Insert
Call For Details	PSC 32 CUT 3000-90 L	Call For Details	PSC 32 CUT 3000-90 R	32	32	22	27	40	19	10	16	3000 Series
Call For Details	PSC 40 CUT 3000-90 L	Call For Details	PSC 40 CUT 3000-90 R	40	40	27	32	50	30	10	16	3000 Series







* Short Insert (hmax)
** Large Insert (h1max)

multidec PSC SVJP (93°)

Left Hand		Right Hand		Dimensions & Features				
Item No.	Description	Item No.	Description	PSC Size	d	f	l	Insert
Call For Details	PSC 32 SVJPL 10	Call For Details	PSC 32 SVJPR 10	32	32	22	40	VP 1003
Call For Details	PSC 40 SVJPL 10	Call For Details	PSC 40 SVJPR 10	40	40	27	55	VP 1003






multidec PSC SVXP (91°)

Left Hand		Right Hand		Dimensions & Features						
Item No.	Description	Item No.	Description	PSC Size	d	f	l	e	a	Insert
Call For Details	PSC 32 SVXPL 10	Call For Details	PSC 32 SVXPR 10	32	32	15	40	22	3	VP 1003
Call For Details	PSC 40 SVXPL 10	Call For Details	PSC 40 SVXPR 10	40	40	20	55	27	3	VP 1003






multidec PSC SDA

Dimensions & Features											
Item No.	Description	PSC Size	d	l	lg	l1	l2	l3	d1	d2	Insert
Call For Details	PSC 32 SDA-4	32	32	l0+l1	l-l3	20	15	45.5	10	4	SD.4/SX.4
Call For Details	PSC 32 SDA-6	32	32	l0+l1	l-l3	20	15	49.5	15	6	SD.6/SX.6
Call For Details	PSC 32 SDA-8	32	32	l0+l1	l-l3	20	15	51.5	18	8	SD.8/SX.8
Call For Details	PSC 40 SDA-4	40	40	l0+l1	l-l3	25	20	50.5	10	4	SD.4/SX.4
Call For Details	PSC 40 SDA-6	40	40	l0+l1	l-l3	25	20	54.5	15	6	SD.6/SX.6
Call For Details	PSC 40 SDA-8	40	40	l0+l1	l-l3	25	20	56.5	18	8	SD.8/SX.8




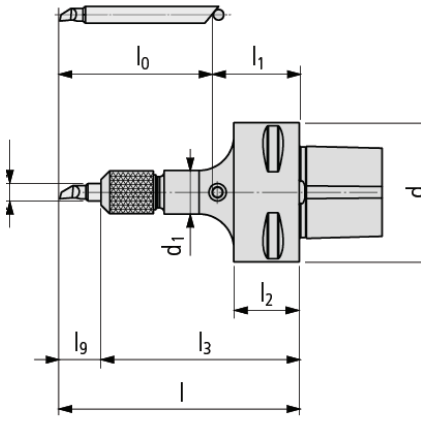

Multitask Bumotec HSK MT Cut 1600

Left Hand		Right Hand		Dimensions & Features							
Item No.	Description	Item No.	Description	HSK Size	d	b	l	l2	a	hmax	Insert
Call For Details	HSK-T32 MT CUT 1600 L	Call For Details	HSK-T32 MT CUT 1600 R	T32	32	12	65	35	3	5	1600 Series
Call For Details	HSK-T40 MT CUT 1600 L	Call For Details	HSK-T40 MT CUT 1600 R	T40	40	12	75	45	3	5	1600 Series
Call For Details	HSK-A40 MT CUT 1600 L	Call For Details	HSK-A40 MT CUT 1600 R	A40	40	12	75	45	3	5	1600 Series




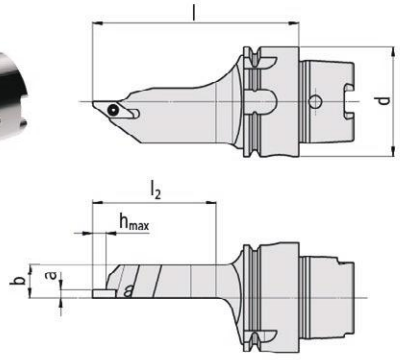

Multitask Bumotec HSK MT Cut 3000

Left Hand		Right Hand		Dimensions & Features									
Item No.	Description	Item No.	Description	HSK Size	d	b	l	l1	l2	a	hmax	h1max	Insert
Call For Details	HSK-T32 MT CUT 3000 L	Call For Details	HSK-T32 MT CUT 3000 R	T32	32	12	65	-	35	3.5	10	-	3000 Series
Call For Details	HSK-T40 MT CUT 3000 L	Call For Details	HSK-T40 MT CUT 3000 R	T40	40	12	75	80	45	3.5	10	16	3000 Series
Call For Details	HSK-A40 MT CUT 3000 L	Call For Details	HSK-A40 MT CUT 3000 R	A40	40	12	75	80	45	3.5	10	16	3000 Series






* Short Insert (hmax)
** Large Insert (h1max)

Multitask Bumotec HSK MT SVJP (93°)

Left Hand		Right Hand		Dimensions & Features					
Item No.	Description	Item No.	Description	HSK Size	d	b	l	l2	Insert
Call For Details	HSK-T32 MT SVJPL 10	Call For Details	HSK-T32 MT SVJPR 10	T32	32	12	65	36	VP.. 1003
Call For Details	HSK-T40 MT SVJPL 10	Call For Details	HSK-T40 MT SVJPR 10	T40	40	15	75	46	VP.. 1003
Call For Details	HSK-A40 MT SVJPL 10	Call For Details	HSK-A40 MT SVJPR 10	A40	40	15	75	46	VP.. 1003






Multitask Bumotec HSK MT SVJP V (93°)

Left Hand		Right Hand		Dimensions & Features					
Item No.	Description	Item No.	Description	HSK Size	d	b	l	l2	Insert
Call For Details	HSK-T32 MT SVJPL 10 V	Call For Details	HSK-T32 MT SVJPR 10 V	T32	32	12	65	36	VP.. 1003
Call For Details	HSK-T40 MT SVJPL 10 V	Call For Details	HSK-T40 MT SVJPR 10 V	T40	40	15	75	46	VP.. 1003
Call For Details	HSK-A40 MT SVJPL 10 V	Call For Details	HSK-A40 MT SVJPR 10 V	A40	40	15	75	46	VP.. 1003






Multitask Bumotec HSK MT SCLC (95°)

Left Hand		Right Hand		Dimensions & Features					
Item No.	Description	Item No.	Description	HSK Size	d	b	l	l2	Insert
Call For Details	HSK-T32 MT SCLCL 06	Call For Details	HSK-T32 MT SCLCR 06	T32	32	15	65	35	CC.. 0602
Call For Details	HSK-T32 MT SCLCL 09	Call For Details	HSK-T32 MT SCLCR 09	T32	32	15	65	35	CC.. 09T3
Call For Details	HSK-T40 MT SCLCL 06	Call For Details	HSK-T40 MT SCLCR 06	T40	40	15	75	45	CC.. 0602
Call For Details	HSK-T40 MT SCLCL 09	Call For Details	HSK-T40 MT SCLCR 09	T40	40	15	75	45	CC.. 09T3
Call For Details	HSK-A40 MT SCLCL 06	Call For Details	HSK-A40 MT SCLCR 06	A40	40	15	75	45	CC.. 0602
Call For Details	HSK-A40 MT SCLCL 09	Call For Details	HSK-A40 MT SCLCR 09	A40	40	15	75	45	CC.. 09T3






Multitask Bumotec HSK MT SDJC (93°)

Left Hand		Right Hand		Dimensions & Features					
Item No.	Description	Item No.	Description	HSK Size	d	b	l	l2	Insert
Call For Details	HSK-T32 MT SDJCL 07	Call For Details	HSK-T32 MT SDJCR 07	T32	32	12	65	36	DC.. 0702
Call For Details	HSK-T32 MT SDJCL 11	Call For Details	HSK-T32 MT SDJCR 11	T32	32	12.5	65	37	DC.. 11T3
Call For Details	HSK-T40 MT SDJCL 07	Call For Details	HSK-T40 MT SDJCR 07	T40	40	15	75	46	DC.. 0702
Call For Details	HSK-T40 MT SDJCL 11	Call For Details	HSK-T40 MT SDJCR 11	T40	40	15	75	46	DC.. 11T3
Call For Details	HSK-A40 MT SDJCL 07	Call For Details	HSK-A40 MT SDJCR 07	A40	40	15	75	46	DC.. 0702
Call For Details	HSK-A40 MT SDJCL 11	Call For Details	HSK-A40 MT SDJCR 11	A40	40	15	75	46	DC.. 11T3






Multitask Bumotec HSK MT SVJC (93°)

Left Hand		Right Hand		Dimensions & Features					
Item No.	Description	Item No.	Description	HSK Size	d	b	l	l2	Insert
Call For Details	HSK-T32 MT SVJCL 07	Call For Details	HSK-T32 MT SVJCR 07	T32	32	12	65	36	VC.. 0702
Call For Details	HSK-T32 MT SVJCL 11	Call For Details	HSK-T32 MT SVJCR 11	T32	32	12	65	36	VC.. 1103
Call For Details	HSK-T40 MT SVJCL 07	Call For Details	HSK-T40 MT SVJCR 07	T40	40	15	75	46	VC.. 0702
Call For Details	HSK-T40 MT SVJCL 11	Call For Details	HSK-T40 MT SVJCR 11	T40	40	15	75	46	VC.. 1103
Call For Details	HSK-T40 MT SVJCL 13	Call For Details	HSK-T40 MT SVJCR 13	T40	40	15	75	46	VC.. 1303
Call For Details	HSK-A40 MT SVJCL 07	Call For Details	HSK-A40 MT SVJCR 07	A40	40	15	75	46	VC.. 0702
Call For Details	HSK-A40 MT SVJCL 11	Call For Details	HSK-A40 MT SVJCR 11	A40	40	15	75	46	VC.. 1103
Call For Details	HSK-A40 MT SVJCL 13	Call For Details	HSK-A40 MT SVJCR 13	A40	40	15	75	46	VC.. 1303






Multitask Bumotec HSK SDA

Dimensions & Features											
Item No.	Description	HSK Size	d	l	lg	l1	l2	l3	d1	d2	Insert
Call For Details	HSK-T32 SDA-4	T32	32	l0+l1	l-l3	25	20	50.5	10	4	SD.4/SX.4
Call For Details	HSK-T32 SDA-6	T32	32	l0+l1	l-l3	25	20	54.5	15	6	SD.6/SX.6
Call For Details	HSK-T32 SDA-8	T32	32	l0+l1	l-l3	25	20	56.5	18	8	SD.8/SX.8
Call For Details	HSK-T40 SDA-4	T40	40	l0+l1	l-l3	25	20	50.5	10	4	SD.4/SX.4
Call For Details	HSK-T40 SDA-6	T40	40	l0+l1	l-l3	25	20	54.5	15	6	SD.6/SX.6
Call For Details	HSK-T40 SDA-8	T40	40	l0+l1	l-l3	25	20	56.5	18	8	SD.8/SX.8
Call For Details	HSK-A40 SDA-4	A40	40	l0+l1	l-l3	25	20	50.5	10	4	SD.4/SX.4
Call For Details	HSK-A40 SDA-6	A40	40	l0+l1	l-l3	25	20	54.5	15	6	SD.6/SX.6
Call For Details	HSK-A40 SDA-8	A40	40	l0+l1	l-l3	25	20	56.5	18	8	SD.8/SX.8




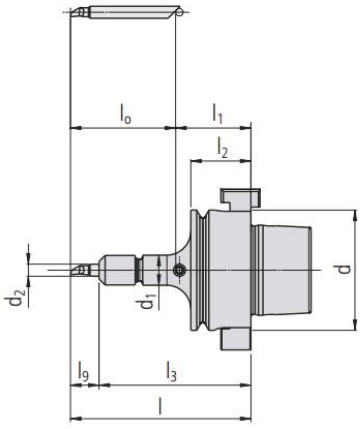

Multitask Willemin Macodel HSK-E40 MT Cut 1600 WM

Left Hand		Right Hand		Dimensions & Features							
Item No.	Description	Item No.	Description	HSK Size	d	b	l	l2	a	hmax	Insert
Call For Details	HSK-E40 MT CUT 1600 L WM	Call For Details	HSK-E40 MT CUT 1600 R WM	E40	40	12	75	45	3	5	1600 Series



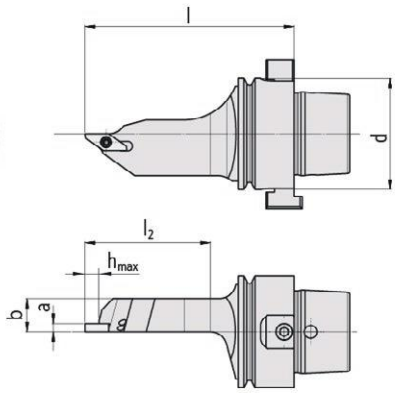


Multitask Willemin Macodel HSK-E40 MT Cut 3000 WM

Left Hand		Dimensions & Features									
Item No.	Description	HSK Size	d	b	l	l1	l2	a	hmax	h1max	Insert
Call For Details	HSK-E40 MT CUT 3000 L WM	E40	40	12	75	80	43	3.5	10	16	3000 Series

Right Hand		Dimensions & Features									
Item No.	Description	HSK Size	d	b	l	l1	l2	a	hmax	h1max	Insert
Call For Details	HSK-E40 MT CUT 3000 R WM	E40	40	12	75	80	43	3.5	10	16	3000 Series






* Short Insert (hmax)
** Large Insert (h1max)

Multitask Willemin Macodel HSK-E40 MT SVJP WM (93°)

Left Hand		Right Hand		Dimensions & Features					
Item No.	Description	Item No.	Description	HSK Size	d	b	l	l2	Insert
Call For Details	HSK-E40 MT SVJPL 10 WM	Call For Details	HSK-E40 MT SVJPR 10 WM	E40	40	15	75	46	VP.. 1003




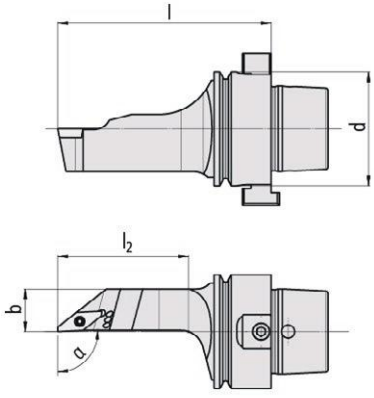

Multitask Willemin Macodel HSK-E40 MT SVJP V WM (93°)

Left Hand		Right Hand		Dimensions & Features					
Item No.	Description	Item No.	Description	HSK Size	d	b	l	l2	Insert
Call For Details	HSK-E40 MT SVJPL 10 V WM	Call For Details	HSK-E40 MT SVJPR 10 V WM	E40	40	15	75	46	VP.. 1003




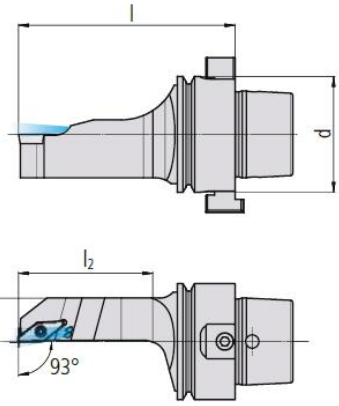

Multitask Willemin Macodel HSK-E40 MT SVJP V WM (93°)

Left Hand		Right Hand		Dimensions & Features					
Item No.	Description	Item No.	Description	HSK Size	d	b	l	l2	Insert
Call For Details	HSK-E40 MT SVJPL 10 V WM	Call For Details	HSK-E40 MT SVJPR 10 V WM	E40	40	15	75	46	VP.. 1003




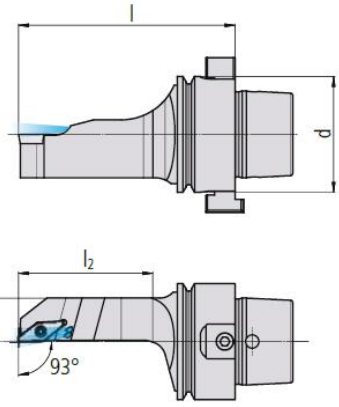

Multitask Willemin Macodel HSK-E40 MT SCLC WM (95°)

Left Hand		Right Hand		Dimensions & Features					
Item No.	Description	Item No.	Description	HSK Size	d	b	l	l2	Insert
Call For Details	HSK-E40 MT SCLCL 06 WM	Call For Details	HSK-E40 MT SCLCR 06 WM	E40	40	15	75	47	CC.. 0602
Call For Details	HSK-E40 MT SCLCL 09 WM	Call For Details	HSK-E40 MT SCLCR 09 WM	E40	40	15	75	47	CC.. 09T3




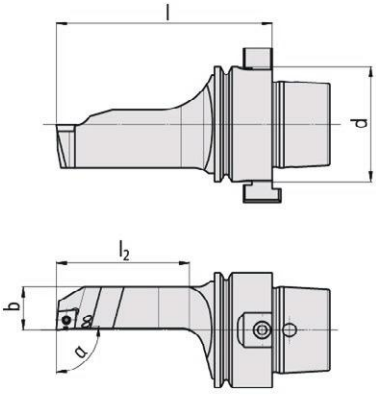

Multitask Willemin Macodel HSK-E40 MT SDJC WM (93°)

Left Hand		Right Hand		Dimensions & Features					
Item No.	Description	Item No.	Description	HSK Size	d	b	l	l2	Insert
Call For Details	HSK-E40 MT SDJCL 07 WM	Call For Details	HSK-E40 MT SDJCR 07 WM	E40	40	15	75	46	DC.. 0702
Call For Details	HSK-E40 MT SDJCL 11 WM	Call For Details	HSK-E40 MT SDJCR 11 WM	E40	40	15	75	46	DC.. 11T3




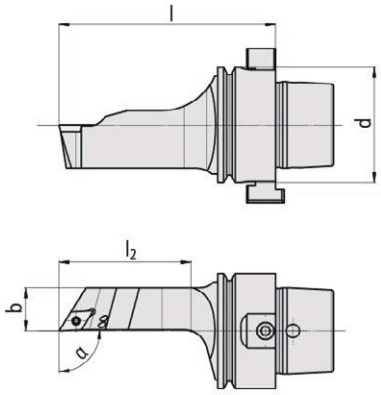

Multitask Willemin Macodel HSK-E40 MT SVJC WM (93°)

Left Hand		Right Hand		Dimensions & Features					
Item No.	Description	Item No.	Description	HSK Size	d	b	l	l2	Insert
Call For Details	HSK-E40 MT SVJCL 07 WM	Call For Details	HSK-E40 MT SVJCR 07 WM	E40	40	15	75	45	VC.. 0702
Call For Details	HSK-E40 MT SVJCL 11 WM	Call For Details	HSK-E40 MT SVJCR 11 WM	E40	40	15	75	45	VC.. 1103
Call For Details	HSK-E40 MT SVJCL 13 WM	Call For Details	HSK-E40 MT SVJCR 13 WM	E40	40	15	75	45	VC.. 1303




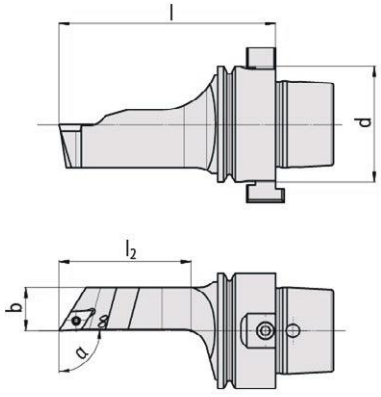

Multitask Willemin Macodel HSK-E40 MT SDA WM

Dimensions & Features											
Item No.	Description	HSK Size	d	l	lg	l1	l2	l3	d1	d2	Insert
Call For Details	HSK-E40 MT SDA-4 WM	E40	40	l0+l1	l-l3	25	20	50.5	10	4	SD.4/SX.4
Call For Details	HSK-E40 MT SDA-6 WM	E40	40	l0+l1	l-l3	25	20	54.5	15	6	SD.6/SX.6
Call For Details	HSK-E40 MT SDA-8 WM	E40	40	l0+l1	l-l3	25	20	56.5	18	8	SD.8/SX.8




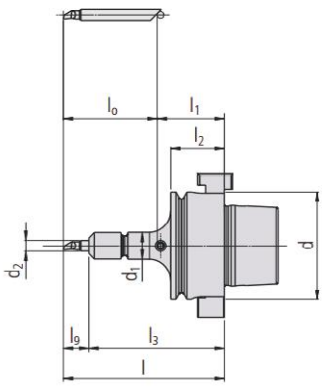

Multitask PSC 40 MT Cut 1600

Left Hand		Right Hand		Dimensions & Features							
Item No.	Description	Item No.	Description	PSC Size	d	b	l	l2	a	hmax	Insert
Call For Details	PSC 40 MT CUT 1600 L	Call For Details	PSC 40 MT CUT 1600 R	40	40	12	75	45	3	5	1600 Series




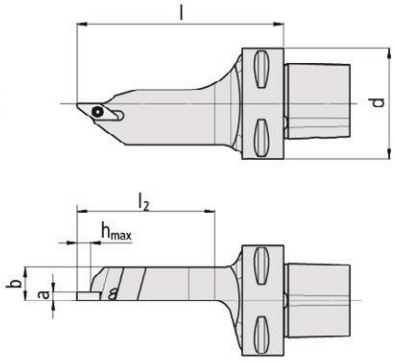

Multitask PSC 40 MT Cut 3000

Left Hand		Right Hand		Dimensions & Features									
Item No.	Description	Item No.	Description	PSC Size	d	b	l	l1	l2	a	hmax	h1max	Insert
Call For Details	PSC 40 MT CUT 3000 L	Call For Details	PSC 40 MT CUT 3000 R	40	40	12	75	80	45	3.5	10	16	3000 Series



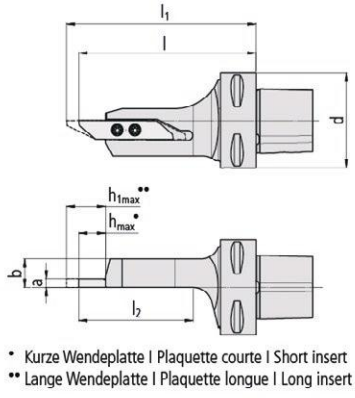


* Short Insert (hmax)
** Large Insert (h1max)

* Kurze Wendeplatte I Plaquette courte I Short insert
** Lange Wendeplatte I Plaquette longue I Long insert

Multitask PSC 40 MT SVJP (93°)

Left Hand		Right Hand		Dimensions & Features					
Item No.	Description	Item No.	Description	PSC Size	d	b	l	l2	Insert
Call For Details	PSC 40 MT CUT SVJPL 10	Call For Details	PSC 40 MT CUT SVJPL 10	40	40	15	75	50	VP.. 1003




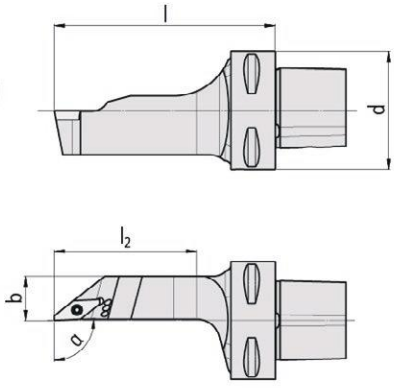

Multitask PSC 40 MT SVJP V (93°)

Left Hand		Right Hand		Dimensions & Features					
Item No.	Description	Item No.	Description	PSC Size	d	b	l	l2	Insert
Call For Details	PSC 40 MT CUT SVJPL 10 V	Call For Details	PSC 40 MT CUT SVJPL 10 V	40	40	15	75	50	VP.. 1003




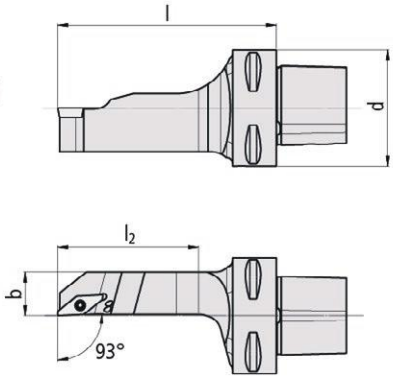

Multitask PSC 40 MT SCLC (95°)

Left Hand		Right Hand		Dimensions & Features					
Item No.	Description	Item No.	Description	PSC Size	d	b	l	l2	Insert
Call For Details	PSC 40 MT SCLCL 06	Call For Details	PSC 40 MT SCLCR 06	40	40	15	75	43	CC.. 0602..
Call For Details	PSC 40 MT SCLCL 09	Call For Details	PSC 40 MT SCLCR 09	40	40	15	75	43	CC.. 09T3..




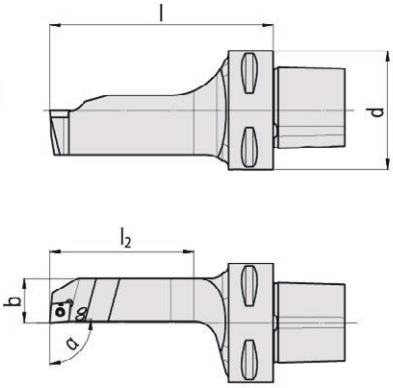

Multitask PSC 40 MT SDJC (93°)

Left Hand		Right Hand		Dimensions & Features					
Item No.	Description	Item No.	Description	PSC Size	d	b	l	l2	Insert
Call For Details	PSC 40 MT SDJCL 07	Call For Details	PSC 40 MT SDJCR 07	40	40	15	75	43	DC.. 0702..
Call For Details	PSC 40 MT SDJCL 11	Call For Details	PSC 40 MT SDJCR 11	40	40	15	75	43	DC.. 11T3..




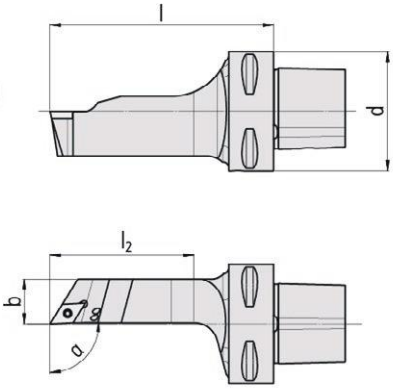

Multitask PSC 40 MT SVJC

Left Hand		Right Hand		Dimensions & Features					
Item No.	Description	Item No.	Description	PSC Size	d	b	l	l2	Insert
Call For Details	PSC 40 MT SVJCL 07	Call For Details	PSC 40 MT SVJCR 07	40	40	15	75	45	VC.. 0702..
Call For Details	PSC 40 MT SVJCL 11	Call For Details	PSC 40 MT SVJCR 11	40	40	15	75	45	VC.. 1103..
Call For Details	PSC 40 MT SVJCL 13	Call For Details	PSC 40 MT SVJCR 13	40	40	15	75	45	VC.. 1303..




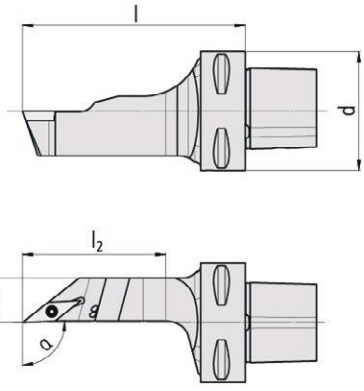

Multitask PSC 40 SDA

Dimensions & Features											
Item No.	Description	HSK Size	d	l	lg	l1	l2	l3	d1	d2	Insert
Call For Details	PSC 40 SDA-4	40	40	l0+l1	l-l3	25	20	50.5	10	4	SD.4/SX.4
Call For Details	PSC 40 SDA-6	40	40	l0+l1	l-l3	25	20	54.5	15	6	SD.6/SX.6
Call For Details	PSC 40 SDA-8	40	40	l0+l1	l-l3	25	20	56.5	18	8	SD.8/SX.8



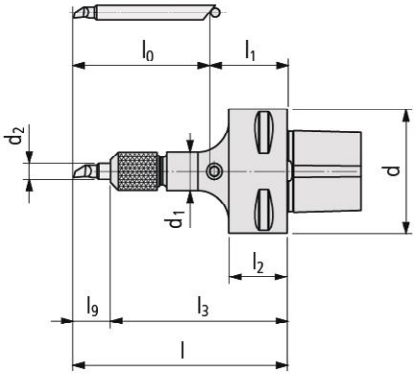

Notes:

SWISS SILVER

Signature Series Cutting Oil



Formulated For CNC Swiss-Type Machines

Swiss Silver is formulated from a highly refined mineral base oil that is as crystal clear as pure water. Low viscosity makes it perfect for Swiss-type machines and small parts manufacturing as it provides superior penetration on micro parts and better flow to the cutting tool.

- NO STAINING RESINS - Your machine stays cleaner
- HIGH FLASH POINT - Reduces possibility of machine fires
- LOW MIST - Good for high pressure delivery
- LOW VISCOSITY - Reduces air entrapment
- INCREASED VISIBILITY - Easier to see into the machine



TYPE A - Most Metals **TYPE B - Ferrous & Tough Alloys**

Type A is for all metals, including copper and brass. It can also be used on plastics.

Type B contains an additive that increases tool life performance on ferrous. metals and tough alloys, but can tarnish brass or copper unless parts are cleaned immediately.

USES:

Swiss Silver low-viscosity cutting oils are designed for machining operations in a CNC Swiss machine. Our fluids provide exceptional visibility during operation, while allowing optimum operating speeds and stock removal. The lower viscosity allows for excellence in precision micromachining, drilling and milling operations, and more, which results in better heat dissipation, improved chip removal and the ability to dig deeper holes.

QUALITY:

Our oils are perfected to a lower viscosity with minimal reduction in flash point. The low foaming qualities and high performance make this fluid ideal for high-pressure coolant delivery systems. Utilizing state-of-the-art technology, Swiss Silver excels on all workable materials. In long-term usage, it provides high performance on all metals. It also out-performs conventional oils previously recommended by machine manufacturers. Provided in type A (all metals) and type B (ferrous and tough metals).

SAFE:

The flash point of Swiss Silver provides maximum safety. This fluid will not cause operator skin irritations and is non-hazardous. It contains no nitrites or ethanolamines.

PROPERTIES:

Swiss Silver is a clear, low-viscosity oil. The unique formulation of this product results in a low-foam, low-smoke fluid that is cleaner than standard oils used in Swiss-style CNC turning machines. Since it is a clear liquid, it provides optimum visibility for the machine operator.

STORAGE AND HANDLING:

Swiss Silver can easily be handled under ordinary commercial conditions. Storage tanks should be mild steel. Glass-lined or stainless tanks are also acceptable.

APPLICATION:

Swiss Silver is designed for circulating systems associated with Swiss-style CNC turning machines.

PACKAGING:

Swiss Silver is sold in 5-gallon pails, 55-gallon drums, and 275-gallon totes.

CUTTING OIL							
Properties:	**A**	**AB**	**HM**	**HP**	**PL**	**VX**	**GD**
Specific Gravity @ 60°F	.92	.90	.94	.92	.86	.95	.88
Pounds/Gallon	7.60	7.50	7.60	7.60	7.20	7.98	7.25
Viscosity SUS @ 100°F	85	85	<90	94	62		90
Appearance	Light Amber	Light Amber	Light Amber	Light Amber	Bright Clear	Amber	Bright Clear
Flash Point	> 365°F	>360°F	> 365°F	>380°F	>320°F	>420°F	>420°F
Materials	Ferrous, Non-Ferrous	Aluminum, Brass, Copper	Nickel, Inconel, Hastelloy, Exotic Alloys	Stainless Steel, Tough Alloys, Titanium, Brass, Aluminum	Stainless Steel, Tough Alloys, Titanium, Brass, Aluminum	Aerospace Alloys, Aluminum, Tough Steel/Nickel Alloys	Stainless Steel, Tough Alloys, Titanium, Brass, Aluminum

Swiss Silver Premium - Most Metals

Our standard premium HIGH PERFORMANCE product, ideal for all Swiss-type machines or small parts turning centers. Provides extended tool life in ferrous and non-ferrous applications. Minimal air entrainment reduces misting under medium pressure coolant delivery.

Type	Size	Item No.	Description
A (Most Metals)	55 Gallon	2505-000100	LCO-SS00-A00-MGS
A (Most Metals)	5 Gallon	2505-000107	LCO-SS00-A00-M-5G
B (Ferrous & Tough Alloys)	55 Gallon	2505-000101	LCO-SS00-B00-MGS
B (Ferrous & Tough Alloys)	5 Gallon	2505-000118	LCO-SS00-B00-M-5G

Swiss Silver AB - Aluminum & Brass

Specifically formulated for enhanced surface finish results in aluminum, brass & copper applications. Prevents tarnishing of yellow metals. Features low air entrainment for low mist under medium pressure coolant delivery.

Type	Size	Item No.	Description
Standard	55 Gallon	2505-000102	LCO-SSAB-000-MGS
Standard	5 Gallon	2505-000113	LCO-SSAB-000-M-5G
High Pressure	55 Gallon	2505-000111	LCO-SSHP-AB0-MGS
High Pressure	5 Gallon	2505-000119	LCO-SSHP-AB0-M-5G

Swiss Silver HM - Hard Metals

A special formulation of Swiss Silver designed to enhance the machining of "hard metals" such as high nickel materials, inconel, hastelloy, and other tough-to-machine exotic alloys. Includes the tool life enhancing additives and low misting agents offered in other Swiss Silver variants.

Type	Size	Item No.	Description
B (Ferrous & Tough Alloys)	55 Gallon	2505-000103	LCO-SSHM-B00-MGS
B (Ferrous & Tough Alloys)	5 Gallon	2505-000120	LCO-SSHM-B00-M-5G

Swiss Silver HP - High Pressure Delivery Formula

An enhanced formula of the standard premium cutting oil product that greatly reduces the mist and air entrainment under high pressure pump coolant delivery applications found in many Swiss-type machining operations.

Type	Size	Item No.	Description
A (Most Metals)	55 Gallon	2505-000104	LCO-SSHP-A00-MGS
A (Most Metals)	5 Gallon	2505-000108	LCO-SSHP-A00-M-5G
B (Ferrous & Tough Alloys)	55 Gallon	2505-000105	LCO-SSHP-B00-MGS
B (Ferrous & Tough Alloys)	5 Gallon	2505-000117	LCO-SSHP-B00-M-5G

Swiss Silver PL - Platinum

Provides low viscosity and better heat dispersion for precision micro machining and deep hole drilling. Available in both TYPE A & Type B Grades. Excels on stainless steel, tough alloys, titanium, brass, and aluminum.

Type	Size	Item No.	Description
A (Most Metals)	55 Gallon	2505-000124	LCO-SPLA-A00-MGS
A (Most Metals)	5 Gallon	2505-000125	LCO-SPLA-A00-M-5G
B (Ferrous & Tough Alloys)	55 Gallon	2505-000126	LCO-SPLB-B00-MGS
B (Ferrous & Tough Alloys)	5 Gallon	2505-000127	LCO-SPLB-B00-M-5G

Swiss Silver VX - Vegetable Based Formula

A high-performance vegetable based cutting oil product that provides pure lubricity and unparalleled surface finish on ferrous and non-ferrous parts. Biodegradable and evironmentally acceptable for fulfilling 'green' manufacturing objectives.

Type	Size	Item No.	Description
A (Most Metals)	55 Gallon	2505-000106	LCO-SSVX-101A-VGS
A (Most Metals)	5 Gallon	2505-000114	LCO-SSVX-101A-VGS-5G
B (Ferrous & Tough Alloys)	55 Gallon	2505-000110	LCO-SSVX-101B-VGS
B (Ferrous & Tough Alloys)	5 Gallon	2505-000123	LCO-SSVX-101B-VGS-5G

Swiss GD - Gold

Low foaming oil with maximum visibility, Swiss Gold is ideal for high pressure systems, providing a mix of low viscosity and a high flash point. Excels on stainless steel, tough alloys, titanium, brass, and aluminum. Long term use provides high performance on all metals.

Type	Size	Item No.	Description
A (Most Metals)	55 Gallon	2505-000129	LCO-SSGA-A00-MGS

Special formulations are also available for custom applications.
Low or no chlorine formulas available on request.
Way Lube also available.

SWISS SILVER

Signature Series Bar Feed Oil

USES:
Swiss Silver Bar Feed Oils are premium rust and oxidation inhibited lubricants that are typically described as circulating, turbine, hydraulic and bearing oil. It can be used as low pressure hydraulic, circulating, gear, and compressor oil. It is specially formulated with high quality base stock and thermally stable additives. This oil offers excellent resistance to rust, oxidation, foam, and sludge formation.

QUALITY:
Our oils are made from high VI Group II paraffinic base stock that provide outstanding thermal and oxidative stability, low copper activity, excellent rust protection, good hydrolytic stability, good demulsifying capability and good antifoam characteristics. These fluids contain no sulfur or zinc-type additives which helps eliminate the formation of biofilms when exposed to water-based metalworking fluids. These oils are suitable for N/C machine tools and other high output equipment where sustained heat is prevalent. These oils exhibit superior hydrolytic stability in the presence of water and will not contribute to either the formation of metal-etching acids or corrosive reactants.

SAFE:
They are inhibited against rusting in both fresh and sea water and pass both A and B Sequences of the ASTM D 665 Turbine Oil Rust Test. These oils are approved against stringent performance requirements including Cincinnati Milacron P-38, P-45, P-54, P-55, P-57, P-62, Parker Hannifin France HF-1, DIN 51524 Part 1, MIL-H-17672C, US Steel 126, and AFNOR E-46-800 HL. ISO 100 Bar Feed Oil resist foaming and will not foster abnormal air entrainment in properly designed hydraulic circuits. The oils also readily and rapidly separate water permitting sump drain-off of the contaminating water.

PROPERTIES:
Swiss Silver is a clear, low-viscosity oil. The unique formulation of this product results in a low-foam, low-smoke fluid that is cleaner than standard oils used in Swiss-style CNC turning machines. Since it is a clear liquid, it provides optimum visibility for the machine operator.

STORAGE AND HANDLING:
Swiss Silver can easily be handled under ordinary commercial conditions. Storage tanks should be mild steel. Glass-lined or stainless tanks are also acceptable.

APPLICATION:
These Oils are recommended for service in vain, piston, and gear pumps when used in accordance with the manufacturer's recommendations. They are designed to provide maximum service life to these pumps as well as to other circuit components such as motors and servos. These oils are also recommended for use as gear and bearing lubricants in industrial applications where rust and oxidation inhibited oils are required.

PACKAGING:
Swiss Silver is sold in 5-gallon pails, 55-gallon drums, and 275-gallon totes.

SWISS SILVER

Signature Series Bar Feed Oil

BAR FEED OIL				
Properties:	**ISO 100**	**ISO 150**	**ISO 220**	**ISO 320**
Specific Gravity @ 60°F	28.6	28	27.5	26.9
Pounds/Gallon	7.3	7.3	7.4	7.4
Viscosity SUS @ 100°F	532	810	1170	1706
Appearance	Light Amber	Light Amber	Light Amber	Light Amber
Flash Point	> 500°F	>525°F	> 547°F	>565°F

Swiss Silver ISO Bar Feed Oil

A premium rust and oxidation inhibited lubricants that are typically described as circulating, turbine, hydraulic and bearing oil. It can be used as low pressure hydraulic, circulating, gear, and compressor oil. It is specially formulated with high quality base stock and thermally stable additives. This oil offers excellent resistance to rust, oxidation, foam, and sludge formation.

Type	Size	Item No.
General Purpose	55 Gallon	Call For Details
General Purpose	5 Gallon	Call For Details










GenSwiss MicroCoolant Kit

- **No more searching for proper fittings!**
- **Everything in one kit with all connections!**
- **Precision Copper sealing gaskets!**
- **High pressure hose with quick disconnect!**
- **Wrenches included for all fittings!**

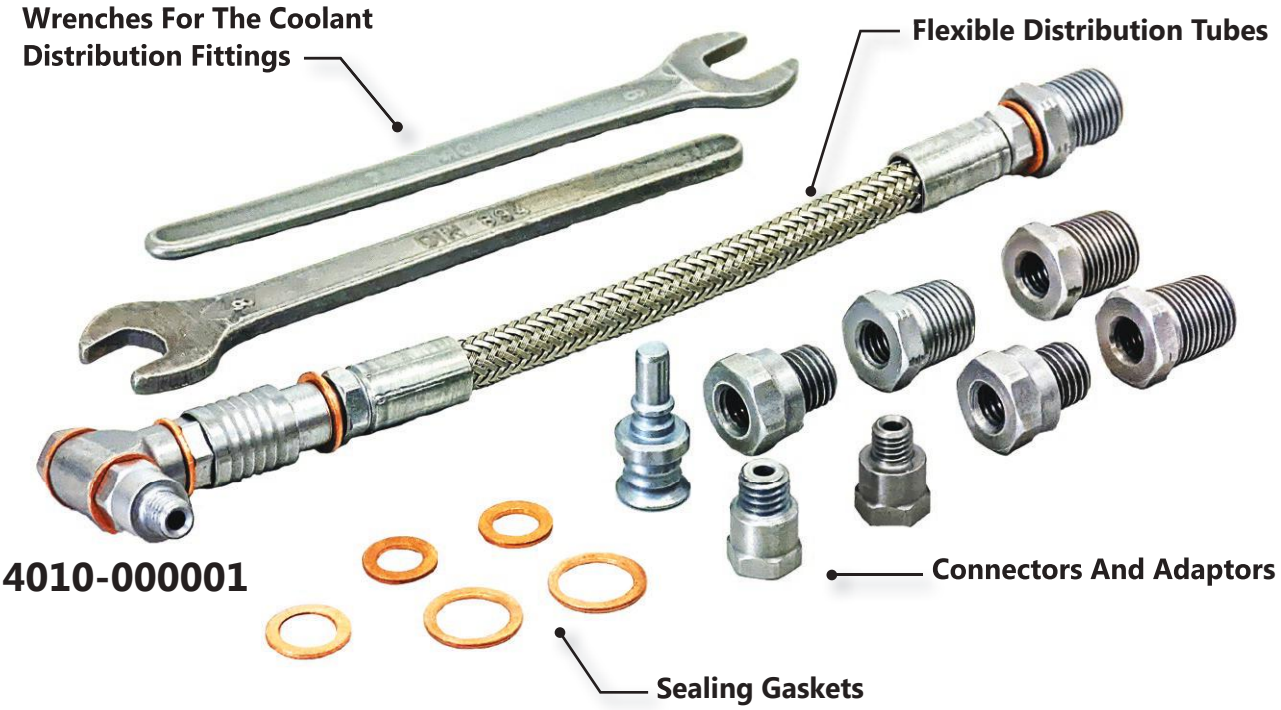

GenSwiss MicroCoolant Kit

Flexible tube 102mm (Stocked) 152mm / 203mm (Available upon request) with quick connection fittings.

Quick Connection Fittings:
(1) Quick connection fitting MICRO with M8x1(M) on one end.

Flexible Distribution Tubes:
(1) M8x1(M), flexible tube OD: 8 mm, L: 4", 6" or 8" (102, 152 or 203 mm), M8x1(M)

Connectors And Adaptors:
(2) Adaptor M8x1 (H) to BSPP 1/8" (M)
(1) Adaptor M8x1 (H) to M6x1 (M)
(1) Spacer H:10mm M8x1 (M)-M8x1 (F)
(1) Short banjo M8x1 (F)
(1) Banjo bolt M8x1 (M)

Locking And Connecting Plugs:
(1) Quick connection fitting NANO to M8x1(F)
(1) Sealing plug with quick connection fitting MICRO

Sealing Gaskets:
(2) Sealing gasket in copper for M6
(6) Sealing gasket in copper for M8
(1) Sealing gasket in copper for M10 & BSPP 1/8"

Fastening Keys For Coolant Distribution Fittings:
(2) Wrench for assembly on the universal hexagon used in the MICRO program.

Connectors and Adaptors



Adaptor M6x1(H) to NPT 1/8"(M)



Adaptor M6x1(H) to BSPT 1/8"(M)



Adaptor M6x1(H) to M8x1(M)



Adaptor M6x1(H) to M5x0.8(M)



Quick-Change Protector Plug



Adaptor M6x1(H) to BSPT 1/8"(M)



Adaptor M6x1(H) to M8x1(M)



Quick-Change Fitting M6x1(M) on one end(M)

GenSwiss Signature Series MicroCoolant Adaptors



M5 to 1/4JIC
4005-000133

- Easily adapts coolant delivery kits to standard quarter JIC feedlines from high-pressure pumps
- Run a feedline from the pump to the tool
- M5 to 1/4JIC



M6 to 1/4JIC
4005-000134

- Easily adapts coolant delivery kits to standard quarter JIC feedlines from high-pressure pumps
- Run a feedline from the pump to the tool
- M6 to 1/4JIC

Signature Series Ejector Pins
For CITIZEN, STAR, & TSUGAMI Machines

Standard Machining Applications

M10 to M8 Adapter For Using Stand-Alone Ejector Pins With 25 & 32mm Machines



Stand-Alone Ejector Pins


Ejector Pin Bases With High Pressure Air Or Coolant-Thru

Interchangeable Tips With High Pressure Air Or Coolant-Thru

*Kit EJK-CIT2532-KIT-A Shown


Cut Down On Cost & Reduce Operation Time

Ejector Pins With High Pressure Air or Coolant-Thru

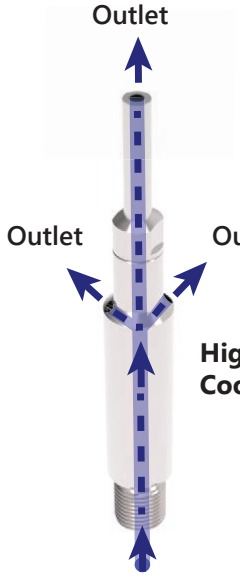

High Pressure Air & Coolant-Thru Ready


Inlet For High Pressure Air or Coolant Inlet

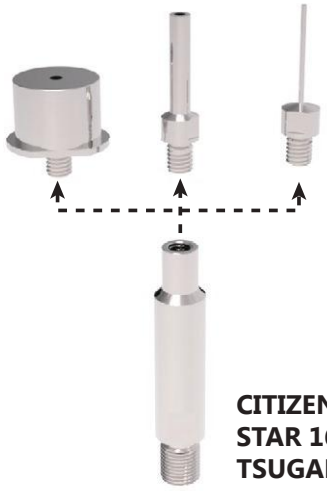

Multiple Tip Sizes For Different Collet Types & Sizes

Interchangeable Tips Cut Down On Cost and Reduces Operation Time

CITIZEN 12, 16, 20, 25, & 32mm Machine Kits
STAR 16, 20, 25, & 32mm Machine Kits
TSUGAMI 12, 16, & 20mm Machine Kits

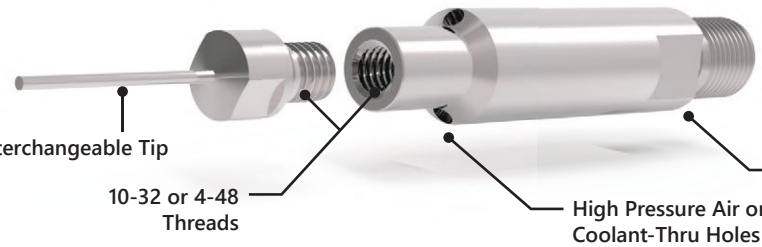

CITIZEN 12mm Machines


Item No.	Kit	Machines	Component Type	Diameter	Length	Coolant-Thru
7512-000128	EJK-CIT12-KIT-A	Citizen K12, L12	Ejector Base	.160in	1.550in	No
				.310in	1.550in	Yes
			Interchangeable Tips	.040in	0.850in	No
				.060in	0.850in	No
				.090in	0.850in	No
				.120in	0.850in	No
				.040in	1.034in	No
				.093in	1.034in	Yes
				.200in	1.034in	Yes
				.310in	1.034in	Yes





CITIZEN 16 & 20mm Machines


Item No.	Kit	Machines	Component Type	Diameter	Length	Coolant-Thru
7512-000124	EJK-CIT1620-KIT-A	Citizen C16, A20, L20, M20	Ejector Base	.276in	1.600in	Yes
			Interchangeable Tips	.625in	0.500in	Yes
				.040in	1.034in	No
				.070in	1.034in	No
				.093in	1.034in	Yes
				.200in	1.034in	Yes
			Stand-Alone Ejectors	.120in	1.600in	No
				.240in	1.600in	Yes
				.300in	1.600in	Yes
				.394in	1.600in	Yes

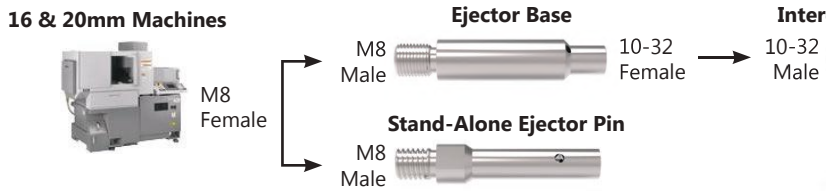



CITIZEN 25 & 32mm Machines

Item No.	Kit	Machines	Component Type	Diameter	Length	Coolant-Thru
7512-000125	EJK-CIT2532-KIT-A	Citizen L25, A32, L32, M32	Ejector Base	.276in	1.600in	Yes
			Interchangeable Tips	.625in	0.500in	Yes
				.040in	1.034in	No
				.070in	1.034in	No
				.093in	1.034in	Yes
				.200in	1.034in	Yes
			Stand-Alone Ejectors	.120in	1.600in	No
				.240in	1.600in	Yes
				.300in	1.600in	Yes
				.394in	1.600in	Yes
			Adapter M10-M8	.394in	0.800in	Yes

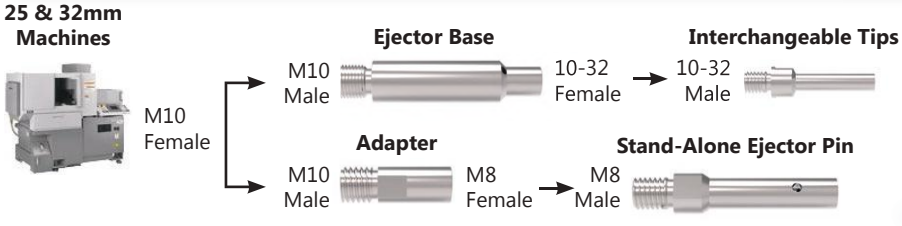



STAR 16, 20, 25, & 32mm Machines

Item No.	Kit	Machines	Component Type	Diameter	Length	Coolant-Thru
7512-000139	EJK-STA1632-KIT-A	Star	Ejector Base	.275in	1.571in	Yes
			Interchangeable Tips	.093in	1.034in	No
				.093in	1.034in	Yes
				.150in	1.034in	Yes
				.250in	1.034in	Yes
				.310in	1.034in	Yes
				.375in	1.034in	No
				.375in	1.034in	Yes
				.437in	1.034in	No
				.437in	1.034in	Yes

16, 20, 25, & 32mm Machines



M10 Female → M10 Male

Ejector Base



10-32 Female → 10-32 Male

Interchangeable Tips





TSUGAMI 12mm Machines

Item No.	Kit	Machines	Component Type	Diameter	Length	Coolant-Thru
7512-000141	EJK-TSU12-KIT-A	Tsugami	Ejector Base	.276in	0.8in	Yes
			Interchangeable Tips	.093in	1.034in	No
				.120in	1.034in	Yes
				.200in	1.034in	Yes
				.310in	1.034in	Yes
				.375in	1.034in	Yes
				.437in	1.034in	No
				.437in	1.034in	Yes

12mm Machines



M8 Female → M8 Male

Ejector Base



10-32 Female → 10-32 Male

Interchangeable Tips





TSUGAMI 16 & 20mm Machines

Item No.	Kit	Machines	Component Type	Diameter	Length	Coolant-Thru
7512-000140	EJK-TSU1620-KIT-A	Tsugami	Ejector Base	.276in	0.8in	Yes
			Interchangeable Tips	.093in	1.034in	No
				.093in	1.034in	Yes
				.150in	1.034in	Yes
				.250in	1.034in	Yes
				.310in	1.034in	Yes
				.375in	1.034in	No
				.375in	1.034in	Yes
				.437in	1.034in	No
				.437in	1.034in	Yes

16mm & 20mm Machines



M8 Female → M8 Male

Ejector Base



10-32 Female → 10-32 Male


Interchangeable Tips





Stand-Alone Ejector Pin Kit

Item No.	Kit	Machines	Diameter	Length	Coolant-Thru
7512-000136	EJK-M8-KIT-A	Citizen C16, A20, L20, M20, L25, A32, L32, M32	.120in	1.600in	No
			.240in	1.600in	Yes
			.300in	1.600in	Yes
			.394in	1.600in	Yes

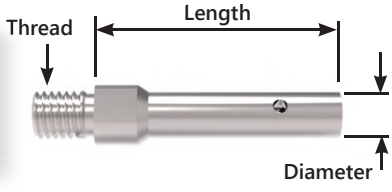

Ejector Base Packs

Machine(s)	Pieces	Coolant-Thru	FIts Ejector TIps	Item No.	Pack No.
TSUGAMI 12, 16, 20mm	4	Yes	10-32	7512-000149	EJK-PACKBASE-M8-1032-080-IC
STAR 12, 16, 20, 32mm	4	Yes	10-32	7512-000150	EJK-PACKBASE-M10-1032-157-IC
CITIZEN 12mm	4	Yes	10-32	7512-000151	EJK-PACKBASE-M5-1032-155-IC
CITIZEN 12mm	4	Yes	4-48	7512-000152	EJK-PACKBASE-M5-448-155-IC*
CITIZEN 16, 20mm	4	Yes	10-32	7512-000153	EJK-PACKBASE-M8-1032-160-IC
CITIZEN 25, 32mm	4	Yes	10-32	7512-000154	EJK-PACKBASE-M10-1032-160-IC

*Requires tips from kit EJK-CIT12-KIT-A or kit EJK-0448-KIT-A

Tip Packs - Includes 5 Pieces Of A Single Size

Pieces	Diameter	Length	Coolant-Thru	Thread	Item No.	Pack No.
5	.040in	1.034in	No	10-32	7512-000163	EJK-PACKTIP-1032-1034-040
5	.070in	1.034in	No	10-32	7512-000162	EJK-PACKTIP-1032-1034-070
5	.093in	1.034in	No	10-32	7512-000161	EJK-PACKTIP-1032-1034-093
5	.093in	1.034in	Yes	10-32	7512-000164	EJK-PACKTIP-1032-1034-093-IC
5	.120in	1.034in	Yes	10-32	7512-000160	EJK-PACKTIP-1032-1034-120-IC
5	.150in	1.034in	Yes	10-32	7512-000159	EJK-PACKTIP-1032-1034-150-IC
5	.200in	1.034in	Yes	10-32	7512-000158	EJK-PACKTIP-1032-1034-200-IC
5	.250in	1.034in	Yes	10-32	7512-000157	EJK-PACKTIP-1032-1034-250-IC
5	.310in	1.034in	Yes	10-32	7512-000155	EJK-PACKTIP-1032-1034-310-IC
5	.375in	1.034in	No	10-32	7512-000167	EJK-PACKTIP-1032-1034-375
5	.375in	1.034in	Yes	10-32	7512-000168	EJK-PACKTIP-1032-1034-375-IC
5	.437in	1.034in	No	10-32	7512-000165	EJK-PACKTIP-1032-1034-437
5	.437in	1.034in	Yes	10-32	7512-000166	EJK-PACKTIP-1032-1034-437-IC
5	.500in	1.034in	Yes	10-32	7512-000169	EJK-PACKTIP-1032-500-500-IC
5	.625in	1.034in	Yes	10-32	7512-000170	EJK-PACKTIP-1032-500-625-IC

Assorted Tip Kits

Machine(s)	Pieces	Diameter	Length	Coolant-Thru	Thread	Item No.	Kit No.
CITIZEN 12mm	4	.040in	.850in	No	4-48	7512-000135	EJK-0448-KIT-A*
		.060in	.850in	No	4-48		
		.090in	.850in	No	4-48		
		.120in	.850in	No	4-48		
CITIZEN 12, 16, 20, 25, 32mm	9	.040in	1.034in	No	10-32	7512-000134	EJK-1032-KIT-A
		.070in	1.034in	No	10-32		
		.093in	1.034in	No	10-32		
		.093in	1.034in	Yes	10-32		
		.120in	1.034in	Yes	10-32		
		.150in	1.034in	Yes	10-32		
		.200in	1.034in	Yes	10-32		
		.250in	1.034in	Yes	10-32		
		.310in	1.034in	Yes	10-32		
STAR 16, 20, 25, & 32mm TSUGAMI 16 & 20mm	13	.040in	1.034in	No	10-32	7512-000142	EJK-STTS1032-KIT-A
		.070in	1.034in	No	10-32		
		.093in	1.034in	No	10-32		
		.375in	1.034in	No	10-32		
		.437in	1.034in	No	10-32		
		.093in	1.034in	Yes	10-32		
		.120in	1.034in	Yes	10-32		
		.150in	1.034in	Yes	10-32		
		.200in	1.034in	Yes	10-32		
		.250in	1.034in	Yes	10-32		
		.310in	1.034in	Yes	10-32		
		.375in	1.034in	Yes	10-32		
		.437in	1.034in	Yes	10-32		

*Requires a base from kit EJK-CIT12-KIT-A or base kit EJK-PACKBASE-M5-448-155-IC for 12mm Citizen machines

Parts Cleaning System

- Easy to install - connects to shop air in minutes
- Keeps the air and floor clean of oil residue
- Captures EXPENSIVE cutting fluids for reuse
- The perfect accessory for Swiss machine shops
- Wash stations are available for washing & drying parts

Item No.	Description
1550-000101	12inch Angle Top MiJET Unit
1550-000102	12inch Flat Top MiJET Unit
1550-000100	8inch Angle Top MiJET Unit
1550-000103	8inch Flat Top MiJET Unit
1550-000131	8inch MiJET Wash Station
1550-000132	12inch MiJET Wash Station



Optional Casters For Ease Of Transport



Flat Top Mi-JET



Solvent Container For Washing Parts



Wash Stations Include:

- Table with counter top
- Solvent container
- Fluid pump
- MiJet unit


MAGNETIC FINISHING
No Feature Is Too Small

- Edge rounding of .002-.003in
- Removes micro burrs
- Improves surface finishes

Contact Us For A FREE Applications Trial





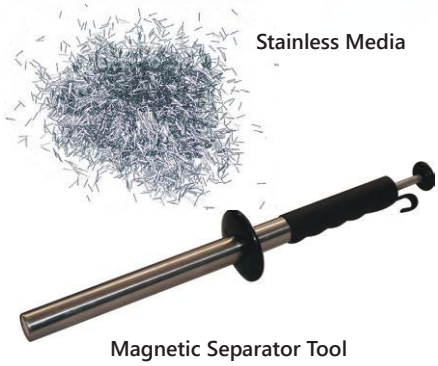

Magnetic Finishers remove micro burrs and improve surface finishes on Non-Ferrous materials and some stainless steels. Small steel pins with diameters ranging from .007in -.050in are spun at a high-speed by a magnetic wheel. The size of the pins enable them to travel through fragile parts to remove microscopic burrs that would normally be removed by hand. The non-aggressive burnishing action enables desirable edge rounding of .002-.003" without part damage to threads, knurls, or other fine edge surfaces.

Complete Sets - Includes Stainless Finishing Media & Supplies

Item No.	Description	Bowl Size	Includes:
1505-000134	FR-CMF-610-S	6in	Includes Base, Turbo Finishing Pins, Burnishing Solution, & Magnetic Separator - 120V or 230V
1505-000130	FR-CMF-900-S	9in	Includes Base, Turbo Finishing Pins, Burnishing Solution, & Magnetic Separator - 120V or 230V

Finisher Units

Item No.	Description	Includes:
1505-000104	FR-23051	6in Finisher Unit
1505-000105	FR-23052	9in Finisher Unit

Stainless Steel Media

Item No.	Description	Includes:
1505-000126	FR-41374R	(1.00kg) .3mm Diameter x 5mm OAL
1505-000128	FR-41378R	(1.00kg) .5mm Diameter x 5mm OAL

Additional sizes available upon request

GenSwiss Signature Series Micro Inspection Vice Blocks

GenSwiss Signatures Series micro inspection vice blocks are a compact solution for holding the round shanks of micro tools and parts during inspection. Each block features precision ground datum surfaces so you can get accurate measurements and no tool or part movement in the block.

- **Special "V" block geometry for excellent hold on round micro parts and tools**
- **Ground datum surfaces for positioning**
- **Can be used on inspection tables and precision surfaces**
- **Holds shanks from 0.5mm to 6.0mm**



GenSwiss Micro Inspection Vice Blocks



5540-000486

V-Block 0.5mm - 1.0mm Micro Inspection Clamp



5540-000487

V-Block 1.0mm - 1.5mm Micro Inspection Clamp



5540-000488

V-Block 1.5mm - 2mm Micro Inspection Clamp




5540-000489

V-Block 2.0mm - 4.0mm Micro Inspection Clamp



5540-000490

V-Block 4.0mm - 6.0mm Micro Inspection Clamp

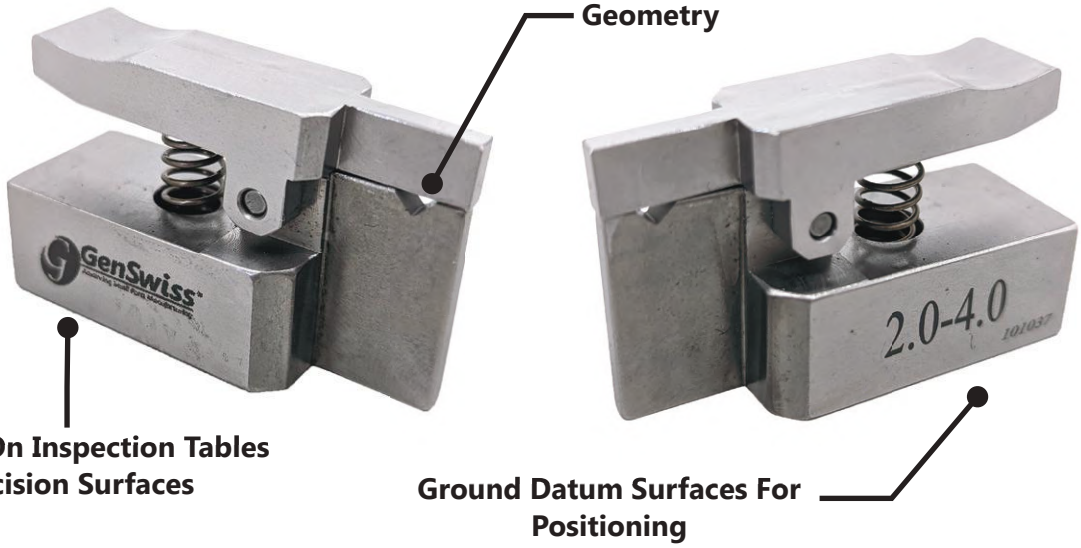

Item No.	Description	Tool Size Range	Block Size
5505-000486	IMC V-Block 0.5mm - 1.0mm Micro Inspection Clamp	0.5-1.0mm	52x20x31mm
5505-000487	IMC V-Block 1.0mm - 1.5mm Micro Inspection Clamp	1.0-1.5mm	52x20x31mm
5505-000488	IMC V-Block 1.5mm - 2.0mm Micro Inspection Clamp	1.5-2.0mm	52x20x31mm
5505-000489	IMC V-Block 2.0mm - 4.0mm Micro Inspection Clamp	2.0-4.0mm	52x20x31mm
5505-000490	IMC V-Block 4.0mm - 6.0mm Micro Inspection Clamp	4.0-6.0mm	52x20x31mm

GenSwiss Micro Inspection Vice Blocks

IMC V-Block 0.5mm - 1.0mm Micro Inspection Clamp
- GSI Part - 5540-000486
- Tool Size Range - 0.5-1.0mm
- Block Length - 52mm
- Block Width - 20mm
- Block Height - 31mm

IMC V-Block 1.0mm - 1.5mm Micro Inspection Clamp
- GSI Part - 5540-000487
- Tool Size Range - 1.0-1.5mm
- Block Length - 52mm
- Block Width - 20mm
- Block Height - 31mm

IMC V-Block 1.5mm - 2.0mm Micro Inspection Clamp
- GSI Part - 5540-000488
- Tool Size Range - 1.5-2.0mm
- Block Length - 52mm
- Block Width - 20mm
- Block Height - 31mm

IMC V-Block 2.0mm - 4.0mm Micro Inspection Clamp
- GSI Part - 5540-000489
- Tool Size Range - 2.0-4.0mm
- Block Length - 52mm
- Block Width - 20mm
- Block Height - 31mm

IMC V-Block 4.0mm - 6.0mm Micro Inspection Clamp
- GSI Part - 5540-000490
- Tool Size Range - 4.0-6.0mm
- Block Length - 52mm
- Block Width - 20mm
- Block Height - 31mm



SIGNATURE SERIES
Collets & Guide Bushings
by GenSwiss®
Advancing Small Parts Manufacturing



Introducing GenSwiss' Signature Series Collets and Guide Bushings. Our collection of precision ground collets and guide bushings provides your stock material with exceptional stability. Get the dependability that you require when rigidity and repeatability are paramount. GenSwiss Signature Series Collets and Guide Bushings have got you covered from the moment that your bar stock enters the machine.

- **Barfeed collets, sub-spindle collets, guide bushings**
- **Minimize the risk of error in your runs**
- **Regular & extended nose**
- **Available for all major machine models**

GenSwiss #	Product Type
1100-XXXXXX	Sub-Spindle Collets
1110-XXXXXX	Guide Bushings
1120-XXXXXX	Emergency Collets
1130-XXXXXX	Barfeed Collets

Steel Emergency Collet - Standard Nose

Standard	Item No.	Description
TF15	1120-000100	EMC-TF15 Steel Emergency Collet
TF16	1120-000101	EMC-TF16 Steel Emergency Collet
TF20	1120-000102	EMC-TF20 Steel Emergency Collet
TF25	1120-000103	EMC-TF25 Steel Emergency Collet
TF30	1120-000104	EMC-TF30 Steel Emergency Collet
TF37	1120-000105	EMC-TF37SP Steel Emergency Collet



Call for additional sizes and extended nose emergengy collets.


Steel Headstock Collet - Grooved

Grooved, Extreme Precision

Standard	Bore Size	Item No.	Description
TF15	1/8in	1100-000100	MC-TF15-0.1250-GR-EP 1/8" Steel Headstock Collet
	1/4in	1100-000101	MC-TF15-0.2500-GR-EP 1/4" Steel Headstock Collet
	3/8in	1100-000102	MC-TF15-0.3750-GR-EP 3/8" Steel Headstock Collet
TF16	1/8in	1100-000103	MC-TF16-0.1250-GR-EP 1/8" Steel Headstock Collet
	1/4in	1100-000104	MC-TF16-0.2500-GR-EP 1/4" Steel Headstock Collet
	3/8in	1100-000105	MC-TF16-0.3750-GR-EP 3/8" Steel Headstock Collet
	1/2in	1100-000106	MC-TF16-0.5000-GR-EP 1/2" Steel Headstock Collet
TF20	1/8in	1100-000107	MC-TF20-0.1250-GR-EP 1/8" Steel Headstock Collet
	1/4in	1100-000108	MC-TF20-0.2500-GR-EP 1/4" Steel Headstock Collet
	3/8in	1100-000109	MC-TF20-0.3750-GR-EP 3/8" Steel Headstock Collet
	1/2in	1100-000110	MC-TF20-0.5000-GR-EP 1/2" Steel Headstock Collet
	5/8in	1100-000111	MC-TF20-0.6250-GR-EP 5/8" Steel Headstock Collet
TF25	1/4in	1100-000112	MC-TF25-0.2500-GR-EP 1/4" Steel Headstock Collet
	3/8in	1100-000113	MC-TF25-0.3750-GR-EP 3/8" Steel Headstock Collet
	1/2in	1100-000114	MC-TF25-0.5000-GR-EP 1/2" Steel Headstock Collet
	5/8in	1100-000115	MC-TF25-0.6250-GR-EP 5/8" Steel Headstock Collet
	3/4in	1100-000116	MC-TF25-0.7500-GR-EP 3/4" Steel Headstock Collet
TF30	1/4in	1100-000117	MC-TF30-0.2500-GR-EP 1/4" Steel Headstock Collet
	3/8in	1100-000118	MC-TF30-0.3750-GR-EP 3/8" Steel Headstock Collet
	1/2in	1100-000119	MC-TF30-0.5000-GR-EP 1/2" Steel Headstock Collet
	5/8in	1100-000120	MC-TF30-0.6250-GR-EP 5/8" Steel Headstock Collet
	3/4in	1100-000121	MC-TF30-0.7500-GR-EP 3/4" Steel Headstock Collet
	7/8in	1100-000122	MC-TF30-0.8750-GR-EP 7/8" Steel Headstock Collet
	1.0in	1100-000123	MC-TF30-1.0000-GR-EP 1.0" Steel Headstock Collet
TF37-SP	1/4in	1100-000124	MC-TF37-SP-0.2500-GR-EP 1/4" Steel Headstock Collet
	3/8in	1100-000125	MC-TF37-SP-0.3750-GR-EP 3/8" Steel Headstock Collet
	1/2in	1100-000126	MC-TF37-SP-0.5000-GR-EP 1/2" Steel Headstock Collet
	5/8in	1100-000127	MC-TF37-SP-0.6250-GR-EP 5/8" Steel Headstock Collet
	3/4in	1100-000128	MC-TF37-SP-0.7500-GR-EP 3/4" Steel Headstock Collet
	7/8in	1100-000129	MC-TF37-SP-0.8750-GR-EP 7/8" Steel Headstock Collet
	1.0in	1100-000130	MC-TF37-SP-1.0000-GR-EP 1.0" Steel Headstock Collet
	1-1/8in	1100-000131	MC-TF37-SP-1.1250-GR-EP 1-1/8" Steel Headstock Collet
	1-1/4in	1100-000132	MC-TF37-SP-1.2500-GR-EP 1-1/4" Steel Headstock Collet

Nomenclature	
MB - Machine Bushing	SB - Smooth Bore
MC - Machine Collet	GR - Grooved
EP - Extreme Precision	EN - Extended Nose
HP - High Precision	ENT - Extended Nose Taper

Example:

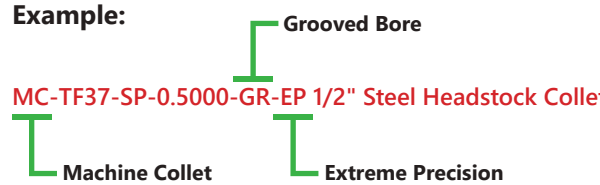


Sub-Spindle Collet - Standard Nose — Smooth Bore, Extreme Precision

Standard	Bore Size	Item No.	Description	Material
TF15	1/4in	1100-000133	MC-TF15-0.1250-SB-EP 1/8"	Steel
	1/8in	1100-000134	MC-TF15-0.2500-SB-EP 1/4"	Steel
	1/2in	1100-000135	MC-TF15-0.3750-SB-EP 3/8"	Steel
TF16	1.0in	1100-000139	MC-TF16-0.1250-SB-EP 1/8"	Steel
	1/4in	1100-000140	MC-TF16-0.2500-SB-EP 1/4"	Steel
	3/8in	1100-000141	MC-TF16-0.3750-SB-EP 3/8"	Steel
	1/2in	1100-000142	MC-TF16-0.5000-SB-EP 1/2"	Steel
TF20	1/4in	1100-000147	MC-TF20-0.1250-SB-EP 1/8"	Steel
	3/8in	1100-000148	MC-TF20-0.2500-SB-EP 1/4"	Steel
	1/2in	1100-000149	MC-TF20-0.3750-SB-EP 3/8"	Steel
	5/8in	1100-000150	MC-TF20-0.5000-SB-EP 1/2"	Steel
	3/4in	1100-000151	MC-TF20-0.6250-SB-EP 5/8"	Steel
TF25	1/4in	1100-000157	MC-TF25-0.2500-SB-EP 1/4"	Steel
	3/8in	1100-000158	MC-TF25-0.3750-SB-EP 3/8"	Steel
	1/2in	1100-000159	MC-TF25-0.5000-SB-EP 1/2"	Steel
	5/8in	1100-000160	MC-TF25-0.6250-SB-EP 5/8"	Steel
	3/4in	1100-000161	MC-TF25-0.7500-SB-EP 3/4"	Steel
TF30	1/4in	1100-000167	MC-TF30-0.2500-SB-EP 1/4"	Steel
	1/8in	1100-000168	MC-TF30-0.3750-SB-EP 1/8"	Steel
	1/2in	1100-000169	MC-TF30-0.5000-SB-EP 1/2"	Steel
	5/8in	1100-000170	MC-TF30-0.6250-SB-EP 5/8"	Steel
	3/4in	1100-000171	MC-TF30-0.7500-SB-EP 3/4"	Steel
	7/8in	1100-000172	MC-TF30-0.8750-SB-EP 7/8"	Steel
	1.0in	1100-000173	MC-TF30-1.0000-SB-EP 1.0"	Steel
TF37	1/4in	1100-000181	MC-TF37-SP-0.2500-SB-EP 1/4"	Steel
	3/8in	1100-000182	MC-TF37-SP-0.3750-SB-EP 3/8"	Steel
	0.397in	1100-000190	MC-TF37-SP-0.3970-SB-EP 0.397"	Steel
	1/2in	1100-000183	MC-TF37-SP-0.5000-SB-EP 1/2"	Steel
	5/8in	1100-000184	MC-TF37-SP-0.6250-SB-EP 5/8"	Steel
	3/4in	1100-000185	MC-TF37-SP-0.7500-SB-EP 3/4"	Steel
	7/8in	1100-000186	MC-TF37-SP-0.8750-SB-EP 7/8"	Steel
	1.0in	1100-000187	MC-TF37-SP-1.0000-SB-EP 1.0"	Steel
	1-1/8in	1100-000188	MC-TF37-SP-1.1250-SB-EP 1-1/8"	Steel
	1-1/4in	1100-000189	MC-TF37-SP-1.2500-SB-EP 1-1/4"	Steel

Nomenclature	
MB - Machine Bushing	SB - Smooth Bore
MC - Machine Collet	GR - Grooved
EP - Extreme Precision	EN - Extended Nose
HP - High Precision	ENT - Extended Nose Taper

Example:

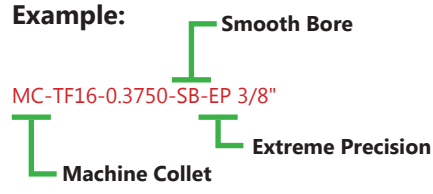


Sub-Spindle Collet - Extended Nose

Smooth Bore, Extreme Precision

Standard	Extension Length	Bore Size	Tapered	Item No.	Description	Material
TF15	.250in	5/8in	Yes	1100-000136	MC-TF15-0.1250-SB-EP-ENT.250 1/8"	Steel
	.250in	3/4in	Yes	1100-000137	MC-TF15-0.2500-SB-EP-ENT.250 1/4"	Steel
	.250in	7/8in	Yes	1100-000138	MC-TF15-0.3750-SB-EP-ENT.250 3/8"	Steel
TF16	.375in	5/8in	Yes	1100-000143	MC-TF16-0.1250-SB-EP-ENT.375 1/8"	Steel
	.375in	3/4in	Yes	1100-000144	MC-TF16-0.2500-SB-EP-ENT.375 1/4"	Steel
	.375in	7/8in	Yes	1100-000145	MC-TF16-0.3750-SB-EP-ENT.375 3/8"	Steel
	.375in	1.0in	Yes	1100-000146	MC-TF16-0.5000-SB-EP-ENT.375 1/2"	Steel
TF20	.375in	7/8in	Yes	1100-000152	MC-TF20-0.1250-SB-EP-ENT.375 1/8"	Steel
	.375in	1.0in	Yes	1100-000153	MC-TF20-0.2500-SB-EP-ENT.375 1/4"	Steel
	.375in	1-1/8in	Yes	1100-000154	MC-TF20-0.3750-SB-EP-ENT.375 3/8"	Steel
	.375in	1-1/4in	Yes	1100-000155	MC-TF20-0.5000-SB-EP-ENT.375 1/2"	Steel
	.375in	0.397in	Yes	1100-000156	MC-TF20-0.6250-SB-EP-ENT.375 5/8"	Steel
TF25	.375in	7/8in	Yes	1100-000162	MC-TF25-0.2500-SB-EP-ENT.375 1/4"	Steel
	.375in	1.0in	Yes	1100-000163	MC-TF25-0.3750-SB-EP-ENT .375 3/8"	Steel
	.375in	1-1/8in	Yes	1100-000164	MC-TF25-0.5000-SB-EP-ENT.375 1/2"	Steel
	.375in	1-1/4in	Yes	1100-000165	MC-TF25-0.6250-SB-EP-ENT.375 5/8"	Steel
	.375in	3/4in	No	1100-000166	MC-TF25-0.7500-SB-EP-EN.375 3/4"	Steel
TF30	.500in	1/4in	Yes	1100-000174	MC-TF30-0.2500-SB-EP-ENT.500 1/4"	Steel
	.500in	3/8in	Yes	1100-000175	MC-TF30-0.3750-SB-EP-ENT.500 3/8"	Steel
	.500in	1/2in	Yes	1100-000176	MC-TF30-0.5000-SB-EP-ENT.500 1/2"	Steel
	.500in	5/8in	Yes	1100-000177	MC-TF30-0.6250-SB-EP-ENT.500 5/8"	Steel
	.500in	3/4in	Yes	1100-000178	MC-TF30-0.7500-SB-EP-ENT.500 3/4"	Steel
	.500in	7/8in	Yes	1100-000179	MC-TF30-0.8750-SB-EP-ENT.500 7/8"	Steel
	.500in	1.0in	No	1100-000180	MC-TF30-1.0000-SB-EP-EN.500 1.0"	Steel
TF37	.500in	1/4in	Yes	1100-000191	MC-TF37-SP-0.2500-SB-EP-ENT.500 1/4"	Steel
	.500in	3/8in	Yes	1100-000192	MC-TF37-SP-0.3750-SB-EP-ENT.500 3/8"	Steel
	.500in	1/2in	Yes	1100-000193	MC-TF37-SP-0.5000-SB-EP-ENT.500 1/2"	Steel
	.500in	5/8in	Yes	1100-000194	MC-TF37-SP-0.6250-SB-EP-ENT.500 5/8"	Steel
	.500in	3/4in	Yes	1100-000195	MC-TF37-SP-0.7500-SB-EP-ENT.500 3/4"	Steel
	.500in	7/8in	Yes	1100-000196	MC-TF37-SP-0.8750-SB-EP-ENT.500 7/8"	Steel
	.500in	1.0in	Yes	1100-000197	MC-TF37-SP-1.0000-SB-EP-ENT.500 1.0"	Steel
	.500in	1-1/8in	Yes	1100-000198	MC-TF37-SP-1.1250-SB-EP-EN.500 1-1/8"	Steel
	.500in	1-1/4in	No	1100-000199	MC-TF37-SP-1.2500-SB-EP-EN.500 1-1/4"	Steel

Nomenclature	
MB - Machine Bushing	SB - Smooth Bore
MC - Machine Collet	GR - Grooved
EP - Extreme Precision	EN - Extended Nose
HP - High Precision	ENT - Extended Nose Taper

Example:

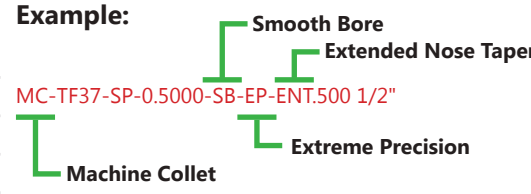

Carbide Guide Bushing — Extreme Precision

Standard	Bore Size	Item No.	Description
TD7	1/8"	1110-000133	MB-TD7-0.1250-EP 1/8" Carbide Guide Bushing
	3/16"	1110-000134	MB-TD7-0.1875-EP 3/16" Carbide Guide Bushing
	1/4"	1110-000135	MB-TD7-0.2500-EP 1/4" Carbide Guide Bushing
TD10	1/8"	1110-000100	MB-TD10-0.1250-EP 1/8" Carbide Guide Bushing
	1/4"	1110-000101	MB-TD10-0.2500-EP 1/4" Carbide Guide Bushing
	3/8"	1110-000102	MB-TD10-0.3750-EP 3/8" Carbide Guide Bushing
SD125R	1/8"	1110-000103	MB-SD125R-0.1250-EP 1/8" Carbide Guide Bushing
	1/4"	1110-000104	MB-SD125R-0.2500-EP 1/4" Carbide Guide Bushing
	3/8"	1110-000105	MB-SD125R-0.3750-EP 3/8" Carbide Guide Bushing
	1/2"	1110-000106	MB-SD125R-0.5000-EP 1/2" Carbide Guide Bushing
0201	1/8"	1110-000107	MB-0201-0.1250-EP 1/8" Carbide Guide Bushing
	1/4"	1110-000108	MB-0201-0.2500-EP 1/4" Carbide Guide Bushing
	3/8"	1110-000109	MB-0201-0.3750-EP 3/8" Carbide Guide Bushing
	1/2"	1110-000110	MB-0201-0.5000-EP 1/2" Carbide Guide Bushing
	5/8"	1110-000111	MB-0201-0.6250-EP 5/8" Carbide Guide Bushing
TD25	1/4"	1110-000112	MB-TD25NS-0.2500-EP 1/4" Carbide Guide Bushing
	3/8"	1110-000113	MB-TD25NS-0.3750-EP 3/8" Carbide Guide Bushing
	1/2"	1110-000114	MB-TD25NS-0.5000-EP 1/2" Carbide Guide Bushing
	5/8"	1110-000115	MB-TD25NS-0.6250-EP 5/8" Carbide Guide Bushing
	3/4"	1110-000116	MB-TD25NS-0.7500-EP 3/4" Carbide Guide Bushing
CD25	1/4"	1110-000117	MB-CD25-0.2500-EP 1/4" Carbide Guide Bushing
	3/8"	1110-000118	MB-CD25-0.3750-EP 3/8" Carbide Guide Bushing
	1/2"	1110-000119	MB-CD25-0.5000-EP 1/2" Carbide Guide Bushing
	5/8"	1110-000120	MB-CD25-0.6250-EP 5/8" Carbide Guide Bushing
	3/4"	1110-000121	MB-CD25-0.7500-EP 3/4" Carbide Guide Bushing
	7/8"	1110-000122	MB-CD25-0.8750-EP 7/8" Carbide Guide Bushing
	1.0"	1110-000123	MB-CD25-1.0000-EP 1.0" Carbide Guide Bushing
TD32	1/4"	1110-000124	MB-TD32-0.2500-EP 1/4" Carbide Guide Bushing
	3/8"	1110-000125	MB-TD32-0.3750-EP 3/8" Carbide Guide Bushing
	1/2"	1110-000126	MB-TD32-0.5000-EP 1/2" Carbide Guide Bushing
	5/8"	1110-000127	MB-TD32-0.6250-EP 5/8" Carbide Guide Bushing
	3/4"	1110-000128	MB-TD32-0.7500-EP 3/4" Carbide Guide Bushing
	7/8"	1110-000129	MB-TD32-0.8750-EP 7/8" Carbide Guide Bushing
	1.0"	1110-000130	MB-TD32-1.0000-EP 1.0" Carbide Guide Bushing
	1-1/8"	1110-000131	MB-TD32-1.1250-EP 1-1/8" Carbide Guide Bushing
	1-1/4"	1110-000132	MB-TD32-1.2500-EP 1-1/4" Carbide Guide Bushing

Nomenclature	
MB - Machine Bushing	SB - Smooth Bore
MC - Machine Collet	GR - Grooved
EP - Extreme Precision	EN - Extended Nose
HP - High Precision	ENT - Extended Nose Taper

Example:

MB-TD10-0.2500-EP 1/4" Carbide Guide Bushing

Machine Bushing — **Extreme Precision**

Barfeed Collets

Barfeeder Model	Range	Bore Size	Item No.	Description
CAV12M-IS	.078 - .334in	0.125in	1130-000100	MCB CAV FC10DL .125 Barfeed Collet
		0.25in	1130-000101	MCB CAV FC10DL .250 Barfeed Collet
	.334 - .413in	0.25in	1130-000102	MCB CAV FC12DL .250 Barfeed Collet
		8.0mm	1130-000103	MCB CAV FC12DL 8mm Barfeed Collet
		0.375in	1130-000104	MCB CAV FC12DL .375 Barfeed Collet
CAV CAV16/20L-IS	.118 - .546in	0.125in	1130-000105	MCB CAV CIT15NF .125 Barfeed Collet
		0.25in	1130-000106	MCB CAV CIT15NF .250 Barfeed Collet
		8.0mm	1130-000107	MCB CAV CIT15NF 8mm Barfeed Collet
		0.375in	1130-000108	MCB CAV CIT15NF .375 Barfeed Collet
		0.5in	1130-000109	MCB CAV CIT15NF .500 Barfeed Collet
	.546 - .629in	0.5in	1130-000110	MCB CAV CIT175NF .500 Barfeed Collet
		0.625in	1130-000111	MCB CAV CIT175NF .625 Barfeed Collet
		0.75in	1130-000112	MCB CAV CIT175NF .750 Barfeed Collet
CAV	.625 - 1.140in	0.625in	1130-000113	MCB CAV FC32NF .625 Barfeed Collet
		0.75in	1130-000114	MCB CAV FC32NF .750 Barfeed Collet
		0.875in	1130-000115	MCB CAV FC32NF .875 Barfeed Collet
		1.0in	1130-000116	MCB CAV FC32NF 1.00 Barfeed Collet
		1.125in	1130-000117	MCB CAV FC32NF 1-1/8 Barfeed Collet
IEMCA Mini Boss 325, BOS 542, CH112, CH225	7 - 18mm	0.25in	1130-000118	MCB IEM#20-.250 Barfeed Collet
		0.375in	1130-000119	MCB IEM#20-.375 Barfeed Collet
		0.5in	1130-000120	MCB IEM#20-.500 Barfeed Collet
		8mm	1130-000121	MCB IEM#20-8mm Barfeed Collet
		0.75in	1130-000122	MCB IEM#20-.750 Barfeed Collet
		1.0in	1130-000123	MCB IEM#20-1.000 Barfeed Collet
		1.125in	1130-000124	MCB IEM#20-1.125 Barfeed Collet

Live Tooling
Spindles & Attachments

Swiss Made by PCM be driven.



CITIZEN CINCOM MACHINES

A20	Pg. 416 - 417	
C16	Pg. 418 - 419	
K12 & K16	Pg. 420 - 421	
L12	Pg. 422 - 424	
L20	Pg. 425 - 430	
	L2-20 VIII / X / XII	Pg. 425
	L5-20 / L7-20 / L20-E	Pg. 428
A32, L32	Pg. 431 - 437	
	L4-25 & L4-32	Pg. 431
	A32-VIII & L32-VIII / X / XII	Pg. 432
	L6-32	Pg. 437
M12 & M16	Pg. 438 - 445	
	M2-12/16 & M3-12/16 Gang	Pg. 438
	M4-12/16 Gang	Pg. 440
	M12 & M16 Turret	Pg. 442
M20 & M32	Pg. 446 - 456	
	M4-20 & M4-32 Gang	Pg. 446
	M3-20 & M3-32 Gang	Pg. 448
	M3-20/32 & M4-20/32 Turret	Pg. 449
	M5-32 Gang	Pg. 454
	M5-32 Turret	Pg. 456

TORNOS DECO MACHINES

DECO 13 Pg. 460 - 461

DECO 20 Pg. 462 - 463

EVODECO 16 Pg. 464

TSUGAMI SWISS-TYPE MACHINES

SS20/32, HS20/32 Pg. 465

BW20 Pg. 465

S205/206 Pg. 466

B026-II/032-II Pg. 466

B026/032/038 Pg. 467

B01-III/02-III/07-III Pg. 468

P034H Pg. 469

STAR SWISS-TYPE MACHINES

ALL Pg. 470 - 475

REPAIRS & RESTORATION

One of the benefits of buying live tooling and spindles from GenSwiss, is knowing we will repair them too. We will repair your spindle at a fraction of the cost to purchase a brand new one and have your Swiss-style CNC running again in no time.




- **Live Swiss machine attachments restored to factory specification**
- **PCM and major OEM brands: CITIZEN, STAR, TSUGAMI, TORNOS**
- **$50 evaluation and inspection**
- **Repaired by factory trained professionals**

Call Us At: 1-413-562-4800

CITIZEN A20

Swiss Made by PCM be driven.

Up To 30,000 RPM
Optimized For Micro Drilling & Milling

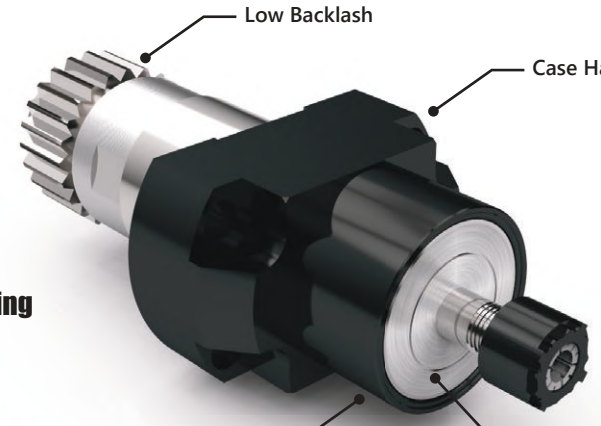

GSC-1110-4X

Citizen A20VII

(Machine's Live Tooling 4,500 RPM Rating)


Position	Operation	Item No.	Description	(#Tools)Size	Input:Output	Machine	Other
		5505-000200	BSC-510-3X	(1) ER11	1:3	$A_2$20VII	High speed
		5505-000351	BSC-510-3X-L	(1) ER11	1:3	$A_2$20VII	High speed, added bearing
		5505-000261	GSC-1110	(1) ER16	1:1	$A_3$20VII	
		5505-000285	GSC-1110-4X	(1) ER08	1:3.8	$A_3$20VII	Up to 30,000 RPM
	Angled Drilling / Milling	5505-000226	BSA-107	(1) ER11	1:1	$A_2$20VII, $A_3$20VII	Adjustable 0-180°
		5505-000353	BSA-2010	(6) ER16	1:1	$A_3$20VII	Double ended, adjustable 0-21°
	End Drilling / Milling	5505-000441	BSE-2007-2X	(4) ER11	1:2	$A_2$20VII, $A_3$20VII	Double ended
		5505-000386	BSE-3206	(6) ER11	1:1	$A_2$20VII, $A_3$20VII	Double ended
		5505-000230	BSE-3208-II	(8) ER16	1:1	$A_3$20VII	Double ended, Tools turn in opposite direction
		5505-000222	BSE-3208-III	(8) ER16	1:1	$A_3$20VII	Double ended, Tools turn in same direction
	Polygon Milling	5505-000271	BSP-509	(1) Ø13	1:1	$A_2$20VII	
	Slitting Saw	5505-000362	GSC-1307-DEC	(1) Ø16	1:1	$A_3$20VII	
	Thread Whirling	5505-000220	BSW-215	(1) Utilis	1:1	$A_2$20VII, $A_3$20VII	9 or 12 insert cutter, adjustable ±15°
	Static Tool Holders	5505-000312	GDF-1207-L	(4) Ø19.05		$A_3$20VII	4 position 3/4" Ø sleeves, added bearing
Sub Spindle		5505-000437	BSC-2330	(1) ER11 (1) ER16	1:1	$A_3$20VII	Double ended
	End Drilling / Milling	5505-000512	GSE-3307	(1) ER11	1:1	$A_3$20VII	
		5505-000513	GSE-3307-3X	(1) ER08	1:3	$A_3$20VII	High speed
		5505-000511	GSE-3307-II	(1) ER11	1:1	$A_3$20VII	
		5505-000514	GSE-3307-L-3X	(1) ER08	1:3	$A_3$20VII	High speed, added bearing
		5505-000294	MSC-507-4X *	(1) ER08	1:3.8	$A_3$20VII	High speed, up to 30,000 RPM
		5505-000254	MSC-507-II *	(1) ER11	1:1	$A_3$20VII	
		5505-000292	MSC-507-L *	(1) ER11	1:1	$A_2$20VII, $A_3$20VII	Added bearing

* MSC tools require optional back rotary tool (U153B)


Gang Slide




BSC-510-3X
Cross Drill/Mill
Collet Size: ER11
Output: 1:3
$A_2$20VII




BSC-510-3X-L
Cross Drill/Mill
Collet Size: ER11
Output: 1:3
$A_2$20VII




GSC-1110
Cross Drill/Mill
Collet Size: ER16
Output: 1:1
$A_3$20VII



GSC-1110-4X
Cross Drill/Mill
Collet Size: ER08
Output: 1:3.8
High Speed Spindle
$A_3$20VII




BSA-107
Angled Drill/Mill
Collet Size: ER11
Output: 1:1
Adjustable 0-180°
$A_2$20VII
$A_3$20VII




BSA-2010
Angled Drill/Mill
Collet Size: ER16
Output: 1:1
Adjustable 0-180°
Crashes with U150B when working with T11 and T12
$A_3$20VII

Citizen Cincom A20

Gang Slide



BSE-2007-2X
End Drill/Mill
Collet Size: ER11
Output: 1:2
$A_2$20VII
$A_3$20VII




BSE-3206
End Drill/Mill
Collet Size: ER11
Output: 1:1
$A_2$20VII
$A_3$20VII




BSE-3208-II
End Drill/Mill
Collet Size: ER16
Output: 1:1
$A_3$20VII




BSE-3208-III
End Drill/Mill
Collet Size: ER16
Output: 1:1
$A_3$20VII



BSP-509
Polygon Milling
Tool ID Size: Ø13mm
Output: 1:1
$A_2$20VII
$A_3$20VII



GSC-1307-DEC
Slitting Saw
Arbor Size: Ø16mm
Output: 1:1
Max Tool Ø: 63mm
Max Tool Width: 6mm
$A_2$20VII




BSW-215
Thread Whirling
Ring: Utilis
Output: 1:1
$A_2$20VII




GDF-1207-L
Tool Holder
Tool Size: Ø19.05mm (3/4in)
4 Tool Positions
$A_2$20VII


Sub Spindle



BSC-2330
Cross Drill/Mill
Collet Size: ER11, ER16
Output: 1:1
$A_3$20VII




GSE-3307
End Drill/Mill
Collet Size: ER1.
Output: 1:1
$A_3$20VII




GSE-3307-3X
End Drill/Mill
Collet Size: ER08
Output: 1:3
$A_3$20VII




GSE-3307-II
End Drill/Mil
Collet Size: ER1
Output: 1:1
$A_3$20VII




GSE-3307-L-3X
End Drill/Mill
Collet Size: ER08
Output: 1:3
$A_3$20VII



MSC-507-4X
End Drill/Mill
Collet Size: ER08
Output: 1:3.8
*Requires U152B
$A_3$20VII



MSC-507-II
End Drill/Mill
Collet Size: ER11
Output: 1:1
*Requires U152B
$A_3$20VII



MSC-507-L
End Drill/Mill
Collet Size: ER11
Output: 1:1
*Requires U152B
$A_2$20VII
$A_3$20VII

CITIZEN C16

Swiss Made by PCM be driven.




GSC-607-2X

Citizen C16-VII & C16-IX


(Machine's Live Tooling 8,000 RPM Rating)

Position	Operation	Item No.	(#Tools)Size	Input:Output	Other
Gang Slide	Cross Drilling / Milling	GSC-607-2X	(1) ER11	1:2	
	Angled Drilling / Milling	GSA-407	(1) ER11	1:2.5	Adjustable 0-180°
	End Drilling / Milling	GSE-507	(1) ER11	1:1	
		GSE-507-2X	(1) ER11	1:2	
		GSE-507-DE	(1) ER11 (1) ER08	1:1	Double ended
		GSE-508	(1) ER11	1:1	
		GSE-707	(1) ER11	1:1	
		GSE-708	(1) ER11	1.65:1	
	Polygon Milling	GSE-509	(1) Ø10	1.6:1	
	Slitting Saw	GSS-250	(1) Ø16	2:1	
		GSS-250-13	(1) Ø13	2:1	
		GSS-250-15	(1) Ø15.875	2:1	
	Static Tool Holders	GDF901	(1) Ø19.05		
		GDF-901-HF	(1) Ø25		Holds Ibag/Meyrat spindles
		GDF-901-S1X6	(1) Ø6		
		GDF-901-S1X4	(1) Ø4		
		GDF-901-S2X4	(2) Ø4		
	Whirling	LSW-424	(1) Utilis	1:1	
Sub Spindle	End Drilling / Milling	GSE-808	(1) ER11	1:1	
		GSE-8-3X	(1) ER08	1:3	
	Static Tool Holders	SAU-319	(1) Ø19.05		


Gang Slide




GSC-607-2X
Cross Drill/Mill
Collet Size: ER11
Output: 1:2




GSA-407
Angled Drill/Mill
Collet Size: ER11
Output: 1:2.5
Adjustable 0-180°
Interferes with adjacent tooling position




GSE-507
End Drill/Mill
Collet Size: ER11
Output: 1:1



GSE-507-2X
End Drill/Mill
Collet Size: ER11
Output: 1:2
High Speed



GSE-507-DE
End Drill/Mill
Collet Size: ER08, ER11
Output: 1:1
Double Ended




GSE-508
End Drill/Mill
Collet Size: ER11
Output: 1:1


CONTINUED ON NEXT PAGE

Citizen Cincom C16


Gang Slide




GSE-707
End Drill/Mill
Collet Size: ER11
Output: 1:1




GSE-708
End Drill/Mill
Collet Size: ER11
Output: 1.65:1




GSE-509
Polygon Milling
Tool ID Size: Ø10mm
Output: 1.6:1




GSS-250
Slitting Saw
Arbor Size: Ø16mm
Output: 2:1




GSS-250-13
Slitting Saw
Arbor Size: Ø13mm
Output: 2:1




GSS-250-15
Slitting Saw
Arbor Size: Ø15.875mm
Output: 2:1




LSW-424
Thread Whirling
Ring: Utilis
Output: 1:1




GDF901
Tool Holder
Tool Size: Ø19.05mm




GDF-901-HF
Tool Holder
Tool Size: Ø25mm
Holds Ibag/Meyrat Spindles



GDF-901-S1X6
Tool Holder
Tool Size: Ø6mm




GDF-901-S1X4
Tool Holder
Tool Size: Ø4mm




GDF-901-S2X4
Tool Holder
Tool Size: Ø4mm


Sub Spindle



GSE-808
End Drill/Mill
Collet Size: ER11
Output: 1:1



GSE-8-3X
End Drill/Mill
Collet Size: ER08
Output: 1:3



SAU-319
Tool Holder
Tool Size: Ø19.05mm

CITIZEN K12 & K16

Swiss Made by PCM be driven.



GSC-850-2X

Citizen K12 & K16


(Machine's Live Tooling 6,000 RPM Rating)

Position	Operation	Item No.	Description	(#Tools)Size	Input:Output	Other
Gang Slide	Cross Drilling / Milling	5505-000375	GSC-807	(1) ER11	1:1	
		5505-000501	GSC-815	(1) ER11	2:3	Up to 9,000 RPM
		5505-000502	GSC-816	(2) ER11	2:3 1:1	Up to 6,000 RPM and 9,000 RPM
		5505-000191	GSC-850-2X	(1) ER11	1:2	High Speed Spindle, Up to 12,000 RPM
		5505-000192	GSC-860	(2) ER11	1:1	
		5505-000334	GSC1107-4X	(1) ER08	1:3.8	High Speed Spindle, Up to 22,800 RPM
		5505-000499	GSC1307-4X	(1) ER11	1:3.8	High Speed Spindle
	End Drilling / Milling	5505-000262	GSE-2107	(1) ER11	1:1	
		5505-000505	GSE-2107-2X	(1) ER11	1:2	High Speed Spindle, Up to 12,000 RPM
		5505-000196	GSE-2207	(1) ER11	1:1	
		5505-000282	GSE-2207-2X	(1) ER11	1:2.086	High Speed Spindle, Up to 12,000 RPM
		5505-000506	GSE-2307	(2) ER11	1:1	
		5505-000278	GSE-2407	(4) ER11	1:1	Double ended, Position T12-14 Right, Offset 37mm
		5505-000387	GSE-2407-2X	(4) ER11	1:2	Double ended, Position T12-14 Right, High speed up to 12,000 RPM
		5505-000365	GSE-2507	(4) ER11	1:1	Double ended, Position T12-14 Left
		5505-000249	GSE-2507-2X	(4) ER11	1:2	Double ended, Position T12-14 Left, High speed up to 12,000 RPM, Offset 37mm
	Slitting Saw	5505-000237	GSS-2145	(1) Ø8	1:1	Max tool Ø58mm, Width 3mm
	Hobbing	5505-000531	GSH-036	(1) Ø3.5	2:3	Hobbing disk Ø8mm, 8mm thick, Requires 1 tool position, Offset 5mm
		5505-000532	GSH-036-L	(1) Ø3.5	2:3	Hobbing disk Ø8mm, 12mm thick, Requires 1 tool positions, Offset 5mm
		5505-000533	GSH-037	(1) Ø3.5	2:3	Hobbing disk Ø16mm, 8mm thick, Requires 1 tool position
		5505-000534	GSH-038	(1) Ø5	2:3	Hobbing disk Ø16mm, 8mm thick, Requires 1 tool position
	Static Tool Holders	5505-000333	BDF-105	(1) Ø19.05		
		5505-000238	BDF-107	(2) Ø19.05		
	Whirling	5505-000135	GSW-101	(1) Utilis	1:1	7 or 9 insert cutter, Adjustable ±15°, Flight circle Ø6mm, Requires 3 tool positions
Sub Spindle	End Drilling / Milling	5505-000495	GSC1107	(1) ER11	1:1	
		5505-000502	GSC-816	(2) ER11	2:3 1:1	Up to 6,000 RPM and 9,000 RPM
		5505-000192	GSC-860	(2) ER11	1:1	

Gang Slide




GSC-807
Cross Drill/Mill
Collet Size: ER11
Output: 1:1




GSC-815
Cross Drill/Mill
Collet Size: ER11
Output: 2:3



GSC-816
Cross Drill/Mill
Collet Size: ER11
Output: 1:0.6, 1:1



GSC-850-2X
Cross Drill/Mill
Collet Size: ER11
Output: 1:2



GSC-860
Cross Drill/Mill
Collet Size: ER11
Output: 1:1




GSC1107-4X
Cross Drill/Mill
Collet Size: ER08
Output: 1:3.8
High Speed Spindle

Citizen Cincom K12 & K16

Gang Slide


GSC-1307-4X
Cross Drill/Mill
Collet Size: ER11
Output: 1:3.8
High Speed Spindle




GSE-2107
End Drill/Mill
Collet Size: ER11
Output: 1:1




GSE-2107-2X
End Drill/Mill
Collet Size: ER11
Output: 1:2
High Speed Spindle




GSE-2207
End Drill/Mill
Collet Size: ER11
Output: 1:1




GSE-2207-2X
End Drill/Mill
Collet Size: ER11
Output: 1:2



GSE-2307
End Drill/Mill
Collet Size: ER11
Output: 1:1



GSE-2407
End Drill/Mill
Collet Size: ER11
Output: 1:1




GSE-2407-2X
End Drill/Mill
Collet Size: ER11
Output: 1:2
High Speed Spindle




GSE-2507
End Drill/Mill
Collet Size: ER11
Output: 1:1



GSE-2507-2X
End Drill/Mill
Collet Size: ER11
Output: 1:2




GSS-2145
Slitting Saw
Arbor Size: Ø8mm
Output: 1:1
Max Tool Ø: 58mm
Max Tool Thickness: 3ı




GSH-036
Gear Hobbing
ID Size: Ø3.5mm
Output: 1.5:1
Hobb OD: Ø8mm
Hobb Thickness: 8mm
Requires 1 tool positions



GSH-036-L
Gear Hobbing
ID Size: Ø3.5mm
Output: 2:3
Hobb OD: Ø8mm
Hobb Thickness: 12mm
Requires 1 tool positions




GSH-037
Gear Hobbing
ID Size: Ø3.5mm
Output: 1.5:1
Hobb OD: Ø16mm
Hobb Thickness: 8mm
Requires 1 tool positions




GSH-038
Gear Hobbing
ID Size: Ø5mm
Output: 1.5:1
Hobb OD: Ø16mm
Hobb Thickness: 8mm
Requires 1 tool positions



BDF-105
Tool Holder
Tool Size: Ø19.05mm




BDF-107
Tool Holder
Tool Size: Ø19.05mm



GSW-101
Whirling
Ring: Utilis
Output: 1:1
7 or 9 Insert Cutter
Flight Circle: Ø6

Sub Spindle



GSC-1107
End Drill/Mill
Collet Size: ER11
Output: 1:1



GSC-816
End Drill/Mill
Collet Size: ER11
Output: 1:1 & 2:3
1 position up to 6,000 &
1 position up to 9,000
RPM



GSC-860
End Drill/Mill
Collet Size: ER11
Output: 1:1

CITIZEN L12


Swiss Made by PCM be driven.

Citizen L12


(Machine's Live Tooling 10,000 RPM Rating)

Position	Operation	Item No.	Description	(#Tools)Size	Input:Output	Other
Gang Slide	Cross Drilling / Milling	5505-000292	MSC-507-L	(1) ER11	1:1	Caution: a collsion could occur in the T08-T10 position
		5505-000254	MSC-507-II	(1) ER11	1:1	Up to 8,000 RPM Max
		5505-000608	MSC-507-2X	(1) ER11	1:2	High speed spindle up to 20,000 RPM
		5505-000294	MSC-507-4X	(1) ER08	1:3.8	High speed spindle up to 38,000 RPM
		5505-000610	MSC510-HP	(1) ER16	1:1	Internal coolant-thru Max pressure 150 bar
		5505-000376	MSC-512	(1) ER16	1:1	
		5505-000330	MSC-513	(1) ER20	1:1	
	End Drilling / Milling	5505-000399	GSE-1207-3X	(1) ER11	1:3	High speed spindle up to 30,000 RPM, Adjustable ±30°, Double ended
		5505-000514	GSE-3307-L-3X	(1) ER08	1:3	High speed spindle up to 30,000 RPM, Long version
		5505-000231	GSE-3507-3X	(1) ER11	1:3	High speed spindle up to 30,000 RPM,
		5505-000517	GSE-3607-1B	(1) ER11	1:1	Adjustable ±45°
		5505-000519	GSE-3607-2B	(2) ER11	1:1	Adjustable ±30°
		5505-000522	GSE-3607-3B	(3) ER11	1:1	Adjustable ±30°
		5505-000518	GSE-3607-1D	(2) ER11	1:1	Double ended, Adjustable ±45°
		5505-000520	GSE-3607-2D	(4) ER11	1:1	Double ended, Adjustable ±30°
		5505-000326	GSE-3607-3D	(6) ER11	1:1	Double ended, Adjustable ±30°
		5505-000339	GSE-3607-1M	(1) ER11	1:1	Adjustable ±45°
		5505-000521	GSE-3607-2M	(2) ER11	1:1	Adjustable ±30°
		5505-000373	GSE-3607-3M	(3) ER11	1:1	Adjustable ±30°
		5505-000523	GSE4307	(6) ER11	1:1	Double ended
		5505-000611	MSE-1007	(2) ER11	1:1	Double ended, Up to 9,000 RPM max, Requires 3 positions
	Slitting Saw	5505-000343	GSS610	(1) Ø10 mm	1:1	Max tool Ø40mm, Width 4.5mm
	Polygon Milling	5505-000529	GSF-080	(1) Ø08mm	1:1	Max tool Ø58mm, Width 3mm
		5505-000538	GSP080	(1) Ø08mm	1:1	Max tool Ø30-70mm, Width 3-6mm, Adjustable ±1.5°
	Hobbing	5505-000530	GSH-035-L	(1) Ø3.5mm	1:1	
		5505-000536	GSH235	(1) Ø3.5mm	1:1	Adjustable ±5°
		5505-000537	GSH245	(1) Ø4.5mm	1:1	Adjustable ±5°
		5505-000643	MSH507	(1) Ø4.5mm	1:1	Disk Ø12mm, Width 10mm, Up to 10,000 RPM max
		5505-000644	MSH50735	(1) Ø3.5mm	1:1	Disk Ø10mm, Width 10mm, Up to 10,000 RPM max
	Whirling	5505-000256	LSW-515	(1) Utilis	1:1	Adjustable ±15°, 7 or 9 insert cutter, 6mm flight Ø, Requires 3 positions, 10,000 Max RPM
	Static Tool Holders	5505-000588	LDF-HF09	(2) Ø20mm	1:1	For high speed NSK spindles
		5505-000672	SAU819-HD	(1) .75in		Intern coolant-thru Max adjustable pressure 220 bar
		5505-000484	GDF3607	(3) .75in		Internal coolant-thru Max pressure 220bar
Sub Spindle	Cross Drilling / Milling	5505-000667	RSC507	(1) ER11	1:1	Position T31 on U151B Max output torque 1Nm
	End Drilling / Milling	5505-000292	MSC-507-L	(1) ER11	1:1	Caution: a collsion could occur in the T08-T10 position, Long version
		5505-000254	MSC-507-II	(1) ER11	1:1	Up to 8,000 RPM Max
		5505-000608	MSC-507-2X	(1) ER11	1:2	High speed spindle up to 20,000 RPM
		5505-000294	MSC-507-4X	(1) ER08	1:3.8	High speed spindle up to 38,000 RPM
		5505-000610	MSC510-HP	(1) ER16	1:1	Internal coolant-thru Max pressure 150 bar, 8,000 RPM max,
		5505-000376	MSC-512	(1) ER16	1:1	
		5505-000330	MSC-513	(1) ER20	1:1	
	Slitting Saw	5505-000542	GSS-1510	(1) ER11	1:1	
		5505-000276	GSS-1530	(1) ER11	5:3	Max tool Ø63mm, Width 2mm
		5505-000668	RSH035	(1) Ø3.5mm	1:1	Max tool Ø30mm, Width 3.5mm, Inclination ±5°, Requires 2 positions, Adjustable cutter height ±2°, Max RPM 9,000
		5505-000669	RSH035-II	(1) Ø3.5mm	1:1	Max tool Ø30mm, Width 11mm, Inclination ±5°, Requires 2 positions, Max RPM 9,000
		5505-000670	RSH-045	(1) Ø4.5mm	1:1	Max tool Ø30mm, Width 3.5mm, Inclination ±5°, Requires 2 positions, Adjustable cutter height ±2°, Max RPM 9,000

Gang Slide




MSC-507-L
Cross Drill/Mill
Collet Size: ER11
Output: 1:1




MSC-507-II
Cross Drill/Mill
Collet Size: ER11
Output: 1:1



MSC-507-2X
Cross Drill/Mill
Collet Size: ER11
Output: 1:2
High Speed



MSC-507-4X
Cross Drill/Mill
Collet Size: ER08
Output: 1:3.8
High Speed



MSC510-HP
Cross Drill/Mill
Collet Size: ER16
Output: 1:1
High pressure coolant-thru



MSC-512
Cross Drill/Mill
Collet Size: ER16
Output: 1:1

Citizen Cincom L12

Gang Slide



MSC-513
Cross Drill/Mill
Collet Size: ER20
Output: 1:1



GSE-1207-3X
End Drill/Mill
Collet Size: ER11
Output: 1:3
High Speed Spindle,
Adjustable ±30°
Double Ended



GSE-3307-L-3X
End Drill/Mill
Collet Size: ER08
Output: 1:3



GSE-3507-3X
End Drill/Mill
Collet Size: ER11
Output: 1:3
High Speed Spindle,



GSE-3607-1B
End Drill/Mill
Collet Size: ER11
Output: 1:1
Adjustable ±45°



GSE-3607-2B
End Drill/Mill
Collet Size: ER11
Output: 1:1
Adjustable ±30°



GSE-3607-3B
End Drill/Mill
Collet Size: ER11
Output: 1:1
Adjustable ±30°



GSE-3607-1D
End Drill/Mill
Collet Size: ER11
Output: 1:1
Adjustable ±45°
Double Ended



GSE-3607-2D
End Drill/Mill
Collet Size: ER11
Output: 1:1
Adjustable ±30°
Double Ended



GSE-3607-3D
End Drill/Mill
Collet Size: ER11
Output: 1:1
Adjustable ±30°
Double Ended




GSE-3607-1M
End Drill/Mill
Collet Size: ER11
Output: 1:1
Adjustable ±45°



GSE-3607-2M
End Drill/Mill
Collet Size: ER11
Output: 1:1
Adjustable ±30°



GSE-3607-3M
End Drill/Mill
Collet Size: ER11
Output: 1:1
Adjustable ±30°



GSE-4307
End Drill/Mill
Collet Size: ER11
Output: 1:1




MSE-1007
End Drill/Mill
Collet Size: ER11
Output: 1:1
Requires 3 Positions




GSS610
Slitting Saw
Saw ID: 10mm
Output: 1:1
Max Tool Ø40mm
Max Width 4.5mm



GSF-080
Polygon Milling
Tool ID Size: Ø8mm
Output: 1:1
Max Tool Ø 58mm
Max Width 3mm



GSP080
Polygon Milling
Tool ID Size: Ø8mm
Output: 1:1
Max Tool Ø 70mm
Max Width 6mm



GSH-035-L
Gear Hobbing
ID Size: Ø3.5mm
Output: 1:1



GSH235
Gear Hobbing
ID Size: Ø3.5mm
Output: 1:1



GSH245
Gear Hobbing
ID Size: Ø4.5mm
Output: 1:1

CONTINUED ON NEXT PAGE

Citizen Cincom L12

Gang Slide



MSH507
Gear Hobbing
ID Size: Ø4.5mm
Output: 1:1
Hobb OD: Ø12mm
Hobb Thickness: 10mm



MSH50735
Gear Hobbing
ID Size: Ø3.5mm
Output: 1:1
Hobb OD: Ø10mm
Hobb Thickness: 10mm




LSW-515
Thread Whirling
Ring: Utilis
Output: 1:1
7 or 9 Insert Cutter
Flight Circle: Ø6mm

Citizen Cincom L12


Sub Spindle



RSC507
Cross Drill/Mill
Collet Size: ER11
Output: 1:1
Max Output
Torque 1Nm
Fits T31 On U151B




MSC-507-L
End Drill/Mill
Collet Size: ER11
Output: 1:1
Longer Spindle
Body




MSC-507-II
End Drill/Mill
Collet Size: ER11
Output: 1:1



MSC-507-2X
Cross Drill/Mill
Collet Size: ER11
Output: 1:2
High Speed



MSC-507-4X
Cross Drill/Mill
Collet Size: ER08
Output: 1:3.8
High Speed



MSC510-HP
Cross Drill/Mill
Collet Size: ER16
Output: 1:1
High pressure
coolant-thru



MSC-512
End Drill/Mill
Collet Size: ER16
Output: 1:1



MSC-513
End Drill/Mill
Collet Size: ER20
Output: 1:1

GSS-1510
Slitting Saw
Collet Size: ER11
Output: 1:1




GSS-1530
Slitting Saw
Collet Size: ER11
Output: 5:3
Max Tool Ø63mm
Max Width 2mm



RSH035
Slitting Saw
Saw ID: 3.5mm
Output: 1:1
Max Tool Ø30mm
Max Width 3.5mm



RSH035-II
Slitting Saw
Saw ID: 3.5mm
Output: 1:1
Max Tool Ø30mm
Max Width 11mm



RSH-045
Slitting Saw
Saw ID: 4.5mm
Output: 1:1
Max Tool Ø30mm
Max Width 3.5mm

CITIZEN L20

Swiss Made by PCM be driven.




MSC-507-4X

Citizen L2-20 VIII / X / XII


(Machine's Live Tooling 4,500 - 6,000 RPM Rating)

Position	Operation	Item No.	Description	(#Tools)Size	Input:Output	Other
Gang Slide	Cross Drilling / Milling	5505-000285	GSC-1110-4X	(1) ER08	1:3.8	High speed
		5505-000329	GSC-1113	(1) ER20	1:1	
	End Drilling / Milling	5505-000444	BSE-307-3X	(2) ER11	1:3	High speed up to 18,000 RPM, Double ended
		5505-000445	BSE-3106	(3) ER11	1:1	Replaces BSE-607
	Angled Drilling & Milling	5505-000491	GSA1007	(1) ER11	1:1	Adjustable 0-10°
	Slitting Saw	5505-000455	BSS122	(1) Ø22mm	2:1	Tool OD 80-125mm, Tool thickness 5mm
		5505-000539	GSS1007-DEC	(1) Ø22mm	2:1	Tool OD 80mm, Tool thickness 2mm
		5505-000541	GSC-1335-DEC	(1) Ø13mm	1:1	Tool OD 58mm Max, Tool thickness 15mm, Up to 6,000 RPM
	Static Tool Holders	5505-000474	GDF-1207	(3) Ø3/4in		3 Position, Internal Coolant-thru with Max pressure 220 bar is OPTIONAL. For coolant-thru capbility, GDF1207-H100 is required
		5505-000475	GDF-1207-HP	(3) Ø3/4in		3 Position, Internal Coolant-thru with Max pressure 220 bar INCLUDED
		5505-000312	GDF-1207-L	(4) Ø3/4in		4 Position 3/4" Ø sleeves
	Thread Whirling	5505-000550	GSW161	(1) PCM	1:1	Adjustable 0-16°, 6,000 Max RPM, Requires coolant kit Art. 876-613-80 for internal coolant capbility with PCM coolant whirling ring, 6,7,9 or 12 insert Utilis ring
		5505-000552	GSW163	(1) Utilis	1:1	Adjustable 0-28°, 6,000 Max RPM, 9 insert cutter, 12mm flight Ø, Requires 2 positions, Whirling ring not included
Sub Spindle	Cross Drilling / Milling	5505-000369	GSC-1407	(1) ER11	1:1	Requires Block U127B
		5505-000268	GSC-1507	(1) ER11	1:1	Up to 5,000 RPM
		5505-000366	GSC-1507-3X	(1) ER11	1:3	High speed up to 15,000 RPM
		5505-000377	GSE-3407	(1) ER11	1:1	Up to 7,500 RPM Max
		5505-000293	GSE-3407-HP	(1) ER11	1:1	Up to 7,500 RPM Max, Internal high pressure coolant-thru with 150 bar max pressure, 50µm seal is required
		5505-000515	GSE-3407-HP-HIQ-ERAX	(1) ER11	1:1	Up to 7,500 RPM Max, Internal high pressure coolant-thru with 150 bar max pressure, 50µm seal is required, Internal Nut
	End Drilling / Milling	5505-000292	MSC-507-L	(1) ER11	1:1	Up to 10,000 RPM, Long version
		5505-000254	MSC-507-II	(1) ER11	1:1	Up to 8,000
		5505-000608	MSC-507-2x	(1) ER11	1:2	High speed up to 20,000 RPM
		5505-000294	MSC-507-4X	(1) ER08	1:3.8	High Speed up to 38,000 RPM
		5505-000376	MSC-512	(1) ER16	1:1	Up to 10,000 RPM
		5505-000330	MSC-513	(1) ER20	1:1	Up to 10,000 RPM
		5505-000514	GSE-3307-L-3X	(1) ER08	1:3	High speed up to 30,000 RPM, Long version
		5505-000231	GSE-3507-3X	(1) ER11	1:3	High speed up to 27,000 RPM
	Slitting Saw	5505-000276	GSS-1530	(1) ER11	5:3	Max tool Ø63mm, Max tool thickness 2mm , Up to 5,400 RPM
	Static Tool Holders	5505-000310	CIT-SAU919-S-CT	(1) Ø3/4in		Coolant-thru, Uses M5-1/4" JIC fitting, For L20-X

Gang Slide



GSC-1110-4X
Cross Drill/Mill
Collet Size: ER08
Output: 1:3.8
High Speed,
Up to 30,000 RPMs
$L_2$20



GSC-1113
Cross Drill/Mill
Collet Size: ER20
Output: 1:1
$L_2$20



BSE-307-3X
End Drill/Mill
Collet Size: ER11
Output: 1:3
High Speed,
Double Ended
$L_2$20



BSE-3106
End Drill/Mill
Collet Size: ER11
Output: 1:1
Replaces BSE-607



GSA1007
Angled Drill/Mill
Collet Size: ER11
Output: 1:1
Adjustable 0-10°




BSS122
Slitting Saw
Arbor Size: Ø22mm
Output: 2:1
Max Tool Ø125mm
Max Width 5mm

Citizen Cincom L2-20 VIII / X / XII

Gang Slide




GSS1007-DEC
Slitting Saw
Arbor Size: Ø22mm
Output: 2:1
Max Tool Ø80mm
Max Width 2mm



GSC-1335-DEC
Slitting Saw
Arbor Size: Ø13mm
Output: 1:1
$L_2$20

GDF-1207
Tool Holder
Tool Size: Ø3/4in
3 Positions
Coolant-thu Optional
$L_2$20



GDF-1207-HP
Tool Holder
Tool Size: Ø3/4in
3 Positions,
Coolant-thu Included,
Max pressure 220 bar
$L_2$20




GDF-1207-L
Tool Holder
Tool Size: Ø19.05mm
4 Positions with 3/4" diameter sleeves
$L_2$20



GSW161
Thread Whirling
Ring: PCM
Output: 1:1
Adjustable 0-16°,
Requires coolant kit for use with PCM coolant whirling ring

GSW163
Thread Whirling
Ring: Utilis
Output: 1:1
Adjustable 0-28°
9 Insert cutter
12mm flight circle

Sub Spindle



GSC-1407
Cross Drill/Mill
Collet Size: ER11
Output: 1:1



GSC-1507
Cross Drill/M
Collet Size: ER1
Output: 1:1



GSC-1507-3X
Cross Drill/Mill
Collet Size: ER11
Output: 1:3




GSE-3407
Cross Drill/Mill
Collet Size: ER11
Output: 1:1




GSE-3407-HP
Cross Drill/Mill
Collet Size: ER11
Output: 1:1
High Pressure
Coolant-Thru



GSE-3407-HP
-HIQ-ERAX
Cross Drill/Mill
Collet Size: ER11
Output: 1:1
High Pressure
Coolant-Thru,
Internal Nut



MSC-507-L
End Drill/Mill
Collet Size: ER11
Output: 1:1




MSC-507-II
End Drill/Mill
Collet Size: ER11
Output: 1:1



MSC-507-2X
End Drill/Mill
Collet Size: ER11
Output: 1:2
High speed up to 20,000RPM

Citizen Cincom L2-20 VIII / X / XII

Sub Spindle




MSC-507-4X
End Drill/Mill
Collet Size: ER08
Output: 1:3.8
High speed up to 38,000RPM




MSC-512
End Drill/Mill
Collet Size: ER16
Output: 1:1



MSC-513
End Drill/Mill
Collet Size: ER20
Output: 1:1




GSE-3307-L-3X
End Drill/Mill
Collet Size: ER08
Output: 1:3
High Speed



GSE-3507-3X
End Drill/Mill
Collet Size: ER11
Output: 1:3
High Speed



GSS-1530
Slitting Saw
Arbor Size: ER11
Output: 5:3



CIT-SAU919-S-CT
Tool Holder
Tool Size: Ø3/4"
Coolant-Thru Version
Uses M5-1/4" JIC Fitting

CITIZEN $L_5$20 / $L_7$20 / L20E-1M

Swiss Made by PCM be driven.

Citizen L5-20 / L7-20 / L20-E


(Machine's Live Tooling 4,500 - 6,000 RPM Rating)

Position	Operation	Item No.	Description	(#Tools)Size	Input:Output	Machine	Other
Gang Slide	Cross Drilling & Milling	5505-000118	GSC-310-3x	(1) ER11	1:3		High speed up to 15,000 RPM
		5505-000291	GSC-510-L-3X	(1) ER11	1:3		High speed up to 18,000 RPM
		5505-000281	GSC-510-4X	(1) ER08	1:3.8		High speed up to 22,800 RPM
		5505-000117	GSC-204-3X	(1) ER11	1:3		High speed up to 15,000 RPM
		5505-000498	GSC-1207-4X	(1) ER11	1:3.8	L20E	High speed up to 22,800 RPM
		5505-000331	GSC-1210	(1) ER16	1:1	L20E	For L20E-1M or newer, Requires GSE3110
		5505-000280	GSC-1210-4X	(1) ER08	1:3.8	L20E	For L20E-1M or newer, Requires GSE3110, High speed up to 19,000 RPM
	Angled Drilling & Milling	5505-000235	GSA107	(1) ER11	1:1		Adjustable 0-180°
	End Drilling & Milling	5505-000444	BSE307-3X	(2) ER11	1:3		High speed up to 18,000 RPM, Double ended
		5505-000493	GSA-1530	(1) ER16	1:1	L20E	Fixed angle at 93°
		5505-000125	GSE-306-SE312	(1) ER11	1:3		High speed up to 18,000 RPM
		5505-000123	GSE-306-DE312	(2) ER11	1:3		High speed up to 18,000 RPM, Double ended
		5505-000124	GSE-306-L-520	(1) ER11	1:1		
		5505-000274	GSE-306-DE011	(2) ER11	1:1		Double ended
		5505-000287	GSE-3107	(4) ER11	1:1		Double ended, Requires GSE3110
		5505-000342	GSE-3207	(6) ER11	1:1	L20E	Double ended, Requires GSE3110 or GSE3010
	Slitting Saw	5505-000134	GSS-510	(1) Ø16mm	2:1		Up to 3,000 RPM
	Static Tool Holders	5505-000250	GDF903	(1) Ø1in			1in sleeve holder
		5505-000424	852-354-OF-010	(1) Ø25mm			High speed Meyrant spindle holder
	Whirling	5505-000155	LSW-101-L20	(1) Utilis	2:1		9 or 12 insert cutter, Adjustable ±10°, 12mm flight cir.
		5505-000158	LSW-215	(1) Utilis	1:1		9 or 12 insert cutter, Adjustable ±15°
Sub Spindle	Cross Drilling & Milling	5505-000268	GSC-1507	(1) ER11	1:1		
		5505-000366	GSC-1507-3X	(1) ER11	1:3		High speed up to 15,000 RPM
		5505-000292	MSC-507-L	(1) ER08	1:1		
		5505-000254	MSC-507-II	(1) ER11	1:1		
		5505-000294	MSC-507-4X	(1) ER08	1:3.8		High speed up to 38,000
	End Drilling & Milling	5505-000330	MSC-513	(1) ER20	1:1		
		5505-000514	GSE-3307-L-3X	(1) ER08	1:3		High speed up to 18,000 RPM
		5505-000516	GSE3407-HP HIQ-ERAX-MAJ	(1) ER11	1:1		Internal coolant-thru with max pressure 150 bar, Internal nut
		5505-000231	GSE-3507-3X	(1) ER11	1:3		High speed, Up to 5,400 RPM
	Slitting Saw	5505-000276	GSS-1530	(1) ER11	5:3		Max tool Ø63mm, Max tool thickness 2mm
		5505-000306	GSS-1331	(1) ER11	1:1		


Gang Slide




GSC-310-3X
Cross Drill/Mill
Collet Size: ER11
Output: 1:3
High Speed




GSC-510-L-3X
Cross Drill/Mill
Collet Size: ER11
Output: 1:3
High Speed




GSC-510-4X
Cross Drill/Mill
Collet Size: ER08
Output: 1:3.8
High Speed



GSC-204-3X
Cross Drill/Mill
Collet Size: ER11
Output: 1:3
High Speed




GSA107
Angled Drill/M
Collet Size: ER11
Output: 1:1
Adjustable 0-180°




GSE-306-SE312
End Drill/Mill
Collet Size: ER11
Output: 1:3
High Speed

Citizen Cincom L5-20 / L7-20 / L20-E


Gang Slide




GSE-306-DE312
End Drill/Mill
Collet Size: ER11
Output: 1:3
High Speed
Double Ended




GSE-306-L-520
End Drill/Mill
Collet Size: ER11
Output: 1:1




GSE-306-DE011
End Drill/Mill
Collet Size: ER11
Output: 1:1
Double Ended




GSS-510
Slitting Saw
Arbor Size: Ø16mm
Output: 2:1




GDF903
Tool Holder
Tool Size: Ø25.4mm
1° Sleeve Holder



852-354-OF-010
Tool Holder
Tool Size: Ø25mm
High Speed
Spindle Holder



LSW-101-L20
Thread Whirling
Ring: Utilis
Output: 1:1
9 or 12 insert cutter,
Flight Ø12mm,
Adjustable ±10°




LSW-215
Thread Whirling
Ring: Utilis
Output: 1:1
9 or 12 insert cutter,
Adjustable ±15°

Gang Slide

For Use With GSE3110 or GSE3010 Expansion Block




GSC-1207-4X
Cross Drill/Mi
Collet Size: ER11
Output: 1:3.8
High Speed
L20E




GSC-1210-4X
Cross Drill/Mill
Collet Size: ER08
Output: 1:3.8
High Speed
Requires GSE3110
L20E



GSC-1210
Cross Drill/Mill
Collet Size: ER16
Output: 1:1
Requires GSE3110
L20E



GSE-3107
End Drill/Mill
Collet Size: ER11
Output: 1:1
Double Ended



GSE-3207
End Drill/Mill
Collet Size: ER11
Output: 1:1
Double Ended

Not Compatible With GSE 3210

CONTINUED ON NEXT PAGE

Citizen Cincom L5-20 / L7-20 / L20-E

Sub Spindle


Equipped With U153B or U155B




GSC-1507
Cross Drill/Mill
Collet Size: ER11
Output: 1:1




GSC-1507-3X
Cross Drill/Mill
Collet Size: ER11
Output: 1:3



MSC-507-L
Cross Drill/Mill
Collet Size: ER08
Output: 1:1




MSC-507-II
Cross Drill/Mill
Collet Size: ER11
Output: 1:1



MSC-507-4X
Cross Drill/Mill
Collet Size: ER08
Output: 1:3.8
High Speed




MSC-513
End Drill/Mill
Collet Size: ER20
Output: 1:1



GSE-3307-L-3X
End Drill/Mill
Collet Size: ER08
Output: 1:3
High Speed



GSE3407-HP
HIQ-ERAX-MAJ
End Drill/Mill
Collet Size: ER11
Output: 1:1
Internal coolant-thru
Max pressure 150 bar
Internal Nut



GSE-3507-3X
End Drill/Mill
Collet Size: ER11
Output: 1:3
High Speed



GSS-1530
Slitting Saw
Arbor Size: ER11
Output: 5:3



GSS-1331
Slitting Saw
Arbor Size: ER11
Output: 1:1

CITIZEN $L_4$25/32

Swiss Made by PCM be driven.

Citizen L_4 25 / L_4 32


(Machine's Live Tooling 3,000 - 4,500 RPM Rating)

Position	Operation	Item No.	Description	(#Tools)Size	Input:Output	Other
Gang Slide	Cross Drilling & Milling	5505-000118	GSC-310-3X	(1) ER11	1:3	High speed up to 15,000 RPM
	End Drilling & Milling	5505-000274	GSE-306-DE511	(2) ER11	1:1	Double Ended
		5505-000123	GSE-306-DE512	(2) ER11	1:3	Double Ended, High speed spindle
		5505-000507	GSE-306-SE512	(1) ER11	1:3	High speed spindle
		5505-000508	GSE-306-L-525	(1) ER11	1:1	Long version


Gang Slide



GSC-310-3X
Cross Drill/Mill
Collet Size: ER11
Output: 1:3
High Speed



GSE-306-DE511
End Drill/Mill
Collet Size: ER11
Output: 1:1
Double Ended



GSE-306-DE512
End Drill/Mill
Collet Size: ER11
Output: 1:3
High Speed
Double Ended



GSE-306-SE512
End Drill/Mill
Collet Size: ER11
Output: 1:3
High Speed

GSE-306-L-525
End Drill/Mill
Collet Size: ER11
Output: 1:1
Long version

CITIZEN A32, L32

Swiss Made by PCM be driven.


Citizen A32-VII & L32-VIII, X, XII

(Machine's Live Tooling 4,000 RPM Rating)

Position	Operation	Item No.	Description	(#Tools)Size	Input:Output	Machine	Other
Gang Slide	Cross Drilling & Milling	5505-000261	GSC-1110	(1) ER16	1:1	A32, L32	
		5505-000496	GSC1110-L	(1) ER16	1:1	A32, L32	Length 70mm
		5505-000285	GSC-1110-4X	(1) ER08	1:3.8	A32, L32	High Speed, Up to 30,000 RPM
		5505-000329	GSC-1113	(1) ER20	1:1	A32, L32	
		5505-000436	BSC-210	(1) ER16	1:1	A32, L32	
		5505-000199	BSC-610-3X	(1) ER11	1:3	A32, L32	High speed up to 15,000 RPM
		5505-000355	BSC-610-L-3X	(1) ER11	1:3	A32, L32	High speed up to 15,000, Added bearing for strength, Long version
		5505-000435	BSC1107-4X	(1) ER11	1:3.8	A32, L32	High speed up to 30,000 RPM
		5505-000623	MSC810	(2) ER16	1:1	L32	Double Ended, For L32X, XII
	Angled Drilling & Milling	5505-000263	GSA-1510	(3) ER16	1:1	A32, L32	Adjustable 0-30°, Requires 2 tool positions
		5505-000353	BSA-2010	(6) ER16	1:1	A32, L32	Adjustable 0-21°, Interferes with adjacent tooling station when at angle
		5505-000232	BSA-3107	(1) ER11	1:1	A32	Adjustable 0-180° , interferes with adjacent tooling station when used at angle
	End Drilling & Milling	5505-000439	BSE107	(1) ER11	1:1	A32, L32	
		5505-000442	BSE207-II	(2) ER11	1:1	A32, L32	
		5505-000438	BSE1007-II	(2) ER11	1:1	A32, L32	Double Ended
		5505-000188	BSE2007-II	(4) ER11	1:1	A32, L32	Double Ended
		5505-000443	BSE3007-IK-3X	(3) ER11	1:1 & 1:3	A32, L32	High speed up to 18,000 RPM, Internal cooling with max pressure 120 bar, Position 1 at 1:1 and position 2 & 3 at 1:3
		5505-000445	BSE-3106	(3) ER11	1:1	A32, L32	
		5505-000446	BSE3107-II	(3) ER11	1:1	A32, L32	
		5505-000447	BSE3206-II	(6) ER11	1:1	A32, L32	Double Ended
		5505-000448	BSE-3207	(4) ER16	1:1	A32, L32	Double Ended, Spindles rotate in same direction
		5505-000258	BSE-3207-III	(4) ER16	1:1	A32, L32	Double Ended, Spindles rotate in alternating directions
		5505-000230	BSE-3208-II	(8) ER16	1:1	A32	Double Ended, Spindles rotate in the same direction
		5505-000222	BSE-3208-III	(8) ER16	1:1	A32	Double Ended, Spindles rotate in alternating directions
		5505-000367	BSE-3209	(3) ER16	1:1	A32, L32	Spindles rotate in alternating directions
		5505-000344	BSE-3210	(6) ER16	1:1	A32, L32	Double Ended, Spindles rotate in alternating directions
		5505-000513	GSE-3307-3X	(1) ER08	1:3	A32	High speed up to 30,000 RPM, Max torque of 1500 Nmm
		5505-000511	GSE-3307-II	(1) ER11	1:1	A32	
		5505-000231	GSE-3507-3X	(1) ER11	1:3	L32	High speed up to 27,000 RPM, Internal nut
		5505-000503	GSE-1710	(6) ER16	1:1	A32	Drill depth 40mm
		5505-000316	GSE-1710-2X	(6) ER16	1:2	A32	High Speed up to 10,000 RPM
		5505-000504	GSE1910	(1) ER16	1:1	A32, L32	
	Polygon Milling	5505-000449	BSF-509	(1) Ø13mm	1:1	A32, L32	Max tool Ø 60mm
		5505-000450	BSP-510	(1) Ø13mm	1:1	A32, L32	Max tool Ø 60mm, Width 15mm
		5505-000451	BSP-511	(1) Ø10mm	1:1	A32, L32	Max tool Ø 55mm
		5505-000452	BSP-513	(1) Ø13mm	1.5:1	A32, L32	Max tool Ø 72mm, Width 8.3mm
		5505-000453	BSP516	(1) Ø16mm	1.5:1	A32, L32	Max tool Ø 72mm, Width 8.3mm
		5505-000671	RSP-013	(1) Ø13mm	1:1	A32, L32	Max tool Ø 72mm, Width 8.3mm
	Slotting Saw	5505-000362	GSS-1307-DEC	(1) Ø16mm	1:1	A32, L32	Max tool Ø 63mm, Width 6mm
		5505-000541	GSS1335-DEC	(1) Ø13mm	1:1	A32, L32	Max tool Ø 58mm, Width 15mm
		5505-000543	GSS15835-DEC	(1) Ø15.875mm	1:1	A32, L32	Max tool Ø 63mm, Width 8mm
		5505-000540	GSS1035-DEC	(1) Ø10mm	1:1	A32, L32	Max tool Ø 50mm, Width 15.5mm
	Whirling	5505-000457	BSW-315	(1) Utilis	1:1	A32	9 or 12 Insert Cutter, Adjustable ±15°, Flight Ø12, Requires removal of the 4-position ID Tool Block , Utilis ring #137578
		5505-000458	BSW-315-II	(1) Utilis	1:1	A32	9 or 12 Insert Cutter, Adjustable ±15°, Flight Ø12, T07 Blocked, Postiton T08 can only be used with Ø25x52mm in position , Utilis ring #137578
		5505-000551	GSW162	(1) Utilis or PCM	1:1	L32	Adjustable 0-16°, 6,000 Max RPM, Requires coolant kit Art. 876-613-80 for internal coolant capability with PCM coolant whirling ring, 6,7,9,12 insert Utilis ring, 15mm from Z0
	Static Tool Holders		GDF-1207-L	(4) Ø0.75in		A32	4 Position 3/4" Ø Sleeves
		5505-000346	GDF1501-IK	(3) Ø1.0in		A32	Intern coolant-thru with max pressure 100 bar, External coolant-thru with max pressure 200 bar, Gang tools U30B - T10
		5505-000358	GDF-1501-II	(3) Ø1inch		A32, L32	Holds 3 Ø1inch sleeves, Position T06-T09
		5505-000359	GDF-1601-L	(3) Ø1inch		L32	Holds 3 Ø1inch sleeves, Position T10, U30B, and U32B
Sub Spindle	Cross Drilling & Milling	5505-000261	GSC-1110	(1) ER16	1:1	L32	
		5505-000496	GSC1110-L	(1) ER16	1:1	L32	Length 70mm
		5505-000285	GSC-1110-4X	(1) ER08	1:3.8	L32	High Speed, Up to 30,000 RPM
		5505-000329	GSC-1113	(1) ER20	1:1	L32	
		5505-000400	GSC-1310-HP-II	(1) ER16	1:1	L32	High Pressure Coolant-Thru, Max Pressure 137 Bar, G1/8 Fitting
		5505-000436	BSC-210	(1) ER16	1:1	L32	
		5505-000390	BSC-1330	(1) ER16	1:1	L32	Requires 2 Tool Positions
		5505-000437	BSC-2330	(1) ER11 (1) ER16	1:1	L32	Requires 2 Tool Positions
	Slitting Saw	5505-000385	BSS-1530	(1) ER16	5:3	A32	Max tool Ø 80mm, Width 3mm

Citizen A32-VII & L32-VIII, X, XII


Gang Slide




GSC-1110
Cross Drill/Mill
Collet Size: ER16
Output: 1:1
A32
L32



GSC-1110-L
Cross Drill/Mill
Collet Size: ER16
Output: 1:1
Length 70mm
A32



GSC-1110-4X
Cross Drill/Mill
Collet Size: ER08
Output: 1:3.8
High Speed,
Up up 30,000 RPMs
A32
L32




GSC-1113
Cross Drill/Mill
Collet Size: ER20
Output: 1:1
A32
L32



BSC-210
Cross Drill/Mill
Collet Size: ER16
Output: 1:1
A32
L32



BSC-610-3X
Cross Drill/Mill
Collet Size: ER11
Output: 1:3
High Speed,
A32
L32



BSC-610-L-3X
Cross Drill/Mill
Collet Size: ER11
Output: 1:3
High Speed,
Long Version
Added bearing
For strength
A32
L32


MSC810
Cross Drill/Mill
Collet Size: ER16
Output: 1:1
Double Ended
L32X, XII



GSA-1510
Angled Drill/Mill
Collet Size: ER16
Output: 1:1
Adjustable 0-30°,
Requires 2 tool positions
A32
L32



BSA-2010
Angled Drill/Mill
Collet Size: ER16
Output: 1:1
Adjustable 0-21°
Interferes with adjacent tooling position when used at angle
A32
L32



BSA-3107
Angled Drill/Mill
Collet Size: ER11
Output: 1:1
Adjustable 0-180°
Crashes with U150B/U151B when working with tool position T11 and T12
A32



BSE107
End Drill/Mill
Collet Size: ER11
Output: 1:1
A32
L32



BSE207-II
End Drill/Mill
Collet Size: ER11
Output: 1:1
A32
L32



BSE1007-II
End Drill/Mill
Collet Size: ER11
Output: 1:1
Double Ended
Holds 2 tools
A32
L32




BSE2007-II
End Drill/Mill
Collet Size: ER11
Output: 1:1
Double Ended
Holds 4 tools
A32
L32


CONTINUED ON NEXT PAGE

Citizen A32-VII & L32-VIII, X, XII


Gang Slide




BSE3007-IK-3X
End Drill/Mill
Collet Size: ER11
Output: 1:1 & 1:3
Up to 18,000 RPM
1 tool @ 1:1, 2 tools @ 1:3
Internal coolingat 120 bar
A32
L32



BSE-3106
End Drill/Mill
Collet Size: ER11
Output: 1:1
Spindle positions rotate in alternating directions
A32
L32



BSE3107-II
End Drill/Mill
Collet Size: ER11
Output: 1:1
A32
L32




BSE3206-II
End Drill/Mill
Collet Size: ER11
Output: 1:1
Double ended
A32
L32




BSE-3207
End Drill/Mill
Collet Size: ER16
Output: 1:1
Double ended
Spindles positions rotate in same direction
A32
L32




BSE-3207-III
End Drill/Mill
Collet Size: ER16
Output: 1:1
Spindle positions rotate in alternating directions
A32
L32




BSE-3208-II
End Drill/Mill
Collet Size: ER16
Output: 1:1
Notice positions on spindle rotate in same direction
A32




BSE-3208-III
End Drill/Mill
Collet Size: ER16
Output: 1:1
Spindle positions rotate in alternating directions
A32



BSE-3209
End Drill/Mill
Collet Size: ER16
Output: 1:1
Notice positions on spindle rotate in alternating directions
A32
L32



BSE-3210
End Drill/Mill
Collet Size: ER16
Output: 1:1
Notice positions on spindle rotate in alternating directions
A32
L32




GSE-3307-3X
End Drill/Mill
Collet Size: ER08
Output: 1:3
High speed
A32




GSE-3307-II
End Drill/Mill
Collet Size: ER11
Output: 1:1
A32



GSE-1710
End Drill/Mill
Collet Size: ER16
Output: 1:1
Notice positions on spindle rotate in alternating directions
A32




GSE-1710-2X
End Drill/Mill
Collet Size: ER16
Output: 1:2
High Speed
Notice positions on spindle rotate in alternating directions
A32




GSE1910
End Drill/Mill
Collet Size: ER16
Output: 1:1
A32
L32



BSP-509
Polygon Milling
Tool ID Size: Ø13mm
Output: 1:1
Max Tool Ø 60mm
A32
L32




BSP-510
Polygon Milling
Tool ID Size: Ø13mm
Output: 1:1
Max Tool Ø 60mm
Tool Thickness 15mm
A32
L32




BSP-511
Polygon Milling
Tool ID Size: Ø10mm
Output: 1:1
Max Tool Ø 55mm
A32
L32

CONTINUED ON NEXT PAGE

Citizen A32-VII & L32-VIII, X, XII



BSP-513
Polygon Milling
Tool ID Size: Ø13mm
Output: 1.5:1
Max Tool Ø 72mm
Tool Thickness 8.3mm
A32
L32




BSP516
Polygon Milling
Tool ID Size: Ø16mm
Output: 1.5:1
Max Tool Ø 72mm
Tool Thickness 8.3mm
A32
L32



RSP-013
Polygon Milling
Tool ID Size: Ø13mm
Output: 1:1
Max Tool Ø 72mm
Tool Thickness 8.3mm
A32
L32




GSS-1307-DEC
Slitting Saw
Arbor Size: Ø16mm
Output: 1:1
Max Tool Ø 63mm
Tool Thickness 6mm
A32
L32




GSS1335-DEC
Slitting Saw
Arbor Size: Ø13mm
Output: 1:1
Max Tool Ø 58mm
Tool Thickness 15mm
A32
L32




GSS15835-DEC
Slitting Saw
Arbor Size: Ø15.875mm
Output: 1:1
Max Tool Ø 63mm
Tool Thickness 8mm
A32
L32



GSS1035-DEC
Slitting Saw
Arbor Size: Ø10mm
Output: 1:1
A32
L32



BSW-315
Thread Whirling
Ring: Utilis
Output: 1:1
9 or 12 insert cutter,
Flight Ø12, Requires removal of the 4-position ID tool Block, Utilis ring #137578
A32



BSW-315-II
Thread Whirling
Ring: Utilis
Output: 1:1
9 or 12 insert cutter,
Flight Ø12, T07 blocked,
Position T08 can only be used with Ø25x52mm in position, Utilis ring #137578
A32



GSW162
Thread Whirling
Ring: PCM
Output: 1:1
Adjustable ±30º,
Requires coolant kit fo internal cooling apabil with PCM coolant whir ing ring.
A32



GDF-1207-L
Tool Holder
Tool Size: Ø3/4in
4 Position Ø3/4in Sleeves
A32



GDF-1501-IK
Tool Holder
Tool Size: Ø1in
3 Position Ø1in Sleeves,
Internal coolant-thru max pressure 150bar,
External coolant-thru max pressure 200 bar,
Gang tools U30B-T10
A32




GDF-1501-II
Tool Holder
Tool Size: Ø1in
3 Position Ø1in Sleeves,
Position T06-T09
A32
L32



GDF-1601-L
Tool Holder
Tool Size: Ø1in
3 Position Ø1in Sleeves,
Position T10, U30B, and U32B
L32

Citizen A32-VII & L32-VIII, X, XII


Sub Spindle




GSC-1110
Cross Drill/Mill
Collet Size: ER16
Output: 1:1
L32




GSC-1110-L
Cross Drill/Mill
Collet Size: ER16
Output: 1:1
Length 70mm
L32



GSC-1110-4X
Cross Drill/Mill
Collet Size: ER08
Output: 1:3.8
High Speed,
Up to 30,000 RPMs
L32



GSC-1113
Cross Drill/Mill
Collet Size: ER20
Output: 1:1
L32



GSC-1310-HP-II
Cross Drill/Mill
Collet Size: ER16
Output: 1:1
High Pressure
Coolant-Thru
Max Pressure
137 Bar
G1/8 Fitting
L32



BSC-210
Cross Drill/Mill
Collet Size: ER16
Output: 1:1
L32



BSC-1330
Cross Drill/Mill
Collet Size: ER16
Output: 1:1
Requires 2 Tool Positions
L32



BSC-2330
Cross Drill/Mill
Collet Size: ER11, ER16
Output: 1:1
Requires 2 Tool Positions
L32



BSS-1530
Slitting Saw
Arbor Size: ER16
Output: 5:3
Max Tool Ø: 80mm
Max Tool Thickness: 3mm
A32

CONTINUED ON NEXT PAGE

CITIZEN $L_6$32

Swiss Made by PCM be driven.


Citizen $L_6$32

(Machine's Live Tooling 3,000 - 4,500 RPM Rating)


Position	Operation	Item No.	Description	(#Tools)Size	Input:Output	Other
Gang Slide	Cross Drilling / Milling	5505-000291	GSC-510-L-3X	(1) ER11	1:3	3X High speed
		5505-000281	GSC-510-4X	(1) ER08	1:3.8	4X High speed
	Angled Drilling / Milling	5505-000235	GSA107	(1) ER11	1:1	Adjustable 0-180°
	End Drilling / Milling	5505-000125	GSE-306-SE312	(1) ER11	1:3	
		5505-000123	GSE-306-DE312	(2) ER11	1:3	Double ended
		5505-000124	GSE-306-L-520	(1) ER11	1:1	
		5505-000274	GSE-306-DE011	(2) ER11	1:1	Double ended
		5505-000510	GSE-316-GS	(1) ER16	1:1	
	Slitting Saw	5505-000134	GSS-510	(1) Ø16	2:1	
	Tool Holder	5505-000250	GDF903	(1) Ø25.4		1" Sleeve holder
		5505-000424	852-354-OF-010	(1) Ø25		High speed spindle holder

Citizen Cincom $L_6$32


Gang Slide




GSC-510-L-3X
Cross Drill/Mill
Collet Size: ER11
Output: 1:3
High Speed
$L_6$32




GSC-510-4X
Cross Drill/Mill
Collet Size: ER08
Output: 1:3.8
High Speed
$L_6$32




GSA107
Angled Drill/Mill
Collet Size: ER11
Output: 1:1
Adjustable 0-180°
$L_6$32




GSE-306-SE312
End Drill/Mill
Collet Size: ER11
Output: 1:3
High Speed
$L_6$32




GSE-306-DE312
End Drill/Mill
Collet Size: ER11
Output: 1:3
High Speed
Double Ended
$L_6$32




GSE-306-L-520
End Drill/Mill
Collet Size: ER11
Output: 1:1
$L_6$32




GSE-306-DE011
End Drill/Mill
Collet Size: ER11
Output: 1:1
Double Ended
$L_6$32




GSE-316-GS
End Drill/Mill
Collet Size: ER16
Output: 1:1
$L_6$32



GSS-510
Slitting Saw
Arbor Size: Ø16mm
Output: 2:1
$L_6$32



GDF903
Tool Holder
Tool Size: Ø25.4mm
Output: 1:3
1in Sleeve Holder
$L_6$32



852-354-OF-010
Tool Holder
Tool Size: Ø25mm
High Speed Spindle
Holder
$L_6$32

CITIZEN $M_2$12/16 & $M_3$12/16

Swiss Made by PCM be driven.


Citizen $M_2$12/16 & $M_3$12/16

Gang Slide Attachments


Position	Operation	Item No.	Description	(#Tools)Size	Input:Output	Other
Gang Slide	Cross Drilling / Milling	5505-000120	GSC-607-2X	(1) ER11	1:2	High speed up to 16,928 RPM
	Angled Drilling / Milling	5505-000203	GSA-407	(1) ER11	1:2.5	Adjustable 0-180°, Up to 20,000 RPM
	End Drilling / Milling	5505-000126	GSE-507	(1) ER11	1:1	
		5505-000127	GSE-507-2X	(1) ER11	1:2	2X High Speed
		5505-000128	GSE-507-DE	(1) ER11 (1) ER08	1:1	Double Ended
		5505-000524	GSE-507-DS	(2) ER11	1:1	Double Ended
		5505-000525	GSE-508	(1) ER11	1:1	
		5505-000129	GSE-707	(1) ER11	1:1	
		5505-000527	GSE-708	(1) ER11	1.65:1	
		5505-000620	MSE607	(3) ER11	1:1	
	Polygon Milling	5505-000526	GSE-509	(1) Ø10	1.6:1	
	Slitting Saw	5505-000133	GSS-250	(1) Ø16	2:1	Max tool size: 50mm, Needs 2 positions
		5505-000545	GSS-250-13	(1) Ø13	2:1	Max tool size: 50mm, Needs 2 positions
	Whirling	5505-000205	LSW-424	(1) Utilis	1:1	9, or 12 Insert Cutter, Adjustable ±10°, 12mm flight circle
		5505-000320	LSW-424-II	(1) Utilis	1:1	9, or 12 Insert Cutter, Adjustable ±15°, 12mm flight circle
	Static Tool Holder	5505-000113	GDF901	(1) Ø3/4in		
		5505-000485	GDF901-HF	(1) Ø25		High speed spindle holder
		5505-000486	GDF901-HF19	(1) Ø3/4in		High speed spindle holder
		5505-000487	GDF901-HF20	(1) Ø20mm		High speed spindle holder
		5505-000488	GDF901-HF22	(1) Ø22mm		High speed spindle holder
		5505-000489	GDF902	(2) Ø3/4in		

Citizen Cincom $M_2$12/16 & $M_3$12/16


Gang Slide




GSC-607-2X
Cross Drill/Mill
Collet Size: ER11
Output: 1:2
High Speed




GSA-407
Angled Drill/Mill
Collet Size: ER11
Output: 1:2.5
Adjustable 0-180°




GSE-507
End Drill/Mill
Collet Size: ER11
Output: 1:1




GSE-507-2X
End Drill/Mill
Collet Size: ER11
Output: 1:1
High Speed




GSE-507-DE
End Drill/Mill
Collet Size: ER08, ER11
Output: 1:1
Double Ended




GSE-507-DS
End Drill/Mill
Collet Size: ER11
Output: 1:1
Double Ended



GSE-508
End Drill/Mill
Collet Size: ER11
Output: 1:1



GSE-707
End Drill/Mill
Collet Size: ER11
Output: 1:1




GSE-708
End Drill/Mill
Collet Size: ER11
Output: 1.65:1


CONTINUED ON NEXT PAGE

Citizen Cincom $M_2$12/16 & $M_3$12/16


Gang Slide




MSE-607
End Drill/Mill
Collet Size: ER11
Output: 1:1




GSE-509
Polygon Milling
ID Size: Ø10mm
Output: 1.6:1




GSS-250
Slitting Saw
Arbor Size: Ø16mm
Output: 2:1




GSS-250-13
Slitting Saw
Arbor Size: Ø13mm
Output: 2:1



LSW-424
Thread Whirling
Ring: Utilis
Output: 1:1
3,9, or 12 insert cutter,
Adjustable ±10°



GDF-901
Tool Holder
Tool Size: Ø19.05mm



GDF901-HF
Tool Holder
Tool Size: Ø25mm
For Broach Holders



GDF901-HF19
Tool Holder
Tool Size: Ø3/4in
For Broach Holders



GDF901-HF20
Tool Holder
Tool Size: Ø20mm
For Broach Holders



GDF901-HF22
Tool Holder
Tool Size: Ø22mm
For Broach Holders



GDF902
Tool Holder
Tool Size: Ø3/4in

CITIZEN $M_4$12/16


Swiss Made by PCM be driven.

Citizen $M_4$12/16


Gang Slide Attachments

Position	Operation	Item No.	Description	(#Tools)Size	Input:Output	Other
Gang Slide	Cross Drilling / Milling	5505-000292	MSC-507-L	(1) ER11	1:1	Long version
		5505-000254	MSC-507-II	(1) ER11	1:1	
		5505-000608	MSC-507-2X	(1) ER11	1:2	High speed up to 20,000 RPM
		5505-000294	MSC-507-4X	(1) ER08	1:3.8	High speed up to 38,000 RPM
		5505-000376	MSC512	(1) ER16	1:1	
		5505-000330	MSC-513	(1) ER20	1:1	
	Angled Drilling / Milling	5505-000494	GSA-607	(3) ER11	1:1	Adjustable ±30°, External cooling, Requires 2 tool positions
	End Drilling / Milling	5505-000620	MSE-607	(3) ER11	1:1	External cooling, requires B-Axis
		5505-000621	MSE-707	(8) ER11	1:1	Exernal cooling, requires B-Axis
	Slitting Saw	5505-000546	GSS507	(1) Ø13mm	1:1	Max tool Ø50mm, Width 6mm
		5505-000547	GSS507-08	(1) Ø8mm	1:1	Max tool Ø50mm, Width 3mm
		5505-000548	GSS507-10	(1) Ø10mm	1:1	Max tool Ø50mm, Width 3mm
		5505-000343	GSS610	(1) Ø10mm	1:1	Max tool Ø40mm, Width 4.5mm
	Polygon Milling	5505-000529	GSF-080	(1) Ø8mm	1:1	Max tool Ø58mm, Width 3mm
	Whirling	5505-000593	LSW-420	(1) Utilis or PCM	1:1	Adjustable 0-16°, 8,000 Max RPM, Requires coolant kit Art. 876-635-80 for internal coolant capability with PCM coolant whirling ring, 6,7,9,or 12 Insert Utilis ring
		5505-000323	GSW-251	(1) Utilis	1:1	9 Insert Cutter, 8mm Flight Ø, Adjustable ±25°
		5505-000554	GSW-261	(1) Utilis	1:1	9 Insert Cutter, 8mm Flight Ø, Adjustable ±25°, Requires B-Axis
	Tool Holders	5505-000490	GDF902-19	(2) Ø3/4in		
		5505-000601	MEU107	(1) Ø10mm H7		Internal cooling with max pressure 80 bar, Requires B-Axis
	Tool Posts	5505-000430	864-615-OF190	(5) Ø3/4in		Internal & external cooling with max pressure 100 bar

Gang Slide




MSC-507-L
Cross Drill/Mill
Collet Size: ER11
Output: 1:1



MSC-507-II
Cross Drill/Mill
Collet Size: ER11
Output: 1:1



MSC-507-2X
Cross Drill/Mill
Collet Size: ER11
Output: 1:2
High Speed



MSC-507-4X
Cross Drill/Mill
Collet Size: ER08
Output: 1:3.8
High Speed



MSC512
Cross Drill/Mill
Collet Size: ER16
Output: 1:1



MSC-513
Cross Drill/Mill
Collet Size: ER20
Output: 1:1



GSA-607
Angled Drill/Mill
Collet Size: ER11
Output: 1:1
Adjustable 30°,
External cooling,
Requires 2 positions



MSE-607
End Drill/Mill
Collet Size: ER11
Output: 1:1
External cooling,
Requires B-Axis



MSE-707
End Drill/Mill
Collet Size: ER11
Output: 1:1
External cooling,
Requires B-Axis



GSS507
Slitting Saw
Arbor Size: Ø13mm
Output: 1:1
Max Tool Ø 50mm
Tool Thickness 6mm



GSS507-08
Slitting Saw
Arbor Size: Ø8mm
Output: 1:1
Max Tool Ø 50mm
Tool Thickness 3mm



GSS507-10
Slitting Saw
Arbor Size: Ø10mm
Output: 1:1
Max Tool Ø 50mm
Tool Thickness 3mm

Citizen Cincom $M_4$12/16

Gang Slide



GSS610
Slitting Saw
Saw ID: 10mm
Output: 1:1
Max Tool Ø40mm
Max Width 4.5mm




GSF-080
Polygon Milling
Tool ID Size: Ø8mm
Output: 1:1
Max Tool Ø 58mm
Max Width 3mm



LSW-420
Thread Whirling
Ring: Utilis or PCM
Output: 1:1
6,7,9, or 12 insert cutter,
Adjustable 0-16°



GSW-251
Thread Whirling
Ring: Utilis
Output: 1:1
9 insert cutter,
8mm flight Ø,
Adjustable ±25°




GSW-261
Thread Whirling
Ring: Utilis
Output: 1:1
9 insert cutter,
8mm flight Ø,
Adjustable ±25°,
Requires B-Axis



GDF902-19
Tool Holder
Tool Size: Ø3/4in



MEU107
Tool Holder
Tool Size: Ø10mm H7
Internal cooling,
Requires B-Axis




864-615-OF190
Tool Post
Tool Size: Ø3/4in
Internal cooling,
External cooling


Operation	Item No.	Description	(#Tools) Size	Output	Coolant-Thru	Other
Cross Drilling / Milling	5505-000165	MSC-106-K	(1) ER11	1:1	Yes	External cooling, 33mm drill depth
	5505-000166	MSC-106-2X	(1) ER11	1:2	Yes	High speed up to 12,000 RPM
	5505-000605	MSC-110-K	(1) ER16	1:1	Yes	External cooling, Internal nut
	5505-000606	MSC-407	(2) ER11	1:1		Requires Y-axis
	5505-000607	MSC-407-3	(3) ER11	1:1		Requires Y-axis
Angled Drilling / Milling	5505-000163	MSA-103	(1) ER11	1:1		Adjustable 0-30°
	5505-000603	MSA-106	(1) ER16	1:1		Fixed at 6°
	5505-000164	MSA-203	(1) ER11	1:1		Adjustable 30-60°
	5505-000604	MSA-303	(1) ER11	1:1		Adjustable 55-90°
	5505-000625	MSF-130-ER	(1) ER11	1:1		Adjustable ±20°, Requires Y-Axis
End Drilling / Milling	5505-000615	MSE-106-K	(1) ER11	1:1	Yes	External cooling
	5505-000338	MSE106-KM-II	(1) ER11	1:1	Yes	External cooling
	5505-000349	MSE106KM2X-II	(1) ER11	1:2	Yes	High speed up to 12,000 RPM, External cooling, Drill depth 20mm
	5505-000612	MSE-106-2X	(1) ER11	1:2	Yes	High speed up to 12,000 RPM, External cooling
	5505-000613	MSE-106-3X	(1) ER11	1:3	Yes	High speed up to 18,000 RPM, External cooling
	5505-000267	MSE-106-KAI	(1) ER11	1:1	Yes	Internal cooling with max pressure 90 bar
	5505-000614	MSE-106-DS	(2) ER11	1:1	Yes	External cooling, Drill depth 20.45mm
	5505-000616	MSE-107-2X	(1) ER11	1:2	Yes	High speed up to 12,000 RPM, Drill depth 10mm
	5505-000169	MSE-306-K	(1) ER11	1:1	Yes	External cooling
	5505-000617	MSE-306-KBL	(1) ER11	1:1	Yes	External cooling
	5505-000618	MSE-403	(1) ER11	1:1	Yes	External cooling, Drill depth 35mm
	5505-000619	MSE403-II	(1) ER11	1:1	Yes	External cooling, Drill depth 40mm
Polygon Milling	5505-000624	MSF-130	(1) Ø13mm	1:1		Adjustable ±20°, Max tool size: 59mm
	5505-000252	MSP-106	(1) Ø13mm	1:1		Max tool Ø50mm, Width 15mm
	5505-000645	MSP-130	(1) Ø13mm	1:3		High speed up to 18,000 RPM, Max tool size: 58mm
	5505-000646	MSP-160	(1) Ø16mm	1:3		High speed up to 18,000 RPM, Max tool size: 58mm
Hobbing	5505-000626	MSH110-035	(1) Ø3.5mm	1:1	Yes	External cooling, Max tool Ø10mm, Width 4-6mm, Adjustable ±10°
	5505-000627	MSH110-080	(1) Ø8.0mm	1:1	Yes	External cooling, Max tool Ø24mm, Width 16mm, Adjustable ±10°, Offset 9mm
	5505-000628	MSH-132-S-035	(1) Ø3.5mm	3:1		Max tool Ø16mm, Width 10mm, Adjustable ±10°, Offset 15mm
	5505-000629	MSH-132-S-080	(1) Ø8mm	3:1		Max tool Ø16mm, Width 10mm, Adjustable ±10°, Offset 15mm
	5505-000303	MSH-132-08	(1) Ø8mm	3:1		Max tool Ø24mm, Width 16mm, Adjustable ±3°
	5505-000304	MSH-132-10	(1) Ø10mm	3:1		Max tool Ø32mm, Width 30mm, Adjustable ±3°
	5505-000630	MSH-133-035	(1) Ø3.5mm	1:0.762		Max tool Ø10mm, Width 6mm, Adjustable ±10°, Offset 15mm
	5505-000631	MSH-133-050	(1) Ø5mm	1:0.762		Max tool Ø12mm, Width 8mm, Adjustable ±10°, Offset 15mm
	5505-000633	MSH-134-035	(1) Ø3.5mm	1:0.846		Max tool Ø10mm, Width 6mm, Adjustable ±10°, Offset 15mm
	5505-000634	MSH-134-050	(1) Ø5mm	1:0.846		Max tool Ø12mm, Width 8mm, Adjustable ±10°, Offset 15mm
	5505-000635	MSH-134-080	(1) Ø8mm	1:0.846		Max tool Ø24mm, Width 16mm, Adjustable ±10°, Offset 15mm
	5505-000632	MSH-133-080	(1) Ø8mm	1:0.762		Max tool Ø24mm, Width 16mm, Adjustable ±10°, Offset 15mm
	5505-000636	MSH210-035	(1) Ø3.5mm	13:11	Yes	External Cooling, Max tool Ø10mm, Width 6mm, Adjustable 0-10°, Offset 9mm
	5505-000637	MSH210-045	(1) Ø4.5mm	13:11	Yes	External Cooling, Max tool Ø12mm, Width 8mm, Adjustable 0-10°, Offset 9mm
	5505-000638	MSH210-080	(1) Ø8mm	13:11	Yes	External Cooling, Max tool Ø24mm, Width 16mm, Adjustable 0-10°, Offset 9mm
	5505-000639	MSH310-035	(1) Ø3.5mm	13:11	Yes	External Cooling, Max tool Ø10mm, Width 6mm, Adjustable 0-10°, Offset 9mm, Belt driven
	5505-000640	MSH310-045	(1) Ø4.5mm	13:11	Yes	External Cooling, Max tool Ø12mm, Width 8mm, Adjustable 0-10°, Offset 9mm, Belt Driven
	5505-000641	MSH310-080	(1) Ø8mm	13:11	Yes	External Cooling, Max tool Ø24mm, Width 16mm, Adjustable 0-10°, Offset 9mm, Belt Driven
	5505-000642	MSH-432-35	(1) Ø3.5mm	1:1		Max tool Ø10mm, Width 6mm, Adjustable ±3°
Static Tool Holders	5505-000673	VDF-101	(1) Ø3/4in		Yes	Internal cooling with max pressure 150 bar, Max drill depth 20mm
	5505-000174	VDF-101-R-S	(1) Ø3/4in			Adjustable, Max drill depth 20mm
	5505-000266	VDF-201	(1) Ø3/4in		Yes	Internal cooling with max pressure 150 bar, Max drill depth 34mm
	5505-000363	VDF-205-HP	(1) Ø3/4in		Yes	Internal cooling with max pressure 100 bar, Max drill depth 58mm
	5505-000332	VDF-206-HP	(1) Ø3/4in		Yes	Internal & external cooling with max pressure 100 bar, Max drill depth 28mm
	5505-000178	VDF-401	(2) Ø3/4in			
	5505-000674	VDF-401-AR	(2) Ø3/4in		Yes	Internal cooling
	5505-000297	VDF-401-HP	(2) Ø3/4in		Yes	Internal & external cooling with max pressure 150 bar
	5505-000179	VDF-501	(1) Ø3/4in			
	5505-000300	VDF701-AR	(3) Ø3/4in		Yes	Internal cooling, Requires Y-Axis
	5505-000676	VDF701-HP	(3) Ø3/4in		Yes	Internal cooling with max pressure 150 bar, Requires Y-Axis
	5505-000299	VDF701-IK	(3) Ø3/4in		Yes	Internal cooling with max pressure 150 bar, Coolant can be enabled/disabled independently for each tool, Requires Y-axis
	5505-000598	MDF-107	(3) Ø19mm			For high speed spindle
	5505-000599	MDF-107-HFN	(3) Ø22mm			For high speed spindle
	5505-000600	MDF107-IK	(3) Ø19mm			High frequency spindle holder, Internal cooling max pressure 200 bar, External cooling max pressure 100 bar
	5505-000345	VTF110-AR	(1) 12x12mm		Yes	External cooling with max pressure 150 bar, Holds OD turning tools
	5505-000248	VTF1510	(2) 10x10mm		Yes	External cooling with max pressure 150 bar, Holds OD turning tools, Requires Y-Axis
	5505-000677	VTF1510-D	(4) 10x10mm		Yes	External cooling with max pressure 150 bar, Holds OD turning tools, Requires Y-Axis
	5505-000181	792-VTF110-R-HP	(1) 1/2in		Yes	1/2in square shank, External coolant-thru with max pressure 150 bar
Whirling	5505-000206	MSW-101	(1) Utilis	2:1		9, or 12 insert Utilis ring, Adjustable ±10°
	5505-000647	MSW-102	(1) Utilis	1:1		6,7,9, or 12 insert Utilis ring, Adjustable ±16°,

Citizen Cincom M12 & M16

Turret




MSC-106-K
Cross Drill/Mill
Collet Size: ER11
Output: 1:1
Coolant-Thru




MSC-106-2X
Cross Drill/Mill
Collet Size: ER11
Output: 1:2
Coolant-Thru
High Speed




MSC110-K
Cross Drill/Mill
Collet Size: ER16
Output: 1:1
Coolant-Thru,
Internal nut



MSC-407
Cross Drill/Mill
Collet Size: ER11
Output: 1:1
Requires Y-Axis




MSC-407-3
Cross Drill/Mill
Collet Size: ER11
Output: 1:1
Requires Y-Axis




MSA-103
Angled Drill/Mill
Collet Size: ER11
Output: 1:1
Adjustable 0-30°




MSA-106
Angled Drill/Mill
Collet Size: ER16
Output: 1:1
Fixed at 6°




MSA-203
Angled Drill/Mill
Collet Size: ER11
Output: 1:1
Adjustable 30-60°




MSA-303
Angled Drill/Mill
Collet Size: ER11
Output: 1:1
Adjustable 55-90°




MSF-130-ER
Angled Drill/Mill
Collet Size: ER11
Output: 1:1
Adjustable ±20°,
Requires Y-Axis




MSE-106-K
End Drill/Mill
Collet Size: ER11
Output: 1:1
Coolant-Thru



MSE106-KM-II
End Drill/Mill
Collet Size: ER11
Output: 1:1
Coolant-Thru




MSE106KM2X-II
End Drill/Mill
Collet Size: ER11
Output: 1:2
Coolant-Thru
High speed up to
12,000 RPM




MSE-106-2X
End Drill/Mill
Collet Size: ER11
Output: 1:2
Coolant-Thru
High speed up to
12,000 RPM




MSE-106-3X
End Drill/Mill
Collet Size: ER11
Output: 1:2
Coolant-Thru
High speed up to
18,000 RPM




MSE-106-KAI
End Drill/Mill
Collet Size: ER11
Output: 1:1
Coolant-Thru




MSE-106-DS
End Drill/Mill
Collet Size: ER11
Output: 1:1




MSE-107-2X
End Drill/Mill
Collet Size: ER11
Output: 1:2
Coolant-Thru
High speed up to
12,000 RPM
Drill depth 10mm



MSE-306-K
End Drill/Mill
Collet Size: ER11
Output: 1:1
Coolant-Thru



MSE-306-KBL
End Drill/Mill
Collet Size: ER11
Output: 1:1
Coolant-Thru




MSE-403
End Drill/Mill
Collet Size: ER11
Output: 1:1
Coolant-Thru
Drill depth 35mm

CONTINUED ON NEXT PAGE

Citizen Cincom M12 & M16

Turret



MSE403-II
End Drill/Mill
Collet Size: ER11
Output: 1:1
Coolant-Thru
Drill depth 40mm



MSF-130
Polygon Milling
Tool ID Size: Ø13mm
Output: 1:1
Max Tool Ø 59mm,
Adjustable ±20°




MSP-106
Polygon Milling
Tool ID Size: Ø13mm
Output: 1:1
Max Tool Ø 50mm
Max Width 15mm




MSP-130
Polygon Milling
Tool ID Size: Ø13mm
Output: 1:3
Max Tool Ø 58mm
High speed up to
18,000 RPM




MSP-160
Polygon Milling
ID Size: Ø16mm
Output: 1:3
Max Tool Ø58mm,
High speed up to
18,000 RPM




MSH110-035
Gear Hobbing
ID Size: Ø3.5mm
Output: 1:1
Coolant-thru
Hobb OD: Ø10mm
Hobb Width: 6mm
Adjustable ±10°




MSH110-080
Gear Hobbing
ID Size: Ø8mm
Output: 1:1
Coolant-thru
Hobb OD: Ø24mm
Hobb Width: 16mm
Adjustable ±10°




MSH-132-S-035
Gear Hobbing
ID Size: Ø3.5mm
Output: 3:1
Hobb OD: Ø16mm
Hobb Width: 10mm
Adjustable ±10°




MSH-132-S-080
Gear Hobbing
ID Size: Ø08mm
Output: 3:1
Hobb OD: Ø16mm
Hobb Width: 10mm
Adjustable ±10°




MSH-132-08
Gear Hobbing
ID Size: Ø08mm
Output: 3:1
Hobb OD: Ø24mm
Hobb Width: 16mm
Adjustable ±3°




MSH-132-10
Gear Hobbing
ID Size: Ø10mm
Output: 3:1
Hobb OD: Ø32mm
Hobb Width: 30mm
Adjustable ±3°




MSH-133-035
Gear Hobbing
ID Size: Ø3.5mm
Output: 1:0.762
Hobb OD: Ø10mm
Hobb Width: 6mm
Adjustable ±10°




MSH-133-050
Gear Hobbing
ID Size: Ø05mm
Output: 1:0.762
Hobb OD: Ø12mm
Hobb Width: 8mm
Adjustable ±10°




MSH-133-080
Gear Hobbing
ID Size: Ø8mm
Output: 1:0.762
Hobb OD: Ø24mm
Hobb Width: 16mm
Adjustable ±10°




MSH-134-035
Gear Hobbing
ID Size: Ø3.5mm
Output: 1:0.846
Hobb OD: Ø10mm
Hobb Width: 6mm
Adjustable ±10°




MSH-134-050
Gear Hobbing
ID Size: Ø5mm
Output: 1:0.846
Hobb OD: Ø12mm
Hobb Width: 8mm
Adjustable ±10°




MSH-134-080
Gear Hobbing
ID Size: Ø8mm
Output: 1:0.846
Hobb OD: Ø24mm
Hobb Width: 16mm
Adjustable ±10°



MSH210-035
Gear Hobbing
ID Size: Ø3.5mm
Output: 13:11
Coolant-thru
Hobb OD: Ø10mm
Hobb Width: 6mm
Adjustable 0-10°



MSH210-045
Gear Hobbing
ID Size: Ø4.5mm
Output: 1:0.846
Coolant-thru
Hobb OD: Ø12mm
Hobb Width: 8mm
Adjustable ±10°



MSH210-080
Gear Hobbing
ID Size: Ø8mm
Output: 1:0.846
Coolant-thru
Hobb OD: Ø24mm
Hobb Width: 16mm
Adjustable ±10°



MSH310-035
Gear Hobbing
ID Size: Ø3.5mm
Output: 13:11
Coolant-thru
Hobb OD: Ø10mm
Hobb Width: 6mm
Adjustable 0-10°
Belt Driven

CONTINUED ON NEXT PAGE

Citizen Cincom M12 & M16


Turret




MSH310-045
Gear Hobbing
ID Size: Ø4.5mm
Output: 13:11
Coolant-thru
Hobb OD: Ø12mm
Hobb Width: 8mm
Adjustable 0-10°
Belt Driven




MSH310-080
Gear Hobbing
ID Size: Ø8mm
Output: 13:11
Coolant-thru
Hobb OD: Ø24mm
Hobb Width: 16mm
Adjustable 0-10°
Belt Driven




MSH-432-35
Gear Hobbing
ID Size: Ø3.5mm
Output: 1:1
Hobb OD: Ø10mm
Hobb Width: 6mm
Adjustable ±3°



VDF-101
Tool Holder
Tool Size: Ø3/4in
Internal cooling
Max drill depth 20mm



VDF-101-R-S
Tool Holder
Tool Size: Ø3/4in
Adjustable,
Max drill depth 20mm




VDF-201
Tool Holder
Tool Size: Ø3/4in
Internal cooling
Max 150 bar,
Max drill depth 34mm




VDF-205-HP
Tool Holder
Tool Size: Ø3/4in
Internal cooling
Max 100 bar,
Max drill depth 58mm



VDF-206-HP
Tool Holder
Tool Size: Ø3/4in
Internal/External cooling,
Max 100 bar,
Max drill depth 58mm




VDF-401
Tool Holder
Tool Size: Ø3/4in




VDF-401-AR
Tool Holder
Tool Size: Ø3/4in
Internal cooling



VDF-401-HP
Tool Holder
Tool Size: Ø3/4in
Internal/External cooling,
Max 150 bar



VDF-501
Tool Holder
Tool Size: Ø3/4in




VDF701-AR
Tool Holder
Tool Size: Ø3/4in
Internal cooling,
Requires Y-Axis




VDF701-HP
Tool Holder
Tool Size: Ø3/4in
Internal cooling,
Max 150 bar,
Requires Y-Axis



VDF701-IK
Tool Holder
Tool Size: Ø3/4in
Internal cooling,
Max 150 bar,
Independent valves,
Requires Y-Axis




MDF-107
Tool Holder
Tool Size: Ø19mm
For High Speed
Spindles




MDF-107-HFN
Tool Holder
Tool Size: Ø22mm
For High Speed
Spindles




MDF107-IK
Tool Holder
Tool Size: Ø19mm
For High Speed
Spindles,
Int cooling 200 bar
Ext cooling 100 bar




VTF110-AR
Tool Holder
Tool Size: 12x12mm
External cooling,
Max 150 bar,
Holds OD turning




VTF1510
Tool Holder
Tool Size: 10x10mm
External cooling,
Max 150 bar,
Holds OD turning
Requires Y-Axis



VTF1510-D
Tool Holder
Tool Size: 10x10mm
External cooling,
Max 150 bar,
Holds OD turning
Requires Y-Axis



792-VTF110-R-HP
Tool Holder
Tool Size: Ø1/2in
1/2in Square shank,
External coolant-thru
max pressure 150 bar



MSW-101
Thread Whirling
Ring: Utilis
Output: 2:1
9, or 12 Utilis ring,
Adjustable ±10°



MSW-102
Thread Whirling
Ring: Utilis
Output: 1:1
6,7,9, or 12 Utilis ring,
Adjustable ±16°

CONTINUED ON NEXT PAGE

CITIZEN M20 & M32

Swiss Made by PCM be driven.

Citizen $M_4$20 & $M_4$32


Gang Slide Attachments
(Machine's Live Tooling 8,000 RPM Rating)

Operation	Item No.	Description	(#Tools)Size	Output	Other
Cross Drilling / Milling	5505-000435	BSC1107-4X	(1) ER11	1:3.8	High speed up to 30,000 RPM
	5505-000261	GSC-1110	(1) ER16	1:1	Cross or end work
	5505-000285	GSC-1110-4X	(1) ER08	1:3.8	High speed up to 30,000 RPM, For M432
	5505-000496	GSC1110-L	(1) ER16	1:1	Long version
	5505-000329	GSC-1113	(1) ER20	1:1	
	5505-000400	GSC1310-HP-II	(1) ER16	1:1	Internal cooling with max pressure 150 bar,
Angled Drilling / Milling	5505-000353	BSA-2010	(6) ER16	1:1	Adjustable 0-21°, Interferes with adjacent tooling station, Requires 2 tool positions
	5505-000263	GSA1510	(3) ER16	1:1	Adjustable 0-30°
	5505-000412	GSE1504	(3) Ø31mm	1:1	Holds GSC1110, GSC1110-4X, GSC1310-HP spindles, For M432
End Drilling / Milling	5505-000257	GSE1510	(3) ER16	1:1	For backworking
	5505-000361	GSE1510-IK	(3) ER16	1:1	For backworking, Coolant-thru ready
	5505-000445	BSE-3106	(3) ER11	1:1	
	5505-000258	BSE-3207-III	(4) ER16	1:1	Double ended, Spindles rotate in opposite directions to onoe another
	5505-000367	BSE-3209	(3) ER16	1:1	Spindles rotate in alternating directions
	5505-000344	BSE-3210	(6) ER16	1:1	Double ended, Spindles rotate in alternating directions
Slitting Saw	5505-000362	GSS-1307-DEC	(1) Ø16mm	1:1	Max tool Ø 63mm, Width 6mm
Static Tool Holders	5505-000358	GDF-1501-II	(3) Ø1in		3 Position 1" Ø Sleeves
	5505-000480	GDF1502-IK	(3) Ø3/4in		Int cooling with max pressure 200 bar, Ext cooling with max pressure 100 bar, Independent shutoff valves, For M432
Whirling	5505-000664	R432-OF5xØ25.4-KAI	(5) Ø1in		Internal cooling
	5505-000553	GSW-250	(1) Utilis	3:2	3,9, or 12 insert Utilis ring, Adjustable 0-25°, 6mm flight circle, Fits manual B-Axis
	5505-000370	GSW-255	(1) Utilis	3:2	3,9, or 12 insert Utilis ring, Adjustable 0-25°, 6mm flight circle, Fits programmable B-Axis


Gang Slide



BSC1107-4X
Cross Drill/Mill
Collet Size: ER11
Output: 1:3.8
High speed up to 30,000 RPM




GSC-1110
Cross Drill/Mill
Collet Size: ER16
Output: 1:1




GSC-1110-4X
Cross Drill/Mill
Collet Size: ER08
Output: 1:3.8
High speed up to 30,000 RPM



GSC1110-L
Cross Drill/Mill
Collet Size: ER16
Output: 1:1
Long version




GSC-1113
Cross Drill/Mill
Collet Size: ER20
Output: 1:1



GSC-1310-HP-II
Cross Drill/Mill
Collet Size: ER16
Output: 1:1
Internal cooling up to 150 bar



BSA-2010
Angled Drill/Mill
Collet Size: ER16
Output: 1:1
Adjustable 0-21°
Interferes with adjacent tooling position



GSA1510
Angled Drill/Mill
Collet Size: ER16
Output: 1:1
Adjustable 0-180°



GSE1504
End Drill/Mill
Bore Size: Ø31mm
Output: 1:1
Holds 3 compatible spindles (GSC1110, GSC1110-4X, GSC1310-HP)

CONTINUED ON NEXT PAGE

$M_4$20 & $M_4$32 Gang Slide Spindles & Attachments


Gang Slide



GSE1510
End Drill/Mill
Collet Size: ER16
Output: 1:1
Notice Spindle Rotation




GSE-1510-IK
End Drill/Mill
Collet Size: ER16
Output: 1:1
Notice Spindle Rotation
Coolant-Thru




BSE-3106
End Drill/Mill
Collet Size: ER11
Output: 1:1
Notice Spindle Rotation




BSE-3207-III
End Drill/Mill
Collet Size: ER16
Output: 1:1
Notice Spindle Rotation



BSE-3209
End Drill/Mill
Collet Size: ER16
Output: 1:1
Notice Spindle Rotation



BSE-3210
End Drill/Mill
Collet Size: ER16
Output: 1:1
Notice Spindle Rotation



GSS-1307-DEC
Slitting Saw
Arbor Size: Ø16mm
Output: 1:1
Max Tool Ø: 63mm
Max Tool Thickness: 6mı



GDF-1501-II
Tool Holder
Tool Size: Ø1in
Coolant-Thru



GDF1502-IK
Tool Holder
Tool Size: Ø3/4in
Int cooling 200 bar,
Ext cooling 100 bar,
Independent shutoff valves



R432-OF5xØ25.4-KAI
Tool Holder
Tool Size: Ø1in
Internal cooling



GSW-250
Thread Whirling
Ring: Utilis
Output: 3:2
3,9, or 12 insert cutter,
Adjustable 0 - 25°
6mm Flight Circle
Fits manual B-Axis



GSW-255
Thread Whirling
Ring: Utilis
Output: 3:2
3,9, or 12 insert cutter,
Adjustable 0 - 25°
6mm Flight Circle
For Programmable B-Axis

REPAIRS & RESTORATION



One of the benefits of buying live tooling and spindles from GenSwiss, is knowing we will repair them too. We will repair your spindle at a fraction of the cost to purchase a brand new one and have your Swiss-style CNC running again in no time.

- **Live Swiss machine attachments restored to factory specification**
- **PCM and major OEM brands: CITIZEN, STAR, TSUGAMI, TORNOS**
- **$50 evaluation & inspection (fee waived if repaired or replaced by us)**
- **Repaired by factory trained professionals**

Call Us At: 1-413-562-4800

Operation	Item No.	Description	(#Tools)Size	Output	Other
	5505-000435	BSC1107-4X	(1) ER11	1:3.8	High speed up to 30,000 RPM
	5505-000119	GSC-510-3X	(1) ER11	1:3	High speed up to 18,000 RPM
	5505-000281	GSC-510-4X	(1) ER08	1:3.8	High speed up to 22,800 RPM
	5505-000291	GSC-510-L-3X	(1) ER11	1:3	High speed up to 18,000 RPM, Long version
	5505-000392	GSC-1010	(1) ER16	1:1	
Angled Drilling / Milling	5505-000235	GSA107	(1) ER11	1:1	Adjustable 0-180°
	5505-000125	GSE-306-SE312	(1) ER11	1:3	High speed up to 18,000 RPM
	5505-000123	GSE-306-DE312	(2) ER11	1:3	High speed up to 18,000 RPM, Double ended
End Drilling / Milling	5505-000124	GSE-306-L-520	(1) ER11	1:1	
	5505-000274	GSE-306-DE011	(2) ER11	1:1	Double ended
	5505-000509	GSE310-L-520	(1) ER16	1:1	Long version
	5505-000510	GSE-316-GS	(1) ER16	1:1	
Slitting Saw	5505-000134	GSS-510	(1) Ø16mm	2:1	
Whirling	5505-000155	LSW-101-L20	(1) Utilis	2:1	3,9, or 12 Insert cutter, Adjustable ±10°
	5505-000158	LSW-215	(1) Utilis	1:1	3, 9, or 12 Insert cutter, Adjustable ±15°
	5505-000591	LSW215-II	(1) Utilis	1:1	3, 9, or 12 Insert cutter, Adjustable ±15°, Requires 2 tool positions


Gang Slide




BSC1107-4X
Cross Drill/Mill
Collet Size: ER11
Output: 1:3.8
High speed up to 30,000 RPM



GSC-510-3X
Cross Drill/Mill
Collet Size: ER11
Output: 1:3
High speed up to 18,000 RPM




GSC-510-4X
Cross Drill/Mill
Collet Size: ER08
Output: 1:3.8
High speed up to 22,800 RPM




GSC-510-L-3X
Cross Drill/Mill
Collet Size: ER11
Output: 1:3
High speed up to 18,000 RPM




GSC-1010
Cross Drill/Mill
Collet Size: ER16
Output: 1:1




GSA107
Angled Drill/Mill
Collet Size: ER11
Output: 1:1
Adjustable 0-180°




GSE-306-SE312
End Drill/Mill
Collet Size: ER11
Output: 1:3
High Speed



GSE-306-DE312
End Drill/Mill
Collet Size: ER11
Output: 1:3
High Speed
Double Ended




GSE-306-L-520
End Drill/Mill
Collet Size: ER11
Output: 1:1




GSE-306-DE011
End Drill/Mill
Collet Size: ER11
Output: 1:1
Double Ended



GSE310-L-520
End Drill/Mill
Collet Size: ER16
Output: 1:1
Long version



GSE-316-GS
End Drill/Mill
Collet Size: ER16
Output: 1:1



GSS-510
Slitting Saw
Arbor Size: Ø16mm
Output: 2:1



LSW-101-L20
Thread Whirling
Ring: Utilis
Output: 1:1
3,9, or 12 insert cutter,
Adjustable ±10°



LSW-215
Thread Whirling
Ring: Utilis
Output: 1:1
3,9, or 12 insert cutter,
Adjustable ±15°



LSW-215-II
Thread Whirling
Ring: Utilis
Output: 1:1
3,9, or 12 insert cutter,
Adjustable ±15°

CONTINUED ON NEXT PAGE

Citizen $M_3$20/$M_4$20 & $M_3$32/$M_4$32


Operation	Item No.	Description	(#Tools) Size	Output	Coolant Thru	Other
Cross Drilling / Milling	5505-000140	KSC110-K	(1) ER16	1:1	Yes	External cooling
	5505-000141	KSC110-K-ER	(1) ER16	1:1	Yes	External cooling, Reduced width to fit 2 on 1 station
	5505-000558	KSC110-K-CR	(1) ER16	1:1	Yes	External cooling, Quick change system ECR
	5505-000264	KSC110-IK	(1) ER16	1:1	Yes	Internal cooling with max pressure 10 bar
	5505-000352	KSC110-HP	(1) ER16	1:1	Yes	Internal cooling with max pressure 70 bar
	5505-000557	KSC110-10000K	(1) ER11	1:2	Yes	External cooling, High speed 2X
	5505-000388	KSC310-II	(3) ER16	1:1.462	Yes	External cooling, 2 Main, 1 Sub
	5505-000560	KSC510	(2) ER16	1:1.462	Yes	External cooling, Y-axis required
	5505-000317	KSC510-10	(2) ER16	1:1.462	Yes	External cooling, Y-axis required, 10mm offset
	5505-000562	KSC-510-DEC-K	(1) ER16	1:1	Yes	External cooling, 10mm offset
	5505-000563	KSC-DEC-10X3	(1) ER11	1:3	Yes	External cooling, High speed up to 15,000 RPM, 10mm offset,
	5505-000296	KSC-DEC-L-10X3	(1) ER11	1:3	Yes	External cooling, High speed up to 15,000 RPM, 10mm offset, Long version for improved milling
Angled Drilling / Milling	5505-000556	KSA115	(1) ER11	1:1		External cooling with max pressure 200 bar, Fixed angle 15º
	5505-000139	KSA-307	(1) ER11	1:1		Adustable 0-30º
	5505-000182	KSA-407	(1) ER11	1:1		Adjustable 30-90º
End Drilling / Milling	5505-000313	KSE105	(1) Ø31	1:1.2		External cooling, Use with GSC-1110, GSC-1110-4X, or GSC1310-HP for extra speed
	5505-000380	KSE110-BKK	(1) ER16	1:1	Yes	Internal cooling with max pressure 120 bar, Max drill depth 29mm
	5505-000565	KSE110-DE	(1) ER11 (1) ER16	1:1	Yes	External cooling, Double ended, Drill depth 25mm on front, 17mm on sub
	5505-000144	KSE110-DE-32	(2) ER16	1:1	Yes	External cooling, Double ended, Drill depth 25mm on front, 17mm on sub,
	5505-000567	KSE110-IK-2X	(1) ER16	1:2	Yes	Internal cooling, High speed up to 10,000 RPM, Max drill depth 25mm
	5505-000217	KSE110-US	(1) ER16	1:1	Yes	External cooling, Max drill depth 22mm
	5505-000570	KSE110-US-2X	(1) ER16	1:2	Yes	External cooling, High speed up to 10,000 RPM, Max drill depth 22mm
	5505-000568	KSE110-K	(1) ER16	1:1	Yes	External cooling, Max drill depth 29.5mm
	5505-000145	KSE110-2X	(1) ER16	1:2	Yes	External cooling, High speed spindle up to 10,000, Max drill depth 28mm
	5505-000146	KSE110-KAI	(1) ER16	1:1	Yes	Internal cooling with max pressure 120 bar, Max drill depth 22mm
	5505-000569	KSE110-KAI-2X	(1) ER16	1:2	Yes	External cooling with max pressure 120 bar, High speed spindle up to 10,000, Max drill depth 22mm
	5505-000308	KSE210-IK	(1) ER16	1:2	Yes	Internal cooling with max pressure 120 bar, Max drill depth 40mm
	5505-000149	KSE250-KAI-2X	(2) ER16	1:2	Yes	Internal cooling for the primary spindle with max pressure 30 bar, High speed up to 10,000 RPM, Max drill depth 22mm, Requires 2 tool positions
	5505-000368	KSE2507-KAI-2x	(2) ER11	1:2	Yes	Internal cooling for the primary spindle with max pressure 30 bar, High speed up to 10,000 RPM, Max drill depth 25mm, Requires 2 tool positions
	5505-000572	KSE307-IK	(1) ER11	1:1	Yes	Internal cooling with max pressure 120 bar, Max drill depth 53mm
	5505-000151	KSE310-K	(1) ER16	1:1	Yes	External cooling, Max drill depth 44.5mm
	5505-000269	KSE310-IK	(1) ER16	1:1	Yes	Internal cooling with max pressure 120 bar, Max drill depth 40mm
	5505-000574	KSE310-IK-Cer	(1) ER16	1:1	Yes	Internal cooling with max pressure 120 bar, Max drill depth 40mm, Ceramic Bearings
	5505-000573	KSE310-2X	(1) ER16	1:2	Yes	External cooling, High speed up to 10,000 RPM, Max drill depth 44mm
	5505-000575	KSE310-UD	(1) ER16	2:1	Yes	External cooling, Reduced speed 2,500 RPM, Max drill depth 44.5mm
	5505-000265	KSE-510-KAI	(2) ER16	1:1	Yes	Internal & External cooling, Max drill depth 35mm, Y-axis required
Polygon Milling	5505-000391	KSF-130	(1) Ø16mm	1:1		Adjustable +-20º
	5505-000576	KSF-130-ER	(1) ER11	1:1		Adjustable +-20º
Hobbing	5505-000314	KSH132-25	(1) Ø13mm	1:1	Yes	External cooling with max pressure 100 bar, Adjustable +-25º, Max tool Ø32mm, Width 40mm
	5505-000315	KSH-132-27-17	(1) Ø10mm	1.588:1		Adjustable 0-20º, Max tool Ø32mm, Width 7mm
	5505-000580	KSH-132-27-17-08	(1) Ø8mm	1.588:1		Adjustable 0-20º, Max tool Ø32mm, Width 7mm
	5505-000578	KSH-132-27-17-II	(1) Ø16mm	1.588:1		Adjustable 0-20º, Max tool Ø32mm, Width 7mm
	5505-000579	KSH-132-27-17-III	(1) Ø10mm	1.588:1		Adjustable 0-20º, Max tool Ø32mm, Width 7mm
	5505-000577	KSH-132-27-17-L	(1) Ø13mm	1.588:1		Adjustable 0-20º, Max tool Ø32mm, Width 7mm
	5505-000581	KSH-133-035	(1) Ø3.5mm	1.588:1		Adjustable +-10º, Max tool Ø10mm, Width 6mm, Requires 2 tool positions

CONTINUED ON NEXT PAGE


Citizen $M_3$20/$M_4$20 & $M_3$32/$M_4$32

Operation	Item No.	Description	(#Tools) Size	Output	Coolant Thru	Other
Static Tool Holders	5505-000102	CDF101	(1) Ø1in			Max drill depth 73mm
	5505-000459	CDF101-AR-1	(1) Ø1in		Yes	Int & Ext cooling, Max drill depth 73mm
	5505-000336	CDF101-HP	(1) Ø1in		Yes	Internal cooling with max pressure 150 bar, Max drill depth 48mm
	5505-000461	CDF101-HP-10	(1) Ø10mm		Yes	Internal cooling, For gun drilling
	5505-000460	CDF101-SP	(1) Ø1in			Max drill depth 113mm
	5505-000318	CDF-201	(1) Ø1in			Max drill depth 40mm
	5505-000463	CDF201-AR	(1) Ø1in		Yes	External cooling, Max drill depth 40mm
	5505-000374	CDF201-HP	(1) Ø1in		Yes	Int & Ext cooling with max pressure 150 bar, Max drill depth 40mm
	5505-000464	CDF201-Jauge				High precision gauge for centering turret position
	5505-000103	CDF-301	(1) Ø1in			Max drill depth 70mm
	5505-000465	CDF-301-AR	(1) Ø1in		Yes	External cooling, Max drill depth 70mm
	5505-000466	CDF301-HP	(1) Ø1in		Yes	Internal cooling with max pressure 100 bar, Max drill depth 70mm
	5505-000279	CDF-401	(2) Ø1in			Max drill depth 73mm
	5505-000467	CDF-401-AR	(2) Ø1in		Yes	Internal cooling for bottom position, Max drill depth 73mm
	5505-000468	CDF401-AR-II	(2) Ø1in		Yes	Internal cooling on both positions, Max drill depth 73mm
	5505-000246	CDF401-HP	(2) Ø1in		Yes	Internal cooling for bottom position with max pressure 150 bar, External cooling for both positions, Max drill depth 73mm
	5505-000469	CDF901-AR	(3) Ø1in			Max drill depth 75mm, Y-axis required
	5505-000335	CDF901-IK	(3) Ø1in		Yes	Int & Ext cooling with max pressure 100 bar, Max drill depth 75mm, Y-axis required
	5505-000471	CDF901-IK-T	(3) Ø1in		Yes	Delivery base (CDF901-IK) required for external cooling, Y-axis required, This is an interchangable head
	5505-000372	CDF901-IK-T-HP	(3) Ø1in		Yes	Delivery base (CDF901-IK) required for ext & int cooling, Y-axis required, This is an interchangable head, Max pressure 150 bar
	5505-000183	CDF-905-AR	(2) Ø.50in (4) Ø.75in			
	5505-000472	CDF905-HP	(2) Ø.50in (4) Ø.75in		Yes	External cooling with max pressure 100 bar,
	5505-000473	CDF-ER16	(2) ER16		Yes	Internal cooling with max pressure 100 bar, With special ER16 coolant sleeve
	5505-000187	CTF1116	(2) 16x16mm		Yes	External cooling, Holds OD turning tools
	5505-000364	CTF1116-D	(2) 16x16mm		Yes	External cooling, Holds OD turning tools, Short version
	5505-000348	CTF116-HP	(2) 16x16mm			External cooling with max pressure 150 bar, Holds OD turning tools
	5505-000427	778-CTF-116-R-AR-HP	(1) 5/8x5/8in		Yes	External cooling with max pressure 150 bar, Holds OD turning tools, Reversable wedge
Whirling	5505-000152	KSW-101	(1) Utilis	2:1		3,6,9, or 12 insert cutter, Adjustable +-15°

Turret




KSC110-K
Cross Drill/Mill
Collet Size: ER16
Output: 1:1
External cooling



KSC110-K-ER
Cross Drill/Mill
Collet Size: ER16
Output: 1:1
External cooling,
Reduced Width




KSC110-K-CR
Cross Drill/Mill
Collet Size: ER16
Output: 1:1
External cooling,
Quick change system ECR




KSC110-IK
Cross Drill/Mill
Collet Size: ER16
Output: 1:1
Internal cooling
10 bar




KSC110-HP
Cross Drill/Mill
Collet Size: ER16
Output: 1:1
Internal cooling
70 bar




KSC110-10000K
Cross Drill/Mill
Collet Size: ER11
Output: 1:2
External cooling,
High speed



KSC-310-II
Cross Drill/Mill
Collet Size: ER16
Output: 1:1.5
External cooling,
2 Main, 1 Sub




KSC-510
Cross Drill/Mill
Collet Size: ER16
Output: 1:1.5
External cooling,
Y-Axis Required



KSC-510-10
Cross Drill/Mill
Collet Size: ER16
Output: 1:1.5
External cooling,
Y-Axis Required
10mm Offset


Turret




KSC-510-DEC-K
Cross Drill/Mill
Collet Size: ER16
Output: 1:1
External cooling,
10mm Offset




KSC-DEC-10X3
Cross Drill/Mill
Collet Size: ER11
Output: 1:3
External cooling,
High speed up to
15,000 RPM
10mm Offset




KSC-DEC-L-10X3
Cross Drill/Mill
Collet Size: ER11
Output: 1:3
External cooling,
High speed up
to 15,000 RPM,
10mm Offset,
Long version




KSA115
Angled Drill/Mill
Collet Size: ER11
Output: 1:1
External cooling
200 bar,
Fixed angle 15°




KSA-307
Angled Drill/Mill
Collet Size: ER11
Output: 1:1
Adjustable 0-30°




KSA-407
Angled Drill/Mill
Collet Size: ER11
Output: 1:1
Adjustable 30-90°




KSE105
End Drill/Mill
Collet Size: Ø31mm
Output: 1:1.2
Must Be Used With
GSC-1110-4X Or GSC-
1110 And Increases The
Output Of Spindle. GSC
Spindle Not Included.



KSE110-BKK
End Drill/Mill
Collet Size: ER16
Output: 1:1
Internal cooling
120 bar,
Drill depth 29mm




KSE110-DE
End Drill/Mill
Collet Size: ER11, ER16
Output: 1:1
External cooling,
Double Ended
Drill depth 25mm front
17mm sub




KSE110-DE-32
End Drill/Mill
Collet Size: ER16
Output: 1:1
External cooling,
Double Ended,
Drill depth 25mm front,
17mm back




KSE110-IK-2X
End Drill/Mill
Collet Size: ER16
Output: 1:2
Internal cooling,
High speed
up to 10,000 RPM,
Drill depth 25mm




KSE110-US
End Drill/Mill
Collet Size: ER16
Output: 1:1
Coolant-Thru




KSE110-US-2X
End Drill/Mill
Collet Size: ER16
Output: 1:2
External cooling,
High speed
up to 10,000 RPM
Drill depth 22mm



KSE110-K
End Drill/Mill
Collet Size: ER16
Output: 1:1
External cooling,
Drilld depth 29.5mm




KSE110-2X
End Drill/Mill
Collet Size: ER16
Output: 1:2
External cooling,
High speed up
to 10,000 RPM,
Drill depth 28mm




KSE110-KAI
End Drill/Mill
Collet Size: ER16
Output: 1:1
Coolant-Thru



KSE110-KAI-2X
End Drill/Mill
Collet Size: ER16
Output: 1:2
External cooling
120 bar,
High speed
up to 10,000 RPM,
Drill depth 22mm




KSE210-IK
End Drill/Mill
Collet Size: ER16
Output: 1:2
Internal cooling
120 bar,
Drill depth 40mm



KSE250-KAI-2X
End Drill/Mill
Collet Size: ER16
Output: 1:2
Internal cooling 30 bar,
High speed up
to 10,000 RPM
*Second Position Is Half Index
Drill depth 22mm



KSE2507-KAI-2X
End Drill/Mill
Collet Size: ER16
Output: 1:2
Internal cooling 30 bar,
High speed up
to 10,000 RPM
*Second Position Is Half Index
Drill depth 25mm




KSE307-IK
End Drill/Mill
Collet Size: ER11
Output: 1:1
Internal cooling
120 bar,
Drill depth 53mm


CONTINUED ON NEXT PAGE

$M_3$20/$M_4$20 & $M_3$32/$M_4$32 Turret Spindles & Attachments


Turret




KSE310-K
End Drill/Mill
Collet Size: ER16
Output: 1:1
External cooling,
Drill depth 44.5mm




KSE310-IK
End Drill/Mill
Collet Size: ER16
Output: 1:1
Internal cooling
120 bar,
Drill depth 40mm




KSE310-IK-Cer
End Drill/Mill
Collet Size: ER16
Output: 1:1
Internal cooling
120 bar,
Drill depth 40mm,
Ceramic bearings




KSE310-2X
End Drill/Mill
Collet Size: ER16
Output: 1:2
External cooling,
High speed up
to 10,000 RPM,
Drill depth 44mm




KSE310-UD
End Drill/Mill
Collet Size: ER16
Output: 2:1
External cooling,
Reduced speed
2,500 RPM,
Drill depth 44.5mm



KSE-510-KAI
End Drill/Mill
Collet Size: ER16
Output: 1:1
Int & Ext cooling
Drill depth 35mm
Y-Axis Required




KSF-130
Polygon Milling
Collet Size: Ø16
Output: 1:1
Adjustable ±20°




KSF-130-ER
Polygon Milling
Collet Size: ER11
Output: 1:1
Adjustable ±20°



KSH132-25
Gear Hobbing
ID Size: Ø13mm
Output: 1:1
External cooling
100 bar,
Hobb OD: Ø32mm
Hobb Width: 40mm
Adjustable ±25°



KSH-132-27-17
Gear Hobbing
ID Size: Ø10mm
Output: 1.588:1
Hobb OD: Ø32mm
Hobb Width: 7mm
Adjustable 0-20°



KSH-132-27-17-08
Gear Hobbing
ID Size: Ø8mm
Output: 1.588:1
Hobb OD: Ø32mm
Hobb Width: 7mm
Adjustable 0-20°




KSH-132-27-17-II
Gear Hobbing
ID Size: Ø16mm
Output: 1.588:1
Hobb OD: Ø32mm
Hobb Width: 7mm
Adjustable 0-20°




KSH-132-27-17-III
Gear Hobbing
ID Size: Ø10mm
Output: 1.588:1
Hobb OD: Ø32mm
Hobb Width: 7mm
Adjustable 0-20°




KSH-132-27-17-L
Gear Hobbing
ID Size: Ø13mm
Output: 1.588:1
Hobb OD: Ø32mm
Hobb Width: 7mm
Adjustable 0-20°
Long version



KSH-133-035
Gear Hobbing
ID Size: Ø3.5mm
Output: 1.588:1
Hobb OD: Ø10mm
Hobb Width: 6mm
Adjustable 0-30°
Requires 2 positions



CDF101
Tool Holder
Tool Size: Ø1in
Drill depth 73mm



CDF101-AR-1
Tool Holder
Tool Size: Ø1in
Int & Ext cooling
Drill depth 79mm




CDF101-HP
Tool Holder
Tool Size: Ø1in
Internal cooling
Max 150 bar,
Drill depth 48mm



CDF101-HP-10
Tool Holder
Tool Size: Ø10mm
Internal cooling,
For gun drilling




CDF101-SP
Tool Holder
Tool Size: Ø1in
Drill depth 113mm



CDF-201
Tool Holder
Tool Size: Ø1in
Drill depth 40mm

$M_3$20/$M_4$20 & $M_3$32/$M_4$32 Turret Spindles & Attachments

Turret



CDF-201-AR
Tool Holder
Tool Size: Ø1in
External cooling,
Drill depth 40mm




CDF-201-HP
Tool Holder
Tool Size: Ø1in
Int & Ext cooling
Max 150 bar,
Drill depth 40mm



CDF-201-Jauge
Gauge
High precision gauge
for centering turret
position


CDF-301
Tool Holder
Tool Size: Ø1in
Drill depth 70mm




CDF-301-AR
Tool Holder
Tool Size: Ø1in
External cooling,
Drill depth 70mm



CDF-301-HP
Tool Holder
Tool Size: Ø1in
Internal cooling
Max 100 bar,
Drill depth 70mm




CDF-401
Tool Holder
Tool Size: Ø1in
Drill depth 73mm




CDF-401-AR
Tool Holder
Tool Size: Ø1in
Internal cooling
on bootom position,
Drill depth 73mm




CDF401-AR-II
Tool Holder
Tool Size: Ø1in
Internal cooling
on both positions,
Drill depth 73mm



CDF401-HP
Tool Holder
Tool Size: Ø1in
Internal cooling
on bottom position,
External cooling
on both positions
Drill depth 73mm




CDF901-AR
Tool Holder
Tool Size: Ø1in
External cooling,
Drill depth 75mm,
Y-Axis Required




CDF901-IK
Tool Holder
Tool Size: Ø1in
Int & Ext cooling
Max 100 bar,
Drill depth 75mm,
Y-Axis Required



CDF901-IK-T
Tool Holder
Tool Size: Ø1in
External cooling
Attaches to CDF-901-IK,
Y-Axis Required



CDF-901-IK-T-HP
Tool Holder
Tool Size: Ø1in
Ext & Int cooling
Attaches to CDF-901-IK
High Pressure 150 Bar
Requires Y-Axis




CDF-905-AR
Tool Holder
Tool Size: Ø.50in, Ø.75in
Coolant-Thru
*Second Position
Is Half Index
*Designed For
$M_2$32 Only




CDF905-HP
Tool Holder
Tool Size: Ø.50in, Ø.75in
External cooling
Max 100 bar



CDF-ER16
Tool Holder
Tool Size: ER16
Internal cooling
Max 100 bar,



CTF-1116
Tool Holder
Tool Size: 16x16mm
External cooling,
Holds OD turning tools
Y-Axis Required




CTF1116-D
Tool Holder
Tool Size: 16x16mm
External cooling,
Holds OD turning tools
Y-Axis Required
Short version



CTF116-HP
Tool Holder
Tool Size: 16x16mm
External cooling
Max 150 bar,
Holds OD turning tools



778-CTF-116-R-AR-HP
Tool Holder
Tool Size: 5/8x5/8in
External cooling
Max 150 bar,
Holds OD turning tools,
Reversable wedge



KSW-101
Thread Whirling
Ring: Utilis
Output: 2:1
3,9, or 12 insert cutter,
Adjustable ±10°

Citizen $M_5$32

Gang Slide Attachments
(Machine's Live Tooling 8,000 RPM Rating)

Operation	Item No.	Description	(#Tools) Size	Output	Other
Cross Drilling / Milling	5505-000435	BSC1107-4X	(1) ER11	1:3.8	High speed up to 30,000 RPM
	5505-000294	MSC-507-4X	(1) ER08	1:3.8	High speed up to 38,000 RPM
	5505-000609	MSC507-HP	(1) ER11	1:1	Internal cooling with max pressure 150 bar
	5505-000254	MSC-507-II	(1) ER11	1:1	
	5505-000292	MSC-507-L	(1) ER11	1:1	Long version for increased rigidity, Up to 10,000 RPM
	5505-000376	MSC512	(1) ER16	1:1	Up to 10,000 RPM
	5505-000666	RSC1107-4X	(1) ER11	1:3.8	High speed up to 22,800 RPM
End Drilling / Milling	5505-000421	GSE1505	(2) Ø31mm	1:1	For use with GSC-110 and GSC-1110-4X to enable end drilling / milling
	5505-000426	GSE1610	(3) ER16	1:1	Max drill depth 41mm
	5505-000422	GSE1610-IK	(3) ER16	1:1	Internal cooling with max pressure 90 bar, Max drilling depth 37mm
Slitting Saw	5505-000544	GSS15835-DEC-II	(1) Ø5/8in	1:1	Max tool Ø 63mm, Width 8mm
Static Tool Holders	5505-000358	GDF-1501-II	(3) Ø1in		3 Position 1" Ø Sleeves
	5505-000479	GDF1501-L350	(3) Ø16x50mm		Internal cooling with max pressure 200 bar
	5505-000425	GDF1701-IK	(3) Ø1in		External cooling with max pressure 100 bar, Internal cooling with max pressure 200 bar
	5505-000250	GDF903	(1) Ø1in		1" Sleeve holder
	5505-000419	GDF903-25	(1) Ø25mm		
	5505-000420	MEU208-MHF	(4) Ø20mm		Internal cooling max pressure 10 bar, For MDF-20 high frequency
Whirling	5505-000417	GSW016	(1) Utilis	1:1	Use with 6,9, & 12 insert cutting ring, Adjustable +-16º, Internal cooling kit is required for use with internal coolant threading ring, T10 on M532 V & VII, T31 on M532 VII & VIII
	5505-000418	GSW116	(1) Utilis	1:1	Use with 6,9, & 12 insert cutting ring, Adjustable +-16º, Internal cooling kit is required for use with internal coolant threading ring, T10 on M532 VIII only


Gang Slide



BSC1107-4X
Cross Drill/Mill
Collet Size: ER11
Output: 1:3.8
High speed up to 30,000 RPM



MSC-507-4X
Cross Drill/Mill
Collet Size: ER08
Output: 1:3.8
High speed up to 30,000 RPM



MSC507-HP
Cross Drill/Mill
Collet Size: ER11
Output: 1:1
Internal cooling
Max 150 bar



MSC-507-II
Cross Drill/Mill
Collet Size: ER11
Output: 1:1



MSC-507-L
Cross Drill/Mill
Collet Size: ER11
Output: 1:1
Long version,
Increased rigidity




MSC512
Cross Drill/Mill
Collet Size: ER16
Output: 1:1
Up to 10,000 RPM



RSC1107-4X
Cross Drill/Mill
Collet Size: ER11
Output: 1:3.8
High speed up to 22,800 RPM




GSE1505
End Drill/Mill
Tool Size: Ø31mm
Output: 1:1
For use with GSC-1110 & GSC-1110-4X



GSE1610
End Drill/Mill
Collet Size: ER16
Output: 1:1
Drill depth 41mm



GSE1610-IK
End Drill/Mill
Collet Size: ER16
Output: 1:1
Inernal cooling
Max 90 bar,
Drill depth 37mm



GSS15835-DEC-II
Slitting Saw
Tool Size: Ø5/8in
Output: 1:1
Max Tool Ø: 63mm
Max Tool Width: 8mm



GDF-1501-II
Tool Holder
Tool Size: Ø1in

CONTINUED ON NEXT PAGE

$M_5$32 Gang Slide Attachments

Gang Slide



GDF1501-L350
Tool Holder
Tool Size: Ø16mm
Internal cooling
Max 200 bar



GDF1701-IK
Tool Holder
Tool Size: Ø1in
Int & Ext cooling
Max 150 & 200 bar,



GDF903
Tool Holder
Tool Size: Ø1in



GDF903-25
Tool Holder
Tool Size: Ø25mm



MEU208-MHF
Tool Holder
Tool Size: Ø20mm
Internal cooling
Max 10 bar,
MDF-20 high freq



GSW016
Thread Whirling
Ring: Utilis
Output: 1:1
6,9, or 12 insert cutter,
Adjustable ±16°
T10 on M532 V/VII
T31 on M532 VII/VIII



GSW116
Thread Whirling
Ring: Utilis
Output: 1:1
6,9, or 12 insert cutter,
Adjustable ±16°
T10 on M532 VIII

Citizen $M_5$32

Operation	Item No.	Description	(#Tools) Size	Output	Coolant Thru	Other
Cross Drilling / Milling	5505-000395	KSC107-4X	(1) ER11	1:3.8	Yes	External cooling, High speed up to 22,800 RPM
	5505-000393	KSC113	(1) ER20	1:1	Yes	External cooling with max pressure 150 bar
	5505-000413	KSC113-IK	(1) ER20	1:1	Yes	Internal cooling with max pressure 150 bar
	5505-000414	KSC213	(1) ER20	1:1	Yes	External cooling with max pressure 150 bar
	5505-000381	KSC313	(2) ER20	1:1	Yes	External cooling, Requires Y-Axis
	5505-000564	KSC-DEC-10x3-V	(1) ER11	1:3	Yes	External cooling, High speed up to 15,000 RPM
	5505-000389	KSC-DEC-L-10x3-V	(1) ER11	1:3	Yes	External cooling, 6mm extended spindle
Angled Drilling / Milling	5505-000415	KSA507	(1) ER11	1:1		Adjustable 0-30º
	5505-000416	KSA607	(1) ER11	1:1		Adjustable 30-90º
End Drilling / Milling	5505-000411	KSE110-IC-V	(1) ER16	1:1	Yes	Internal cooling, Max drill depth 23mm
	5505-000410	KSE110-V	(1) ER16	1:1	Yes	External cooling, Max drill depth 22mm
	5505-000409	KSE113	(1) ER20	1:1	Yes	External cooling, Max drill depth 26.5mm
	5505-000408	KSE1410	(1) ER16	1:2	Yes	Internal cooling with max pressure 120 bar, High speed up to 12,000 RPM Drill depth 26mm
	5505-000407	KSE210-IC-V	(1) ER16	1:2	Yes	Internal cooling with max pressure 120 bar, High speed up to 12,000 RPM, Drill depth 22mm
	5505-000406	KSE210-V	(1) ER16	1:2	Yes	External cooling, Drill depth 22mm
	5505-000382	KSE213	(1) ER20	1:1	Yes	External cooling, Drill depth 44.5mm
Slitting Saw	5505-000402	KSS960	(1) Ø5/8in	8:1		Max tool Ø60mm, Width 4mm
	5505-000401	KSS963	(1) Ø5/8in	8:1		Max tool Ø63mm, Width 4mm, Requires 2 tool positions
Polygon Milling	5505-000404	KSP580	(1) Ø5/8in	54:17		Max tool Ø80mm, Width 16mm
	5505-000403	KSP680	(1) Ø5/8in	1:1		Max tool Ø80mm, Width 16mm
Hobbing	5505-000405	KSH332	(1) Ø10mm	54:17		Adjustable +-5º, Max tool Ø32mm, Width 30mm
	5505-000582	KSH432	(1) Ø10mm	1:1		Adjustable +-5º, Max tool Ø32mm, Width 30mm
Static Tool Holders	5505-000427	778-CTF-116-R-AR-HP	(1) 5/8x5/8in		Yes	External cooling with max pressure 150 bar, Holds OD turning tools, Reversable wedge
	5505-000424	852-354-0F010	(1) Ø25mm			Holds Meyrant high frequency spindle
	5505-000429	857-203-OF120	(3) Ø1in (1) Ø10mm			Replaces original back ID block
	5505-000423	866-349-0F030	(5) Ø1in H5		Yes	Int & Ext cooling
	5505-000102	CDF-101	(1) Ø1in			Max drill depth 73mm
	5505-000459	CDF-101-AR-1	(1) Ø1in		Yes	Int & Ext cooling, Max drill depth 73mm
	5505-000336	CDF101-HP	(1) Ø1in		Yes	Internal cooling with max pressure 150 bar, Max drill depth 48mm
	5505-000461	CDF101-HP-10	(1) Ø10mm		Yes	Internal cooling, For gun drilling
	5505-000460	CDF101-SP	(1) Ø1in			Max drill depth 113mm
	5505-000462	CDF1101-HP	(3) Ø1in		Yes	Int & Ext cooling with max pressure 150 bar, Max drill depth 75.5mm
	5505-000383	CDF1301	(1) Ø1in		Yes	External cooling with max pressure 150 bar, Max drill depth 43mm
	5505-000384	CDF1401	(1) Ø1in		Yes	External cooling with max pressure 150 bar, Max drill depth 83mm
	5505-000318	CDF-201	(1) Ø1in			Max drill depth 40mm
	5505-000463	CDF201-AR	(1) Ø1in		Yes	External cooling, Max drill depth 40mm
	5505-000374	CDF201-HP	(1) Ø1in		Yes	Int & Ext cooling with max pressure 150 bar, Max drill depth 40mm
	5505-000464	CDF201-Jauge				High precision gauge for centering turret position
	5505-000103	CDF-301	(1) Ø1in			Max drill depth 70mm
	5505-000465	CDF-301-AR	(1) Ø1in		Yes	External cooling, Max drill depth 70mm
	5505-000466	CDF301-HP	(1) Ø1in		Yes	Internal cooling with max pressure 100 bar, Max drill depth 70mm
	5505-000279	CDF-401	(2) Ø1in			Max drill depth 73mm
	5505-000467	CDF-401-AR	(2) Ø1in		Yes	Internal cooling for bottom position, Max drill depth 73mm
	5505-000468	CDF401-AR-II	(2) Ø1in		Yes	Internal cooling on both positions, Max drill depth 73mm
	5505-000246	CDF401-HP	(2) Ø1in		Yes	Internal cooling for bottom position with max pressure 150 bar, External cooling for both positions, Max drill depth 73mm
	5505-000469	CDF901-AR	(3) Ø1in			Max drill depth 75mm, Y-axis required
	5505-000335	CDF901-IK	(3) Ø1in		Yes	Int & Ext cooling with max pressure 100 bar, Max drill depth 75mm, Y-axis required
	5505-000471	CDF901-IK-T	(3) Ø1in		Yes	Delivery base (CDF901-IK) required for external cooling, Y-axis required, This is an interchangable head
	5505-000372	CDF901-IK-T-HP	(3) Ø1in		Yes	Delivery base (CDF901-IK) required for ext & int cooling, Y-axis required, This is an interchangable head, Max pressure 150 bar
	5505-000183	CDF-905-AR	(2) Ø.50in (4) Ø.75in			
	5505-000472	CDF905-HP	(2) Ø.50in (4) Ø.75in		Yes	External cooling with max pressure 100 bar,
	5505-000473	CDF-ER16	(2) ER16		Yes	Internal cooling with max pressure 100 bar, With special ER16 coolant sleeve

$M_5$32 Turret Attachments

Turret



KSC107-4X
Cross Drill/Mill
Collet Size: ER11
Output: 1:3.8
External cooling,
High speed up
to 22,800 RPM



KSC113
Cross Drill/Mill
Collet Size: ER20
Output: 1:1
External cooling
Max 150 bar




KSC113-IK
Cross Drill/Mill
Collet Size: ER20
Output: 1:1
Internal cooling
Max 150 bar



KSC213
Cross Drill/Mill
Collet Size: ER20
Output: 1:1
External cooling
Max 150 bar



KSC313
Cross Drill/Mill
Collet Size: ER20
Output: 1:1
External cooling,
Requires Y-Axis



KSC-DEC-10x3-V
Cross Drill/Mill
Collet Size: ER11
Output: 1:3
External cooling,
High speed up
to 15,000 RPM



KSC-DEC-L-10x3-V
Cross Drill/Mill
Collet Size: ER11
Output: 1:3
External cooling,
High speed up
to 15,000 RPM,
6mm extended



KSA507
Angled Drill/Mill
Collet Size: ER11
Output: 1:1
Adjustable 0-30°



KSA607
Angled Drill/Mill
Collet Size: ER11
Output: 1:1
Adjustable 30-90°



KSE110-IC-V
End Drill/Mill
Collet Size: ER16
Output: 1:1
Internal cooling,
Drill depth 23mm



KSE110-V
End Drill/Mill
Collet Size: ER16
Output: 1:1
External cooling,
Drill depth 22mm



KSE113
End Drill/Mill
Collet Size: ER20
Output: 1:1
External cooling,
Drill depth 26.5mm



KSE1410
End Drill/Mill
Collet Size: ER16
Output: 1:2
Internal cooling,
Max 120 bar,
Up to 12,000 RPM
Drill depth 26mm



KSE210-IC-V
End Drill/Mill
Collet Size: ER16
Output: 1:2
Internal cooling,
Max 120 bar,
Up to 12,000 RPM
Drill depth 22mm



KSE210-V
End Drill/Mill
Collet Size: ER16
Output: 1:2
External cooling,
Drill depth 22mm



KSE213
End Drill/Mill
Collet Size: ER16
Output: 1:1
External cooling,
Drill depth 44.5mm



KSS960
Slitting Saw
Tool Size: Ø5/8in
Output: 8:1
Max Tool Ø: 60mm
Max Tool Width: 4mm



KSS963
Slitting Saw
Tool Size: Ø5/8in
Output: 8:1
Max Tool Ø: 63mm
Max Tool Width: 4mm
Requires 2 tool positions



KSP580
Polygon Milling
Tool ID Size: Ø5/8in
Output: 54:17
Max Tool Ø 80mm,
Max Tool Width: 16mm



KSP680
Polygon Milling
Tool ID Size: Ø5/8in
Output: 1:1
Max Tool Ø 80mm,
Max Tool Width: 16mm




KSH332
Gear Hobbing
ID Size: Ø10mm
Output: 54:17
Coolant-thru
Hobb OD: Ø32mm
Hobb Width: 30mm
Adjustable ±5°

M_S32 Turret Attachments

Turret



KSH432
Gear Hobbing
ID Size: Ø10mm
Output: 1:1
Coolant-thru
Hobb OD: Ø32mm
Hobb Width: 30mm
Adjustable ±5°



778-CTF-116-R-AR-HP
Tool Holder
Tool ID Size: Ø5/8x5/8in
External cooling
Max 150 bar,
Holds OD turning tools,
Reversable wedge



852-354-0F010
Tool Holder
ID Size: Ø25mm
Holds Meyrant
high freq spindle




857-203-OF120
Tool Holder
ID Size: Ø1in & 10mm
Replaces original ID
block



866-349-0F030
Tool Holder
Tool ID Size: Ø1in H5
Int & Ext cooling



CDF-101
Tool Holder
ID Size: Ø1in
Drill depth 73mm



CDF-101-AR-1
Tool Holder
ID Size: Ø1in
Int & Ext cooling
Drill depth 73mm



CDF101-HP
Tool Holder
Tool ID Size: Ø1in
Internal cooling
Max 150 bar,
Drill depth 48mm



CDF101-HP-10
Tool Holder
ID Size: Ø10mm
Internal cooling,
Ideal for gun drilling



CDF101-SP
Tool Holder
ID Size: Ø1in
Drill depth 113mm



CDF1101-HP
Tool Holder
Tool ID Size: Ø1in
Int & Ext cooling
Max 150 bar,
Drill depth 75.5mm



CDF1301
Tool Holder
ID Size: Ø1in
External cooling
Max 150 bar,
Drill depth 43mm



CDF1401
Tool Holder
ID Size: Ø1in
External cooling
Max 150 bar
Drill depth 83mm



CDF-201
Tool Holder
Tool ID Size: Ø1in
Drill depth 40mm



CDF201-AR
Tool Holder
ID Size: Ø1in
External cooling,
Drill depth 40mm



CDF201-HP
Tool Holder
ID Size: Ø1in
Int & Ext cooling
Max 150 bar
Drill depth 40mm



CDF201-Jauge
Tool Holder
High precision gauge for
centering turret position



CDF-301
Tool Holder
ID Size: Ø1in
Drill depth 70mm



CDF-301-AR
Tool Holder
ID Size: Ø1in
External cooling
Drill depth 70mm




CDF301-HP
Tool Holder
Tool ID Size: Ø1in
Internal cooling
Max 150 bar,
Drill depth 70mm



CDF-401
Tool Holder
ID Size: Ø1in
Drill depth 73mm

M$_5$32 Turret Attachments

Turret



CDF901-AR
Tool Holder
ID Size: Ø1in
Drill depth 75mm,
Y-Zxis required




CDF901-IK
Tool Holder
Tool ID Size: Ø1in
Int & Ext cooling
Max 100 bar,
Drill depth 75mm,
Y-Axis required




CDF901-IK-T
Tool Holder
ID Size: Ø1in
Delivery base (CDF90-IK)
required for external
cooling, Y-Axis required




CDF901-IK-T-HP
Tool Holder
ID Size: Ø1in
Delivery base (CDF90-IK)
required for external
cooling, Max 150 bar,
Y-Axis required



CDF-905-AR
Tool Holder
Tool ID Size: Ø.5in, .75in




CDF905-HP
Tool Holder
Tool ID Size: Ø.5in, .75in
External cooling (100 bar)



CDF-ER16
Tool Holder
Collet Size: ER16
Internal cooling
Max 100 bar with
special ER16 sleeve

TORNOS DECO 13


Swiss Made by PCM be driven.

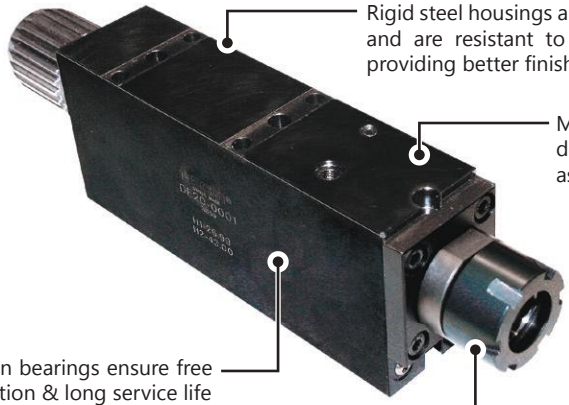

Tornos DECO 13

(Machine's Live Tooling 8,000 RPM Rating)


Operation	Item No.	(#Tools)Size	Output	Other
Cross Drilling / Milling	DE13-0001	(1) ER20	1:1	25mm height, 193 Length
	DE13-0001-H	(1) ER20	1:1	28mm height, 193 Length
	DE13-0002	(1) ER20	1:1	25mm height, 180 Length
	DE13-0002-H	(1) ER20	1:1	28mm height, 180 Length
	DE13-0003	(1) ER20	1:1	25mm height, 218 Length
	DE13-0003-H	(1) ER20	1:1	28mm height, 218 Length
	DE13-0010	(3) ER11	1:1	
Angled Drilling / Milling	DE13-0020	(1) ER11	1:1	Adjustable 0-180°
	DE13-0041	(1) ER11	1:1	Adjustable 0-90°
	DE13-0042	(1) ER11	1:1	Adjustable 0-90°
End Drilling / Milling	DE13-0011	(1) ER11	1:1	
	DE13-0012	(1) ER11	1:1	
Polygon Milling	DE13-0015	(1) Ø16	1:1	Max tool Ø80mm
Tool Holder	DE13-0050	(1) Ø25		For high speed broaches
	DE13-0060	(1) Ø25		
	DE13-OF-030	(1) Ø20		
	DE13-GTF-010	(1) 12x12mm		
	DE13-HF-220	(1) Ø22		For high speed broaches
Whirling	DE13-W15	(1) Utilis	1:1	9 or 12 Insert cutter, Adjustable ±15°, Coolant-thru
	DE13-W25	(1) Utilis	1:1	9 or 12 Insert cutter, Adjustable ±25°, Coolant-thru



DE13-0001
Cross Drilling / Milling
Collet Size: ER20
Output: 1:1
Height 25mm



DE13-0001-H
Cross Drilling / Milling
Collet Size: ER20
Output: 1:1
Height 28mm




DE13-0002
Cross Drilling / Milling
Collet Size: ER20
Output: 1:1

Tornos DECO 13




DE13-0002-H
Cross Drilling / Milling
Collet Size: ER20
Output: 1:1




DE13-0003
Cross Drilling / Milling
Collet Size: ER20
Output: 1:1




DE13-0003-H
Cross Drilling / Milling
Collet Size: ER20
Output: 1:1




DE13-0010
Cross Drilling / Milling
Collet Size: ER11
Output: 1:1




DE13-0020
Angled Drilling / Milling
Collet Size: ER11
Output: 1:1
Adjustable 0-180°




DE13-0041
Angled Drilling / Milling
Collet Size: ER11
Output: 1:1
Adjustable 0-90°




DE13-0042
Angled Drilling / Milling
Collet Size: ER11
Output: 1:1
Adjustable 0-90°




DE13-0011
End Drilling / Milling
Collet Size: ER11
Output: 1:1



DE13-0012
End Drilling / Milling
Collet Size: ER11
Output: 1:1



DE13-0015
Polygon Milling
Tool ID: Ø16mm
Output: 1:1
Max Tool Ø80mm




DE13-W15
Thread Whirling
Ring: Utilis
Output: 1:1
9 or 12 insert cutter,
Flight Circle Ø12mm,
Uses 2 Tooling Positions
Adjustable ±15°
Coolant-Thru




DE13-W25
Thread Whirling
Ring: Utilis
Output: 1:1
7 or 9 insert cutter,
Uses 2 Tooling Positions
Adjustable ±25°
Coolant-Thru



DEC13-0050
Tool Holder
Tool Size: Ø25mm
For High Speed Broaches



DEC13-0060
Tool Holder
Tool Size: Ø25mm



DE13-OF-030
Tool Holder
Tool Size: Ø20mm


TORNOS DECO 20

Swiss Made by PCM be driven.


Tornos DECO 20

(Machine's Live Tooling 8,000 RPM Rating)


Operation	Item No.	(#Tools)Size	Output	Coolant Thru	Other
Drilling / Milling	DE20-0001	(1) ER25	1:1	External	258mm length
	DE20-0001-HP	(1) ER25	1:1	Int + Ext	258mm length
	DE20-0002	(1) ER25	1:1	External	228mm length
	DE20-0002-HP	(1) ER25	1:1	Int + Ext	228mm length
	DE20-0002-CR	(1) ER11 to ER20	1:1	External	Quick change, 187mm length
	DE20-0003	(1) ER25	1:1	External	292mm length
	DE20-0003-HP	(1) ER25	1:1	Int + Ext	292mm length
	DE20-0003-IK	(1) ER25	1:1	Int + Ext	292mm length
	DE20-0003-CR	(1) ER11 to ER20	1:1	External	Quick change, 277mm length
	DE20-0003-2X	(1) ER11	1:2		High speed, 277mm length
	DE20-0010	(3) ER11	1:1	External	Uses two locations
	DE20-0011	(1) ER16	1:1		
Angled Drilling / Milling	DE20-0004	(1) ER11	1:1	External	Adjustable 0-90°
	DE20-0005	(1) ER11	1:1	External	Adjustable 0-180°
	DE20-0020	(1) ER16	1:1		Adjustable 0-180°
Tool Holder	DE20-2160-L	(1) Ø8mm	1:1	External	Broaching holder, 319mm length
	DE20-OF-010	(1) 16x16mm			20mm height
	DE20-OF-020	(1) 16x16mm			24mm height
	DE20-OF-030	(1) Ø20		External	25mm height
	DE20-OF-040	(1) Ø25		External	25mm height
Whirling	DE20-W15	(1) Utilis	1:1	External	9 or 12 insert cutter, Ø12mm flight circle
	DE20-W15-II	(1) Utilis	1:1	External	9 or 12 insert cutter Ø12mm flight circle




DE20-0001
Drilling / Milling
Collet Size: ER25
Output: 1:1
Length 258mm
Coolant-Thru (Ext)




DE20-0001-HP
Drilling / Milling
Collet Size: ER25
Output: 1:1
Length 258mm
Coolant-Thru (Int+Ext)




DE20-0002
Drilling / Milling
Collet Size: ER25
Output: 1:1
Length 228mm
Coolant-Thru (Ext)



DE20-0002-HP
Drilling / Milling
Collet Size: ER25
Output: 1:1
Length 228mm
Coolant-Thru (Int+Ext)




DE20-0002-CR
Drilling / Milling
Collet Size: ER11 to ER20
Output: 1:1
Length 187mm
Coolant-Thru (Ext)
Quick Change




DE20-0003
Drilling / Milling
Collet Size: ER25
Output: 1:1
Length 292mm
Coolant-Thru (Ext)


Tornos DECO 20



DE20-0003-HP
Drilling / Milling
Collet Size: ER25
Output: 1:1
Length 292mm
Coolant-Thru (Int+Ext)




DE20-0003-IK
Drilling / Milling
Collet Size: ER25
Output: 1:1
Length 292mm
Coolant-Thru (Int+Ext)




DE20-0003-CR
Drilling / Milling
Collet Size: ER11 to ER20
Output: 1:1
Length 277mm
Coolant-Thru (Ext)




DE20-0003-2X
Drilling / Milling
Collet Size: ER11
Output: 1:2
Length 277mm
High Speed




DE20-0010
Drilling / Milling
Collet Size: ER11
Output: 1:1
Coolant-Thru (Ext)
Uses Two Locations




DE20-0011
Drilling / Milling
Collet Size: ER16
Output: 1:1




DE20-0004
Angled Drilling / Milling
Collet Size: ER11
Output: 1:1
Coolant-Thru (Ext)
Adjustable 0-90º




DE20-0005
Angled Drilling / Milling
Collet Size: ER11
Output: 1:1
Coolant-Thru (Ext)
Adjustable 0-180º



DE20-0020
Angled Drilling / Milling
Collet Size: ER16
Output: 1:1
Adjustable 0-180º




DE20-W15
Thread Whirling
Ring: Utilis
Output: 1:1
9 or 12 Insert Cutter,
Flight Circle Ø12mm
Coolant-Thru (Ext)




DE20-W15-II
Thread Whirling
Ring: Utilis
Output: 1:1
9 or 12 Insert Cutter,
Flight Circle Ø12mm
Coolant-Thru (Ext)



DE20-2160L
Tool Holder
Tool Size: Ø8mm
Length 319mm
Coolant-Thru (Ext)
Broach Holder



DE20-OF-010
Tool Holder
Tool Size: 16x16mm
Height 20mm



DE20-OF-020
Tool Holder
Tool Size: 16x16mm
Height 24mm




DE20-OF-030
Tool Holder
Tool Size: Ø20mm
Height 25mm
Coolant-Thru (Ext)

TORNOS EvoDECO 16


Swiss Made by PCM be driven.

(Machine's Live Tooling 8,000 RPM Rating)


Operation	Item No.	(#Tools)Size	Output	Coolant Thru	Other
Drilling / Milling	DE13-0001-H	(1) ER20	1:1		
	DE13-0002-H	(1) ER20	1:1		
	DE13-0003-H	(1) ER20	1:1		
	DE13-0006	(1) ER16	1:1		
Polygon Milling	DE13-0015	(1) Ø16	1:1		




DE13-0001-H
Drilling / Milling
Collet Size: ER20
Output: 1:1




DE13-0002-H
Drilling / Milling
Collet Size: ER20
Output: 1:1



DE13-0003-H
Drilling / Milling
Collet Size: ER20
Output: 1:1



DE13-0006
Drilling / Milling
Collet Size: ER16
Output: 1:1



DE13-0015
Polygon Milling
Tool ID: Ø16mm
Output: 1:1

REPAIRS & RESTORATION



One of the benefits of buying live tooling and spindles from GenSwiss, is knowing we will repair them too. We will repair your spindle at a fraction of the cost to purchase a brand new one and have your Swiss-style CNC running again in no time.

- **Live Swiss machine attachments restored to factory specification**
- **PCM and major OEM brands: CITIZEN, STAR, TSUGAMI, TORNOS**
- **$50 evaluation & inspection (fee waived if repaired or replaced by us)**
- **Repaired by factory trained professionals**

Call Us At: 1-413-562-4800

TSUGAMI SS20/32, HS20/32

Swiss Made by PCM be driven.


Machine	Operation	Item No.	Size	Output	Notes
SS20 SS32 HS20 HS32	**Radial Drilling / Milling**	HS20-GSC-107-3X-II	(1) ER11	1:3	High speed spindle up to 15,000 RPM
	Axial Drilling / Milling	HS20-GSE-107-3X-II	(1) ER11	1:3	High speed spindle up to 15,000 RPM
	Polygon Milling	HS20-GSP-613	(1) 13mm	1:1	Max tool Ø72mm, Max tool thickness 8.3mm



HS20-GSC-107-3X-II
Radial Drill/Mill
Collet Size: ER11
Output: 1:3
High Speed
Machine: SS20/32, HS20/32



HS20-GSE-107-3X-II
Radial Drill/Mill
Collet Size: ER11
Output: 1:3
High Speed
Machine: SS20/32, HS20/32



HS20-GSP-613
Polygon Milling
Tool Size:
ID Ø13
OD Ø72
Tool Thickness 8.3mm
Output: 1:1
Machine: SS20/32, HS20/32

TSUGAMI BW20

Swiss Made by PCM be driven.

Machine	Operation	Item No.	Size	Output	Notes
BW207 BW208 BW208Z BW209Z	**Radial Drilling / Milling**	BW20-GSC-105-4X	(1) ER08	1:3.8	High speed spindle up to 30,400 RPM



BW20-GSC-105-4X
Radial Drill/Mill
Collet Size: ER08
Output: 1:3.8
High Speed
Machine: BW20

TSUGAMI S205/206

Swiss Made by PCM be driven.


Machine	Operation	Item No.	Size	Output	Notes
S205 S206	**Radial Drilling / Milling**	S20-RSC-107-3X	(1) ER11	1:3	High speed spindle up to 24,000 RPM
	Axial Drilling / Milling	S20-RSE-107-3X	(1) ER11	1:3	High speed spindle up to 24,000 RPM
	Polygon Milling	S20-GSP-613	(1) 13mm	1:1	Max tool Ø72mm Max tool thickness 8.3mm
	Slitting Saw	S20-RSS-110	(1) ER16	1:1	Max tool Ø70mm
	Thread Whirling	TSUGAMI1-GSW-220	(1) Utilis	1:1	Adjustable 0-20°, Utilis ring: 6mm flight circle



S20-RSC-107-3X
Radial Drilling / Milling
Collet Size: ER11
Output: 1:3
High Speed
Machine: S205/S206



S20-RSE-107-3X
Axial Drilling / Milling
Collet Size: ER11
Output: 1:3
High Speed
Machine: S205/S206



S20-GSP-613
Polygon Milling
Tool Size:
ID Ø13
OD Ø72
Tool Thickness 8.3mm
Output: 1:1
Machine: S205/S206



S20-RSS-110
Slotted Saw
Arbor Size: ER16
Output: 1:1
Max Tool Ø: 70mm
Machine: S205/S206



TSUGAMI1-GSW-220
Thread Whirling
Ring: Utilis Ring
Output: 1:1
Adjustable 0-20°
Flight Circle 6mm
Machine: S205/S206

TSUGAMI B026-II/032-II

Swiss Made by PCM be driven.

Machine	Operation	Item No.	Size	Output	Notes
B0265 II **B0265B II** **B0266 II** **B0325 II** **B0325B II** **B0326 II**	**Radial Drilling / Milling**	B026-GSC-105-4X	(1) ER08	1:3.8	High speed spindle up to 22,800 RPM
		B026-GSC-107-4X	(1) ER11	1:3.8	High speed spindle up to 22,800 RPM
		B026-GSC-107-3X	(1) ER11	1:3	High speed spindle up to 15,000
		B026-BSC-110-HP	(1) ER11	1:1	Internal coolant-thru



B026-GSC-105-4X
Radial Drill/Mill
Collet Size: ER08
Output: 1:3.8
High Speed
Machine: B026-II/B032-II



B026-GSC-107-4X
Radial Drill/Mill
Collet Size: ER11
Output: 1:3.8
High Speed
Machine: B026-II/B032-II



B026-GSC-107-3X
Radial Drill/Mill
Collet Size: ER11
Output: 1:3
High Speed
Machine: B026-II/B032-II



B026-BSC-110-HP
Radial Drill/Mill
Collet Size: ER11
Output: 1:1
Internal Coolant-Thru
Machine: B026-II/B032-II

TSUGAMI B026/032/038

Swiss Made by PCM be driven.

Machine	Operation	Item No.	Size	Output	Notes
B026 B032 B038	Axial Drilling / Milling	B026-RSE-110	(2) ER16	1:1	Double-ended
		B026-RSE-110-IK	(2) ER16	1:1	Double-ended, Internal coolant-thru
		B026-RSE-110M	(1) ER16	1:1	
		B026-RSE-110M-IK	(1) ER16	1:1	Internal coolant-thru
		B026-RSE-210	(4) ER16	1:1	Double-ended
		B026-RSE-210-IK	(4) ER16	1:1	Double-ended, Internal coolant-thru
		B026-RSE-210M	(2) ER16	1:1	
		B026-RSE-310	(6) ER16	1:1	Double-ended
		B026-RSE-310-IK	(6) ER16	1:1	Double-ended, Internal coolant-thru
		B026-RSE-310M	(3) ER16	1:1	
		B026-RSE-310M-IK	(3) ER16	1:1	Internal coolant-thru



B026-RSE-110
Axial Drilling / Milling
Collet Size: ER16
Output: 1:1
Double-Ended
Machine: B026/32/38



B026-RSE-110-IK
Axial Drilling / Milling
Collet Size: ER16
Output: 1:1
Internal Coolant-Thru
Double-Ended
Machine: B026/32/38



B026-RSE-110M
Axial Drilling / Milling
Collet Size: ER16
Output: 1:1
Machine: B026/32/38



B026-RSE-110M-IK
Axial Drilling / Milling
Collet Size: ER16
Output: 1:1
Internal Coolant-Thru
Machine: B026/32/38




B026-RSE-210
Axial Drilling / Milling
Arbor Size: ER16
Output: 1:1
Double-Ended
Machine: B026/32/38



B026-RSE-210-IK
Axial Drilling / Milling
Collet Size: ER16
Output: 1:1
Double-Ended
Internal Coolant-Thru
Machine: B026/32/38



B026-RSE-210M
Axial Drilling / Milling
Collet Size: ER16
Output: 1:1
Machine: B026/32/38



B026-RSE-310
Axial Drilling / Milling
Collet Size: ER16
Output: 1:1
Double-Ended
Machine: B026/32/38



B026-RSE-310-IK
Axial Drilling / Milling
Collet Size: ER16
Output: 1:1
Double-Ended
Internal Coolant-Thru
Machine: B026/32/38



B026-RSE-310M
Axial Drilling / Milling
Collet Size: ER16
Output: 1:1
Machine: B026/32/38



B026-RSE-310M-IK
Axial Drilling / Milling
Collet Size: ER16
Output: 1:1
Internal Coolant-Thru
Machine: B026/32/38

TSUGAMI B01-III/02-III/07-III

Swiss Made by PCM be driven.

Machine	Operation	Item No.	Size	Output	Notes
B073-III B074-III B075-III B0123-III B0124-III B0125-III B0126-III B0203-III B0204-III B0205-III B0206-III	Radial Drilling / Milling	B07-GSC-105-4X	(1) ER08	1:3.8	High speed spindle up to 22,800 RPM
		B07-GSC-107-4X	(1) ER11	1:3.8	High speed spindle up to 22,800 RPM
		B07-GSC-110	(1) ER16	1:1	
	Axial Drilling / Milling	B07-RSE-207	(2) ER11	1:1	
		B07-RSE-207-IK	(2) ER11	1:1	Internal coolant-thru
		B07-RSE-207-2X	(2) ER11	1:2	High speed spindle up to 16,000 RPM
		B07-RSE-207-IK-2X	(2) ER11	1:2	High speed spindle up to 16,000 RPM, Internal coolant-thru
	Angled Drilling / Milling	B07-GSA-207	(2) ER11	1:1	Adjustable 90°
		B07-GSA-207-IK	(2) ER11	1:1	Adjustable 90°, Internal coolant-thru
		B07-GSA-207-2X	(2) ER11	1:2	High speed spindle up to 16,000 RPM, Adjustable 90°
		B07-GSA-207-IK-2X	(2) ER11	1:2	High speed spindle up to 16,000 RPM, Adjustable 90°, Internal coolant-thru
	Slitting Saw	B07-GSS-110	(1) ER16	1:1	Max tool Ø70mm
	Thread Milling	B07-GSF-418	(1) 8mm	1:1	Max tool Ø72mm, Tool width 3-5mm
		B07-GSF-518	(1) 8mm	1:1	Max tool Ø72mm, Tool width 3-5mm, Adjustable 1.5°




B07-GSC-105-4X
Radial Drilling / Milling
Collet Size: ER08
Output: 1:3.8
High Speed
Machine: B01/02/07




B07-GSC-107-4X
Radial Drilling / Milling
Collet Size: ER11
Output: 1:3.8
High Speed
Machine: B01/02/07



B07-GSC-110
Radial Drilling / Milling
Collet Size: ER16
Output: 1:1
Machine: B01/02/07



B07-RSE-207
Axial Drilling / Milling
Collet Size: ER11
Output: 1:1
Machine: B01/02/07




B07-RSE-207-IK
Axial Drilling / Milling
Collet Size: ER11
Output: 1:1
Internal Coolant-Thru
Machine: B01/02/07




B07-RSE-207-2X
Axial Drilling / Milling
Collet Size: ER11
Output: 1:2
High Speed
Machine: B01/02/07




B07-RSE-207-IK-2X
Axial Drilling / Milling
Collet Size: ER11
Output: 1:2
High Speed
Internal Coolant-Thru
Machine: B01/02/07




B07-GSA-207
Angled Drilling / Milling
Arbor Size: ER11
Output: 1:1
Adjustable 90°
Machine: B01/02/07



B07-GSA-207-IK
Angled Drilling / Milling
Arbor Size: ER11
Output: 1:1
Adjustable 90°
Internal Coolant-Thru
Machine: B01/02/07



B07-GSA-207-2X
Angled Drilling / Milling
Arbor Size: ER11
Output: 1:2
Adjustable 90°
High Speed
Machine: B01/02/07



B07-GSA-207-IK-2X
Angled Drilling / Milling
Arbor Size: ER11
Output: 1:2
Adjustable 90°
High Speed,
Internal Coolant-Thru
Machine: B01/02/07



B07-GSS-110
Slotted Saw
Arbor Size: ER16
Output: 1:1
Max Tool Ø: 70mm
Machine: B01/02/07



B07-GSF-418
Thread Milling
Tool Size: 8mm
Output: 1:1
Max Tool Ø: 72mm
Tool Width: 3-5mm
Machine: B01/02/07




B07-GSF-518
Thread Milling
Tool Size: 8mm
Output: 1:1
Max Tool Ø: 72mm
Tool Width: 3-5mm
Adjustable 1.5°
Machine: B01/02/07

TSUGAMI P034H

Swiss Made by PCM be driven.

Machine	Operation	Item No.	Size	Output	Notes
P034H	Axial Drilling / Milling	P03-GSE-207-II	(2) ER11	1:1	
	Radial Drilling / Milling	P03-GSC-015	(1) ER08	1:1	
	Gear Hobbing	P03-GSH-135-L	(1) 3.5mm	1:1	Adjustable ±2.5°
	Polygon Milling	P03-GSP-118	(1) 8mm	1:1	Adjustable ±2.5°, Max tool Ø45mm
		P03-GSP-218	(1) 8mm	1:1	Adjustable ±2.5°, Max tool Ø45mm, Cutter offset
		P03-GSP-318	(1) 8mm	1:1	Adjustable in X ±2.5°, Adjustable in Y ±1.5°, Max tool Ø45mm
	Thread Whirling	P03-GSW-220	(1) Utilis	1:1	Adjustable 0-20°
	Static Holders & Blocks	P03-GDF-416	(3) 16mm		
		P03-GDF-516	(3) 16mm		
		P03-GTF-018	(7) 8x8mm		
	Main Block Tool Holder with Gang Slide and High Speed Spindle	P03-GSC-117-S	See Notes To The Right	1:2	(2) 8x8mm square shank (1) Ø25mm holder for high speed spindle (1) ER11 high speed spindle, Up to 16,000 RPM (1) Modular



P03-GSE-207-II
End Drilling / Milling
Collet Size: ER11
Output: 1:1
Machine: P034H



P03-GSC-015
Cross Drilling / Milling
Collet Size: ER08
Output: 1:1
Machine: P034H



P03-GSH-135-L
Gear Hobbing
ID Size: Ø3.5mm
Output: 1:1
Adjustable ±2.5°
Machine: P034H



P03-GSP-118
Polygon Milling
Tool Size: Ø8mm
Output: 1:1
Max Tool Ø: 45mm
Adjustable ±2.5°
Machine: P034H




P03-GSP-218
Polygon Milling
Arbor Size: Ø8mm
Output: 1:1
Max Tool Ø: 45mm
Adjustable ±2.5°
Cutter Offset
Machine: P034H




P03-GSP-318
Polygon Milling
Arbor Size: Ø8mm
Output: 1:1
Max Tool Ø: 45mm
Y Adjustable ±1.5°
X Adjustable ±2.5°
Machine: P034H



P03-GSW-220
Thread Whirling
Ring: Utilis
Output: 1:1
9 or 12 Insert Cutter,
Adjustable 0-20°
Machine: P034H




P03-GDF-416
Static Tool Holder
Tool Size: Ø16mm
Machine: P034H



P03-GDF-516
Static Tool Holder
Tool Size: Ø16mm
Machine: P034H



P03-GTF-018
Static Tool Holder
Tool Size: 8mmx8mm
Machine: P034H

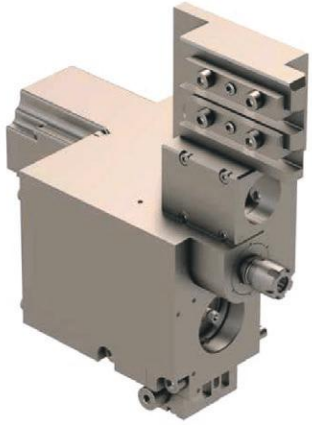

P03-GSC-117-S
Main Block Tool Holder
Collet Size: ER11
Output: 1:2
Tool N°01 cutter carrier 8mm x 8mm
Tool N°02 cutter carrier 8mm x 8mm
Tool N°03 hight frequency Ø25
Tool N°04 in ER11 with RPM 16'000.
Tool N°05 is a modular quick change for different operation.
Machine: P034H

STAR
Swiss Made by
PCM
be driven.



SR20J-W20
Thread Whirling

All Machines

Gang Slide Tools

Operation	Item No.	(#Tools)Size	Output	Machine	Other
Cross Drilling / Milling	E20-GSC-3X	(1) ER11	1:2.59	ECAS12/20, SB12-20R, SR20J/JN, SR-20RII/RIII/RIV, SR32J/JN, SV12/20/32, SV32JII, SV38R, SW20	High speed
	E20-GSC-110	(1) ER16	1:1	ECAS12/20, SB12-20R, SR20J/JN, SR-20RII/RIII/RIV, SR32J/JN, SV12/20/32, SV32JII, SV38R, SW20	
	STA-SR20J-GSC-010-HP	(1) ER16	1:1	ECAS12/20, SB12-20R, SR20J/JN/SR-20RIII, SR20RII, SR20 RIV, SR32J/JN, SV12/20/32, SV32JII, SV38R, SW20	2175psi max coolant cressure
	STA-A100-E16	(1) ER16	1:1	ECAS12/20, SB12-20R, SR20J/JN, SR-20RII/RIII/RIV, SR32J/JN, SV12/20/32, SV32JII, SV38R, SW20	
	STA-A106-E11	(1) ER11	1:1	ECAS12/20, SB12-20R, SR20J/JN, SR-20RIII, SR20RII/IV, SR32J/JN, SW20	
	STA-A120-E16	(1) ER16	1:1	ECAS12/20, ECAS-32T, SB12-20R, SR20J/JN/SR-20RIII, SR20RII/IV, SV38R, SW20	
	STA-A121-E08	(1) ER08	1:1	ECAS12/20, SB12-20R, SR20J/JN/SR-20RIII, SR20RII/IV, SV38R, SW20	
End Drilling / Milling	E20-DE-1111	(2) ER11	1:1	ECAS12/20, SB12-20R, SR20J/JN, SR-20RII/RIII/RIV, SR32J/JN, SV12/20/32, SV32JII, SV38R, SW20	Double ended
	E20-GSE-210	(2) ER16	1:1	ECAS12/20, SB12-20R, SR20J/JN, SR-20RII/RIII/RIV, SR32J/JN, SV12/20/32, SV32JII, SV38R, SW20	
	SR20J-GSE-3710	(3) ER11 (3) ER16	1:1	SR20J	
	SR32J-GSE-3710	(3) ER11 (3) ER16	1:1	SR32J	Double ended
	STA-R177-2E16	(2) ER16	1:1	SB-12/20R, SR20J/JN/RIII, SR20RII, SR20RIV	
	STA-R146-E16	(1) ER16	1:1	SB-12/20R, SR20J/JN/RIII, SR20RII/RIV, SW20	
	STA-R208-3E16	(3) ER16	1:1	SB-12/20R, SR20J/JN/RIII, SR20RIV	
	STA-R177-4E11	(4) ER11	1:1	SR20J/JN/RIII, SR-20RIV	Double ended
	STA-R146-E11	(1) ER11	1:1	ECAS12/20, SW20	
	STA-R146-2E11	(2) ER11	1:1	ECAS12/20, SW20	
Hobbing	E20RSH-035 *	(1) Ø3.5	1:1	SR20	Adjustable ±5°
	E20-RSH-080	(1) Ø8	1:1	SR20	Adjustable ±5°
	SW12-GSH-045	(1) Ø4.5		SW12-RII	Adjustable +15°/-3°
	SW12-GSH-080	(1) Ø8	1:1	SW12-RII	Adjustable +10°/-3°
Polygon Milling	SR20RII-GSP-713	(1) Ø13	1:1	SR20RII	Max tool Ø60mm Max thickness 8.3mm
	SB-GSP-218	(1) Ø8	1:1	SB16, SB20	Adjustable ±10°
	SW12-GSP-218	(1) Ø8	1:1	SW12-RII	Adjustable ±10°
Whirling	E20-W20	(1) Utilis	1:1	SR-20, SR-30, SW-20, ECAS-12, ECAS-20	9 or 12 Insert, Adjustable ±20°, Flight circle Ø6mm
	SR20J-W20	(1) Utilis	1:1	SR20J/JN/RIII	9 or 12 Insert, Adjustable ±20°, Flight circle Ø12mm
	STAR2-GSW-210	(1) Utilis	1:1	SR20J, SB-16R	7 or 9 Insert, Adjustable ±10°, Flight circle Ø6mm
Modular	SW12-GSH-045 (Hobbing)	(1) Ø4.5		SW12-RII	Adjustable +15°/-3°
	SW12-GSH-080 (Hobbing)	(1) Ø8	1:1	SW12-RII	Adjustable +10°/-3°
	SB-GSP-218 (Polygon Milling)	(1) Ø8	1:1	SB16, SB20	Adjustable ±10°
	SW12-GSP-218 (Whirling)	(1) Ø8	1:1	SW12-RII	Adjustable ±10°
	STAR2-GSW-210 (Whirling)	(1) Utilis	1:1	SR20J, SB-16R	7 or 9 Insert, Adjustable ±10°, Flight circle Ø6mm

All Machines

Sub Spindle Tools

Operation	Item No.	(#Tools)Size	Output	Machine	Other
Back Working	STA-BW096-E11	(1) ER11	1:1	ECAS12/20, SB12-20R, SR10J, SR20J/JN/SR-20RIII, SR20RII/RIV, SR32J/JN, SW12RII	
	STA-BW096-E16	(1) ER16	1:1	ECAS12/20, SB12-20R, SR20J/JN/SR-20RIII, SR20RII/RIV, SR32J/JN, SW12RII	
	STA-BW098-E16	(1) ER16	1:1	SR20-RIV, SW-12RII, SW20	
	STA-SR20J-GSE-010-HP	(1) ER16	1:1	ECAS12/20, SB12-20R, SR20J/JN/SR-20RIII, SR20RII, SR20 RIV, SR32J/JN, SW12RII	2175psi Max Coolant Pressure
	STA-SR20J-RSC-007	(1) ER11	1:1	ECAS12/20, SB12-20R, SR20J/JN/SR-20RIII, SR20RII, SR20 RIV, SR32J/JN, SW12RII	
End Drilling / Milling	E20-GSE-110	(1) ER16	1:1	ECAS12/20, SB12-20R, SR20J/JN, SR-20RII/RIII/RIV, SR32J/JN, SV12/20/32, SV32JII, SV38R, SW20	

20mm Machines

Turret Tools

Operation	Item No.	(#Tools)Size	Output	Machine	Other
Cross Drilling / Milling	SV20-TSC-210	(4) ER11	1:4	20T, SV20	Double ended
End Drilling / Milling	SV20-T2X2X4	(4) ER11	1:4	SV12, SV20	Double ended, High speed
	SV20-TSE-010	(2) ER16	1:1	20T, SV20	Double ended
	SV20-TSE-207	(4) ER11	1:1	20T, SV20	Double ended

32 & 38mm Machines

Turret Tools


Operation	Item No.	(#Tools)Size	Output	Machine	Other
Cross Drilling / Milling	E20C-110-IK *	(1) ER16	1:1	20T, SV20	
	E20C-110-K *	(1) ER16	1:1	20T, SV20	
	SV32-TSC-210	(2) ER16	1:1	32T, SV32	
End Drilling / Milling	SV32-TSE-010	(4) ER11	1:1	SV-38R, ECAS-32T	Double ended
	SV32-TSE-207	(4) ER11	1:1	SV-38R, ECAS-32T	Double ended
Whirling	SV32-W20	(1) Utilis	1:1	SV-32	9 or 12 Insert, Adjustable ±20°, Flight circle Ø12mm

SR10J Machine Specific Tooling


Operation	Item No.	(#Tools)Size	Output	Machine	Other
Cross Drilling / Milling	SR10J-GSC-E11-2X	(2) ER11	1:1	SR10J	
	SR10J-GSC-E11-2X-DEC	(2) ER11	1:1	SR10J	
	SR10J-GSC-E08	(1) ER08	1:1	SR10J	
Hobbing	SR10J-GSH-035	(1) Ø3.5		SR10J	
	SR10J-GSH-035-II	(1) Ø3.5		SR10J	
	SR10J-GSH-050-II	(1) Ø5	1:1	SR10J	
Polygon Milling	SR10J-GSF-080-II	(1) Ø8		SR10J	
	SR10J-GSF-100-II	(1) Ø10		SR10J	
Tool Holder	SR10J-GSC-E11S	(1) ER11	1:1.666	SR10J	Replaces main block with fixed ER11 spindle plus quick change modular spindle.
	SR10J-GSC-E11AZ	(1) ER11	1:1.666	SR10J	Same as SR10J-GSC-E11S but spindle is 8.7mm set back and main block is 10mm longer.
	5510-000-139A	(1) ER11		SR10J	
Whirling	SR10J-GSW-010	(1) Utilis	1:1	SR10J	7 or 9 Insert, Adjustable ±10°, Flight circle Ø6mm

Star Spindles & Attachments

Gang Slide - All Machines




E20-GSC-3X
Cross Drill/Mill
Collet Size: ER11
Output: 1:2.59
High Speed
Double Ended




E20-GSC-110
Cross Drill/Mill
Collet Size: ER16
Output: 1:1




STA-SR20J-GSC-010-HP
Cross Drill/Mill
Collet Size: ER16
Output: 1:1
Coolant-Thru
2175psi Max



E20-DE-1111
End Drill/Mill
Collet Size: ER11
Output: 1:1
Double Ended




E20-GSE-210
End Drill/Mill
Collet Size: ER16
Output: 1:1




SR20J-GSE-3710
End Drill/Mill
Collet Size: ER11 ER16
Output: 1:1



SR32J-GSE-3710
End Drill/Mill
Collet Size: ER11 ER16
Output: 1:1
Double Ended

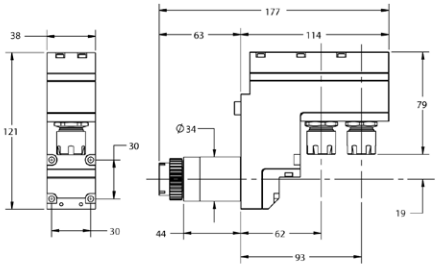


STA-R177-2E16
End Drill/Mill
Collet Size: ER16
Output: 1:1

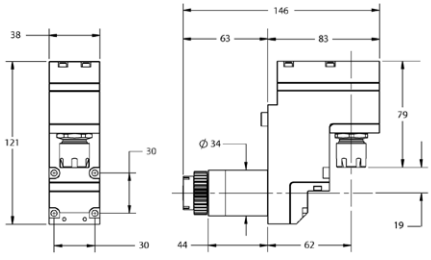


STA-R146-E16
End Drill/Mill
Collet Size: ER16
Output: 1:1

Star Spindles & Attachments

Gang Slide - All Machines



E20-RSH-035
Gear Hobbing
ID Size: Ø3.5mm
Output: 1:1
Adjustable ±5°




E20-RSH-080
Gear Hobbing
ID Size: Ø08mm
Output: 1:1
Adjustable ±5°



SR20RII-GSP-713
Polygon Milling
ID Size: Ø13mm
Output: 1:1
Max Tool Ø60mm
Max Thickness 8.3mm



E20-W20
Thread Whirling
Ring: Utilis
Output: 1:1
9 or 12 Insert Cutter,
Flight Circle Ø6mm
Adjustable ±20°



SR20J-W20
Thread Whirling
Ring: Utilis
Output: 1:1
9 or 12 Insert Cutter,
Flight Circle Ø12mm
Adjustable ±20°

Gang Slide - Modular



SW12-GSH-045
Modular
Gear Hobbing
ID Size: Ø4.5mm
Output: 1:1
Adjustable +15°/-3°



SW12-GSH-080
Modular
Gear Hobbing
ID Size: Ø8mm
Output: 1:1
Adjustable +15°/-3°



SB-GSP-218
Modular
Polygon Milling
ID Size: Ø8mm
Output: 1:1
Adjustable ±10°



SW12-GSP-218
Modular
Polygon Milling
ID Size: Ø8mm
Output: 1:1
Adjustable ±10°



STAR2-GSW-210
Modular
Thread Whirling
Ring: Utilis
Output: 1:1
7 or 9 Insert Cutter,
Flight Circle Ø6mm
Adjustable ±10°

Star Spindles & Attachments


Sub Spindle



STA-SR20J-GSE-010-HP
Back Working
Collet Size: ER16
Output: 1:1
Coolant-Thru 2175psi Max




STA-SR20J-RSC-007
Back Working
Collet Size: ER11
Output: 1:1



E20-GSE-110
End Drill/Mill
Collet Size: ER16
Output: 1:1


Turret - 20mm Machines




SV20-TSC-210
Cross Drill/Mill
Collet Size: ER11
Output: 1:4
High Speed
Double Ended



SV20-T2X2X4
End Drill/Mill
Collet Size: ER11
Output: 1:4
High Speed
Double Ended




SV20-TSE-010
End Drill/Mill
Collet Size: ER16
Output: 1:1
Double Ended




SV20-TSE-207
End Drill/Mill
Collet Size: ER11
Output: 1:1
Double Ended


Turret - 32 & 38mm Machines




E20C-110-IK
Cross Drill/Mil
Collet Size: ER16
Output: 1:1




E20C-110-K
Cross Drill/Mill
Collet Size: ER16
Output: 1:1



SV32-TSE-207
End Drill/Mill
Collet Size: ER11
Output: 1:1
Double Ended



SV32-TSE-010
End Drill/Mill
Collet Size: ER11
Output: 1:1




SV32-TSC-210
Cross Drill/Mill
Collet Size: ER16
Output: 1:1




SV32-W20
Thread Whirling
Ring: Utilis
Output: 1:1
9 or 12 Insert Cutter,
Flight Circle Ø12mm
Adjustable ±20°

Star Spindles & Attachments

SR10J Specific Tooling



SR10J-GSC-E11S
Tool Holder
Collet Size: ER11
Output: 1:1.666
Replaces main block with fixed ER11 spindle plus an additional quick-change modular spindle supporting various operations




SR10J-GSC-E11AZ
Tool Holder
Collet Size: ER11
Output: 1:1.666
Same as SR10J-GSC-E11S but ER11 spindle is 8.7mm set back and main block 10mm longer




5510-000-139A
Tool Holder
Collet Size: ER11

NOTE: Installation Of SR10J-GSC-E11S or SR10J-GSC-E11AZ Requires A Certified STAR Technician

Modular Spindles Require SR10J-GSC-E11S or E11AZ




SR10J-GSC-E11-2X
Cross Drill/Mill
Collet Size: ER11
Output: 1:1
MODULAR HEAD




SR10J-GSC-E11-2X-DEC
Cross Drill/Mill
Collet Size: ER11
Output: 1:1
MODULAR HEAD



SR10J-GSC-E08
Cross Drill/Mill
Collet Size: ER08
Output: 1:1
MODULAR HEAD




SR10J-GSH-035
Gear Hobbing
ID Size: Ø3.5mm
Output: 1:1
MODULAR HEAD




SR10J-GSH-035-II
Gear Hobbing
ID Size: Ø3.5mm
Output: 1:1
MODULAR HEAD



SR10J-GSH-050-II
Gear Hobbing
ID Size: Ø5mm
Output: 1:1
MODULAR HEAD




SR10J-GSF-080-II
Polygon Milling
ID Size: Ø08mm
Output: 1:1
MODULAR HEAD




SR10J-GSF-100-II
Polygon Milling
ID Size: Ø10mm
Output: 1:1
MODULAR HEAD



SR10J-GSW-010
Thread Whirling
Ring: Utilis
Output: 1:1
7 or 9 Insert Cutter,
Flight Circle Ø6mm
Adjustable ±10°
MODULAR HEAD

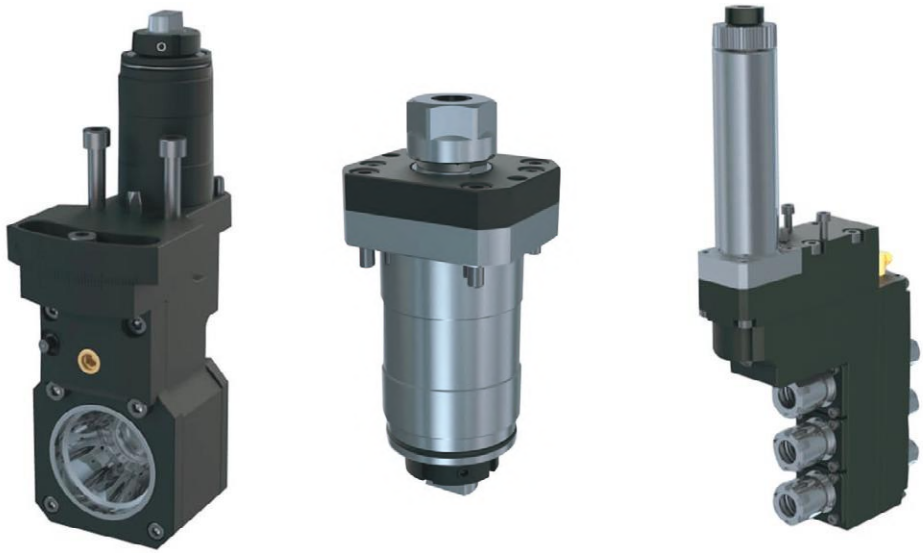

SIGNATURE SERIES
Machine Attachments
by GenSwiss®
Advancing Small Parts Manufacturing

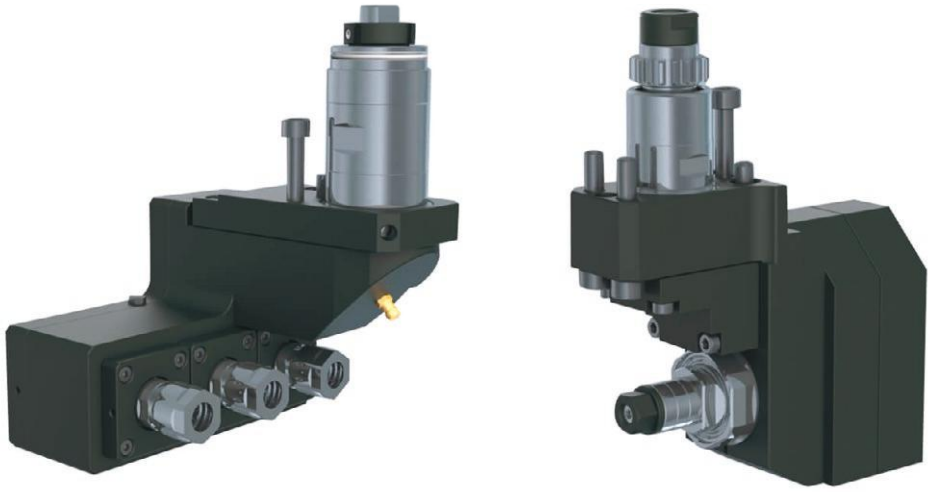

CITIZEN
CINCOM MACHINES

A20	Pg. 474
L12	Pg. 475
L16	Pg. 476-477
L20	Pg. 478-486
L25	Pg. 487
L32	Pg. 487-490
M16	Pg. 491
M20	Pg. 492
M32	Pg. 493



CITIZEN

STAR
SWISS-TYPE MACHINES

ECAS-12	Pg. 494
ECAS-20	Pg. 495
SB-12	Pg. 496-497
SB-16	Pg. 497-498
SB-20	Pg. 498-500
SR-10	Pg. 500-501
SR-20	Pg. 520-514
SR-32	Pg. 515-520
SR-38	Pg. 521
ST-20, ST-38	Pg. 526-529
SV-12, SV-20, SV-32, & SV-38	Pg. 526-527
SW-12 & SW-20	Pg. 530-531



star®

TSUGAMI
SWISS-TYPE MACHINES

B0205	Pg. 528-529
B0206	Pg. 529
B0265	Pg. 530-532
B0266	Pg. 532-534
B0325	Pg. 535-537
B0326	Pg. 537-539
B0385	Pg. 540-542
S205 & S206	Pg. 542-543



TSUGAMI

CITIZEN
Swiss-Type CNC Machining Tools
by GenSwiss®
Advancing Small Parts Manufacturing

Citizen A20

Machine	Work Location	Live or Static	Operation	Item No.	Description	# of Tool Positions	Tool Size	Output	Other
A3-20 VII		Live Tools	Cross Drilling / Milling	5540-000284	CIT-GSC1310-GSI	1	ER16	1:1	Single Ended
A3-20 VII		Live Tools	Cross Drilling / Milling	5540-000336	CIT-MSC507-GSI	1	ER11	1:1	Single Ended
A3-20 VII	Main Spindle	Live Tools	End Drilling / Milling	5540-000285	CIT-BSE3209-GSI	3	ER11A	1:1	Single Ended
A3-20 VII	Main Spindle	Live Tools	End Drilling / Milling	5540-000287	CIT-BSE2007-GSI	4	ER11A	1:1	Double Ended
A3-20 VII	Main Spindle	Live Tools	End Drilling / Milling	5540-000288	CIT-BSE3209-DE-GSI	6	ER11A	1:1	Double Ended
A3-20 VII	Main Spindle	Live Tools	Polygon Milling	5540-000282	CIT-BSP509-GS	1		1:1	Single Ended
A3-20 VII	Main Spindle	Static Tool	Round Shank Tool Holder	5540-000280	CIT-5540-000280	3	20MM		
A3-20 VII	Main Spindle	Static Tool	Round Shank Tool Holder	5540-000281	CIT-5540-000281	3	19.05MM		
A3-20 VII	Main Spindle	Static Tool	Round Shank Tool Holder	5540-000358	CIT-3XBBH1905	3	19.05MM		
A3-20 VII	Main Spindle	Static Tool	Round Shank Tool Holder	5540-000359	CIT-GDF3200	3	20MM		
A3-20 VII	Main Spindle	Static Tool	Turning Holder	5540-000317	CIT-GTF6312-GSI	1	12MM		

Citizen A3-20 VII Machines



5540-000284
CIT-GSC1310-GSI
Cross Drilling / Milling
A3-20 VII
Tool Size: ER16
Output: 1:1
Single Ended



5540-000336
CIT-MSC507-GSI
Cross Drilling / Milling
A3-20 VII
Tool Size: ER11
Output: 1:1
Single Ended



5540-000285
CIT-BSE3209-GSI
End Drilling / Milling
A3-20 VII
Main Spindle
Tool Size: ER11A
Output: 1:1
Single Ended



5540-000287
CIT-BSE2007-GSI
End Drilling / Milling
A3-20 VII
Main Spindle
Tool Size: ER11A
Output: 1:1
Double Ended



5540-000288
CIT-BSE3209-DE-GSI
End Drilling / Milling
A3-20 VII
Main Spindle
Tool Size: ER11A
Output: 1:1
Double Ended



5540-000282
CIT-BSP509-GS
Polygon Milling
A3-20 VII
Main Spindle
Tool Size:
Output: 1:1
Single Ended



5540-000280
CIT-5540-000280
Round Shank Tool Holder
A3-20 VII
Main Spindle
Tool Size: 20MM



5540-000281
CIT-5540-000281
Round Shank Tool Holder
A3-20 VII
Main Spindle
Tool Size: 19.05MM



5540-000358
CIT-3XBBH1905
Round Shank Tool Holder
A3-20 VII
Main Spindle
Tool Size: 19.05MM



5540-000359
CIT-GDF3200
Round Shank Tool Holder
A3-20 VII
Main Spindle
Tool Size: 20MM



5540-000317
CIT-GTF6312-GSI
Turning Tool Holder
A3-20 VII
Main Spindle
Tool Size: 12MM

Citizen L12

Machine	Work Location	Live or Static	Operation	Item No.	Description	# of Tool Positions	Tool Size	Output	Other
L SERIES	Sub Spindle	Static Tool	Turning	5540-000335	CIT-THS12M	1	12MM		
L12		Live Tools	Angled Drilling / Milling	5540-000332	CIT-GSE3607-GSI	6	ER11	1:1	Double Ended, Adjustable ±30°
L12	Sub Spindle	Live Tools	Cross Drilling / Milling	5540-000292	CIT-5540-000292	1	ER11	1:1	Single Ended
L12 VII		Live Tools	Cross Drilling / Milling	5540-000336	CIT-MSC507-GSI	1	ER11	1:1	Single Ended
L12 VII	Main Spindle	Static Tool	Turning	5540-000299	CIT-5540-000299	1	10MM		

Citizen L Series Machines



5540-000335
CIT-THS12M
Turning Tool Holder
L SERIES
Sub Spindle
Tool Size: 12MM

Citizen L12 Machines



5540-000332
CIT-GSE3607-GSI
Angled Drilling / Milling
L12
Tool Size: ER11
Output: 1:1
Double Ended, Adjustable ±30°



5540-000292
CIT-5540-000292
Cross Drilling / Milling
L12
Sub Spindle
Tool Size: ER11
Output: 1:1
Single Ended

L12 VII Machines



5540-000336
CIT-MSC507-GSI
Cross Drilling / Milling
L12 VII
Tool Size: ER11
Output: 1:1
Single Ended



5540-000299
CIT-5540-000299
Turning Tool Holder
L12 VII
Main Spindle
Tool Size: 10MM

Citizen L16

Machine	Work Location	Live or Static	Operation	Item No.	Description	# of Tool Positions	Tool Size	Output	Other
L16		Live Tools	Cross Drilling / Milling	5540-000295	CIT-GSC907-GSI	1	ER11	1:1	Single Ended
L16		Live Tools	Cross Drilling / Milling	5540-000314	CIT-GSC510/1010-GSI	1	ER16	1:1	Single Ended
L16		Live Tools	End Drilling / Milling	5540-000319	CIT-GSE306-GSI	1	ER11		Single Ended
L16		Live Tools	End Drilling / Milling	5540-000322	CIT-GSE306-DE11-GSI	2	ER11	1:1	Double Ended
L5-16 VIII	Main Spindle	Live Tools	Cross Drilling / Milling	5540-000311	CIT-GSE307-GSI	1	ER11A	1:1	Single Ended
L5-16 VIII	Main Spindle	Live Tools	End Drilling / Milling	5540-000290	CIT-GSE910-GSI	3	ER16M	1:1	Single Ended
L5-16 VIII	Main Spindle	Live Tools	End Drilling / Milling	5540-000320	CIT-GSE306-2E11-GSI	2	ER11A	1:1	Single Ended
L5-16 VIII	Main Spindle	Live Tools	End Drilling / Milling	5540-000321	CIT-GSE306-3PE11	3	ER11A	1:1	Single Ended
L5-16 VIII	Main Spindle	Live Tools	End Drilling / Milling	5540-000327	CIT-GSE1007-GSI	6	ER11A	1:1	Double Ended
L5-16 VIII	Main Spindle	Live Tools	End Drilling / Milling	5540-000328	CIT-GSE1107-3D	6	ER11A, ER11M	1:1	Double Ended
L5-16 VIII	Main Spindle	Static Tool	Round Shank Tool Holder	5540-000293	CIT-GDF506-GSI	1	19.05MM		
L5-16 VIII	Main Spindle	Static Tool	Round Shank Tool Holder	5540-000294	CIT-GDF607-GSI	3	19.05MM		
L5-16 VIII	Main Spindle	Static Tool	Round Shank Tool Holder	5540-000302	CIT-5540-000302	2	19.05MM		
L5-16 VIII	Main Spindle	Static Tool	Round Shank Tool Holder	5540-000304	CIT-5540-000304	3	19.05MM		
L5-16 VIII	Main Spindle	Static Tool	Round Shank Tool Holder	5540-000306	CIT-5540-000306	3	19.05MM		
L5-16 VIII	Main Spindle	Static Tool	Round Shank Tool Holder	5540-000308	CIT-5540-000308	3	20MM		
L7-16 VIII	Main Spindle	Live Tools	Cross Drilling / Milling	5540-000311	CIT-GSE307-GSI	1	ER11A	1:1	Single Ended
L7-16 VIII	Main Spindle	Live Tools	End Drilling / Milling	5540-000320	CIT-GSE306-2E11-GSI	2	ER11A	1:1	Single Ended
L7-16 VIII	Main Spindle	Live Tools	End Drilling / Milling	5540-000321	CIT-GSE306-3PE11	3	ER11A	1:1	Single Ended
L7-16 VIII	Main Spindle	Live Tools	End Drilling / Milling	5540-000323	CIT-GSE1307-GSI	6	ER11A	1:1	Double Ended
L7-16 VIII	Main Spindle	Live Tools	End Drilling / Milling	5540-000328	CIT-GSE1107-3D	6	ER11A, ER11M	1:1	Double Ended
L7-16 VIII	Main Spindle	Static Tool	Round Shank Tool Holder	5540-000293	CIT-GDF506-GSI	1	19.05MM		
L7-16 VIII	Main Spindle	Static Tool	Round Shank Tool Holder	5540-000294	CIT-GDF607-GSI	3	19.05MM		
L7-16 VIII	Main Spindle	Static Tool	Round Shank Tool Holder	5540-000302	CIT-5540-000302	2	19.05MM		
L7-16 VIII	Main Spindle	Static Tool	Round Shank Tool Holder	5540-000306	CIT-5540-000306	3	19.05MM		
L7-16 VIII	Main Spindle	Static Tool	Round Shank Tool Holder	5540-000308	CIT-5540-000308	3	20MM		
L7-16 VIII	Main Spindle		Round Shank Tool Holder	5540-000309	CIT-5540-000309	3	20MM		

Citizen L16 Machines



5540-000295
CIT-GSC907-GSI
Cross Drilling / Milling
L16
Tool Size: ER11
Output: 1:1
Single Ended



5540-000314
CIT-GSC510/1010-GSI
Cross Drilling / Milling
L16
Tool Size: ER16
Output: 1:1
Single Ended



5540-000319
CIT-GSE306-GSI
End Drilling / Milling
L16
Tool Size: ER11
Output:
Single Ended



5540-000322
CIT-GSE306-DE11-GSI
End Drilling / Milling
L16
Tool Size: ER11
Output: 1:1
Double Ended

Citizen L5-16 VIII Machines



5540-000311
CIT-GSE307-GSI
Cross Drilling / Milling
L5-16 VIII
Main Spindle
Tool Size: ER11A
Output: 1:1
Single Ended



5540-000290
CIT-GSE910-GSI
End Drilling / Milling
L5-16 VIII
Main Spindle
Tool Size: ER16M
Output: 1:1
Single Ended



5540-000320
CIT-GSE306-2E11-GSI
End Drilling / Milling
L5-16 VIII
Main Spindle
Tool Size: ER11A
Output: 1:1
Single Ended



5540-000321
CIT-GSE306-3PE11
End Drilling / Milling
L5-16 VIII
Main Spindle
Tool Size: ER11A
Output: 1:1
Single Ended



5540-000327
CIT-GSE1007-GSI
End Drilling / Milling
L5-16 VIII
Main Spindle
Tool Size: ER11A
Output: 1:1
Double Ended



5540-000328
CIT-GSE1107-3D
End Drilling / Milling
L5-16 VIII
Main Spindle
Tool Size: ER11A, ER11M
Output: 1:1
Double Ended



5540-000293
CIT-GDF506-GSI
Round Shank Tool Holder
L5-16 VIII
Main Spindle
Tool Size: 19.05MM



5540-000294
CIT-GDF607-GSI
Round Shank Tool Holder
L5-16 VIII
Main Spindle
Tool Size: 19.05MM



5540-000302
CIT-5540-000302
Round Shank Tool Holder
L5-16 VIII
Main Spindle
Tool Size: 19.05MM



5540-000304
CIT-5540-000304
Round Shank Tool Holder
L5-16 VIII
Main Spindle
Tool Size: 19.05MM



5540-000306
CIT-5540-000306
Round Shank Tool Holder
L5-16 VIII
Main Spindle
Tool Size: 19.05MM



5540-000308
CIT-5540-000308
Round Shank Tool Holder
L5-16 VIII
Main Spindle
Tool Size: 20MM

Citizen L7-16 VIII Machines



5540-000311
CIT-GSE307-GSI
Cross Drilling / Milling
L7-16 VIII
Main Spindle
Tool Size: ER11A
Output: 1:1
Single Ended



5540-000320
CIT-GSE306-2E11-GSI
End Drilling / Milling
L7-16 VIII
Main Spindle
Tool Size: ER11A
Output: 1:1
Single Ended



5540-000321
CIT-GSE306-3PE11
End Drilling / Milling
L7-16 VIII
Main Spindle
Tool Size: ER11A
Output: 1:1
Single Ended



5540-000323
CIT-GSE1307-GSI
End Drilling / Milling
L7-16 VIII
Main Spindle
Tool Size: ER11A
Output: 1:1
Double Ended



5540-000328
CIT-GSE1107-3D
End Drilling / Milling
L7-16 VIII
Main Spindle
Tool Size: ER11A, ER11M
Output: 1:1
Double Ended



5540-000293
CIT-GDF506-GSI
Round Shank Tool Holder
L7-16 VIII
Main Spindle
Tool Size: 19.05MM



5540-000294
CIT-GDF607-GSI
Round Shank Tool Holder
L7-16 VIII
Main Spindle
Tool Size: 19.05MM



5540-000302
CIT-5540-000302
Round Shank Tool Holder
L7-16 VIII
Main Spindle
Tool Size: 19.05MM



5540-000306
CIT-5540-000306
Round Shank Tool Holder
L7-16 VIII
Main Spindle
Tool Size: 19.05MM



5540-000308
CIT-5540-000308
Round Shank Tool Holder
L7-16 VIII
Main Spindle
Tool Size: 20MM



5540-000309
CIT-5540-000309
Round Shank Tool Holder
L7-16 VIII
Main Spindle
Tool Size: 20MM

Citizen L20

Machine	Work Location	Live or Static	Operation	Item No.	Description	# of Tool Positions	Tool Size	Output	Other
L20 X		Live Tools	Cross Drilling / Milling	5540-000295	CIT-GSC907-GSI	1	ER11	1:1	Single Ended
L20 X		Live Tools	Cross Drilling / Milling	5540-000314	CIT-GSC510/1010-GSI	1	ER16	1:1	Single Ended
L20 X		Live Tools	Cross Drilling / Milling	5540-000338	CIT-GSC1210-GSI	1	ER16	1:1	Single Ended
L20 X		Live Tools	Cross Drilling / Milling	5540-000356	CIT-GSC1210-Hex-GSI	1	ER16	1:1	Single Ended
L20 X		Live Tools	End Drilling / Milling	5540-000329	CIT-GSE3207-GSI	6	ER11	1:1	Double Ended
L20 X		Live Tools	End Drilling / Milling	5540-000325	CIT-GSE3107-GSI	4	ER11	1:1	Double Ended
L20 X Innovation	Main Spindle	Live Tools	Gear Hobbing	5540-000301	CIT-CGHU-1	1		1:1	Single Ended, Adjustable +/- 20°
L20 X Innovation	Main Spindle	Static Tool	Round Shank Tool Holder	5540-000303	CIT-GDF508-GSI	2	19.05MM		
L20 X Innovation	Main Spindle	Static Tool	Round Shank Tool Holder	5540-000307	CIT-GDF507-GSI	3	19.05MM		
L20 X Innovation	Main Spindle	Static Tool	Turning	5540-000296	CIT-5540-000296	1	VC.T1103		
L20 X Innovation	Main Spindle	Static Tool	Turning	5540-000297	CIT-5540-000297	1	DC.T1103		
L20 X Innovation	Main Spindle	Static Tool	Turning	5540-000298	CIT-5540-000298	1	TGF32R 175 PR930		
L20E		Live Tools	End Drilling / Milling	5540-000325	CIT-GSE3107-GSI	4	ER11	1:1	Double Ended
L2-20 X	Sub Spindle	Live Tools	Cross Drilling / Milling	5540-000292	CIT-5540-000292	1	ER11	1:1	Single Ended
L2-20 X		Live Tools	Cross Drilling / Milling	5540-000284	CIT-GSC1310-GSI	1	ER16	1:1	Single Ended
L2-20 X		Live Tools	Cross Drilling / Milling	5540-000336	CIT-MSC507-GSI	1	ER11	1:1	Single Ended
L2-20 X	Main Spindle	Live Tools	End Drilling / Milling	5540-000285	CIT-BSE3209-GSI	3	ER11A	1:1	Single Ended
L2-20 X	Main Spindle	Live Tools	End Drilling / Milling	5540-000287	CIT-BSE2007-GSI	4	ER11A	1:1	Double Ended
L2-20 X	Main Spindle	Live Tools	End Drilling / Milling	5540-000288	CIT-BSE3209-DE-GSI	6	ER11A	1:1	Double Ended
L2-20 X	Main Spindle	Live Tools	End Drilling / Milling	5540-000312	CIT-GSE3210-GSI	3	31mm	1:1	Single Ended
L2-20 X	Main Spindle	Live Tools	End Drilling / Milling	5540-000326	CIT-GSE3707-GSI	4	ER11A	1:1	Double Ended
L2-20 X	Main Spindle	Live Tools	End Drilling / Milling	5540-000330	CIT-GSE3807-GSI	2	ER11A	1:1	Double Ended
L2-20 X	Main Spindle	Live Tools	Gear Hobbing	5540-000279	CIT-GSH507	1		1:1	Single Ended
L2-20 X	Main Spindle	Static Tool	Round Shank Tool Holder	5540-000303	CIT-GDF508-GSI	2	19.05MM		
L2-20 X	Main Spindle	Static Tool	Round Shank Tool Holder	5540-000358	CIT-3XBBH1905	3	19.05MM		
L2-20 X	Main Spindle	Static Tool	Round Shank Tool Holder	5540-000359	CIT-GDF3200	3	20MM		
L2-20 X		Live Tools	Thread Whirling	5540-000318	CIT-TWU-L2032-15				Single Ended, Adjustable ±15°
L2-20 X	Main Spindle	Static Tool	Turning	5540-000317	CIT-GTF6312-GSI	1	12MM		
L2-20 XII	Sub Spindle	Live Tools	Cross Drilling / Milling	5540-000292	CIT-5540-000292	1	ER11	1:1	Single Ended
L2-20 XII		Live Tools	Cross Drilling / Milling	5540-000284	CIT-GSC1310-GSI	1	ER16	1:1	Single Ended
L2-20 XII		Live Tools	Cross Drilling / Milling	5540-000336	CIT-MSC507-GSI	1	ER11	1:1	Single Ended
L2-20 XII	Main Spindle	Live Tools	End Drilling / Milling	5540-000285	CIT-BSE3209-GSI	3	ER11A	1:1	Single Ended
L2-20 XII	Main Spindle	Live Tools	End Drilling / Milling	5540-000287	CIT-BSE2007-GSI	4	ER11A	1:1	Double Ended
L2-20 XII	Main Spindle	Live Tools	End Drilling / Milling	5540-000288	CIT-BSE3209-DE-GSI	6	ER11A	1:1	Double Ended
L2-20 XII	Main Spindle	Live Tools	End Drilling / Milling	5540-000312	CIT-GSE3210-GSI	3	31mm	1:1	Single Ended
L2-20 XII	Main Spindle	Live Tools	End Drilling / Milling	5540-000326	CIT-GSE3707-GSI	4	ER11A	1:1	Double Ended
L2-20 XII	Main Spindle	Live Tools	End Drilling / Milling	5540-000330	CIT-GSE3807-GSI	2	ER11A	1:1	Double Ended
L2-20 XII	Main Spindle	Live Tools	Gear Hobbing	5540-000279	CIT-GSH507	1		1:1	Single Ended
L2-20 XII	Main Spindle	Static Tool	Round Shank Tool Holder	5540-000303	CIT-GDF508-GSI	2	19.05MM		
L2-20 XII	Main Spindle	Static Tool	Round Shank Tool Holder	5540-000358	CIT-3XBBH1905	3	19.05MM		
L2-20 XII	Main Spindle	Static Tool	Round Shank Tool Holder	5540-000359	CIT-GDF3200	3	20MM		
L2-20 XII	Sub Spindle	Live Tools	Slitting Saw	5540-000337	CIT-5540-000337	1	Ø12.7mm	1:0.55	Single Ended
L2-20 XII		Live Tools	Thread Whirling	5540-000318	CIT-TWU-L2032-15				Single Ended, Adjustable ±15°
L2-20 XII	Main Spindle	Static Tool	Turning	5540-000317	CIT-GTF6312-GSI	1	12MM		
L5-20 VIII	Main Spindle	Live Tools	Cross Drilling / Milling	5540-000311	CIT-GSE307-GSI	1	ER11A	1:1	Single Ended
L5-20 VIII		Live Tools	Cross Drilling / Milling	5540-000295	CIT-GSC907-GSI	1	ER11	1:1	Single Ended
L5-20 VIII		Live Tools	Cross Drilling / Milling	5540-000314	CIT-GSC510/1010-GSI	1	ER16	1:1	Single Ended
L5-20 VIII	Main Spindle	Live Tools	End Drilling / Milling	5540-000290	CIT-GSE910-GSI	3	ER16M	1:1	Single Ended
L5-20 VIII	Main Spindle	Live Tools	End Drilling / Milling	5540-000320	CIT-GSE306-2E11-GSI	2	ER11A	1:1	Single Ended
L5-20 VIII	Main Spindle	Live Tools	End Drilling / Milling	5540-000321	CIT-GSE306-3PE11	3	ER11A	1:1	Single Ended
L5-20 VIII	Main Spindle	Live Tools	End Drilling / Milling	5540-000327	CIT-GSE1007-GSI	6	ER11A	1:1	Double Ended
L5-20 VIII	Main Spindle	Live Tools	End Drilling / Milling	5540-000328	CIT-GSE1107-3D	6	ER11A, ER11M	1:1	Double Ended
L5-20 VIII		Live Tools	End Drilling / Milling	5540-000319	CIT-GSE306-GSI	1	ER11		Single Ended
L5-20 VIII		Live Tools	End Drilling / Milling	5540-000322	CIT-GSE306-DE11-GSI	2	ER11	1:1	Double Ended
L5-20 VIII	Main Spindle	Static Tool	Round Shank Tool Holder	5540-000293	CIT-GDF506-GSI	1	19.05MM		
L5-20 VIII	Main Spindle	Static Tool	Round Shank Tool Holder	5540-000294	CIT-GDF607-GSI	3	19.05MM		
L5-20 VIII	Main Spindle	Static Tool	Round Shank Tool Holder	5540-000302	CIT-5540-000302	2	19.05MM		
L5-20 VIII	Main Spindle	Static Tool	Round Shank Tool Holder	5540-000304	CIT-5540-000304	3	19.05MM		
L5-20 VIII	Main Spindle	Static Tool	Round Shank Tool Holder	5540-000306	CIT-5540-000306	3	19.05MM		
L5-20 VIII	Main Spindle	Static Tool	Round Shank Tool Holder	5540-000308	CIT-5540-000308	3	20MM		
L7-20 VIII	Main Spindle	Live Tools	Cross Drilling / Milling	5540-000311	CIT-GSE307-GSI	1	ER11A	1:1	Single Ended
L7-20 VIII		Live Tools	Cross Drilling / Milling	5540-000295	CIT-GSC907-GSI	1	ER11	1:1	Single Ended
L7-20 VIII		Live Tools	Cross Drilling / Milling	5540-000314	CIT-GSC510/1010-GSI	1	ER16	1:1	Single Ended
L7-20 VIII	Main Spindle	Live Tools	End Drilling / Milling	5540-000320	CIT-GSE306-2E11-GSI	2	ER11A	1:1	Single Ended
L7-20 VIII	Main Spindle	Live Tools	End Drilling / Milling	5540-000321	CIT-GSE306-3PE11	3	ER11A	1:1	Single Ended
L7-20 VIII	Main Spindle	Live Tools	End Drilling / Milling	5540-000323	CIT-GSE1307-GSI	6	ER11A	1:1	Double Ended
L7-20 VIII	Main Spindle	Live Tools	End Drilling / Milling	5540-000328	CIT-GSE1107-3D	6	ER11A, ER11M	1:1	Double Ended
L7-20 VIII		Live Tools	End Drilling / Milling	5540-000319	CIT-GSE306-GSI	1	ER11		Single Ended
L7-20 VIII		Live Tools	End Drilling / Milling	5540-000322	CIT-GSE306-DE11-GSI	2	ER11	1:1	Double Ended
L7-20 VIII	Main Spindle	Static Tool	Round Shank Tool Holder	5540-000293	CIT-GDF506-GSI	1	19.05MM		
L7-20 VIII	Main Spindle	Static Tool	Round Shank Tool Holder	5540-000294	CIT-GDF607-GSI	3	19.05MM		
L7-20 VIII	Main Spindle	Static Tool	Round Shank Tool Holder	5540-000302	CIT-5540-000302	2	19.05MM		
L7-20 VIII	Main Spindle	Static Tool	Round Shank Tool Holder	5540-000306	CIT-5540-000306	3	19.05MM		
L7-20 VIII	Main Spindle	Static Tool	Round Shank Tool Holder	5540-000308	CIT-5540-000308	3	20MM		
L7-20 VIII	Main Spindle	Static Tool	Round Shank Tool Holder	5540-000309	CIT-5540-000309	3	20MM		

Citizen L20X Machines



5540-000295
CIT-GSC907-GSI
Cross Drilling / Milling
L20 X
Tool Size: ER11
Output: 1:1
Single Ended



5540-000314
CIT-GSC510/1010-GSI
Cross Drilling / Milling
L20 X
Tool Size: ER16
Output: 1:1
Single Ended



5540-000338
CIT-GSC1210-GSI
Cross Drilling / Milling
L20 X
Tool Size: ER16
Output: 1:1
Single Ended



5540-000356
CIT-GSC1210-Hex-GSI
Cross Drilling / Milling
L20 X
Tool Size: ER16
Output: 1:1
Single Ended



5540-000329
CIT-GSE3207-GSI
End Drilling / Milling
L20 X
Tool Size: ER11
Output: 1:1
Double Ended



5540-000325
CIT-GSE3107-GSI
End Drilling / Milling
L20 X
Tool Size: ER11
Output: 1:1
Double Ended

Citizen L20X Innovation Machines



5540-000301
CIT-CGHU-1
Gear Hobbing
L20 X Innovation
Main Spindle
Output: 1:1
Single Ended, Adjustable
+/- 20°



5540-000303
CIT-GDF508-GSI
Round Shank Tool Holder
L20 X Innovation
Main Spindle
Tool Size: 19.05MM



5540-000307
CIT-GDF507-GSI
Round Shank Tool Holder
L20 X Innovation
Main Spindle
Tool Size: 19.05MM



5540-000296
CIT-5540-000296
Turning
L20 X Innovation
Main Spindle
Tool Size: VC.T1103



5540-000297
CIT-5540-000297
Turning
L20 X Innovation
Main Spindle
Tool Size: DC.T1103



5540-000298
CIT-5540-000298
Turning
L20 X Innovation
Main Spindle
Tool Size: TGF32R 175 PR930

Citizen L20E Machines



5540-000325
CIT-GSE3107-GSI
End Drilling / Milling
L20E
Tool Size: ER11
Output: 1:1
Double Ended

Citizen L20E IX Machines



5540-000295
CIT-GSC907-GSI
Cross Drilling / Milling
L20E IX
Tool Size: ER11
Output: 1:1
Single Ended



5540-000314
CIT-GSC510/1010-GSI
Cross Drilling / Milling
L20E IX
Tool Size: ER16
Output: 1:1
Single Ended



5540-000338
CIT-GSC1210-GSI
Cross Drilling / Milling
L20E IX
Tool Size: ER16
Output: 1:1
Single Ended



5540-000356
CIT-GSC1210-Hex-GSI
Cross Drilling / Milling
L20E IX
Tool Size: ER16
Output: 1:1
Single Ended



5540-000329
CIT-GSE3207-GSI
End Drilling / Milling
L20E IX
Tool Size: ER11
Output: 1:1
Double Ended

Citizen L20E IX Evolution Machines



5540-000303
CIT-GDF508-GSI
Round Shank Tool Holder
L20E IX Evolution
Main Spindle
Tool Size: 19.05MM



5540-000296
CIT-5540-000296
Turning
L20E IX Evolution
Main Spindle
Tool Size: VC.T1103



5540-000297
CIT-5540-000297
Turning
L20E IX Evolution
Main Spindle
Tool Size: DC.T1103



5540-000298
CIT-5540-000298
Turning
L20E IX Evolution
Main Spindle
Tool Size: TGF32R 175 PR930

Citizen L20E VIII Machines



5540-000295
CIT-GSC907-GSI
Cross Drilling / Milling
L20E VIII
Tool Size: ER11
Output: 1:1
Single Ended



5540-000314
CIT-GSC510/1010-GSI
Cross Drilling / Milling
L20E VIII
Tool Size: ER16
Output: 1:1
Single Ended



5540-000338
CIT-GSC1210-GSI
Cross Drilling / Milling
L20E VIII
Tool Size: ER16
Output: 1:1
Single Ended



5540-000356
CIT-GSC1210-Hex-GSI
Cross Drilling / Milling
L20E VIII
Tool Size: ER16
Output: 1:1
Single Ended



5540-000329
CIT-GSE3207-GSI
End Drilling / Milling
L20E VIII
Tool Size: ER11
Output: 1:1
Double Ended

Citizen L20E VIII Evolution Machines



5540-000303
CIT-GDF508-GSI
Round Shank Tool Holder
L20E VIII Evolution
Main Spindle
Tool Size: 19.05MM



5540-000296
CIT-5540-000296
Turning
L20E VIII Evolution
Main Spindle
Tool Size: VC.T1103



5540-000297
CIT-5540-000297
Turning
L20E VIII Evolution
Main Spindle
Tool Size: DC.T1103



5540-000298
CIT-5540-000298
Turning
L20E VIII Evolution
Main Spindle
Tool Size: TGF32R 175 PR930

Citizen L2-20 III Machines



5540-000336
CIT-MSC507-GSI
Cross Drilling / Milling
L2-20 III
Tool Size: ER11
Output: 1:1
Single Ended

Citizen L2-20 IX Machines



5540-000292
CIT-5540-000292
Cross Drilling / Milling
L2-20 IX
Sub Spindle
Tool Size: ER11
Output: 1:1
Single Ended



5540-000284
CIT-GSC1310-GSI
Cross Drilling / Milling
L2-20 IX
Tool Size: ER16
Output: 1:1
Single Ended



5540-000336
CIT-MSC507-GSI
Cross Drilling / Milling
L2-20 IX
Tool Size: ER11
Output: 1:1
Single Ended



5540-000285
CIT-BSE3209-GSI
End Drilling / Milling
L2-20 IX
Main Spindle
Tool Size: ER11A
Output: 1:1
Single Ended



5540-000287
CIT-BSE2007-GSI
End Drilling / Milling
L2-20 IX
Main Spindle
Tool Size: ER11A
Output: 1:1
Double Ended



5540-000288
CIT-BSE3209-DE-GSI
End Drilling / Milling
L2-20 IX
Main Spindle
Tool Size: ER11A
Output: 1:1
Double Ended



5540-000312
CIT-GSE3210-GSI
End Drilling / Milling
L2-20 IX
Main Spindle
Tool Size: 31mm
Output: 1:1
Single Ended



5540-000326
CIT-GSE3707-GSI
End Drilling / Milling
L2-20 IX
Main Spindle
Tool Size: ER11A
Output: 1:1
Double Ended



5540-000330
CIT-GSE3807-GSI
End Drilling / Milling
L2-20 IX
Main Spindle
Tool Size: ER11A
Output: 1:1
Double Ended



5540-000279
CIT-GSH507
Gear Hobbing
L2-20 IX
Main Spindle
Tool Size:
Output: 1:1
Single Ended



5540-000303
CIT-GDF508-GSI
Round Shank Tool Holder
L2-20 IX
Main Spindle
Tool Size: 19.05MM



5540-000358
CIT-3XBBH1905
Round Shank Tool Holder
L2-20 IX
Main Spindle
Tool Size: 19.05MM



5540-000359
CIT-GDF3200
Round Shank Tool Holder
L2-20 IX
Main Spindle
Tool Size: 20MM



5540-000337
CIT-5540-000337
Slitting Saw
L2-20 IX
Sub Spindle
Tool Size: Ø12.7mm
Output: 1:0.55
Single Ended



5540-000337
CIT-5540-000337
Slitting Saw
L2-20 IX
Sub Spindle
Tool Size: Ø12.7mm
Output: 1:0.55
Single Ended



5540-000318
CIT-TWU-L2032-15
Thread Whirling
L2-20 IX
Tool Size: Utilis Ring
Single Ended, Adjustable ±15°



5540-000317
CIT-GTF6312-GSI
Turning
L2-20 IX
Main Spindle
Tool Size: 12MM

Citizen L2-20 VIII Machines



5540-000292
CIT-5540-000292
Cross Drilling / Milling
L2-20 VIII
Sub Spindle
Tool Size: ER11
Output: 1:1
Single Ended



5540-000284
CIT-GSC1310-GSI
Cross Drilling / Milling
L2-20 VIII
Tool Size: ER16
Output: 1:1
Single Ended



5540-000285
CIT-BSE3209-GSI
End Drilling / Milling
L2-20 VIII
Main Spindle
Tool Size: ER11A
Output: 1:1
Single Ended



5540-000287
CIT-BSE2007-GSI
End Drilling / Milling
L2-20 VIII
Main Spindle
Tool Size: ER11A
Output: 1:1
Double Ended



5540-000288
CIT-BSE3209-DE-GSI
End Drilling / Milling
L2-20 VIII
Main Spindle
Tool Size: ER11A
Output: 1:1
Double Ended



5540-000312
CIT-GSE3210-GSI
End Drilling / Milling
L2-20 VIII
Main Spindle
Tool Size: 31mm
Output: 1:1
Single Ended



5540-000326
CIT-GSE3707-GSI
End Drilling / Milling
L2-20 VIII
Main Spindle
Tool Size: ER11A
Output: 1:1
Double Ended



5540-000330
CIT-GSE3807-GSI
End Drilling / Milling
L2-20 VIII
Main Spindle
Tool Size: ER11A
Output: 1:1
Double Ended



5540-000279
CIT-GSH507
Gear Hobbing
L2-20 VIII
Main Spindle
Tool Size:
Output: 1:1
Single Ended



5540-000303
CIT-GDF508-GSI
Round Shank Tool Holder
L2-20 VIII
Main Spindle
Tool Size: 19.05MM



5540-000358
CIT-3XBBH1905
Round Shank Tool Holder
L2-20 VIII
Main Spindle
Tool Size: 19.05MM



5540-000359
CIT-GDF3200
Round Shank Tool Holder
L2-20 VIII
Main Spindle
Tool Size: 20MM



5540-000337
CIT-5540-000337
Slitting Saw
L2-20 VIII
Sub Spindle
Tool Size: Ø12.7mm
Output: 1:0.55
Single Ended



5540-000318
CIT-TWU-L2032-15
Thread Whirling
L2-20 VIII
Tool Size: Utilis Ring
Single Ended, Adjustable
±15°, Max tool Ø35mm



5540-000317
CIT-GTF6312-GSI
Turning
L2-20 VIII
Main Spindle
Tool Size: 12MM

Citizen L2-20 X Machines



5540-000292
CIT-5540-000292
Cross Drilling / Milling
L2-20 X
Sub Spindle
Tool Size: ER11
Output: 1:1
Single Ended



5540-000284
CIT-GSC1310-GSI
Cross Drilling / Milling
L2-20 X
Tool Size: ER16
Output: 1:1
Single Ended



5540-000336
CIT-MSC507-GSI
Cross Drilling / Milling
L2-20 X
Tool Size: ER11
Output: 1:1
Single Ended



5540-000285
CIT-BSE3209-GSI
End Drilling / Milling
L2-20 X
Main Spindle
Tool Size: ER11A
Output: 1:1
Single Ended



5540-000287
CIT-BSE2007-GSI
End Drilling / Milling
L2-20 X
Main Spindle
Tool Size: ER11A
Output: 1:1
Double Ended



5540-000288
CIT-BSE3209-DE-GSI
End Drilling / Milling
L2-20 X
Main Spindle
Tool Size: ER11A
Output: 1:1
Double Ended



5540-000312
CIT-GSE3210-GSI
End Drilling / Milling
L2-20 X
Main Spindle
Tool Size: 31mm
Output: 1:1
Single Ended



5540-000326
CIT-GSE3707-GSI
End Drilling / Milling
L2-20 X
Main Spindle
Tool Size: ER11A
Output: 1:1
Double Ended



5540-000330
CIT-GSE3807-GSI
End Drilling / Milling
L2-20 X
Main Spindle
Tool Size: ER11A
Output: 1:1
Double Ended



5540-000279
CIT-GSH507
Gear Hobbing
L2-20 X
Main Spindle
Output: 1:1
Single Ended



5540-000303
CIT-GDF508-GSI
Round Shank Tool Holder
L2-20 X
Main Spindle
Tool Size: 19.05MM



5540-000358
CIT-3XBBH1905
Round Shank Tool Holder
L2-20 X
Main Spindle
Tool Size: 19.05MM



5540-000359
CIT-GDF3200
Round Shank Tool Holder
L2-20 X
Main Spindle
Tool Size: 20MM



5540-000318
CIT-TWU-L2032-15
Thread Whirling
L2-20 X
Tool Size: Utilis Ring
Single Ended, Adjustable ±15°



5540-000317
CIT-GTF6312-GSI
Turning Tool Holder
L2-20 X
Main Spindle
Tool Size: 12MM

Citizen L2-20 XII Machines



5540-000292
CIT-5540-000292
Cross Drilling / Milling
L2-20 XII
Sub Spindle
Tool Size: ER11
Output: 1:1
Single Ended



5540-000284
CIT-GSC1310-GSI
Cross Drilling / Milling
L2-20 XII
Tool Size: ER16
Output: 1:1
Single Ended



5540-000336
CIT-MSC507-GSI
Cross Drilling / Milling
L2-20 XII
Tool Size: ER11
Output: 1:1
Single Ended



5540-000285
CIT-BSE3209-GSI
End Drilling / Milling
L2-20 XII
Main Spindle
Tool Size: ER11A
Output: 1:1
Single Ended



5540-000287
CIT-BSE2007-GSI
End Drilling / Milling
L2-20 XII
Main Spindle
Tool Size: ER11A
Output: 1:1
Double Ended



5540-000288
CIT-BSE3209-DE-GSI
End Drilling / Milling
L2-20 XII
Main Spindle
Tool Size: ER11A
Output: 1:1
Double Ended



5540-000312
CIT-GSE3210-GSI
End Drilling / Milling
L2-20 XII
Main Spindle
Tool Size: 31mm
Output: 1:1
Single Ended



5540-000326
CIT-GSE3707-GSI
End Drilling / Milling
L2-20 XII
Main Spindle
Tool Size: ER11A
Output: 1:1
Double Ended



5540-000330
CIT-GSE3807-GSI
End Drilling / Milling
L2-20 XII
Main Spindle
Tool Size: ER11A
Output: 1:1
Double Ended



5540-000279
CIT-GSH507
Gear Hobbing
L2-20 XII
Main Spindle
Output: 1:1
Single Ended



5540-000303
CIT-GDF508-GSI
Round Shank Tool Holder
L2-20 XII
Main Spindle
Tool Size: 19.05MM



5540-000358
CIT-3XBBH1905
Round Shank Tool Holder
L2-20 XII
Main Spindle
Tool Size: 19.05MM



5540-000359
CIT-GDF3200
Round Shank Tool Holder
L2-20 XII
Main Spindle
Tool Size: 20MM



5540-000337
CIT-5540-000337
Slitting Saw
L2-20 XII
Sub Spindle
Tool Size: Ø12.7mm
Output: 1:0.55
Single Ended



5540-000318
CIT-TWU-L2032-15
Thread Whirling
L2-20 XII
Tool Size: Utilis Ring
Single Ended, Adjustable ±15°



5540-000317
CIT-GTF6312-GSI
Turning Tool Holder
L2-20 XII
Main Spindle
Tool Size: 12MM

Citizen L5-20 VIII Machines



5540-000311
CIT-GSE307-GSI
Cross Drilling / Milling
L5-20 VIII
Main Spindle
Tool Size: ER11A
Output: 1:1
Single Ended



5540-000295
CIT-GSC907-GSI
Cross Drilling / Milling
L5-20 VIII
Tool Size: ER11
Output: 1:1
Single Ended



5540-000314
CIT-GSC510/1010-GSI
Cross Drilling / Milling
L5-20 VIII
Tool Size: ER16
Output: 1:1
Single Ended



5540-000290
CIT-GSE910-GSI
End Drilling / Milling
L5-20 VIII
Main Spindle
Tool Size: ER16M
Output: 1:1
Single Ended



5540-000320
CIT-GSE306-2E11-GSI
End Drilling / Milling
L5-20 VIII
Main Spindle
Tool Size: ER11A
Output: 1:1
Single Ended



5540-000321
CIT-GSE306-3PE11
End Drilling / Milling
L5-20 VIII
Main Spindle
Tool Size: ER11A
Output: 1:1
Single Ended



5540-000327
CIT-GSE1007-GSI
End Drilling / Milling
L5-20 VIII
Main Spindle
Tool Size: ER11A
Output: 1:1
Double Ended



5540-000328
CIT-GSE1107-3D
End Drilling / Milling
L5-20 VIII
Main Spindle
Tool Size: ER11A, ER11M
Output: 1:1
Double Ended



5540-000319
CIT-GSE306-GSI
End Drilling / Milling
L5-20 VIII
Tool Size: ER11
Single Ended



5540-000322
CIT-GSE306-DE11-GSI
End Drilling / Milling
L5-20 VIII
Tool Size: ER11
Output: 1:1
Double Ended



5540-000293
CIT-GDF506-GSI
Round Shank Tool Holder
L5-20 VIII
Main Spindle
Tool Size: 19.05MM



5540-000294
CIT-GDF607-GSI
Round Shank Tool Holder
L5-20 VIII
Main Spindle
Tool Size: 19.05MM



5540-000302
CIT-5540-000302
Round Shank Tool Holder
L5-20 VIII
Main Spindle
Tool Size: 19.05MM



5540-000304
CIT-5540-000304
Round Shank Tool Holder
L5-20 VIII
Main Spindle
Tool Size: 19.05MM



5540-000306
CIT-5540-000306
Round Shank Tool Holder
L5-20 VIII
Main Spindle
Tool Size: 19.05MM



5540-000308
CIT-5540-000308
Round Shank Tool Holder
L5-20 VIII
Main Spindle
Tool Size: 20MM

Citizen L7-20 VIII Machines



5540-000311
CIT-GSE307-GSI
Cross Drilling / Milling
L7-20 VIII
Main Spindle
Tool Size: ER11A
Output: 1:1
Single Ended



5540-000295
CIT-GSC907-GSI
Cross Drilling / Milling
L7-20 VIII
Tool Size: ER11
Output: 1:1
Single Ended



5540-000314
CIT-GSC510/1010-GSI
Cross Drilling / Milling
L7-20 VIII
Tool Size: ER16
Output: 1:1
Single Ended



5540-000320
CIT-GSE306-2E11-GSI
End Drilling / Milling
L7-20 VIII
Main Spindle
Tool Size: ER11A
Output: 1:1
Single Ended



5540-000321
CIT-GSE306-3PE11
End Drilling / Milling
L7-20 VIII
Main Spindle
Tool Size: ER11A
Output: 1:1
Single Ended



5540-000323
CIT-GSE1307-GSI
End Drilling / Milling
L7-20 VIII
Main Spindle
Tool Size: ER11A
Output: 1:1
Double Ended



5540-000328
CIT-GSE1107-3D
End Drilling / Milling
L7-20 VIII
Main Spindle
Tool Size: ER11A, ER11M
Output: 1:1
Double Ended



5540-000319
CIT-GSE306-GSI
End Drilling / Milling
L7-20 VIII
Tool Size: ER11
Single Ended



5540-000322
CIT-GSE306-DE11-GSI
End Drilling / Milling
L7-20 VIII
Tool Size: ER11
Output: 1:1
Double Ended



5540-000293
CIT-GDF506-GSI
Round Shank Tool Holder
L7-20 VIII
Main Spindle
Tool Size: 19.05MM



5540-000294
CIT-GDF607-GSI
Round Shank Tool Holder
L7-20 VIII
Main Spindle
Tool Size: 19.05MM



5540-000302
CIT-5540-000302
Round Shank Tool Holder
L7-20 VIII
Main Spindle
Tool Size: 19.05MM



5540-000306
CIT-5540-000306
Round Shank Tool Holder
L7-20 VIII
Main Spindle
Tool Size: 19.05MM



5540-000308
CIT-5540-000308
Round Shank Tool Holder
L7-20 VIII
Main Spindle
Tool Size: 20MM



5540-000309
CIT-5540-000309
Round Shank Tool Holder
L7-20 VIII
Main Spindle
Tool Size: 20MM

Citizen L25

Machine	Work Location	Live or Static	Operation	Item No.	Description	# of Tool Positions	Tool Size	Output	Other
L25	Main Spindle	Live Tools	Cross Drilling / Milling	5540-000315	CIT-GSC310-GSI	1	ER16A	1:1	Single Ended
L25		Live Tools	End Drilling / Milling	5540-000324	CIT-5540-000324	2	ER11	1:1	Single Ended
L25	Main Spindle	Static Tool	Turning	5540-000316	CIT-5540-000316	1	12MM		



5540-000315
CIT-GSC310-GSI
Cross Drilling / Milling
L25
Main Spindle
Tool Size: ER16A
Output: 1:1
Single Ended



5540-000324
CIT-5540-000324
End Drilling / Milling
L25
Tool Size: ER11
Output: 1:1
Single Ended



5540-000316
CIT-5540-000316
Turning
L25
Main Spindle
Tool Size: 12MM

Citizen L32

Machine	Work Location	Live or Static	Operation	Item No.	Description	# of Tool Positions	Tool Size	Output	Other
L32	Main Spindle	Live Tools	Cross Drilling / Milling	5540-000315	CIT-GSC310-GSI	1	ER16A	1:1	Single Ended
L32		Live Tools	End Drilling / Milling	5540-000324	CIT-5540-000324	2	ER11	1:1	Single Ended
L32	Main Spindle	Static Tool	Turning	5540-000316	CIT-5540-000316	1	12MM		
L32 IV		Live Tools	End Drilling / Milling	5540-000331	CIT-GSE1810-GSI	3	ER16	1:1	Single Ended
L32 VIII	Sub Spindle	Live Tools	Cross Drilling / Milling	5540-000339	CIT-GSE1910-GSI	1	ER16AM	1:1	Single Ended
L32 VIII		Live Tools	Cross Drilling / Milling	5540-000284	CIT-GSC1310-GSI	1	ER16	1:1	Single Ended
L32 VIII	Main Spindle	Live Tools	End Drilling / Milling	5540-000285	CIT-BSE3209-GSI	3	ER11A	1:1	Single Ended
L32 VIII	Main Spindle	Live Tools	End Drilling / Milling	5540-000287	CIT-BSE2007-GSI	4	ER11A	1:1	Double Ended
L32 VIII	Main Spindle	Live Tools	End Drilling / Milling	5540-000288	CIT-BSE3209-DE-GSI	6	ER11A	1:1	Double Ended
L32 VIII	Main Spindle	Live Tools	End Drilling / Milling	5540-000312	CIT-GSE3210-GSI	3	31mm	1:1	Single Ended
L32 VIII	Main Spindle	Live Tools	End Drilling / Milling	5540-000326	CIT-GSE3707-GSI	4	ER11A	1:1	Double Ended
L32 VIII	Main Spindle	Live Tools	End Drilling / Milling	5540-000330	CIT-GSE3807-GSI	2	ER11A	1:1	Double Ended
L32 VIII		Live Tools	End Drilling / Milling	5540-000331	CIT-GSE1810-GSI	3	ER16	1:1	Single Ended
L32 VIII	Main Spindle	Static Tool	Round Shank Tool Holder	5540-000310	CIT-GDF1601-GSI	3	25.4MM		
L32 VIII	Main Spindle	Static Tool	Round Shank Tool Holder	5540-000358	CIT-3XBBH1905	3	19.05MM		
L32 VIII	Main Spindle	Static Tool	Round Shank Tool Holder	5540-000359	CIT-GDF3200	3	20MM		
L32 VIII		Live Tools	Thread Whirling	5540-000318	CIT-TWU-L2032-15				Single Ended, Adjustable ±15°
L32 VIII	Main Spindle	Static Tool	Turning	5540-000317	CIT-GTF6312-GSI	1	12MM		
L32 IX	Sub Spindle	Live Tools	Cross Drilling / Milling	5540-000339	CIT-GSE1910-GSI	1	ER16AM	1:1	Single Ended
L32 IX		Live Tools	Cross Drilling / Milling	5540-000284	CIT-GSC1310-GSI	1	ER16	1:1	Single Ended
L32 IX	Main Spindle	Live Tools	End Drilling / Milling	5540-000285	CIT-BSE3209-GSI	3	ER11A	1:1	Single Ended
L32 IX	Main Spindle	Live Tools	End Drilling / Milling	5540-000287	CIT-BSE2007-GSI	4	ER11A	1:1	Double Ended
L32 IX	Main Spindle	Live Tools	End Drilling / Milling	5540-000288	CIT-BSE3209-DE-GSI	6	ER11A	1:1	Double Ended
L32 IX	Main Spindle	Static Tool	Round Shank Tool Holder	5540-000310	CIT-GDF1601-GSI	3	25.4MM		
L32 IX	Main Spindle	Static Tool	Round Shank Tool Holder	5540-000358	CIT-3XBBH1905	3	19.05MM		
L32 IX	Main Spindle	Static Tool	Round Shank Tool Holder	5540-000359	CIT-GDF3200	3	20MM		
L32 IX	Main Spindle	Static Tool	Turning	5540-000317	CIT-GTF6312-GSI	1	12MM		
L32 X	Sub Spindle	Live Tools	Cross Drilling / Milling	5540-000339	CIT-GSE1910-GSI	1	ER16AM	1:1	Single Ended
L32 X		Live Tools	Cross Drilling / Milling	5540-000284	CIT-GSC1310-GSI	1	ER16	1:1	Single Ended
L32 X	Main Spindle	Live Tools	End Drilling / Milling	5540-000285	CIT-BSE3209-GSI	3	ER11A	1:1	Single Ended
L32 X	Main Spindle	Live Tools	End Drilling / Milling	5540-000287	CIT-BSE2007-GSI	4	ER11A	1:1	Double Ended
L32 X	Main Spindle	Live Tools	End Drilling / Milling	5540-000288	CIT-BSE3209-DE-GSI	6	ER11A	1:1	Double Ended
L32 X		Live Tools	End Drilling / Milling	5540-000331	CIT-GSE1810-GSI	3	ER16	1:1	Single Ended
L32 X	Main Spindle	Static Tool	Round Shank Tool Holder	5540-000310	CIT-GDF1601-GSI	3	25.4MM		
L32 X	Main Spindle	Static Tool	Round Shank Tool Holder	5540-000358	CIT-3XBBH1905	3	19.05MM		
L32 X	Main Spindle	Static Tool	Round Shank Tool Holder	5540-000359	CIT-GDF3200	3	20MM		
L32 X		Live Tools	Thread Whirling	5540-000318	CIT-TWU-L2032-15				Single Ended, Adjustable ±15°
L32 X	Main Spindle	Static Tool	Turning	5540-000317	CIT-GTF6312-GSI	1	12MM		
L32 XII	Sub Spindle	Live Tools	Cross Drilling / Milling	5540-000339	CIT-GSE1910-GSI	1	ER16AM	1:1	Single Ended
L32 XII		Live Tools	Cross Drilling / Milling	5540-000284	CIT-GSC1310-GSI	1	ER16	1:1	Single Ended
L32 XII	Main Spindle	Live Tools	End Drilling / Milling	5540-000285	CIT-BSE3209-GSI	3	ER11A	1:1	Single Ended
L32 XII	Main Spindle	Live Tools	End Drilling / Milling	5540-000287	CIT-BSE2007-GSI	4	ER11A	1:1	Double Ended
L32 XII	Main Spindle	Live Tools	End Drilling / Milling	5540-000288	CIT-BSE3209-DE-GSI	6	ER11A	1:1	Double Ended
L32 XII		Live Tools	End Drilling / Milling	5540-000331	CIT-GSE1810-GSI	3	ER16	1:1	Single Ended
L32 XII	Main Spindle	Static Tool	Round Shank Tool Holder	5540-000310	CIT-GDF1601-GSI	3	25.4MM		
L32 XII	Main Spindle	Static Tool	Round Shank Tool Holder	5540-000358	CIT-3XBBH1905	3	19.05MM		
L32 XII	Main Spindle	Static Tool	Round Shank Tool Holder	5540-000359	CIT-GDF3200	3	20MM		
L32 XII		Live Tools	Thread Whirling	5540-000318	CIT-TWU-L2032-15				Single Ended, Adjustable ±15°
L32 XII	Main Spindle	Static Tool	Turning	5540-000317	CIT-GTF6312-GSI	1	12MM		

Citizen L32 Machines



5540-000315
CIT-GSC310-GSI
Cross Drilling / Milling
L32
Main Spindle
Tool Size: ER16A
Output: 1:1
Single Ended



5540-000324
CIT-5540-000324
End Drilling / Milling
L32
Tool Size: ER11
Output: 1:1
Single Ended



5540-000316
CIT-5540-000316
Turning Tool Holder
L32
Main Spindle
Tool Size: 12MM

Citizen L32 IV Machines



5540-000331
CIT-GSE1810-GSI
End Drilling / Milling
L32 IV
Tool Size: ER16
Output: 1:1
Single Ended

Citizen L32 VIII Machines



5540-000339
CIT-GSE1910-GSI
Cross Drilling / Milling
L32 VIII
Sub Spindle
Tool Size: ER16AM
Output: 1:1
Single Ended



5540-000284
CIT-GSC1310-GSI
Cross Drilling / Milling
L32 VIII
Tool Size: ER16
Output: 1:1
Single Ended



5540-000285
CIT-BSE3209-GSI
End Drilling / Milling
L32 VIII
Main Spindle
Tool Size: ER11A
Output: 1:1
Single Ended



5540-000287
CIT-BSE2007-GSI
End Drilling / Milling
L32 VIII
Main Spindle
Tool Size: ER11A
Output: 1:1
Double Ended



5540-000288
CIT-BSE3209-DE-GSI
End Drilling / Milling
L32 VIII
Main Spindle
Tool Size: ER11A
Output: 1:1
Double Ended



5540-000312
CIT-GSE3210-GSI
End Drilling / Milling
L32 VIII
Main Spindle
Tool Size: 31mm
Output: 1:1
Single Ended



5540-000326
CIT-GSE3707-GSI
End Drilling / Milling
L32 VIII
Main Spindle
Tool Size: ER11A
Output: 1:1
Double Ended



5540-000330
CIT-GSE3807-GSI
End Drilling / Milling
L32 VIII
Main Spindle
Tool Size: ER11A
Output: 1:1
Double Ended



5540-000331
CIT-GSE1810-GSI
End Drilling / Milling
L32 VIII
Tool Size: ER16
Output: 1:1
Single Ended



5540-000310
CIT-GDF1601-GSI
Round Shank Tool Holder
L32 VIII
Main Spindle
Tool Size: 25.4MM



5540-000358
CIT-3XBBH1905
Round Shank Tool Holder
L32 VIII
Main Spindle
Tool Size: 19.05MM



5540-000359
CIT-GDF3200
Round Shank Tool Holder
L32 VIII
Main Spindle
Tool Size: 20MM



5540-000318
CIT-TWU-L2032-15
Thread Whirling
L32 VIII
Single Ended, Adjustable ±15°



5540-000317
CIT-GTF6312-GSI
Turning Tool Holder
L32 VIII
Main Spindle
Tool Size: 12MM

Citizen L32 IX Machines



5540-000339
CIT-GSE1910-GSI
Cross Drilling / Milling
L32 IX
Sub Spindle
Tool Size: ER16AM
Output: 1:1
Single Ended



5540-000284
CIT-GSC1310-GSI
Cross Drilling / Milling
L32 IX
Tool Size: ER16
Output: 1:1
Single Ended



5540-000285
CIT-BSE3209-GSI
End Drilling / Milling
L32 IX
Main Spindle
Tool Size: ER11A
Output: 1:1
Single Ended



5540-000287
CIT-BSE2007-GSI
End Drilling / Milling
L32 IX
Main Spindle
Tool Size: ER11A
Output: 1:1
Double Ended



5540-000288
CIT-BSE3209-DE-GSI
End Drilling / Milling
L32 IX
Main Spindle
Tool Size: ER11A
Output: 1:1
Double Ended



5540-000310
CIT-GDF1601-GSI
Round Shank Tool Holder
L32 IX
Main Spindle
Tool Size: 25.4MM



5540-000358
CIT-3XBBH1905
Round Shank Tool Holder
L32 IX
Main Spindle
Tool Size: 19.05MM



5540-000359
CIT-GDF3200
Round Shank Tool Holder
L32 IX
Main Spindle
Tool Size: 20MM



5540-000317
CIT-GTF6312-GSI
Turning Tool Holder
L32 IX
Main Spindle
Tool Size: 12MM

Citizen L32 X Machines



5540-000339
CIT-GSE1910-GSI
Cross Drilling / Milling
L32 X
Sub Spindle
Tool Size: ER16AM
Output: 1:1
Single Ended



5540-000284
CIT-GSC1310-GSI
Cross Drilling / Milling
L32 X
Tool Size: ER16
Output: 1:1
Single Ended



5540-000285
CIT-BSE3209-GSI
End Drilling / Milling
L32 X
Main Spindle
Tool Size: ER11A
Output: 1:1
Single Ended



5540-000287
CIT-BSE2007-GSI
End Drilling / Milling
L32 X
Main Spindle
Tool Size: ER11A
Output: 1:1
Double Ended



5540-000288
CIT-BSE3209-DE-GSI
End Drilling / Milling
L32 X
Main Spindle
Tool Size: ER11A
Output: 1:1
Double Ended



5540-000331
CIT-GSE1810-GSI
End Drilling / Milling
L32 X
Tool Size: ER16
Output: 1:1
Single Ended



5540-000310
CIT-GDF1601-GSI
Round Shank Tool Holder
L32 X
Main Spindle
Tool Size: 25.4MM



5540-000358
CIT-3XBBH1905
Round Shank Tool Holder
L32 X
Main Spindle
Tool Size: 19.05MM



5540-000359
CIT-GDF3200
Round Shank Tool Holder
L32 X
Main Spindle
Tool Size: 20MM



5540-000318
CIT-TWU-L2032-15
Thread Whirling
L32 X
Single Ended, Adjustable ±15°



5540-000317
CIT-GTF6312-GSI
Turning Tool Holder
L32 X
Main Spindle
Tool Size: 12MM

Citizen L32 XII Machines



5540-000339
CIT-GSE1910-GSI
Cross Drilling / Milling
L32 XII
Sub Spindle
Tool Size: ER16AM
Output: 1:1
Single Ended



5540-000284
CIT-GSC1310-GSI
Cross Drilling / Milling
L32 XII
Tool Size: ER16
Output: 1:1
Single Ended



5540-000285
CIT-BSE3209-GSI
End Drilling / Milling
L32 XII
Main Spindle
Tool Size: ER11A
Output: 1:1
Single Ended



5540-000287
CIT-BSE2007-GSI
End Drilling / Milling
L32 XII
Main Spindle
Tool Size: ER11A
Output: 1:1
Double Ended



5540-000288
CIT-BSE3209-DE-GSI
End Drilling / Milling
L32 XII
Main Spindle
Tool Size: ER11A
Output: 1:1
Double Ended



5540-000331
CIT-GSE1810-GSI
End Drilling / Milling
L32 XII
Tool Size: ER16
Output: 1:1
Single Ended



5540-000310
CIT-GDF1601-GSI
Round Shank Tool Holder
L32 XII
Main Spindle
Tool Size: 25.4MM



5540-000358
CIT-3XBBH1905
Round Shank Tool Holder
L32 XII
Main Spindle
Tool Size: 19.05MM



5540-000359
CIT-GDF3200
Round Shank Tool Holder
L32 XII
Main Spindle
Tool Size: 20MM



5540-000318
CIT-TWU-L2032-15
Thread Whirling
L32 XII
Single Ended, Adjustable ±15°



5540-000317
CIT-GTF6312-GSI
Turning Tool Holder
L32 XII
Main Spindle
Tool Size: 12MM

Citizen M16

Machine	Work Location	Live or Static	Operation	Item No.	Description	# of Tool Positions	Tool Size	Output	Other
M16	Turret	Live Tools	Cross Drilling / Milling	5540-000344	CIT-MST306-GSI	1	ER11A	1:1	Single Ended
M16	Turret	Live Tools	Cross Drilling / Milling	5540-000349	CIT-MSC106-GSI	1	ER11	1:1	Single Ended
M16	Turret	Live Tools	Cross Drilling / Milling	5540-000350	CIT-MSC107BT-GSI	1	ER11	1:1	Single Ended
M16	Turret	Live Tools	Cross Drilling / Milling	5540-000351	CIT-MSC407-GSI	2	ER11	1:1	Single Ended
M16	Turret	Live Tools	End Drilling / Milling	5540-000348	CIT-MSE106-GSI	1	ER11	1:1	Single Ended
M16	Turret	Static Tool	Round Shank Tool Holder	5540-000346	CIT-VDF501-GSI	1	Ø19.05mm		Single Ended
M16	Turret	Static Tool	Round Shank Tool Holder	5540-000347	CIT-VDF401-GSI	2	Ø19.05mm		Single Ended
M16		Static Tool	Round Shank Tool Holder	5540-000345	CIT-VDF201-GSI	1	Ø19.05mm		Single Ended
M16	Turret	Live Tools	Slitting Saw	5540-000352	CIT-MSS345-GSI	1	Ø12.7mm	1:1	Single Ended, Max tool Ø70mm
M16	Turret	Static Tool	Turning	5540-000342	CIT-VTF110-GSI	1	10x10mm		Single Ended
M16	Turret	Static Tool	Turning	5540-000343	CIT-VTF1310-GSI	1	10MM		

Citizen M16 Machines



5540-000344
CIT-MST306-GSI
Cross Drilling / Milling
M16
Turret
Tool Size: ER11A
Output: 1:1
Single Ended



5540-000349
CIT-MSC106-GSI
Cross Drilling / Milling
M16
Turret
Tool Size: ER11
Output: 1:1
Single Ended



5540-000350
CIT-MSC107BT-GSI
Cross Drilling / Milling
M16
Turret
Tool Size: ER11
Output: 1:1
Single Ended



5540-000351
CIT-MSC407-GSI
Cross Drilling / Milling
M16
Turret
Tool Size: ER11
Output: 1:1
Single Ended



5540-000348
CIT-MSE106-GSI
End Drilling / Milling
M16
Turret
Tool Size: ER11
Output: 1:1
Single Ended



5540-000346
CIT-VDF501-GSI
Round Shank Tool Holder
M16
Turret
Tool Size: Ø19.05mm
Single Ended



5540-000347
CIT-VDF401-GSI
Round Shank Tool Holder
M16
Turret
Tool Size: Ø19.05mm
Single Ended



5540-000345
CIT-VDF201-GSI
Round Shank Tool Holder
M16
Tool Size: Ø19.05mm
Single Ended



5540-000352
CIT-MSS345-GSI
Slitting Saw
M16
Turret
Tool Size: Ø12.7mm
Output: 1:1
Single Ended, Max tool Ø70mm



5540-000342
CIT-VTF110-GSI
Turning Tool Holder
M16
Turret
Tool Size: 10x10mm
Single Ended



5540-000343
CIT-VTF1310-GSI
Turning Tool Holder
M16
Turret
Tool Size: 10MM

Citizen M20

Machine	Work Location	Live or Static	Operation	Item No.	Description	# of Tool Positions	Tool Size	Output	Other
M2-20		Static Tool	Round Shank Tool Holder	5540-000341	CIT-CDF401-GSI	2	Ø25.4mm		Single Ended
M3-20	Turret	Live Tools	Cross Drilling / Milling	5540-000100	CIT-KSC110-GSI	1	ER16	1:1	Single Ended
M3-20	Turret	Live Tools	End Drilling / Milling	5540-000101	CIT-KSE310-GSI	1	ER16	1:1	Single Ended
M3-20	Turret	Live Tools	End Drilling / Milling	5540-000354	CIT-KSE110-GSI	1	ER16	1:1	Single Ended
M4-20	Turret	Live Tools	Cross Drilling / Milling	5540-000100	CIT-KSC110-GSI	1	ER16	1:1	Single Ended
M4-20	Turret	Live Tools	End Drilling / Milling	5540-000101	CIT-KSE310-GSI	1	ER16	1:1	Single Ended
M4-20	Turret	Live Tools	End Drilling / Milling	5540-000354	CIT-KSE110-GSI	1	ER16	1:1	Single Ended

Citizen M2-20 Machines



5540-000341
CIT-CDF401-GSI
Round Shank Tool Holder
M2-20
Tool Size: Ø25.4mm
Single Ended

Citizen M3-20 Machines



5540-000100
CIT-KSC110-GSI
Cross Drilling / Milling
M3-20
Turret
Tool Size: ER16
Output: 1:1
Single Ended



5540-000101
CIT-KSE310-GSI
End Drilling / Milling
M3-20
Turret
Tool Size: ER16
Output: 1:1
Single Ended



5540-000354
CIT-KSE110-GSI
End Drilling / Milling
M3-20
Turret
Tool Size: ER16
Output: 1:1
Single Ended

Citizen M4-20 Machines



5540-000100
CIT-KSC110-GSI
Cross Drilling / Milling
M4-20
Turret
Tool Size: ER16
Output: 1:1
Single Ended



5540-000101
CIT-KSE310-GSI
End Drilling / Milling
M4-20
Turret
Tool Size: ER16
Output: 1:1
Single Ended



5540-000354
CIT-KSE110-GSI
End Drilling / Milling
M4-20
Turret
Tool Size: ER16
Output: 1:1
Single Ended

Citizen M32

Machine	Work Location	Live or Static	Operation	Item No.	Description	# of Tool Positions	Tool Size	Output	Other
M2-32		Static Tool	Round Shank Tool Holder	5540-000341	CIT-CDF401-GSI	2	Ø25.4mm		Single Ended
M32	Turret	Live Tools	Cross Drilling / Milling	5540-000353	CIT-KSC110-2X-GSI	1	ER16	1:2	Single Ended, Max RPM 10,000
M32		Static Tool	Round Shank Tool Holder	5540-000340	CIT-CDF101-GSI	1	Ø25.4mm		Single Ended
M32		Static Tool	Turning	5540-000355	CIT-CTF116-GSI	1	Ø15.875mm		Single Ended
M3-32	Turret	Live Tools	Cross Drilling / Milling	5540-000100	CIT-KSC110-GSI	1	ER16	1:1	Single Ended
M3-32	Turret	Live Tools	End Drilling / Milling	5540-000101	CIT-KSE310-GSI	1	ER16	1:1	Single Ended
M3-32	Turret	Live Tools	End Drilling / Milling	5540-000354	CIT-KSE110-GSI	1	ER16	1:1	Single Ended
M4-32	Turret	Live Tools	Cross Drilling / Milling	5540-000100	CIT-KSC110-GSI	1	ER16	1:1	Single Ended
M4-32	Turret	Live Tools	End Drilling / Milling	5540-000101	CIT-KSE310-GSI	1	ER16	1:1	Single Ended
M4-32	Turret	Live Tools	End Drilling / Milling	5540-000354	CIT-KSE110-GSI	1	ER16	1:1	Single Ended

Citizen M32 Machines



5540-000353
CIT-KSC110-2X-GSI
Cross Drilling / Milling
M32
Turret
Tool Size: ER16
Output: 1:2
Single Ended, Max RPM 10,000



5540-000340
CIT-CDF101-GSI
Round Shank Tool Holder
M32
Tool Size: Ø25.4mm
Single Ended



5540-000355
CIT-CTF116-GSI
Turning Tool Holder
M32
Tool Size: Ø15.875mm
Single Ended



5540-000341
CIT-CDF401-GSI
Round Shank Tool Holder
M2-32
Tool Size: Ø25.4mm
Single Ended

Citizen M3-32 Machines



5540-000100
CIT-KSC110-GSI
Cross Drilling / Milling
M3-32
Turret
Tool Size: ER16
Output: 1:1
Single Ended



5540-000101
CIT-KSE310-GSI
End Drilling / Milling
M3-32
Turret
Tool Size: ER16
Output: 1:1
Single Ended



5540-000354
CIT-KSE110-GSI
End Drilling / Milling
M3-32
Turret
Tool Size: ER16
Output: 1:1
Single Ended

Citizen M4-32 Machines



5540-000100
CIT-KSC110-GSI
Cross Drilling / Milling
M4-32
Turret
Tool Size: ER16
Output: 1:1
Single Ended



5540-000101
CIT-KSE310-GSI
End Drilling / Milling
M4-32
Turret
Tool Size: ER16
Output: 1:1
Single Ended



5540-000354
CIT-KSE110-GSI
End Drilling / Milling
M4-32
Turret
Tool Size: ER16
Output: 1:1
Single Ended

STAR
Swiss-Type CNC Machining Tools
by GenSwiss®
Advancing Small Parts Manufacturing

ECAS-12

Machine	Work Location	Live or Static	Operation	Item No.	Description	# of Tool Positions	Tool Size	Output	Other
ECAS-12	Sub Spindle	Live Tools	Cross Drilling / Milling	5540-000113	STA-GSC110-GSI	1	ER16	1:1	Single Ended
ECAS-12		Live Tools	Cross Drilling / Milling	5540-000114	STA-GSC3X-GSI	1	ER11	1:3	High Speed, 18,000 Max RPM, Single Ended
ECAS-12		Live Tools	Cross Drilling / Milling	5540-000115	STA-A120-E16-GSI	1	ER16		Single Ended
ECAS-12	Main Spindle	Live Tools	Cross Drilling / Milling	5540-000116	STA-SCDM	1	ER20M	1:1	Single Ended
ECAS-12	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000149	STA-5540-000149	1	ER16M		8mm Flange Thickness
ECAS-12	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000150	STA-BWER16-CT	1	ER16M		Coolant Thru
ECAS-12	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000153	STA-BWER16-10	1	ER16M		10mm Flange Thickness
ECAS-12	Sub Spindle	Live Tools	Cross Drilling / Milling	5540-000155	STA-BWE11	1	ER11	1:1	Single Ended
ECAS-12	Sub Spindle	Live Tools	End Drilling / Milling	5540-000163	STA-BWE16	1	ER16	1:1	Single Ended

Star ECAS-12 Machines



5540-000113
STA-GSC110-GSI
Cross Drilling / Milling
ECAS-12
Sub Spindle
Tool Size: ER16
Output: 1:1
Single Ended



5540-000114
STA-GSC3X-GSI
Cross Drilling / Milling
ECAS-12
Tool Size: ER11
Output: 1:3
High Speed, 18,000 Max RPM,
Single Ended



5540-000115
STA-A120-E16-GSI
Cross Drilling / Milling
ECAS-12
Tool Size: ER16
Single Ended



5540-000116
STA-SCDM
Cross Drilling / Milling
ECAS-12
Main Spindle
Tool Size: ER20M
Output: 1:1
Single Ended



5540-000155
STA-BWE11
Cross Drilling / Milling
ECAS-12
Sub Spindle
Tool Size: ER11
Output: 1:1
Single Ended



5540-000163
STA-BWE16
End Drilling / Milling
ECAS-12
Sub Spindle
Tool Size: ER16
Output: 1:1
Single Ended



5540-000149
STA-5540-000149
Round Shank Tool Holder
ECAS-12
Sub Spindle
Tool Size: ER16M
8mm Flange Thickness



5540-000150
STA-BWER16-CT
Round Shank Tool Holder
ECAS-12
Sub Spindle
Tool Size: ER16M
Coolant Thru



5540-000153
STA-BWER16-10
Round Shank Tool Holder
ECAS-12
Sub Spindle
Tool Size: ER16M
10mm Flange Thickness

ECAS-20

Machine	Work Location	Live or Static	Operation	Item No.	Description	# of Tool Positions	Tool Size	Output	Other
ECAS-20	Sub Spindle	Live Tools	Cross Drilling / Milling	5540-000113	STA-GSC110-GSI	1	ER16	1:1	Single Ended
ECAS-20		Live Tools	Cross Drilling / Milling	5540-000114	STA-GSC3X-GSI	1	ER11	1:3	High Speed, 18,000 Max RPM
ECAS-20		Live Tools	Cross Drilling / Milling	5540-000115	STA-A120-E16-GSI	1	ER16		Single Ended
ECAS-20	Main Spindle	Live Tools	Cross Drilling / Milling	5540-000116	STA-SCDM	1	ER20M	1:1	Single Ended
ECAS-20	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000149	STA-5540-000149	1	ER16M		8mm Flange Thickness
ECAS-20	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000150	STA-BWER16-CT	1	ER16M		Coolant Thru
ECAS-20	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000153	STA-BWER16-10	1	ER16M		10mm Flange Thickness
ECAS-20	Sub Spindle	Live Tools	Cross Drilling / Milling	5540-000155	STA-BWE11	1	ER11	1:1	Single Ended
ECAS-20	Sub Spindle	Live Tools	End Drilling / Milling	5540-000163	STA-BWE16	1	ER16	1:1	Single Ended
ECAS-20T	Turret	Live Tools	Cross Drilling / Milling	5540-000172	STA-SV20C-E16	1	ER16A	1:1	Single Ended
ECAS-20T	Turret	Static Tool	Round Shank Tool Holder	5540-000174	STA-SV3200-1P	1	32MM Round		
ECAS-20T	Turret	Live Tools	Thread Whirling	5540-000175	STA-WH20T-MWT12	1		1:1	Single Ended, Adjustable +/- 20°
ECAS-20T	Turret	Static Tool	Turning	5540-000179	STA-TU1616-ADJ	1	16x16mm		Adjustable +/- 1mm
ECAS-20T	Turret	Static Tool	Turning	5540-000180	STA-5540-000180	1	16x16mm		Adjustable +/- 1mm

Star ECAS-20 Machines



5540-000113
STA-GSC110-GSI
Cross Drilling / Milling
ECAS-20
Sub Spindle
Tool Size: ER16
Output: 1:1
Single Ended



5540-000114
STA-GSC3X-GSI
Cross Drilling / Milling
ECAS-20
Tool Size: ER11
Output: 1:3
High Speed, 18,000 Max RPM



5540-000115
STA-A120-E16-GSI
Cross Drilling / Milling
ECAS-20
Tool Size: ER16
Single Ended



5540-000116
STA-SCDM
Cross Drilling / Milling
ECAS-20
Main Spindle
Tool Size: ER20M
Output: 1:1
Single Ended



5540-000155
STA-BWE11
Cross Drilling / Milling
ECAS-20
Sub Spindle
Tool Size: ER11
Single Ended



5540-000149
STA-5540-000149
Round Shank Tool Holder
ECAS-20
Sub Spindle
Tool Size: ER16M
8mm Flange Thickness



5540-000150
STA-BWER16-CT
Round Shank Tool Holder
ECAS-20
Sub Spindle
Tool Size: ER16M
Coolant Thru



5540-000153
STA-BWER16-10
Round Shank Tool Holder
ECAS-20
Sub Spindle
Tool Size: ER16M
Output: 1:1
10mm Flange Thickness



5540-000163
STA-BWE16
End Drilling / Milling
ECAS-20
Sub Spindle
Tool Size: ER16
Output: 1:1
Single Ended



5540-000172
STA-SV20C-E16
Cross Drilling / Milling
ECAS-20T
Turret
Tool Size: ER16A
Output: 1:1
Single Ended



5540-000174
STA-SV3200-1P
Round Shank Tool Holder
ECAS-20T
Turret
Tool Size: 32MM Round



5540-000175
STA-WH20T-MWT12
Thread Whirling
ECAS-20T
Turret
Output: 1:1
Single Ended, Adjustable +/- 20°



5540-000179
STA-TU1616-ADJ
Turning
ECAS-20T
Turret
Tool Size: 16x16mm
Adjustable +/- 1mm



5540-000180
STA-5540-000180
Turning
ECAS-20T
Turret
Tool Size: 16x16mm
Adjustable +/- 1mm

SB-12

Machine	Work Location	Live or Static	Operation	Item No.	Description	# of Tool Positions	Tool Size	Output	Other
SB-12	Sub Spindle	Live Tools	Cross Drilling / Milling	5540-000113	STA-GSC110-GSI	1	ER16	1:1	Single Ended
SB-12		Live Tools	Cross Drilling / Milling	5540-000114	STA-GSC3X-GSI	1	ER11	1:3	High Speed 18,000 Max RPM, Single Ended
SB-12		Live Tools	Cross Drilling / Milling	5540-000115	STA-A120-E16-GSI	1	ER16		Single Ended
SB-12	Main Spindle	Live Tools	Cross Drilling / Milling	5540-000116	STA-SCDM	1	ER20M	1:1	Single Ended
SB-12	Main Spindle	Live Tools	Slitting Saw	5540-000120	STA-12.7SU	1	Ø12.7mm	1:0.374	Single Ended, Max Tool Ø50mm, 8mm Flange Thickness
SB-12		Live Tools	End Drilling / Milling	5540-000121	STA-GSE210-GSI	1	ER16	1:1	Single Ended, Coolant Thru
SB-12		Live Tools	End Drilling / Milling	5540-000122	STA-R124-3E16	3	ER16	1:1	Single Ended, 10mm Flange Thickness
SB-12	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000146	STA-BWER20-8	1	ER20M		
SB-12	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000147	STA-BWER20-CT	1	ER20M		
SB-12	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000148	STA-BWER20-10	1	ER20M		
SB-12	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000149	STA-5540-000149	1	ER16M		
SB-12	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000150	STA-BWER16-CT	1	ER16M		
SB-12	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000152	STA-5540-000152	1	ER16M		
SB-12	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000153	STA-BWER16-10	1	ER16M		
SB-12	Sub Spindle	Live Tools	Cross Drilling / Milling	5540-000155	STA-BWE11	1	ER11	1:1	Single Ended
SB-12	Sub Spindle	Live Tools	End Drilling / Milling	5540-000160	STA-SRBW-3E11	3	ER11M	1:1	Single Ended
SB-12	Sub Spindle	Live Tools	End Drilling / Milling	5540-000163	STA-BWE16	1	ER16	1:1	Single Ended
SB-12	Sub Spindle	Live Tools	End Drilling / Milling	5540-000165	STA-STBWR20-E16	1	ER16	1:1	Single Ended

Star SB-12 Machines



5540-000113
STA-GSC110-GSI
Cross Drilling / Milling
SB-12
Sub Spindle
Tool Size: ER16
Output: 1:1
Single Ended



5540-000114
STA-GSC3X-GSI
Cross Drilling / Milling
SB-12
Tool Size: ER11
Output: 1:3
High Speed 18,000 Max RPM, Single Ended



5540-000115
STA-A120-E16-GSI
Cross Drilling / Milling
SB-12
Tool Size: ER16
Single Ended



5540-000116
STA-SCDM
Cross Drilling / Milling
SB-12
Main Spindle
Tool Size: ER20M
Output: 1:1
Single Ended



5540-000155
STA-BWE11
Cross Drilling / Milling
SB-12
Sub Spindle
Tool Size: ER11
Output: 1:1
Single Ended



5540-000121
STA-GSE210-GSI
End Drilling / Milling
SB-12
Tool Size: ER16
Output: 1:1
Single Ended, Coolant Thru



5540-000122
STA-R124-3E16
End Drilling / Milling
SB-12
Tool Size: ER16
Output: 1:1
Single Ended, 10mm Flange Thickness



5540-000160
STA-SRBW-3E11
End Drilling / Milling
SB-12
Sub Spindle
Tool Size: ER11M
Output: 1:1
Single Ended



5540-000163
STA-BWE16
End Drilling / Milling
SB-12
Sub Spindle
Tool Size: ER16
Output: 1:1
Single Ended



5540-000165
STA-STBWR20-E16
End Drilling / Milling
SB-12
Sub Spindle
Tool Size: ER16
Output: 1:1
Single Ended



5540-000146
STA-BWER20-8
Round Shank Tool Holder
SB-12
Sub Spindle
Tool Size: ER20M



5540-000147
STA-BWER20-CT
Round Shank Tool Holder
SB-12
Sub Spindle
Tool Size: ER20M



5540-000148
STA-BWER20-10
Round Shank Tool Holder
SB-12
Sub Spindle
Tool Size: ER20M



5540-000149
STA-5540-000149
Round Shank Tool Holder
SB-12
Sub Spindle
Tool Size: ER16M



5540-000150
STA-BWER16-CT
Round Shank Tool Holder
SB-12
Sub Spindle
Tool Size: ER16M



5540-000152
STA-5540-000152
Round Shank Tool Holder
SB-12
Sub Spindle
Tool Size: ER16M



5540-000153
STA-BWER16-10
Round Shank Tool Holder
SB-12
Sub Spindle
Tool Size: ER16M



5540-000120
STA-12.7SU
Slitting Saw
SB-12
Main Spindle
Tool Size: Ø12.7mm
Output: 1:0.374
Single Ended, Max Tool Ø50mm, 8mm Flange Thickness

SB-16

Machine	Work Location	Live or Static	Operation	Item No.	Description	# of Tool Positions	Tool Size	Output	Other
SB-16C	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000149	STA-5540-000149	1	ER16M		8mm Flange Thickness
SB-16C	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000150	STA-BWER16-CT	1	ER16M		Coolant Thru
SB-16C	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000153	STA-BWER16-10	1	ER16M		10mm Flange Thickness
SB-16D	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000146	STA-BWER20-8	1	ER20M		8mm Flange Thickness
SB-16D	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000147	STA-BWER20-CT	1	ER20M		Coolant Thru
SB-16D	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000148	STA-BWER20-10	1	ER20M		10mm Flange Thickness
SB-16D	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000149	STA-5540-000149	1	ER16M		8mm Flange Thickness
SB-16D	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000150	STA-BWER16-CT	1	ER16M		Coolant Thru
SB-16D	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000153	STA-BWER16-10	1	ER16M		10mm Flange Thickness
SB-16E	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000146	STA-BWER20-8	1	ER20M		8mm Flange Thickness
SB-16E	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000147	STA-BWER20-CT	1	ER20M		Coolant Thru
SB-16E	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000148	STA-BWER20-10	1	ER20M		10mm Flange Thickness
SB-16E	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000149	STA-5540-000149	1	ER16M		8mm Flange Thickness
SB-16E	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000150	STA-BWER16-CT	1	ER16M		Coolant Thru
SB-16E	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000153	STA-BWER16-10	1	ER16M		10mm Flange Thickness

Star SB-16C Machines



5540-000149
STA-5540-000149
Round Shank Tool Holder
SB-16C
Sub Spindle
Tool Size: ER16M
8mm Flange Thickness



5540-000150
STA-BWER16-CT
Round Shank Tool Holder
SB-16C
Sub Spindle
Tool Size: ER16M
Coolant Thru



5540-000153
STA-BWER16-10
Round Shank Tool Holder
SB-16C
Sub Spindle
Tool Size: ER16M
10mm Flange Thickness

Star SB-16D Machines



5540-000146
STA-BWER20-8
Round Shank Tool Holder
SB-16D
Sub Spindle
Tool Size: ER20M
8mm Flange Thickness



5540-000147
STA-BWER20-CT
Round Shank Tool Holder
SB-16D
Sub Spindle
Tool Size: ER20M
Coolant Thru



5540-000148
STA-BWER20-10
Round Shank Tool Holder
SB-16D
Sub Spindle
Tool Size: ER20M
10mm Flange Thickness



5540-000149
STA-5540-000149
Round Shank Tool Holder
SB-16D
Sub Spindle
Tool Size: ER16M
8mm Flange Thickness



5540-000150
STA-BWER16-CT
Round Shank Tool Holder
SB-16D
Sub Spindle
Tool Size: ER16M
Coolant Thru



5540-000153
STA-BWER16-10
Round Shank Tool Holder
SB-16D
Sub Spindle
Tool Size: ER16M
10mm Flange Thickness

Star SB-16E Machines



5540-000146
STA-BWER20-8
Round Shank Tool Holder
SB-16E
Sub Spindle
Tool Size: ER20M
8mm Flange Thickness



5540-000147
STA-BWER20-CT
Round Shank Tool Holder
SB-16E
Sub Spindle
Tool Size: ER20M
Coolant Thru



5540-000148
STA-BWER20-10
Round Shank Tool Holder
SB-16E
Sub Spindle
Tool Size: ER20M
10mm Flange Thickness



5540-000149
STA-5540-000149
Round Shank Tool Holder
SB-16E
Sub Spindle
Tool Size: ER16M
8mm Flange Thickness



5540-000150
STA-BWER16-CT
Round Shank Tool Holder
SB-16E
Sub Spindle
Tool Size: ER16M
Coolant Thru



5540-000153
STA-BWER16-10
Round Shank Tool Holder
SB-16E
Sub Spindle
Tool Size: ER16M
10mm Flange Thickness

SB-20

Machine	Work Location	Live or Static	Operation	Item No.	Description	# of Tool Positions	Tool Size	Output	Other
SB-20J		Live Tools	Cross Drilling / Milling	5540-000115	STA-A120-E16-GSI	1	ER16		Single Ended
SB-20JN		Live Tools	Cross Drilling / Milling	5540-000115	STA-A120-E16-GSI	1	ER16		Single Ended
SB-20R	Sub Spindle	Live Tools	Cross Drilling / Milling	5540-000113	STA-GSC110-GSI	1	ER16	1:1	Single Ended
SB-20R		Live Tools	Cross Drilling / Milling	5540-000114	STA-GSC3X-GSI	1	ER11	1:3	High Speed 18,000 Max RPM, Single Ended
SB-20R		Live Tools	Cross Drilling / Milling	5540-000115	STA-A120-E16-GSI	1	ER16		Single Ended
SB-20R	Main Spindle	Live Tools	Cross Drilling / Milling	5540-000116	STA-SCDM	1	ER20M	1:1	Single Ended
SB-20R	Main Spindle	Live Tools	Slitting Saw	5540-000120	STA-12.7SU	1	Ø12.7mm	1:0.374	Single Ended, Max Tool Ø50mm
SB-20R		Live Tools	End Drilling / Milling	5540-000121	STA-GSE210-GSI	1	ER16	1:1	Single Ended
SB-20R		Live Tools	End Drilling / Milling	5540-000122	STA-R124-3E16	3	ER16	1:1	Single Ended
SB-20R	Main Spindle	Live Tools	End Drilling / Milling	5540-000127	STA-5540-000127	3	ER16M	1:1	Single Ended, Adjustable +/- 180°
SB-20R	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000146	STA-BWER20-8	1	ER20M		8mm Flange Thickness
SB-20R	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000147	STA-BWER20-CT	1	ER20M		Coolant Thru
SB-20R	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000148	STA-BWER20-10	1	ER20M		10mm Flange Thickness
SB-20R	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000149	STA-5540-000149	1	ER16M		8mm Flange Thickness
SB-20R	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000150	STA-BWER16-CT	1	ER16M		Coolant Thru
SB-20R	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000152	STA-5540-000152	1	ER16M		Coolant Thru
SB-20R	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000153	STA-BWER16-10	1	ER16M		10mm Flange Thickness
SB-20R	Sub Spindle	Live Tools	Cross Drilling / Milling	5540-000155	STA-BWE11	1	ER11	1:1	Single Ended
SB-20R	Sub Spindle	Live Tools	End Drilling / Milling	5540-000160	STA-SRBW-3E11	3	ER11M	1:1	Single Ended
SB-20R	Sub Spindle	Live Tools	End Drilling / Milling	5540-000163	STA-BWE16	1	ER16	1:1	Single Ended
SB-20R	Sub Spindle	Live Tools	End Drilling / Milling	5540-000165	STA-STBWR20-E16	1	ER16	1:1	Single Ended
SB-20R	Sub Spindle	Live Tools	Cross Drilling / Milling	5540-000166	STA-5540-000166	1	ER11M	1:1	Single Ended

Star SB-20 Machines



5540-000115
STA-A120-E16-GSI
Cross Drilling / Milling
SB-20J
Tool Size: ER16
Single Ended



5540-000115
STA-A120-E16-GSI
Cross Drilling / Milling
SB-20JN
Tool Size: ER16
Single Ended



5540-000113
STA-GSC110-GSI
Cross Drilling / Milling
SB-20R
Sub Spindle
Tool Size: ER16
Output: 1:1
Single Ended



5540-000114
STA-GSC3X-GSI
Cross Drilling / Milling
SB-20R
Tool Size: ER11
Output: 1:3
High Speed 18,000 Max RPM,
Single Ended



5540-000115
STA-A120-E16-GSI
Cross Drilling / Milling
SB-20R
Tool Size: ER16
Single Ended



5540-000116
STA-SCDM
Cross Drilling / Milling
SB-20R
Main Spindle
Tool Size: ER20M
Output: 1:1
Single Ended



5540-000155
STA-BWE11
Cross Drilling / Milling
SB-20R
Sub Spindle
Tool Size: ER11
Output: 1:1
Single Ended



5540-000166
STA-5540-000166
Cross Drilling / Milling
SB-20R
Sub Spindle
Tool Size: ER11M
Output: 1:1
Single Ended



5540-000121
STA-GSE210-GSI
End Drilling / Milling
SB-20R
Tool Size: ER16
Output: 1:1
Single Ended



5540-000122
STA-R124-3E16
End Drilling / Milling
SB-20R
Tool Size: ER16
Output: 1:1
Single Ended



5540-000127
STA-5540-000127
End Drilling / Milling
SB-20R
Main Spindle
Tool Size: ER16M
Output: 1:1
Single Ended, Adjustable
+/- 180°



5540-000160
STA-SRBW-3E11
End Drilling / Milling
SB-20R
Sub Spindle
Tool Size: ER11M
Output: 1:1
Single Ended



5540-000163
STA-BWE16
End Drilling / Milling
SB-20R
Sub Spindle
Tool Size: ER16
Output: 1:1
Single Ended



5540-000165
STA-STBWR20-E16
End Drilling / Milling
SB-20R
Sub Spindle
Tool Size: ER16
Output: 1:1
Single Ended



5540-000146
STA-BWER20-8
Round Shank Tool Holder
SB-20R
Sub Spindle
Tool Size: ER20M
8mm Flange Thickness



5540-000147
STA-BWER20-CT
Round Shank Tool Holder
SB-20R
Sub Spindle
Tool Size: ER20M
Coolant Thru



5540-000148
STA-BWER20-10
Round Shank Tool Holder
SB-20R
Sub Spindle
Tool Size: ER20M
10mm Flange Thickness



5540-000149
STA-5540-000149
Round Shank Tool Holder
SB-20R
Sub Spindle
Tool Size: ER16M
8mm Flange Thickness



5540-000150
STA-BWER16-CT
Round Shank Tool Holder
SB-20R
Sub Spindle
Tool Size: ER16M
Coolant Thru



5540-000152
STA-5540-000152
Round Shank Tool Holder
SB-20R
Sub Spindle
Tool Size: ER16M
Coolant Thru



5540-000153
STA-BWER16-10
Round Shank Tool Holder
SB-20R
Sub Spindle
Tool Size: ER16M
10mm Flange Thickness



5540-000120
STA-12.7SU
Slitting Saw
SB-20R
Main Spindle
Tool Size: Ø12.7mm
Output: 1:0.374
Single Ended, Max Tool Ø50mm

SR-10

Machine	Work Location	Live or Static	Operation	Item No.	Description	# of Tool Positions	Tool Size	Output	Other
SR-10J	Sub Spindle	Static Tool	Turning	5540-000137	STA-5540-000137	1	DC.T11T3		Single Ended, Adjustable +/- 1mm Y
SR-10J	Sub Spindle	Static Tool	Turning	5540-000138	STA-5540-000138	1	10x10mm		Adjustable +/- 1mm Y
SR-10J	Sub Spindle	Static Tool	Turning	5540-000141	STA-BWT20-DC11T	1	DC.T11T3		Adjustable +/- 1mm Y
SR-10J	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000144	STA-5540-000144	1	ER11	1:1	
SR-10J	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000146	STA-BWER20-8	1	ER20M		8mm Flange Thickness
SR-10J	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000147	STA-BWER20-CT	1	ER20M		Single Ended, Coolant Thru
SR-10J	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000148	STA-BWER20-10	1	ER20M		Single Ended, 10mm Flange Thickness
SR-10J	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000154	STA-5540-000154	1	MULTIPLE		Single Ended, Coolant Thru
SR-10J	Sub Spindle	Live Tools	Cross Drilling / Milling	5540-000155	STA-BWE11	1	ER11	1:1	Single Ended
SR-10J	Sub Spindle	Live Tools	Cross Drilling / Milling	5540-000158	STA-BW-GSC-E11	1	ER11A	1:0.55	Adjustable +/- 1mm
SR-10J	Sub Spindle	Live Tools	Cross Drilling / Milling	5540-000159	STA-SR-BWC16	1	ER16A	1:0.77	Adjustable +/- 1mm
SR-10J	Sub Spindle	Live Tools	Cross Drilling / Milling	5540-000170	STA-5540-000170	1	ER11	1:1	
SR-10J	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000199	STA-BW-3MM-ADJ	1	3MM Bore		Adjustable +/- 1mm Y
SR-10J	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000200	STA-BW-4MM-ADJ	1	4MM Bore		Adjustable +/- 1mm Y
SR-10J	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000201	STA-BW-5MM-ADJ	1	5MM Bore		Adjustable +/- 1mm Y
SR-10J	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000202	STA-BW-6MM-ADJ	1	6MM Bore		Adjustable +/- 1mm Y
SR-10J	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000203	STA-BW-8MM-ADJ	1	8MM Bore		Adjustable +/- 1mm Y
SR-10J	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000204	STA-BW-9MM-ADJ	1	9MM Bore		Adjustable +/- 1mm Y
SR-10J	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000205	STA-BW-10MM-ADJ	1	10MM Bore		Adjustable +/- 1mm Y
SR-10J	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000206	STA-BW-12MM-ADJ	1	12MM Bore		Adjustable +/- 1mm Y
SR-10J	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000207	STA-BW-16MM-ADJ	1	16MM Bore		Adjustable +/- 1mm Y
SR-10J	Sub Spindle	Static Tool	Turning	5540-000454	STA-5540-000454	1	VC.T1103		Adjustable +/- 1mm Y
SR-10J	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000149	STA-5540-000149	1	ER16M		Single Ended, 8mm Flange Thickness
SR-10J	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000150	STA-BWER16-CT	1	ER16M		Single Ended, Coolant Thru
SR-10J	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000153	STA-BWER16-10	1	ER16M		10mm Flange Thickness
SR-10J	Sub Spindle	Live Tools	Cross Drilling / Milling	5540-000169	STA-5540-000169	1	ER11	1:1	
SR-10J FANUC 18i	Sub Spindle	Live Tools	End Drilling / Milling	5540-000162	STA-5540-000162	4	ER8M	1:1	

Star SR-10J Machines



5540-000155
STA-BWE11
Cross Drilling / Milling
SR-10J
Sub Spindle
Tool Size: ER11
Output: 1:1
Single Ended



5540-000158
STA-BW-GSC-E11
Cross Drilling / Milling
SR-10J
Sub Spindle
Tool Size: ER11A
Output: 1:0.55
Adjustable +/- 1mm



5540-000159
STA-SR-BWC16
Cross Drilling / Milling
SR-10J
Sub Spindle
Tool Size: ER16A
Output: 1:0.77
Adjustable +/- 1mm



5540-000170
STA-5540-000170
Cross Drilling / Milling
SR-10J
Sub Spindle
Tool Size: ER11
Output: 1:1



5540-000169
STA-5540-000169
Cross Drilling / Milling
SR-10J
Sub Spindle
Tool Size: ER11
Output: 1:1



5540-000162
STA-5540-000162
End Drilling / Milling
SR-10J FANUC 18i
Sub Spindle
Tool Size: ER8M
Output: 1:1



5540-000144
STA-5540-000144
Round Shank Tool Holder
SR-10J
Sub Spindle
Tool Size: ER11
Output: 1:1



5540-000146
STA-BWER20-8
Round Shank Tool Holder
SR-10J
Sub Spindle
Tool Size: ER20M
8mm Flange Thickness



5540-000147
STA-BWER20-CT
Round Shank Tool Holder
SR-10J
Sub Spindle
Tool Size: ER20M
Single Ended, Coolant Thru



5540-000148
STA-BWER20-10
Round Shank Tool Holder
SR-10J
Sub Spindle
Tool Size: ER20M
Single Ended, 10mm Flange Thickness



5540-000154
STA-5540-000154
Round Shank Tool Holder
SR-10J
Sub Spindle
Tool Size: MULTIPLE
Single Ended, Coolant Thru



5540-000199
STA-BW-3MM-ADJ
Round Shank Tool Holder
SR-10J
Sub Spindle
Tool Size: 3MM Bore
Adjustable +/- 1mm Y



5540-000200
STA-BW-4MM-ADJ
Round Shank Tool Holder
SR-10J
Sub Spindle
Tool Size: 4MM Bore
Adjustable +/- 1mm Y



5540-000201
STA-BW-5MM-ADJ
Round Shank Tool Holder
SR-10J
Sub Spindle
Tool Size: 5MM Bore
Adjustable +/- 1mm Y



5540-000202
STA-BW-6MM-ADJ
Round Shank Tool Holder
SR-10J
Sub Spindle
Tool Size: 6MM Bore
Adjustable +/- 1mm Y



5540-000203
STA-BW-8MM-ADJ
Round Shank Tool Holder
SR-10J
Sub Spindle
Tool Size: 8MM Bore
Adjustable +/- 1mm Y



5540-000204
STA-BW-9MM-ADJ
Round Shank Tool Holder
SR-10J
Sub Spindle
Tool Size: 9MM Bore
Adjustable +/- 1mm Y



5540-000205
STA-BW-10MM-ADJ
Round Shank Tool Holder
SR-10J
Sub Spindle
Tool Size: 10MM Bore
Adjustable +/- 1mm Y



5540-000206
STA-BW-12MM-ADJ
Round Shank Tool Holder
SR-10J
Sub Spindle
Tool Size: 12MM Bore
Adjustable +/- 1mm Y



5540-000207
STA-BW-16MM-ADJ
Round Shank Tool Holder
SR-10J
Sub Spindle
Tool Size: 16MM Bore
Adjustable +/- 1mm Y



5540-000149
STA-5540-000149
Round Shank Tool Holder
SR-10J
Sub Spindle
Tool Size: ER16M
Single Ended, 8mm Flange Thickness



5540-000150
STA-BWER16-CT
Round Shank Tool Holder
SR-10J
Sub Spindle
Tool Size: ER16M
Single Ended, Coolant Thru



5540-000153
STA-BWER16-10
Round Shank Tool Holder
SR-10J
Sub Spindle
Tool Size: ER16M
10mm Flange Thickness



5540-000137
STA-5540-000137
Turning
SR-10J
Sub Spindle
Tool Size: DC.T11T3
Single Ended, Adjustable +/- 1mm Y



5540-000138
STA-5540-000138
Turning
SR-10J
Sub Spindle
Tool Size: 10x10mm
Adjustable +/- 1mm Y



5540-000141
STA-BWT20-DC11T
Turning
SR-10J
Sub Spindle
Tool Size: DC.T11T3
Adjustable +/- 1mm Y



5540-000454
STA-5540-000454
Turning
SR-10J
Sub Spindle
Tool Size: VC.T1103
Adjustable +/- 1mm Y

SR-20

Machine	Work Location	Live or Static	Operation	Item No.	Description	# of Tool Positions	Tool Size	Output	Other
SR-20II	Main Spindle	Live Tools	Polygon Milling	5540-000111	STA-PMU	1		1:1	Single Ended
SR-20J	Main Spindle	Live Tools	Polygon Milling	5540-000111	STA-PMU	1		1:1	Single Ended
SR-20J	Main Spindle	Static Tool	Idler Shaft	5540-000112	STA-IDLER				
SR-20J	Sub Spindle	Live Tools	Cross Drilling / Milling	5540-000113	STA-GSC110-GSI	1	ER16	1:1	Single Ended
SR-20J		Live Tools	Cross Drilling / Milling	5540-000114	STA-GSC3X-GSI	1	ER11	1:3	High Speed 18,000 Max RPM, Single Ended
SR-20J	Main Spindle	Live Tools	Cross Drilling / Milling	5540-000116	STA-SCDM	1	ER20M	1:1	Single Ended
SR-20J	Main Spindle	Live Tools	Thread Whirling	5540-000118	STA-TWU-SR2032-20	1			Adjustable +/- 20°
SR-20J	Main Spindle	Live Tools	Slitting Saw	5540-000120	STA-12.7SU	1	Ø12.7mm	1:0.374	Single Ended, Max Tool Ø50mm
SR-20J		Live Tools	End Drilling / Milling	5540-000121	STA-GSE210-GSI	1	ER16	1:1	Single Ended
SR-20J		Live Tools	End Drilling / Milling	5540-000122	STA-R124-3E16	3	ER16	1:1	Single Ended
SR-20J		Live Tools	End Drilling / Milling	5540-000128	STA-R093-DE2E1611	4	ER11, ER16	1:1	Double Ended, ER16 front facing, ER11 back facing
SR-20J	Sub Spindle	Static Tool	Turning	5540-000136	STA-5540-000136	1	10x10mm		
SR-20J	Sub Spindle	Static Tool	Turning	5540-000137	STA-5540-000137	1	DC.T11T3		Adjustable +/- 1mm Y
SR-20J	Sub Spindle	Static Tool	Turning	5540-000138	STA-5540-000138	1	10x10mm		Adjustable +/- 1mm Y
SR-20J	Sub Spindle	Static Tool	Turning	5540-000141	STA-BWT20-DC11T	1	DC.T11T3		Adjustable +/- 1mm Y
SR-20J	Sub Spindle	Static Tool	Turning	5540-000142	STA-5540-000142	1	12x12mm		
SR-20J	Sub Spindle	Static Tool	Turning	5540-000143	STA-5540-000143	1	12x12mm		
SR-20J	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000146	STA-BWER20-8	1	ER20M		8mm Flange Thickness
SR-20J	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000147	STA-BWER20-CT	1	ER20M		Coolant Thru
SR-20J	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000148	STA-BWER20-10	1	ER20M		10mm Flange Thickness
SR-20J	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000149	STA-5540-000149	1	ER16M		8mm Flange Thickness
SR-20J	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000150	STA-BWER16-CT	1	ER16M		Coolant Thru
SR-20J	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000153	STA-BWER16-10	1	ER16M		10mm Flange Thickness
SR-20J	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000154	STA-5540-000154	1	MULTIPLE		Coolant Thru
SR-20J	Sub Spindle	Live Tools	Cross Drilling / Milling	5540-000155	STA-BWE11	1	ER11	1:1	Single Ended
SR-20J	Sub Spindle	Live Tools	Cross Drilling / Milling	5540-000158	STA-BW-GSC-E11	1	ER11A	1:0.55	Adjustable +/- 1mm, Single Ended
SR-20J	Sub Spindle	Live Tools	Cross Drilling / Milling	5540-000159	STA-SR-BWC16	1	ER16A	1:0.77	Adjustable +/- 1mm, Single Ended
SR-20J	Sub Spindle	Live Tools	End Drilling / Milling	5540-000160	STA-SRBW-3E11	3	ER11M	1:1	Single Ended
SR-20J	Sub Spindle	Live Tools	End Drilling / Milling	5540-000163	STA-BWE16	1	ER16	1:1	Single Ended
SR-20J	Sub Spindle	Live Tools	Cross Drilling / Milling	5540-000166	STA-5540-000166	1	ER11M	1:1	Single Ended
SR-20J	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000199	STA-BW-3MM-ADJ	1	3MM Bore		Adjustable +/- 1mm Y
SR-20J	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000200	STA-BW-4MM-ADJ	1	4MM Bore		Adjustable +/- 1mm Y
SR-20J	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000201	STA-BW-5MM-ADJ	1	5MM Bore		Adjustable +/- 1mm Y
SR-20J	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000202	STA-BW-6MM-ADJ	1	6MM Bore		Adjustable +/- 1mm Y
SR-20J	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000203	STA-BW-8MM-ADJ	1	8MM Bore		Adjustable +/- 1mm Y
SR-20J	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000204	STA-BW-9MM-ADJ	1	9MM Bore		Adjustable +/- 1mm Y
SR-20J	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000205	STA-BW-10MM-ADJ	1	10MM Bore		Adjustable +/- 1mm Y
SR-20J	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000206	STA-BW-12MM-ADJ	1	12MM Bore		Adjustable +/- 1mm Y
SR-20J	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000207	STA-BW-16MM-ADJ	1	16MM Bore		Adjustable +/- 1mm Y
SR-20J	Sub Spindle	Static Tool	Turning	5540-000454	STA-5540-000454	1	VC.T1103		Adjustable +/- 1mm Y
SR-20JC	Sub Spindle	Live Tools	End Drilling / Milling	5540-000104	STA-5540-000104	2	22MM, 16MM		Single Ended
SR-20JC	Sub Spindle	Live Tools	End Drilling / Milling	5540-000105	STA-5540-000105	3	22MM, 16MM		Single Ended
SR-20JC	Main Spindle	Live Tools	Cross Drilling / Milling	5540-000119	STA-3PDM	3	ER11M	1:1	Single Ended
SR-20JC	Sub Spindle	Live Tools	Cross Drilling / Milling	5540-000166	STA-5540-000166	1	ER11M	1:1	Single Ended
SR-20JN	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000146	STA-BWER20-8	1	ER20M		8mm Flange Thickness
SR-20JN	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000147	STA-BWER20-CT	1	ER20M		Coolant Thru
SR-20JN	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000148	STA-BWER20-10	1	ER20M		10mm Flange Thickness
SR-20JN	Main Spindle	Live Tools	Polygon Milling	5540-000111	STA-PMU	1		1:1	Single Ended
SR-20JN	Main Spindle	Static Tool	Idler Shaft	5540-000112	STA-IDLER				
SR-20JN	Sub Spindle	Live Tools	Cross Drilling / Milling	5540-000113	STA-GSC110-GSI	1	ER16	1:1	Single Ended
SR-20JN		Live Tools	Cross Drilling / Milling	5540-000114	STA-GSC3X-GSI	1	ER11	1:3	High Speed 18,000 Max RPM, Single Ended
SR-20JN	Main Spindle	Live Tools	Cross Drilling / Milling	5540-000116	STA-SCDM	1	ER20M	1:1	Single Ended
SR-20JN	Main Spindle	Live Tools	Thread Whirling	5540-000118	STA-TWU-SR2032-20	1			Adjustable +/- 20°
SR-20JN	Main Spindle	Live Tools	Slitting Saw	5540-000120	STA-12.7SU	1	Ø12.7mm	1:0.374	Single Ended, Max Tool Ø50mm
SR-20JN		Live Tools	End Drilling / Milling	5540-000121	STA-GSE210-GSI	1	ER16	1:1	Single Ended
SR-20JN		Live Tools	End Drilling / Milling	5540-000122	STA-R124-3E16	3	ER16	1:1	Single Ended
SR-20JN		Live Tools	End Drilling / Milling	5540-000128	STA-R093-DE2E1611	4	ER11, ER16	1:1	Double Ended, ER16 front facing, ER11 back facing
SR-20JN	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000149	STA-5540-000149	1	ER16M		8mm Flange Thickness
SR-20JN	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000150	STA-BWER16-CT	1	ER16M		Coolant Thru
SR-20JN	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000153	STA-BWER16-10	1	ER16M		10mm Flange Thickness
SR-20JN	Sub Spindle	Live Tools	Cross Drilling / Milling	5540-000155	STA-BWE11	1	ER11	1:1	Single Ended
SR-20JN	Sub Spindle	Live Tools	End Drilling / Milling	5540-000163	STA-BWE16	1	ER16	1:1	Single Ended
SR-20JN	Sub Spindle	Live Tools	Cross Drilling / Milling	5540-000166	STA-5540-000166	1	ER11M	1:1	Single Ended
SR-20N	Sub Spindle	Live Tools	End Drilling / Milling	5540-000160	STA-SRBW-3E11	3	ER11M	1:1	Single Ended

SR-20 Continued On Next Page

SR-20

Machine	Work Location	Live or Static	Operation	Item No.	Description	# of Tool Positions	Tool Size	Output	Other
SR-20R	Main Spindle	Live Tools	Gear Hobbing	5540-000108	STA-GHU	1		1:1	Adjustable +/- 20°, Single Ended
SR-20R	Main Spindle	Static Tool	Round Shank Tool Holder	5540-000109	STA-3X22ID	3	22MM		
SR-20R	Main Spindle	Static Tool	Round Shank Tool Holder	5540-000117	STA-ATH3P	3	22MM		Adjustable +/- 20°
SR-20R	Main Spindle	Live Tools	End Drilling / Milling	5540-000123	STA-5540-000123	2	ER16M	1:1	Adjustable 0-90°, Single Ended
SR-20R	Main Spindle	Live Tools	End Drilling / Milling	5540-000125	STA-5540-000125	3	ER16M	1:1	Adjustable 0-90°, Single Ended
SR-20R	Main Spindle	Live Tools	End Drilling / Milling	5540-000126	STA-5540-000126	3	ER16M	1:1	Adjustable +/- 180°, Single Ended
SR-20R	Main Spindle	Live Tools	End Drilling / Milling	5540-000132	STA-5540-000132	6	ER16M, ER11M	1:1	Adjustable 0-90°, Double Ended
SR-20R	Sub Spindle	Static Tool	Turning	5540-000136	STA-5540-000136	1	10x10mm		
SR-20R	Sub Spindle	Static Tool	Turning	5540-000137	STA-5540-000137	1	DC.T11T3		Adjustable +/- 1mm Y
SR-20R	Sub Spindle	Static Tool	Turning	5540-000138	STA-5540-000138	1	10x10mm		Adjustable +/- 1mm Y
SR-20R	Sub Spindle	Static Tool	Turning	5540-000139	STA-5540-000139	1	12MM		
SR-20R	Sub Spindle	Static Tool	Turning	5540-000141	STA-BWT20-DC11T	1	DC.T11T3		Adjustable +/- 1mm Y
SR-20R	Sub Spindle	Static Tool	Turning	5540-000142	STA-5540-000142	1	12x12mm		
SR-20R	Sub Spindle	Static Tool	Turning	5540-000143	STA-5540-000143	1	12x12mm		
SR-20R	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000145	STA-5540-000145	1	ER11M		
SR-20R	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000154	STA-5540-000154	1	MULTIPLE		Coolant Thru
SR-20R	Sub Spindle	Live Tools	Slitting Saw	5540-000156	STA-BWSS-A5MM	1	Ø5mm	1:0.55	Adjustable +/- 1mm, Single Ended, Max Tool Ø50mm
SR-20R	Sub Spindle	Live Tools	Cross Drilling / Milling	5540-000158	STA-BW-GSC-E11	1	ER11A	1:0.55	Adjustable +/- 1mm, Single Ended
SR-20R	Sub Spindle	Live Tools	Cross Drilling / Milling	5540-000159	STA-SR-BWC16	1	ER16A	1:0.77	Adjustable +/- 1mm, Single Ended
SR-20R	Sub Spindle	Live Tools	Cross Drilling / Milling	5540-000161	STA-5540-000161	1	ER11	1:1	Single Ended
SR-20R	Sub Spindle	Live Tools	End Drilling / Milling	5540-000164	STA-5540-000164	2	ER11, ER11M	1:3	Driven Tool - ER11 / Fixed Tool ER11M, Single Ended
SR-20R	Sub Spindle	Live Tools	Cross Drilling / Milling	5540-000168	STA-BWCSR20	1	ER11	1:1	Single Ended
SR-20R	Sub Spindle	Live Tools	Cross Drilling / Milling	5540-000170	STA-5540-000170	1	ER11	1:1	Single Ended
SR-20R	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000190	STA-5540-000190	1	3MM Bore		
SR-20R	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000191	STA-BWSR-4MM	1	4MM Bore		
SR-20R	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000192	STA-5540-000192	1	5MM Bore		
SR-20R	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000193	STA-5540-000193	1	6MM Bore		
SR-20R	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000194	STA-BW0800	1	8MM Bore		
SR-20R	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000195	STA-5540-000195	1	9MM Bore		
SR-20R	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000196	STA-5540-000196	1	10MM Bore		
SR-20R	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000197	STA-BW1200	1	12MM Bore		
SR-20R	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000198	STA-5540-000198	1	16MM Bore		
SR-20R	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000199	STA-BW-3MM-ADJ	1	3MM Bore		Adjustable +/- 1mm Y
SR-20R	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000200	STA-BW-4MM-ADJ	1	4MM Bore		Adjustable +/- 1mm Y
SR-20R	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000201	STA-BW-5MM-ADJ	1	5MM Bore		Adjustable +/- 1mm Y
SR-20R	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000202	STA-BW-6MM-ADJ	1	6MM Bore		Adjustable +/- 1mm Y
SR-20R	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000203	STA-BW-8MM-ADJ	1	8MM Bore		Adjustable +/- 1mm Y
SR-20R	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000204	STA-BW-9MM-ADJ	1	9MM Bore		Adjustable +/- 1mm Y
SR-20R	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000205	STA-BW-10MM-ADJ	1	10MM Bore		Adjustable +/- 1mm Y
SR-20R	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000206	STA-BW-12MM-ADJ	1	12MM Bore		Adjustable +/- 1mm Y
SR-20R	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000207	STA-BW-16MM-ADJ	1	16MM Bore		Adjustable +/- 1mm Y
SR-20R	Sub Spindle	Static Tool	Turning	5540-000454	STA-5540-000454	1	VC.T1103		Adjustable +/- 1mm Y
SR-20R	Sub Spindle	Live Tools	Slitting Saw	5540-000455	STA-5540-000455	1	Ø6mm	1:0.55	Adjustable +/- 1mm, Single Ended , Max Tool Ø50mm
SR-20R	Sub Spindle	Live Tools	Slitting Saw	5540-000456	STA-5540-000456	1	Ø8mm	1:0.55	Adjustable +/- 1mm, Single Ended , Max Tool Ø50mm
SR-20R	Sub Spindle	Live Tools	Slitting Saw	5540-000457	STA-5540-000457	1	Ø10mm	1:0.55	Adjustable +/- 1mm, Single Ended , Max Tool Ø50mm
SR-20R	Sub Spindle	Live Tools	Slitting Saw	5540-000458	STA-5540-000458	1	Ø12.7mm	1:0.55	Adjustable +/- 1mm, Single Ended , Max Tool Ø50mm
SR-20R	Sub Spindle	Live Tools	Slitting Saw	5540-000459	STA-5540-000459	1	Ø13mm	1:0.55	Adjustable +/- 1mm, Single Ended , Max Tool Ø50mm
SR-20RII	Main Spindle	Static Tool	Idler Shaft	5540-000112	STA-IDLER				
SR-20RII	Sub Spindle	Live Tools	Cross Drilling / Milling	5540-000113	STA-GSC110-GSI	1	ER16	1:1	Single Ended
SR-20RII		Live Tools	Cross Drilling / Milling	5540-000114	STA-GSC3X-GSI	1	ER11	1:3	High Speed 18,000 Max RPM, Single Ended
SR-20RII	Main Spindle	Live Tools	Cross Drilling / Milling	5540-000116	STA-SCDM	1	ER20M	1:1	Single Ended
SR-20RII	Main Spindle	Live Tools	Thread Whirling	5540-000118	STA-TWU-SR2032-20	1			Adjustable +/- 20°
SR-20RII	Main Spindle	Live Tools	Slitting Saw	5540-000120	STA-12.7SU	1	Ø12.7mm	1:0.374	Single Ended, Max Tool Ø50mm
SR-20RII		Live Tools	End Drilling / Milling	5540-000121	STA-GSE210-GSI	1	ER16	1:1	Single Ended
SR-20RII		Live Tools	End Drilling / Milling	5540-000122	STA-R124-3E16	3	ER16	1:1	Single Ended
SR-20RII		Live Tools	End Drilling / Milling	5540-000128	STA-R093-DE2E1611	4	ER11, ER16	1:1	Double Ended, ER16 front facing, ER11 back facing
SR-20RII	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000146	STA-BWER20-8	1	ER20M		8mm Flange Thickness
SR-20RII	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000147	STA-BWER20-CT	1	ER20M		Coolant Thru
SR-20RII	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000148	STA-BWER20-10	1	ER20M		10mm Flange Thickness
SR-20RII	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000149	STA-5540-000149	1	ER16M		8mm Flange Thickness
SR-20RII	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000150	STA-BWER16-CT	1	ER16M		Coolant Thru
SR-20RII	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000153	STA-BWER16-10	1	ER16M		10mm Flange Thickness
SR-20RII	Sub Spindle	Live Tools	Cross Drilling / Milling	5540-000155	STA-BWE11	1	ER11	1:1	Single Ended
SR-20RII	Sub Spindle	Live Tools	End Drilling / Milling	5540-000163	STA-BWE16	1	ER16	1:1	Single Ended

SR-20 Continued On Next Page

SR-20

Machine	Work Location	Live or Static	Operation	Item No.	Description	# of Tool Positions	Tool Size	Output	Other
SR-20RIII	Main Spindle	Live Tools	Polygon Milling	5540-000111	STA-PMU	1		1:1	Single Ended
SR-20RIII	Main Spindle	Static Tool	Idler Shaft	5540-000112	STA-IDLER				
SR-20RIII	Sub Spindle	Live Tools	Cross Drilling / Milling	5540-000113	STA-GSC110-GSI	1	ER16	1:1	Single Ended
SR-20RIII		Live Tools	Cross Drilling / Milling	5540-000114	STA-GSC3X-GSI	1	ER11	1:3	High Speed 18,000 Max RPM, Single Ended, Single Ended
SR-20RIII		Live Tools	Cross Drilling / Milling	5540-000115	STA-A120-E16-GSI	1	ER16		Single Ended
SR-20RIII		Live Tools	Cross Drilling / Milling	5540-000115	STA-A120-E16-GSI	1	ER16		Single Ended
SR-20RIII	Main Spindle	Live Tools	Cross Drilling / Milling	5540-000116	STA-SCDM	1	ER20M	1:1	Single Ended
SR-20RIII	Main Spindle	Live Tools	Thread Whirling	5540-000118	STA-TWU-SR2032-20	1			Adjustable +/- 20°
SR-20RIII	Main Spindle	Live Tools	Slitting Saw	5540-000120	STA-12.7SU	1	Ø12.7mm	1:0.374	Single Ended, Max Tool Ø50mm
SR-20RIII		Live Tools	End Drilling / Milling	5540-000121	STA-GSE210-GSI	1	ER16	1:1	Single Ended
SR-20RIII		Live Tools	End Drilling / Milling	5540-000122	STA-R124-3E16	3	ER16	1:1	Single Ended
SR-20RIII		Live Tools	End Drilling / Milling	5540-000128	STA-R093-DE2E1611	4	ER11, ER16	1:1	Double Ended, ER16 front facing, ER11 back facing
SR-20RIII	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000146	STA-BWER20-8	1	ER20M		8mm Flange Thickness
SR-20RIII	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000147	STA-BWER20-CT	1	ER20M		Coolant Thru
SR-20RIII	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000148	STA-BWER20-10	1	ER20M		10mm Flange Thickness
SR-20RIII	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000149	STA-5540-000149	1	ER16M		8mm Flange Thickness
SR-20RIII	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000150	STA-BWER16-CT	1	ER16M		Coolant Thru
SR-20RIII	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000153	STA-BWER16-10	1	ER16M		10mm Flange Thickness
SR-20RIII	Sub Spindle	Live Tools	Cross Drilling / Milling	5540-000155	STA-BWE11	1	ER11	1:1	Single Ended
SR-20RIII	Sub Spindle	Live Tools	End Drilling / Milling	5540-000160	STA-SRBW-3E11	3	ER11M	1:1	Single Ended
SR-20RIII	Sub Spindle	Live Tools	End Drilling / Milling	5540-000163	STA-BWE16	1	ER16	1:1	Single Ended
SR-20RIII	Sub Spindle	Live Tools	Cross Drilling / Milling	5540-000166	STA-5540-000166	1	ER11M	1:1	Single Ended
SR-20RIV	Sub Spindle	Live Tools	Cross Drilling / Milling	5540-000113	STA-GSC110-GSI	1	ER16	1:1	Single Ended
SR-20RIV		Live Tools	Cross Drilling / Milling	5540-000114	STA-GSC3X-GSI	1	ER11	1:3	High Speed 18,000 Max RPM, Single Ended, Single Ended
SR-20RIV		Live Tools	Cross Drilling / Milling	5540-000115	STA-A120-E16-GSI	1	ER16		Single Ended
SR-20RIV	Main Spindle	Live Tools	Cross Drilling / Milling	5540-000116	STA-SCDM	1	ER20M	1:1	Single Ended
SR-20RIV	Main Spindle	Live Tools	Thread Whirling	5540-000118	STA-TWU-SR2032-20	1			Adjustable +/- 20°
SR-20RIV	Main Spindle	Live Tools	Slitting Saw	5540-000120	STA-12.7SU	1	Ø12.7mm	1:0.374	Single Ended, Max Tool Ø50mm
SR-20RIV		Live Tools	End Drilling / Milling	5540-000121	STA-GSE210-GSI	1	ER16	1:1	Single Ended
SR-20RIV		Live Tools	End Drilling / Milling	5540-000122	STA-R124-3E16	3	ER16	1:1	Single Ended
SR-20RIV		Live Tools	End Drilling / Milling	5540-000128	STA-R093-DE2E1611	4	ER11, ER16	1:1	Double Ended, ER16 front facing, ER11 back facing
SR-20RIV	Main Spindle	Live Tools	End Drilling / Milling	5540-000129	STA-R623131-DE-3E16-11	6	ER16M, ER11M	1:1	Double Ended
SR-20RIV	Sub Spindle	Static Tool	Turning	5540-000140	STA-5540-000140	1	10x10mm		
SR-20RIV	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000146	STA-BWER20-8	1	ER20M		8mm Flange Thickness
SR-20RIV	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000147	STA-BWER20-CT	1	ER20M		Coolant Thru
SR-20RIV	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000148	STA-BWER20-10	1	ER20M		10mm Flange Thickness
SR-20RIV	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000149	STA-5540-000149	1	ER16M		8mm Flange Thickness
SR-20RIV	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000150	STA-BWER16-CT	1	ER16M		Coolant Thru
SR-20RIV	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000153	STA-BWER16-10	1	ER16M		10mm Flange Thickness
SR-20RIV	Sub Spindle	Live Tools	Cross Drilling / Milling	5540-000155	STA-BWE11	1	ER11	1:1	Single Ended
SR-20RIV	Sub Spindle	Live Tools	Slitting Saw	5540-000157	STA-BWSS-5MM	1	Ø5mm	1:0.55	Single Ended, Adjustable +/- 1mm, Max Tool Ø50mm
SR-20RIV	Sub Spindle	Live Tools	End Drilling / Milling	5540-000163	STA-BWE16	1	ER16	1:1	Single Ended
SR-20RIV	Sub Spindle	Live Tools	Cross Drilling / Milling	5540-000167	STA-0R151	1	ER16M	1:1	Single Ended
SR-20RIV	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000184	STA-5540-000184	1	6MM Bore		Coolant Thru
SR-20RIV	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000185	STA-5540-000185	1	8MM Bore		Coolant Thru
SR-20RIV	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000186	STA-5540-000186	1	9MM Bore		Coolant Thru
SR-20RIV	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000187	STA-5540-000187	1	10MM Bore		Coolant Thru
SR-20RIV	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000188	STA-5540-000188	1	12MM Bore		Coolant Thru
SR-20RIV	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000189	STA-5540-000189	1	16MM Bore		Coolant Thru
SR-20RIV	Sub Spindle	Live Tools	Slitting Saw	5540-000460	STA-5540-000460	1	Ø6mm	1:0.55	Single Ended, Adjustable +/- 1mm, Max Tool Ø50mm
SR-20RIV	Sub Spindle	Live Tools	Slitting Saw	5540-000461	STA-5540-000461	1	Ø8mm	1:0.55	Single Ended, Adjustable +/- 1mm, Max Tool Ø50mm
SR-20RIV	Sub Spindle	Live Tools	Slitting Saw	5540-000462	STA-5540-000462	1	Ø10mm	1:0.55	Single Ended, Adjustable +/- 1mm, Max Tool Ø50mm
SR-20RIV	Sub Spindle	Live Tools	Slitting Saw	5540-000463	STA-5540-000463	1	Ø12.7mm	1:0.55	Single Ended, Adjustable +/- 1mm, Max Tool Ø50mm
SR-20RIV	Sub Spindle	Live Tools	Slitting Saw	5540-000464	STA-5540-000464	1	Ø13mm	1:0.55	Single Ended, Adjustable +/- 1mm, Max Tool Ø50mm

Star SR-20II Machines



5540-000111
STA-PMU
Polygon Milling
SR-20II
Main Spindle
Output: 1:1
Single Ended

Star SR-20J Machines



5540-000113
STA-GSC110-GSI
Cross Drilling / Milling
SR-20J
Sub Spindle
Tool Size: ER16
Output: 1:1
Single Ended



5540-000114
STA-GSC3X-GSI
Cross Drilling / Milling
SR-20J
Tool Size: ER11
Output: 1:3
High Speed 18,000 Max RPM, Single Ended



5540-000116
STA-SCDM
Cross Drilling / Milling
SR-20J
Main Spindle
Tool Size: ER20M
Output: 1:1
Single Ended



5540-000155
STA-BWE11
Cross Drilling / Milling
SR-20J
Sub Spindle
Tool Size: ER11
Output: 1:1
Single Ended



5540-000158
STA-BW-GSC-E11
Cross Drilling / Milling
SR-20J
Sub Spindle
Tool Size: ER11A
Output: 1:0.55
Adjustable +/- 1mm, Single Ended



5540-000159
STA-SR-BWC16
Cross Drilling / Milling
SR-20J
Sub Spindle
Tool Size: ER16A
Output: 1:0.77
Adjustable +/- 1mm, Single Ended



5540-000166
STA-5540-000166
Cross Drilling / Milling
SR-20J
Sub Spindle
Tool Size: ER11M
Output: 1:1
Single Ended



5540-000121
STA-GSE210-GSI
End Drilling / Milling
SR-20J
Tool Size: ER16
Output: 1:1
Single Ended



5540-000122
STA-R124-3E16
End Drilling / Milling
SR-20J
Tool Size: ER16
Output: 1:1
Single Ended



5540-000128
STA-R093-DE2E1611
End Drilling / Milling
SR-20J
Tool Size: ER11, ER16
Output: 1:1
Double Ended, ER16 front facing, ER11 back facing



5540-000160
STA-SRBW-3E11
End Drilling / Milling
SR-20J
Sub Spindle
Tool Size: ER11M
Output: 1:1
Single Ended



5540-000163
STA-BWE16
End Drilling / Milling
SR-20J
Sub Spindle
Tool Size: ER16
Output: 1:1
Single Ended



5540-000112
STA-IDLER
Idler Shaft
SR-20J
Main Spindle



5540-000111
STA-PMU
Polygon Milling
SR-20J
Main Spindle
Tool Size:
Output: 1:1
Single Ended



5540-000146
STA-BWER20-8
Round Shank Tool Holder
SR-20J
Sub Spindle
Tool Size: ER20M
8mm Flange Thickness



5540-000147
STA-BWER20-CT
Round Shank Tool Holder
SR-20J
Sub Spindle
Tool Size: ER20M
Coolant Thru



5540-000148
STA-BWER20-10
Round Shank Tool Holder
SR-20J
Sub Spindle
Tool Size: ER20M
10mm Flange Thickness



5540-000149
STA-5540-000149
Round Shank Tool Holder
SR-20J
Sub Spindle
Tool Size: ER16M
8mm Flange Thickness



5540-000150
STA-BWER16-CT
Round Shank Tool Holder
SR-20J
Sub Spindle
Tool Size: ER16M
Coolant Thru



5540-000153
STA-BWER16-10
Round Shank Tool Holder
SR-20J
Sub Spindle
Tool Size: ER16M
10mm Flange Thickness



5540-000154
STA-5540-000154
Round Shank Tool Holder
SR-20J
Sub Spindle
Tool Size: MULTIPLE
Coolant Thru



5540-000199
STA-BW-3MM-ADJ
Round Shank Tool Holder
SR-20J
Sub Spindle
Tool Size: 3MM Bore
Adjustable +/- 1mm Y



5540-000200
STA-BW-4MM-ADJ
Round Shank Tool Holder
SR-20J
Sub Spindle
Tool Size: 4MM Bore
Adjustable +/- 1mm Y



5540-000201
STA-BW-5MM-ADJ
Round Shank Tool Holder
SR-20J
Sub Spindle
Tool Size: 5MM Bore
Adjustable +/- 1mm Y



5540-000202
STA-BW-6MM-ADJ
Round Shank Tool Holder
SR-20J
Sub Spindle
Tool Size: 6MM Bore
Adjustable +/- 1mm Y



5540-000203
STA-BW-8MM-ADJ
Round Shank Tool Holder
SR-20J
Sub Spindle
Tool Size: 8MM Bore
Adjustable +/- 1mm Y



5540-000204
STA-BW-9MM-ADJ
Round Shank Tool Holder
SR-20J
Sub Spindle
Tool Size: 9MM Bore
Adjustable +/- 1mm Y



5540-000205
STA-BW-10MM-ADJ
Round Shank Tool Holder
SR-20J
Sub Spindle
Tool Size: 10MM Bore
Adjustable +/- 1mm Y



5540-000206
STA-BW-12MM-ADJ
Round Shank Tool Holder
SR-20J
Sub Spindle
Tool Size: 12MM Bore
Adjustable +/- 1mm Y



5540-000207
STA-BW-16MM-ADJ
Round Shank Tool Holder
SR-20J
Sub Spindle
Tool Size: 16MM Bore
Adjustable +/- 1mm Y



5540-000120
STA-12.7SU
Slitting Saw
SR-20J
Main Spindle
Tool Size: Ø12.7mm
Output: 1:0.374
Single Ended, Max Tool
Ø50mm



5540-000118
STA-TWU-SR2032-20
Thread Whirling
SR-20J
Main Spindle
Adjustable +/- 20°



5540-000136
STA-5540-000136
Turning
SR-20J
Sub Spindle
Tool Size: 10x10mm



5540-000137
STA-5540-000137
Turning
SR-20J
Sub Spindle
Tool Size: DC.T11T3
Adjustable +/- 1mm Y



5540-000138
STA-5540-000138
Turning
SR-20J
Sub Spindle
Tool Size: 10x10mm
Adjustable +/- 1mm Y



5540-000141
STA-BWT20-DC11T
Turning
SR-20J
Sub Spindle
Tool Size: DC.T11T3
Adjustable +/- 1mm Y



5540-000142
STA-5540-000142
Turning
SR-20J
Sub Spindle
Tool Size: 12x12mm



5540-000143
STA-5540-000143
Turning
SR-20J
Sub Spindle
Tool Size: 12x12mm



5540-000454
STA-5540-000454
Turning
SR-20J
Sub Spindle
Tool Size: VC.T1103
Adjustable +/- 1mm Y

Star SR-20JC Machines



5540-000119
STA-3PDM
Cross Drilling / Milling
SR-20JC
Main Spindle
Tool Size: ER11M
Output: 1:1
Single Ended



5540-000166
STA-5540-000166
Cross Drilling / Milling
SR-20JC
Sub Spindle
Tool Size: ER11M
Output: 1:1
Single Ended



5540-000104
STA-5540-000104
End Drilling / Milling
SR-20JC
Sub Spindle
Tool Size: 22MM, 16MM
Single Ended



5540-000105
STA-5540-000105
End Drilling / Milling
SR-20JC
Sub Spindle
Tool Size: 22MM, 16MM
Single Ended

Star SR-20JN Machines



5540-000113
STA-GSC110-GSI
Cross Drilling / Milling
SR-20JN
Sub Spindle
Tool Size: ER16
Output: 1:1
Single Ended



5540-000114
STA-GSC3X-GSI
Cross Drilling / Milling
SR-20JN
Tool Size: ER11
Output: 1:3
High Speed 18,000 Max RPM,
Single Ended



5540-000116
STA-SCDM
Cross Drilling / Milling
SR-20JN
Main Spindle
Tool Size: ER20M
Output: 1:1
Single Ended



5540-000155
STA-BWE11
Cross Drilling / Milling
SR-20JN
Sub Spindle
Tool Size: ER11
Output: 1:1
Single Ended



5540-000166
STA-5540-000166
Cross Drilling / Milling
SR-20JN
Sub Spindle
Tool Size: ER11M
Output: 1:1
Single Ended



5540-000121
STA-GSE210-GSI
End Drilling / Milling
SR-20JN
Tool Size: ER16
Output: 1:1
Single Ended



5540-000122
STA-R124-3E16
End Drilling / Milling
SR-20JN
Tool Size: ER16
Output: 1:1
Single Ended



5540-000128
STA-R093-DE2E1611
End Drilling / Milling
SR-20JN
Tool Size: ER11, ER16
Output: 1:1
Double Ended, ER16 front facing, ER11 back facing



5540-000163
STA-BWE16
End Drilling / Milling
SR-20JN
Sub Spindle
Tool Size: ER16
Output: 1:1
Single Ended



5540-000112
STA-IDLER
Idler Shaft
SR-20JN
Main Spindle



5540-000111
STA-PMU
Polygon Milling
SR-20JN
Main Spindle
Output: 1:1
Single Ended



5540-000146
STA-BWER20-8
Round Shank Tool Holder
SR-20JN
Sub Spindle
Tool Size: ER20M
8mm Flange Thickness



5540-000147
STA-BWER20-CT
Round Shank Tool Holder
SR-20JN
Sub Spindle
Tool Size: ER20M
Coolant Thru



5540-000148
STA-BWER20-10
Round Shank Tool Holder
SR-20JN
Sub Spindle
Tool Size: ER20M
10mm Flange Thickness



5540-000149
STA-5540-000149
Round Shank Tool Holder
SR-20JN
Sub Spindle
Tool Size: ER16M
8mm Flange Thickness



5540-000150
STA-BWER16-CT
Round Shank Tool Holder
SR-20JN
Sub Spindle
Tool Size: ER16M
Coolant Thru



5540-000153
STA-BWER16-10
Round Shank Tool Holder
SR-20JN
Sub Spindle
Tool Size: ER16M
10mm Flange Thickness



5540-000120
STA-12.7SU
Slitting Saw
SR-20JN
Main Spindle
Tool Size: Ø12.7mm
Output: 1:0.374
Single Ended, Max Tool Ø50mm



5540-000118
STA-TWU-SR2032-20
Thread Whirling
SR-20JN
Main Spindle
Adjustable +/- 20°

Star SR-20N Machines



5540-000160
STA-SRBW-3E11
End Drilling / Milling
SR-20N
Sub Spindle
Tool Size: ER11M
Output: 1:1
Single Ended

Star SR-20N Machines



5540-000158
STA-BW-GSC-E11
Cross Drilling / Milling
SR-20R
Sub Spindle
Tool Size: ER11A
Output: 1:0.55
Adjustable +/- 1mm, Single Ended



5540-000159
STA-SR-BWC16
Cross Drilling / Milling
SR-20R
Sub Spindle
Tool Size: ER16A
Output: 1:0.77
Adjustable +/- 1mm, Single Ended



5540-000161
STA-5540-000161
Cross Drilling / Milling
SR-20R
Sub Spindle
Tool Size: ER11
Output: 1:1
Single Ended



5540-000168
STA-BWCSR20
Cross Drilling / Milling
SR-20R
Sub Spindle
Tool Size: ER11
Output: 1:1
Single Ended



5540-000170
STA-5540-000170
Cross Drilling / Milling
SR-20R
Sub Spindle
Tool Size: ER11
Output: 1:1
Single Ended



5540-000123
STA-5540-000123
End Drilling / Milling
SR-20R
Main Spindle
Tool Size: ER16M
Output: 1:1
Adjustable 0-90°, Single Ended



5540-000125
STA-5540-000125
End Drilling / Milling
SR-20R
Main Spindle
Tool Size: ER16M
Output: 1:1
Adjustable 0-90°, Single Ended



5540-000126
STA-5540-000126
End Drilling / Milling
SR-20R
Main Spindle
Tool Size: ER16M
Output: 1:1
Adjustable +/- 180°, Single Ended



5540-000132
STA-5540-000132
End Drilling / Milling
SR-20R
Main Spindle
Tool Size: ER16M, ER11M
Output: 1:1
Adjustable 0-90°, Double Ended



5540-000164
STA-5540-000164
End Drilling / Milling
SR-20R
Sub Spindle
Tool Size: ER11, ER11M
Output: 1:3
Driven Tool - ER11 / Fixed Tool ER11M, Single Ended



5540-000108
STA-GHU
Gear Hobbing
SR-20R
Main Spindle
Tool Size:
Output: 1:1
Adjustable +/- 20°, Single Ended



5540-000109
STA-3X22ID
Round Shank Tool Holder
SR-20R
Main Spindle
Tool Size: 22MM



5540-000117
STA-ATH3P
Round Shank Tool Holder
SR-20R
Main Spindle
Tool Size: 22MM
Adjustable +/- 20°



5540-000145
STA-5540-000145
Round Shank Tool Holder
SR-20R
Sub Spindle
Tool Size: ER11M



5540-000154
STA-5540-000154
Round Shank Tool Holder
SR-20R
Sub Spindle
Tool Size: MULTIPLE
Coolant Thru



5540-000190
STA-5540-000190
Round Shank Tool Holder
SR-20R
Sub Spindle
Tool Size: 3MM Bore



5540-000191
STA-BWSR-4MM
Round Shank Tool Holder
SR-20R
Sub Spindle
Tool Size: 4MM Bore



5540-000192
STA-5540-000192
Round Shank Tool Holder
SR-20R
Sub Spindle
Tool Size: 5MM Bore



5540-000193
STA-5540-000193
Round Shank Tool Holder
SR-20R
Sub Spindle
Tool Size: 6MM Bore



5540-000194
STA-BW0800
Round Shank Tool Holder
SR-20R
Sub Spindle
Tool Size: 8MM Bore



5540-000195
STA-5540-000195
Round Shank Tool Holder
SR-20R
Sub Spindle
Tool Size: 9MM Bore



5540-000196
STA-5540-000196
Round Shank Tool Holder
SR-20R
Sub Spindle
Tool Size: 10MM Bore



5540-000197
STA-BW1200
Round Shank Tool Holder
SR-20R
Sub Spindle
Tool Size: 12MM Bore



5540-000198
STA-5540-000198
Round Shank Tool Holder
SR-20R
Sub Spindle
Tool Size: 16MM Bore



5540-000199
STA-BW-3MM-ADJ
Round Shank Tool Holder
SR-20R
Sub Spindle
Tool Size: 3MM Bore
Adjustable +/- 1mm Y



5540-000200
STA-BW-4MM-ADJ
Round Shank Tool Holder
SR-20R
Sub Spindle
Tool Size: 4MM Bore
Adjustable +/- 1mm Y



5540-000201
STA-BW-5MM-ADJ
Round Shank Tool Holder
SR-20R
Sub Spindle
Tool Size: 5MM Bore
Adjustable +/- 1mm Y



5540-000202
STA-BW-6MM-ADJ
Round Shank Tool Holder
SR-20R
Sub Spindle
Tool Size: 6MM Bore
Adjustable +/- 1mm Y



5540-000203
STA-BW-8MM-ADJ
Round Shank Tool Holder
SR-20R
Sub Spindle
Tool Size: 8MM Bore
Adjustable +/- 1mm Y



5540-000204
STA-BW-9MM-ADJ
Round Shank Tool Holder
SR-20R
Sub Spindle
Tool Size: 9MM Bore
Adjustable +/- 1mm Y



5540-000205
STA-BW-10MM-ADJ
Round Shank Tool Holder
SR-20R
Sub Spindle
Tool Size: 10MM Bore
Adjustable +/- 1mm Y



5540-000206
STA-BW-12MM-ADJ
Round Shank Tool Holder
SR-20R
Sub Spindle
Tool Size: 12MM Bore
Adjustable +/- 1mm Y



5540-000207
STA-BW-16MM-ADJ
Round Shank Tool Holder
SR-20R
Sub Spindle
Tool Size: 16MM Bore
Adjustable +/- 1mm Y



5540-000156
STA-BWSS-A5MM
Slitting Saw
SR-20R
Sub Spindle
Tool Size: Ø5mm
Output: 1:0.55
Adjustable +/- 1mm, Single Ended, Max Tool Ø50mm



5540-000455
STA-5540-000455
Slitting Saw
SR-20R
Sub Spindle
Tool Size: Ø6mm
Output: 1:0.55
Adjustable +/- 1mm, Single Ended , Max Tool Ø50mm



5540-000456
STA-5540-000456
Slitting Saw
SR-20R
Sub Spindle
Tool Size: Ø8mm
Output: 1:0.55
Adjustable +/- 1mm, Single Ended , Max Tool Ø50mm



5540-000457
STA-5540-000457
Slitting Saw
SR-20R
Sub Spindle
Tool Size: Ø10mm
Output: 1:0.55
Adjustable +/- 1mm, Single Ended , Max Tool Ø50mm



5540-000458
STA-5540-000458
Slitting Saw
SR-20R
Sub Spindle
Tool Size: Ø12.7mm
Output: 1:0.55
Adjustable +/- 1mm, Single Ended , Max Tool Ø50mm



5540-000459
STA-5540-000459
Slitting Saw
SR-20R
Sub Spindle
Tool Size: Ø13mm
Output: 1:0.55
Adjustable +/- 1mm, Single Ended , Max Tool Ø50mm



5540-000136
STA-5540-000136
Turning
SR-20R
Sub Spindle
Tool Size: 10x10mm



5540-000137
STA-5540-000137
Turning
SR-20R
Sub Spindle
Tool Size: DC.T11T3
Adjustable +/- 1mm Y



5540-000138
STA-5540-000138
Turning
SR-20R
Sub Spindle
Tool Size: 10x10mm
Adjustable +/- 1mm Y



5540-000139
STA-5540-000139
Turning
SR-20R
Sub Spindle
Tool Size: 12MM



5540-000141
STA-BWT20-DC11T
Turning
SR-20R
Sub Spindle
Tool Size: DC.T11T3
Adjustable +/- 1mm Y



5540-000142
STA-5540-000142
Turning
SR-20R
Sub Spindle
Tool Size: 12x12mm



5540-000143
STA-5540-000143
Turning
SR-20R
Sub Spindle
Tool Size: 12x12mm



5540-000454
STA-5540-000454
Turning
SR-20R
Sub Spindle
Tool Size: VC.T1103
Adjustable +/- 1mm Y

Star SR-20II Machines



5540-000113
STA-GSC110-GSI
Cross Drilling / Milling
SR-20RII
Sub Spindle
Tool Size: ER16
Output: 1:1
Single Ended



5540-000114
STA-GSC3X-GSI
Cross Drilling / Milling
SR-20RII
Tool Size: ER11
Output: 1:3
High Speed 18,000 Max RPM,
Single Ended



5540-000116
STA-SCDM
Cross Drilling / Milling
SR-20RII
Main Spindle
Tool Size: ER20M
Output: 1:1
Single Ended



5540-000155
STA-BWE11
Cross Drilling / Milling
SR-20RII
Sub Spindle
Tool Size: ER11
Output: 1:1
Single Ended



5540-000121
STA-GSE210-GSI
End Drilling / Milling
SR-20RII
Tool Size: ER16
Output: 1:1
Single Ended



5540-000122
STA-R124-3E16
End Drilling / Milling
SR-20RII
Tool Size: ER16
Output: 1:1
Single Ended



5540-000128
STA-R093-DE2E1611
End Drilling / Milling
SR-20RII
Tool Size: ER11, ER16
Output: 1:1
Double Ended, ER16 front facing, ER11 back facing



5540-000163
STA-BWE16
End Drilling / Milling
SR-20RII
Sub Spindle
Tool Size: ER16
Output: 1:1
Single Ended



5540-000112
STA-IDLER
Idler Shaft
SR-20RII
Main Spindle



5540-000146
STA-BWER20-8
Round Shank Tool Holder
SR-20RII
Sub Spindle
Tool Size: ER20M
8mm Flange Thickness



5540-000147
STA-BWER20-CT
Round Shank Tool Holder
SR-20RII
Sub Spindle
Tool Size: ER20M
Coolant Thru



5540-000148
STA-BWER20-10
Round Shank Tool Holder
SR-20RII
Sub Spindle
Tool Size: ER20M
10mm Flange Thickness



5540-000149
STA-5540-000149
Round Shank Tool Holder
SR-20RII
Sub Spindle
Tool Size: ER16M
8mm Flange Thickness



5540-000150
STA-BWER16-CT
Round Shank Tool Holder
SR-20RII
Sub Spindle
Tool Size: ER16M
Coolant Thru



5540-000153
STA-BWER16-10
Round Shank Tool Holder
SR-20RII
Sub Spindle
Tool Size: ER16M
10mm Flange Thickness



5540-000120
STA-12.7SU
Slitting Saw
SR-20RII
Main Spindle
Tool Size: Ø12.7mm
Output: 1:0.374
Single Ended, Max Tool Ø50mm



5540-000118
STA-TWU-SR2032-20
Thread Whirling
SR-20RII
Main Spindle
Adjustable +/- 20°



5540-000113
STA-GSC110-GSI
Cross Drilling / Milling
SR-20RIII
Sub Spindle
Tool Size: ER16
Output: 1:1
Single Ended

Star SR-20III Machines



5540-000114
STA-GSC3X-GSI
Cross Drilling / Milling
SR-20RIII
Tool Size: ER11
Output: 1:3
High Speed 18,000 Max RPM, Single Ended, Single Ended



5540-000115
STA-A120-E16-GSI
Cross Drilling / Milling
SR-20RIII
Tool Size: ER16
Single Ended



5540-000115
STA-A120-E16-GSI
Cross Drilling / Milling
SR-20RIII
Tool Size: ER16
Single Ended



5540-000116
STA-SCDM
Cross Drilling / Milling
SR-20RIII
Main Spindle
Tool Size: ER20M
Output: 1:1
Single Ended



5540-000155
STA-BWE11
Cross Drilling / Milling
SR-20RIII
Sub Spindle
Tool Size: ER11
Output: 1:1
Single Ended



5540-000166
STA-5540-000166
Cross Drilling / Milling
SR-20RIII
Sub Spindle
Tool Size: ER11M
Output: 1:1
Single Ended



5540-000121
STA-GSE210-GSI
End Drilling / Milling
SR-20RIII
Tool Size: ER16
Output: 1:1
Single Ended



5540-000122
STA-R124-3E16
End Drilling / Milling
SR-20RIII
Tool Size: ER16
Output: 1:1
Single Ended



5540-000128
STA-R093-DE2E1611
End Drilling / Milling
SR-20RIII
Tool Size: ER11, ER16
Output: 1:1
Double Ended, ER16 front facing, ER11 back facing



5540-000160
STA-SRBW-3E11
End Drilling / Milling
SR-20RIII
Sub Spindle
Tool Size: ER11M
Output: 1:1
Single Ended



5540-000163
STA-BWE16
End Drilling / Milling
SR-20RIII
Sub Spindle
Tool Size: ER16
Output: 1:1
Single Ended



5540-000112
STA-IDLER
Idler Shaft
SR-20RIII
Main Spindle



5540-000111
STA-PMU
Polygon Milling
SR-20RIII
Main Spindle
Output: 1:1
Single Ended



5540-000146
STA-BWER20-8
Round Shank Tool Holder
SR-20RIII
Sub Spindle
Tool Size: ER20M
8mm Flange Thickness



5540-000147
STA-BWER20-CT
Round Shank Tool Holder
SR-20RIII
Sub Spindle
Tool Size: ER20M
Coolant Thru



5540-000148
STA-BWER20-10
Round Shank Tool Holder
SR-20RIII
Sub Spindle
Tool Size: ER20M
10mm Flange Thickness



5540-000149
STA-5540-000149
Round Shank Tool Holder
SR-20RIII
Sub Spindle
Tool Size: ER16M
8mm Flange Thickness



5540-000150
STA-BWER16-CT
Round Shank Tool Holder
SR-20RIII
Sub Spindle
Tool Size: ER16M
Coolant Thru



5540-000153
STA-BWER16-10
Round Shank Tool Holder
SR-20RIII
Sub Spindle
Tool Size: ER16M
10mm Flange Thickness



5540-000120
STA-12.7SU
Slitting Saw
SR-20RIII
Main Spindle
Tool Size: Ø12.7mm
Output: 1:0.374
Single Ended, Max Tool Ø50mm



5540-000118
STA-TWU-SR2032-20
Thread Whirling
SR-20RIII
Main Spindle
Adjustable +/- 20°

Star SR-20IV Machines



5540-000113
STA-GSC110-GSI
Cross Drilling / Milling
SR-20RIV
Sub Spindle
Tool Size: ER16
Output: 1:1
Single Ended



5540-000114
STA-GSC3X-GSI
Cross Drilling / Milling
SR-20RIV
Tool Size: ER11
Output: 1:3
High Speed 18,000 Max RPM, Single Ended, Single Ended



5540-000115
STA-A120-E16-GSI
Cross Drilling / Milling
SR-20RIV
Tool Size: ER16
Single Ended



5540-000116
STA-SCDM
Cross Drilling / Milling
SR-20RIV
Main Spindle
Tool Size: ER20M
Output: 1:1
Single Ended



5540-000155
STA-BWE11
Cross Drilling / Milling
SR-20RIV
Sub Spindle
Tool Size: ER11
Output: 1:1
Single Ended



5540-000167
STA-0R151
Cross Drilling / Milling
SR-20RIV
Sub Spindle
Tool Size: ER16M
Output: 1:1
Single Ended



5540-000121
STA-GSE210-GSI
End Drilling / Milling
SR-20RIV
Tool Size: ER16
Output: 1:1
Single Ended



5540-000122
STA-R124-3E16
End Drilling / Milling
SR-20RIV
Tool Size: ER16
Output: 1:1
Single Ended



5540-000128
STA-R093-DE2E1611
End Drilling / Milling
SR-20RIV
Tool Size: ER11, ER16
Output: 1:1
Double Ended, ER16 front facing, ER11 back facing



5540-000129
STA-R623131-DE-3E16-11
End Drilling / Milling
SR-20RIV
Main Spindle
Tool Size: ER16M, ER11M
Output: 1:1
Double Ended



5540-000163
STA-BWE16
End Drilling / Milling
SR-20RIV
Sub Spindle
Tool Size: ER16
Output: 1:1
Single Ended



5540-000146
STA-BWER20-8
Round Shank Tool Holder
SR-20RIV
Sub Spindle
Tool Size: ER20M



5540-000147
STA-BWER20-CT
Round Shank Tool Holder
SR-20RIV
Sub Spindle
Tool Size: ER20M
Coolant Thru



5540-000148
STA-BWER20-10
Round Shank Tool Holder
SR-20RIV
Sub Spindle
Tool Size: ER20M
10mm Flange Thickness



5540-000149
STA-5540-000149
Round Shank Tool Holder
SR-20RIV
Sub Spindle
Tool Size: ER16M
8mm Flange Thickness



5540-000150
STA-BWER16-CT
Round Shank Tool Holder
SR-20RIV
Sub Spindle
Tool Size: ER16M
Coolant Thru



5540-000153
STA-BWER16-10
Round Shank Tool Holder
SR-20RIV
Sub Spindle
Tool Size: ER16M
10mm Flange Thickness



5540-000184
STA-5540-000184
Round Shank Tool Holder
SR-20RIV
Sub Spindle
Tool Size: 6MM Bore
Coolant Thru



5540-000185
STA-5540-000185
Round Shank Tool Holder
SR-20RIV
Sub Spindle
Tool Size: 8MM Bore
Coolant Thru



5540-000186
STA-5540-000186
Round Shank Tool Holder
SR-20RIV
Sub Spindle
Tool Size: 9MM Bore
Coolant Thru



5540-000187
STA-5540-000187
Round Shank Tool Holder
SR-20RIV
Sub Spindle
Tool Size: 10MM Bore
Coolant Thru



5540-000188
STA-5540-000188
Round Shank Tool Holder
SR-20RIV
Sub Spindle
Tool Size: 12MM Bore
Coolant Thru



5540-000189
STA-5540-000189
Round Shank Tool Holder
SR-20RIV
Sub Spindle
Tool Size: 16MM Bore
Coolant Thru



5540-000120
STA-12.7SU
Slitting Saw
SR-20RIV
Main Spindle
Tool Size: Ø12.7mm
Output: 1:0.374
Single Ended, Max Tool Ø50mm



5540-000157
STA-BWSS-5MM
Slitting Saw
SR-20RIV
Sub Spindle
Tool Size: Ø5mm
Output: 1:0.55
Single Ended, Adjustable +/- 1mm, Max Tool Ø50mm



5540-000460
STA-5540-000460
Slitting Saw
SR-20RIV
Sub Spindle
Tool Size: Ø6mm
Output: 1:0.55
Single Ended, Adjustable +/- 1mm, Max Tool Ø50mm



5540-000461
STA-5540-000461
Slitting Saw
SR-20RIV
Sub Spindle
Tool Size: Ø8mm
Output: 1:0.55
Single Ended, Adjustable +/- 1mm, Max Tool Ø50mm



5540-000462
STA-5540-000462
Slitting Saw
SR-20RIV
Sub Spindle
Tool Size: Ø10mm
Output: 1:0.55
Single Ended, Adjustable +/- 1mm, Max Tool Ø50mm



5540-000463
STA-5540-000463
Slitting Saw
SR-20RIV
Sub Spindle
Tool Size: Ø12.7mm
Output: 1:0.55
Single Ended, Adjustable +/- 1mm, Max Tool Ø50mm



5540-000464
STA-5540-000464
Slitting Saw
SR-20RIV
Sub Spindle
Tool Size: Ø13mm
Output: 1:0.55
Single Ended, Adjustable +/- 1mm, Max Tool Ø50mm



5540-000118
STA-TWU-SR2032-20
Thread Whirling
SR-20RIV
Main Spindle
Adjustable +/- 20°



5540-000140
STA-5540-000140
Turning
SR-20RIV
Sub Spindle
Tool Size: 10x10mm

SR-32

Machine	Work Location	Live or Static	Operation	Item No.	Description	# of Tool Positions	Tool Size	Output	Other
SR-32J	Main Spindle	Live Tools	Gear Hobbing	5540-000108	STA-GHU	1		1:1	Single Ended, Adjustable +/- 20°
SR-32J	Main Spindle	Static Tool	Idler Shaft	5540-000112	STA-IDLER				
SR-32J	Sub Spindle	Live Tools	Cross Drilling / Milling	5540-000113	STA-GSC110-GSI	1	ER16	1:1	Single Ended
SR-32J		Live Tools	Cross Drilling / Milling	5540-000114	STA-GSC3X-GSI	1	ER11	1:3	High Speed 18,000 Max RPM, Single Ended
SR-32J	Main Spindle	Live Tools	Cross Drilling / Milling	5540-000116	STA-SCDM	1	ER20M	1:1	Single Ended
SR-32J	Main Spindle	Static Tool	Round Shank Tool Holder	5540-000117	STA-ATH3P	3	22MM		Adjustable +/- 20°
SR-32J	Main Spindle	Live Tools	Thread Whirling	5540-000118	STA-TWU-SR2032-20	1			Adjustable +/- 20°
SR-32J	Main Spindle	Live Tools	Slitting Saw	5540-000120	STA-12.7SU	1	Ø12.7mm	1:0.374	Single Ended, Max Tool Ø50mm
SR-32J	Main Spindle	Live Tools	End Drilling / Milling	5540-000124	STA-SR32GSA-2E16-180	2	ER16M	1:1	Single Ended, Adjustable +/- 180°
SR-32J	Main Spindle	Live Tools	End Drilling / Milling	5540-000129	STA-R623131-DE-3E16-11	6	ER16M, ER11M	1:1	Double Ended
SR-32J		Live Tools	End Drilling / Milling	5540-000131	STA-SR32J-GSE3710-GSI	3	ER16	1:1	Single Ended
SR-32J	Main Spindle	Live Tools	End Drilling / Milling	5540-000133	STA-5540-000133	6	ER16M, ER11M	1:1	Double Ended, Adjustable 0-90°
SR-32J	Sub Spindle	Static Tool	Turning	5540-000137	STA-5540-000137	1	DC.T11T3		Adjustable +/- 1mm Y
SR-32J	Sub Spindle	Static Tool	Turning	5540-000138	STA-5540-000138	1	10x10mm		Adjustable +/- 1mm Y
SR-32J	Sub Spindle	Static Tool	Turning	5540-000141	STA-BWT20-DC11T	1	DC.T11T3		Adjustable +/- 1mm Y
SR-32J	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000146	STA-BWER20-8	1	ER20M		8mm Flange Thickness
SR-32J	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000147	STA-BWER20-CT	1	ER20M		
SR-32J	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000148	STA-BWER20-10	1	ER20M		10mm Flange Thickness
SR-32J	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000149	STA-5540-000149	1	ER16M		8mm Flange Thickness
SR-32J	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000150	STA-BWER16-CT	1	ER16M		
SR-32J	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000153	STA-BWER16-10	1	ER16M		10mm Flange Thickness
SR-32J	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000154	STA-5540-000154	1	MULTIPLE		
SR-32J	Sub Spindle	Live Tools	Cross Drilling / Milling	5540-000155	STA-BWE11	1	ER11	1:1	Single Ended
SR-32J	Sub Spindle	Live Tools	End Drilling / Milling	5540-000163	STA-BWE16	1	ER16	1:1	Single Ended
SR-32J	Sub Spindle	Live Tools	Cross Drilling / Milling	5540-000171	STA-BWC-E11	1	ER11	1:1	Single Ended
SR-32J	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000199	STA-BW-3MM-ADJ	1	3MM Bore		Adjustable +/- 1mm Y
SR-32J	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000200	STA-BW-4MM-ADJ	1	4MM Bore		Adjustable +/- 1mm Y
SR-32J	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000201	STA-BW-5MM-ADJ	1	5MM Bore		Adjustable +/- 1mm Y
SR-32J	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000202	STA-BW-6MM-ADJ	1	6MM Bore		Adjustable +/- 1mm Y
SR-32J	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000203	STA-BW-8MM-ADJ	1	8MM Bore		Adjustable +/- 1mm Y
SR-32J	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000204	STA-BW-9MM-ADJ	1	9MM Bore		Adjustable +/- 1mm Y
SR-32J	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000205	STA-BW-10MM-ADJ	1	10MM Bore		Adjustable +/- 1mm Y
SR-32J	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000206	STA-BW-12MM-ADJ	1	12MM Bore		Adjustable +/- 1mm Y
SR-32J	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000207	STA-BW-16MM-ADJ	1	16MM Bore		Adjustable +/- 1mm Y
SR-32J	Main Spindle	Live Tools	End Drilling / Milling	5540-000453	STA-5540-000453	3	ER16M	1:1	Single Ended, Adjustable 0-90°
SR-32J	Sub Spindle	Static Tool	Turning	5540-000454	STA-5540-000454	1	VC.T1103		Adjustable +/- 1mm Y
SR-32JII	Sub Spindle	Live Tools	Cross Drilling / Milling	5540-000113	STA-GSC110-GSI	1	ER16	1:1	Single Ended
SR-32JII		Live Tools	Cross Drilling / Milling	5540-000114	STA-GSC3X-GSI	1	ER11	1:3	High Speed 18,000 Max RPM, Single Ended
SR-32JII		Live Tools	End Drilling / Milling	5540-000130	STA-5540-000130	6	ER11, ER16		Double Ended
SR-32JII	Sub Spindle	Live Tools	Cross Drilling / Milling	5540-000155	STA-BWE11	1	ER11	1:1	Single Ended
SR-32JII	Sub Spindle	Live Tools	End Drilling / Milling	5540-000163	STA-BWE16	1	ER16	1:1	Single Ended
SR-32JII-A	Main Spindle	Static Tool	Idler Shaft	5540-000112	STA-IDLER				
SR-32JII-A	Main Spindle	Live Tools	Slitting Saw	5540-000120	STA-12.7SU	1	Ø12.7mm	1:0.374	Single Ended, Max Tool Ø50mm
SR-32JII-A	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000149	STA-5540-000149	1	ER16M		8mm Flange Thickness
SR-32JII-A	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000150	STA-BWER16-CT	1	ER16M		Coolant Thru
SR-32JII-A	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000153	STA-BWER16-10	1	ER16M		10mm Flange Thickness
SR-32JII-A	Sub Spindle	Live Tools	End Drilling / Milling	5540-000165	STA-STBWR20-E16	1	ER16	1:1	Single Ended
SR-32JII-A	Main Spindle	Live Tools	Cross Drilling / Milling	5540-000116	STA-SCDM	1	ER20M	1:1	Single Ended
SR-32JII-A	Main Spindle	Live Tools	Thread Whirling	5540-000118	STA-TWU-SR2032-20	1			Adjustable +/- 20°
SR-32JII-A	Main Spindle	Live Tools	End Drilling / Milling	5540-000129	STA-R623131-DE-3E16-11	6	ER16M, ER11M	1:1	Double Ended
SR-32JII-A		Live Tools	End Drilling / Milling	5540-000131	STA-SR32J-GSE3710-GSI	3	ER16	1:1	Single Ended
SR-32JII-A	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000146	STA-BWER20-8	1	ER20M		8mm Flange Thickness
SR-32JII-A	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000147	STA-BWER20-CT	1	ER20M		Coolant Thru
SR-32JII-A	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000148	STA-BWER20-10	1	ER20M		10mm Flange Thickness
SR-32JII-B	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000106	STA-20SDH	1	ER20M		
SR-32JII-B	Main Spindle	Static Tool	Idler Shaft	5540-000112	STA-IDLER				
SR-32JII-B	Main Spindle	Live Tools	Cross Drilling / Milling	5540-000116	STA-SCDM	1	ER20M	1:1	Single Ended
SR-32JII-B	Main Spindle	Live Tools	Thread Whirling	5540-000118	STA-TWU-SR2032-20	1			Adjustable +/- 20°
SR-32JII-B	Main Spindle	Live Tools	Slitting Saw	5540-000120	STA-12.7SU	1	Ø12.7mm	1:0.374	Single Ended, Max Tool Ø50mm
SR-32JII-B	Main Spindle	Live Tools	End Drilling / Milling	5540-000129	STA-R623131-DE-3E16-11	6	ER16M, ER11M	1:1	Double Ended
SR-32JII-B		Live Tools	End Drilling / Milling	5540-000131	STA-SR32J-GSE3710-GSI	3	ER16	1:1	Single Ended
SR-32JII-B	Sub Spindle	Live Tools	End Drilling / Milling	5540-000165	STA-STBWR20-E16	1	ER16	1:1	Single Ended
SR-32JII-B	Sub Spindle	Live Tools	Cross Drilling / Milling	5540-000167	STA-0R151	1	ER16M	1:1	Single Ended
SR-32JIII	Sub Spindle	Live Tools	Cross Drilling / Milling	5540-000113	STA-GSC110-GSI	1	ER16	1:1	Single Ended
SR-32JIII		Live Tools	Cross Drilling / Milling	5540-000114	STA-GSC3X-GSI	1	ER11	1:3	High Speed 18,000 Max RPM, Single Ended

SR-32 Continued On Next Page

SR-32

Machine	Work Location	Live or Static	Operation	Item No.	Description	# of Tool Positions	Tool Size	Output	Other
SR-32JN	Main Spindle	Static Tool	Idler Shaft	5540-000112	STA-IDLER				
SR-32JN	Sub Spindle	Live Tools	Cross Drilling / Milling	5540-000113	STA-GSC110-GSI	1	ER16	1:1	Single Ended
SR-32JN		Live Tools	Cross Drilling / Milling	5540-000114	STA-GSC3X-GSI	1	ER11	1:3	High Speed 18,000 Max RPM, Single Ended
SR-32JN	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000146	STA-BWER20-8	1	ER20M		8mm Flange Thickness
SR-32JN	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000147	STA-BWER20-CT	1	ER20M		Coolant Thru
SR-32JN	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000148	STA-BWER20-10	1	ER20M		10mm Flange Thickness
SR-32JN	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000149	STA-5540-000149	1	ER16M		8mm Flange Thickness
SR-32JN	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000150	STA-BWER16-CT	1	ER16M		Coolant Thru
SR-32JN	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000153	STA-BWER16-10	1	ER16M		10mm Flange Thickness
SR-32JN	Sub Spindle	Live Tools	Cross Drilling / Milling	5540-000155	STA-BWE11	1	ER11	1:1	Single Ended
SR-32JN	Sub Spindle	Live Tools	End Drilling / Milling	5540-000163	STA-BWE16	1	ER16	1:1	Single Ended
SR-32JN	Main Spindle	Live Tools	Cross Drilling / Milling	5540-000116	STA-SCDM	1	ER20M	1:1	Single Ended
SR-32JN	Main Spindle	Live Tools	Thread Whirling	5540-000118	STA-TWU-SR2032-20	1			Adjustable +/- 20°
SR-32JN	Main Spindle	Live Tools	Slitting Saw	5540-000120	STA-12.7SU	1	Ø12.7mm	1:0.374	Single Ended, Max Tool Ø50mm
SR-32JN	Main Spindle	Live Tools	End Drilling / Milling	5540-000129	STA-R623131-DE-3E16-11	6	ER16M, ER11M	1:1	Double Ended
SR-32JN		Live Tools	End Drilling / Milling	5540-000131	STA-SR32J-GSE3710-GSI	3	ER16	1:1	Single Ended

Star SR-32J Machines



5540-000113
STA-GSC110-GSI
Cross Drilling / Milling
SR-32J
Sub Spindle
Tool Size: ER16
Output: 1:1
Single Ended



5540-000114
STA-GSC3X-GSI
Cross Drilling / Milling
SR-32J
Tool Size: ER11
Output: 1:3
High Speed 18,000 Max RPM, Single Ended



5540-000116
STA-SCDM
Cross Drilling / Milling
SR-32J
Main Spindle
Tool Size: ER20M
Output: 1:1
Single Ended



5540-000155
STA-BWE11
Cross Drilling / Milling
SR-32J
Sub Spindle
Tool Size: ER11
Output: 1:1
Single Ended



5540-000171
STA-BWC-E11
Cross Drilling / Milling
SR-32J
Sub Spindle
Tool Size: ER11
Output: 1:1
Single Ended



5540-000124
STA-SR32GSA-2E16-180
End Drilling / Milling
SR-32J
Main Spindle
Tool Size: ER16M
Output: 1:1
Single Ended, Adjustable +/- 180°



5540-000129
STA-R623131-DE-3E16-11
End Drilling / Milling
SR-32J
Main Spindle
Tool Size: ER16M, ER11M
Output: 1:1
Double Ended



5540-000131
STA-SR32J-GSE3710-GSI
End Drilling / Milling
SR-32J
Tool Size: ER16
Output: 1:1
Single Ended



5540-000133
STA-5540-000133
End Drilling / Milling
SR-32J
Main Spindle
Tool Size: ER16M, ER11M
Output: 1:1
Double Ended, Adjustable 0-90°



5540-000163
STA-BWE16
End Drilling / Milling
SR-32J
Sub Spindle
Tool Size: ER16
Output: 1:1
Single Ended



5540-000453
STA-5540-000453
End Drilling / Milling
SR-32J
Main Spindle
Tool Size: ER16M
Output: 1:1
Single Ended, Adjustable 0-90°



5540-000108
STA-GHU
Gear Hobbing
SR-32J
Main Spindle
Tool Size:
Output: 1:1
Single Ended, Adjustable +/- 20°



5540-000112
STA-IDLER
Idler Shaft
SR-32J
Main Spindle



5540-000117
STA-ATH3P
Round Shank Tool Holder
SR-32J
Main Spindle
Tool Size: 22MM
Adjustable +/- 20°



5540-000146
STA-BWER20-8
Round Shank Tool Holder
SR-32J
Sub Spindle
Tool Size: ER20M
8mm Flange Thickness



5540-000147
STA-BWER20-CT
Round Shank Tool Holder
SR-32J
Sub Spindle
Tool Size: ER20M
Output:



5540-000148
STA-BWER20-10
Round Shank Tool Holder
SR-32J
Sub Spindle
Tool Size: ER20M
Output:
10mm Flange Thickness



5540-000149
STA-5540-000149
Round Shank Tool Holder
SR-32J
Sub Spindle
Tool Size: ER16M
Output:
8mm Flange Thickness



5540-000150
STA-BWER16-CT
Round Shank Tool Holder
SR-32J
Sub Spindle
Tool Size: ER16M



5540-000153
STA-BWER16-10
Round Shank Tool Holder
SR-32J
Sub Spindle
Tool Size: ER16M
10mm Flange Thickness



5540-000154
STA-5540-000154
Round Shank Tool Holder
SR-32J
Sub Spindle
Tool Size: MULTIPLE



5540-000199
STA-BW-3MM-ADJ
Round Shank Tool Holder
SR-32J
Sub Spindle
Tool Size: 3MM Bore
Adjustable +/- 1mm Y



5540-000200
STA-BW-4MM-ADJ
Round Shank Tool Holder
SR-32J
Sub Spindle
Tool Size: 4MM Bore
Adjustable +/- 1mm Y



5540-000201
STA-BW-5MM-ADJ
Round Shank Tool Holder
SR-32J
Sub Spindle
Tool Size: 5MM Bore
Adjustable +/- 1mm Y



5540-000202
STA-BW-6MM-ADJ
Round Shank Tool Holder
SR-32J
Sub Spindle
Tool Size: 6MM Bore
Adjustable +/- 1mm Y



5540-000203
STA-BW-8MM-ADJ
Round Shank Tool Holder
SR-32J
Sub Spindle
Tool Size: 8MM Bore
Adjustable +/- 1mm Y



5540-000204
STA-BW-9MM-ADJ
Round Shank Tool Holder
SR-32J
Sub Spindle
Tool Size: 9MM Bore
Adjustable +/- 1mm Y



5540-000205
STA-BW-10MM-ADJ
Round Shank Tool Holder
SR-32J
Sub Spindle
Tool Size: 10MM Bore
Adjustable +/- 1mm Y



5540-000206
STA-BW-12MM-ADJ
Round Shank Tool Holder
SR-32J
Sub Spindle
Tool Size: 12MM Bore
Adjustable +/- 1mm Y



5540-000207
STA-BW-16MM-ADJ
Round Shank Tool Holder
SR-32J
Sub Spindle
Tool Size: 16MM Bore
Adjustable +/- 1mm Y



5540-000120
STA-12.7SU
Slitting Saw
SR-32J
Main Spindle
Tool Size: Ø12.7mm
Output: 1:0.374
Single Ended, Max Tool Ø50mm



5540-000118
STA-TWU-SR2032-20
Thread Whirling
SR-32J
Main Spindle
Adjustable +/- 20°



5540-000137
STA-5540-000137
Turning
SR-32J
Sub Spindle
Tool Size: DC.T11T3
Adjustable +/- 1mm Y



5540-000138
STA-5540-000138
Turning
SR-32J
Sub Spindle
Tool Size: 10x10mm
Adjustable +/- 1mm Y



5540-000141
STA-BWT20-DC11T
Turning
SR-32J
Sub Spindle
Tool Size: DC.T11T3
Adjustable +/- 1mm Y



5540-000454
STA-5540-000454
Turning
SR-32J
Sub Spindle
Tool Size: VC.T1103
Adjustable +/- 1mm Y



5540-000113
STA-GSC110-GSI
Cross Drilling / Milling
SR-32JII
Sub Spindle
Tool Size: ER16
Output: 1:1
Single Ended



5540-000114
STA-GSC3X-GSI
Cross Drilling / Milling
SR-32JII
Tool Size: ER11
Output: 1:3
High Speed 18,000 Max RPM,
Single Ended



5540-000155
STA-BWE11
Cross Drilling / Milling
SR-32JII
Sub Spindle
Tool Size: ER11
Output: 1:1
Single Ended



5540-000130
STA-5540-000130
End Drilling / Milling
SR-32JII
Tool Size: ER11, ER16
Double Ended



5540-000163
STA-BWE16
End Drilling / Milling
SR-32JII
Sub Spindle
Tool Size: ER16
Output: 1:1
Single Ended



5540-000116
STA-SCDM
Cross Drilling / Milling
SR-32JII-A
Main Spindle
Tool Size: ER20M
Output: 1:1
Single Ended



5540-000165
STA-STBWR20-E16
End Drilling / Milling
SR-32JII-A
Sub Spindle
Tool Size: ER16
Output: 1:1
Single Ended



5540-000129
STA-R623131-DE-3E16-11
End Drilling / Milling
SR-32JII-A
Main Spindle
Tool Size: ER16M, ER11M
Output: 1:1
Double Ended



5540-000131
STA-SR32J-GSE3710-GSI
End Drilling / Milling
SR-32JII-A
Tool Size: ER16
Output: 1:1
Single Ended



5540-000112
STA-IDLER
Idler Shaft
SR-32JII-A
Main Spindle



5540-000149
STA-5540-000149
Round Shank Tool Holder
SR-32JII-A
Sub Spindle
Tool Size: ER16M
8mm Flange Thickness



5540-000150
STA-BWER16-CT
Round Shank Tool Holder
SR-32JII-A
Sub Spindle
Tool Size: ER16M
Coolant Thru



5540-000153
STA-BWER16-10
Round Shank Tool Holder
SR-32JII-A
Sub Spindle
Tool Size: ER16M
10mm Flange Thickness



5540-000146
STA-BWER20-8
Round Shank Tool Holder
SR-32JII-A
Sub Spindle
Tool Size: ER20M
8mm Flange Thickness



5540-000147
STA-BWER20-CT
Round Shank Tool Holder
SR-32JII-A
Sub Spindle
Tool Size: ER20M
Coolant Thru



5540-000148
STA-BWER20-10
Round Shank Tool Holder
SR-32JII-A
Sub Spindle
Tool Size: ER20M
10mm Flange Thickness



5540-000120
STA-12.7SU
Slitting Saw
SR-32JII-A
Main Spindle
Tool Size: Ø12.7mm
Output: 1:0.374
Single Ended, Max Tool
Ø50mm



5540-000118
STA-TWU-SR2032-20
Thread Whirling
SR-32JII-A
Main Spindle
Adjustable +/- 20°



5540-000116
STA-SCDM
Cross Drilling / Milling
SR-32JII-B
Main Spindle
Tool Size: ER20M
Output: 1:1
Single Ended



5540-000167
STA-0R151
Cross Drilling / Milling
SR-32JII-B
Sub Spindle
Tool Size: ER16M
Output: 1:1
Single Ended



5540-000129
STA-R623131-DE-3E16-11
End Drilling / Milling
SR-32JII-B
Main Spindle
Tool Size: ER16M, ER11M
Output: 1:1
Double Ended



5540-000131
STA-SR32J-GSE3710-GSI
End Drilling / Milling
SR-32JII-B
Tool Size: ER16
Output: 1:1
Single Ended



5540-000165
STA-STBWR20-E16
End Drilling / Milling
SR-32JII-B
Sub Spindle
Tool Size: ER16
Output: 1:1
Single Ended



5540-000112
STA-IDLER
Idler Shaft
SR-32JII-B
Main Spindle



5540-000106
STA-20SDH
Round Shank Tool Holder
SR-32JII-B
Sub Spindle
Tool Size: ER20M



5540-000120
STA-12.7SU
Slitting Saw
SR-32JII-B
Main Spindle
Tool Size: Ø12.7mm
Output: 1:0.374
Single Ended, Max Tool Ø50mm



5540-000118
STA-TWU-SR2032-20
Thread Whirling
SR-32JII-B
Main Spindle
Adjustable +/- 20°



5540-000113
STA-GSC110-GSI
Cross Drilling / Milling
SR-32JIII
Sub Spindle
Tool Size: ER16
Output: 1:1
Single Ended



5540-000114
STA-GSC3X-GSI
Cross Drilling / Milling
SR-32JIII
Tool Size: ER11
Output: 1:3
High Speed 18,000 Max RPM, Single Ended



5540-000113
STA-GSC110-GSI
Cross Drilling / Milling
SR-32JN
Sub Spindle
Tool Size: ER16
Output: 1:1
Single Ended



5540-000114
STA-GSC3X-GSI
Cross Drilling / Milling
SR-32JN
Tool Size: ER11
Output: 1:3
High Speed 18,000 Max RPM, Single Ended



5540-000155
STA-BWE11
Cross Drilling / Milling
SR-32JN
Sub Spindle
Tool Size: ER11
Output: 1:1
Single Ended



5540-000116
STA-SCDM
Cross Drilling / Milling
SR-32JN
Main Spindle
Tool Size: ER20M
Output: 1:1
Single Ended



5540-000163
STA-BWE16
End Drilling / Milling
SR-32JN
Sub Spindle
Tool Size: ER16
Output: 1:1
Single Ended



5540-000129
STA-R623131-DE-3E16-11
End Drilling / Milling
SR-32JN
Main Spindle
Tool Size: ER16M, ER11M
Output: 1:1
Double Ended



5540-000131
STA-SR32J-GSE3710-GSI
End Drilling / Milling
SR-32JN
Tool Size: ER16
Output: 1:1
Single Ended



5540-000112
STA-IDLER
Idler Shaft
SR-32JN
Main Spindle



5540-000146
STA-BWER20-8
Round Shank Tool Holder
SR-32JN
Sub Spindle
Tool Size: ER20M
8mm Flange Thickness



5540-000147
STA-BWER20-CT
Round Shank Tool Holder
SR-32JN
Sub Spindle
Tool Size: ER20M
Coolant Thru



5540-000148
STA-BWER20-10
Round Shank Tool Holder
SR-32JN
Sub Spindle
Tool Size: ER20M
10mm Flange Thickness



5540-000149
STA-5540-000149
Round Shank Tool Holder
SR-32JN
Sub Spindle
Tool Size: ER16M
8mm Flange Thickness



5540-000150
STA-BWER16-CT
Round Shank Tool Holder
SR-32JN
Sub Spindle
Tool Size: ER16M
Coolant Thru



5540-000153
STA-BWER16-10
Round Shank Tool Holder
SR-32JN
Sub Spindle
Tool Size: ER16M
10mm Flange Thickness



5540-000120
STA-12.7SU
Slitting Saw
SR-32JN
Main Spindle
Tool Size: Ø12.7mm
Output: 1:0.374
Single Ended, Max Tool Ø50mm



5540-000118
STA-TWU-SR2032-20
Thread Whirling
SR-32JN
Main Spindle
Adjustable +/- 20°

SR-38

Machine	Work Location	Live or Static	Operation	Item No.	Description	# of Tool Positions	Tool Size	Output	Other
SR-38	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000152	STA-5540-000152	1	ER16M		Coolant Thru
SR-38	Sub Spindle	Live Tools	Slitting Saw	5540-000157	STA-BWSS-5MM	1	Ø5mm	1:0.55	Single Ended, Adjustable +/- 1mm, Max Tool Ø50mm
SR-38	Sub Spindle	Live Tools	Slitting Saw	5540-000460	STA-5540-000460	1	Ø6mm	1:0.55	Single Ended, Adjustable +/- 1mm, Max Tool Ø50mm
SR-38	Sub Spindle	Live Tools	Slitting Saw	5540-000461	STA-5540-000461	1	Ø8mm	1:0.55	Single Ended, Adjustable +/- 1mm, Max Tool Ø50mm
SR-38	Sub Spindle	Live Tools	Slitting Saw	5540-000462	STA-5540-000462	1	Ø10mm	1:0.55	Single Ended, Adjustable +/- 1mm, Max Tool Ø50mm
SR-38	Sub Spindle	Live Tools	Slitting Saw	5540-000463	STA-5540-000463	1	Ø12.7mm	1:0.55	Single Ended, Adjustable +/- 1mm, Max Tool Ø50mm
SR-38	Sub Spindle	Live Tools	Slitting Saw	5540-000464	STA-5540-000464	1	Ø13mm	1:0.55	Single Ended, Adjustable +/- 1mm, Max Tool Ø50mm
SR-38-A	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000106	STA-20SDH	1	ER20M		
SR-38-A	Main Spindle	Live Tools	End Drilling / Milling	5540-000107	STA-E20E16	4	ER20M, ER16M	1:1	Double Ended
SR-38-A	Sub Spindle	Live Tools	End Drilling / Milling	5540-000165	STA-STBWR20-E16	1	ER16	1:1	Single Ended
SR-38-A	Sub Spindle	Live Tools	Cross Drilling / Milling	5540-000167	STA-0R151	1	ER16M	1:1	Single Ended
SR-38-B	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000106	STA-20SDH	1	ER20M		
SR-38-B	Main Spindle	Live Tools	End Drilling / Milling	5540-000107	STA-E20E16	4	ER20M, ER16M	1:1	Double Ended
SR-38-B	Sub Spindle	Live Tools	End Drilling / Milling	5540-000165	STA-STBWR20-E16	1	ER16	1:1	Single Ended
SR-38-B	Sub Spindle	Live Tools	Cross Drilling / Milling	5540-000167	STA-0R151	1	ER16M	1:1	Single Ended
SR-32JII-A	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000146	STA-BWER20-8	1	ER20M		8mm Flange Thickness
SR-32JII-A	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000147	STA-BWER20-CT	1	ER20M		Coolant Thru

Star SR-38 Machines



5540-000152
STA-5540-000152
Round Shank Tool Holder
SR-38
Sub Spindle
Tool Size: ER16M
Coolant Thru



5540-000157
STA-BWSS-5MM
Slitting Saw
SR-38
Sub Spindle
Tool Size: Ø5mm
Output: 1:0.55
Single Ended, Adjustable +/- 1mm, Max Tool Ø50mm



5540-000460
STA-5540-000460
Slitting Saw
SR-38
Sub Spindle
Tool Size: Ø6mm
Output: 1:0.55
Single Ended, Adjustable +/- 1mm, Max Tool Ø50mm



5540-000461
STA-5540-000461
Slitting Saw
SR-38
Sub Spindle
Tool Size: Ø8mm
Output: 1:0.55
Single Ended, Adjustable +/- 1mm, Max Tool Ø50mm



5540-000462
STA-5540-000462
Slitting Saw
SR-38
Sub Spindle
Tool Size: Ø10mm
Output: 1:0.55
Single Ended, Adjustable +/- 1mm, Max Tool Ø50mm



5540-000463
STA-5540-000463
Slitting Saw
SR-38
Sub Spindle
Tool Size: Ø12.7mm
Output: 1:0.55
Single Ended, Adjustable +/- 1mm, Max Tool Ø50mm



5540-000464
STA-5540-000464
Slitting Saw
SR-38
Sub Spindle
Tool Size: Ø13mm
Output: 1:0.55
Single Ended, Adjustable +/- 1mm, Max Tool Ø50mm



5540-000107
STA-E20E16
End Drilling / Milling
SR-38-A
Main Spindle
Tool Size: ER20M, ER16M
Output: 1:1
Double Ended



5540-000165
STA-STBWR20-E16
End Drilling / Milling
SR-38-A
Sub Spindle
Tool Size: ER16
Output: 1:1
Single Ended



5540-000167
STA-0R151
Cross Drilling / Milling
SR-38-A
Sub Spindle
Tool Size: ER16M
Output: 1:1
Single Ended



5540-000106
STA-20SDH
Round Shank Tool Holder
SR-38-A
Sub Spindle
Tool Size: ER20M



5540-000107
STA-E20E16
End Drilling / Milling
SR-38-B
Main Spindle
Tool Size: ER20M, ER16M
Output: 1:1
Double Ended



5540-000165
STA-STBWR20-E16
End Drilling / Milling
SR-38-B
Sub Spindle
Tool Size: ER16
Output: 1:1
Single Ended



5540-000167
STA-0R151
Cross Drilling / Milling
SR-38-B
Sub Spindle
Tool Size: ER16M
Output: 1:1
Single Ended



5540-000106
STA-20SDH
Round Shank Tool Holder
SR-38-B
Sub Spindle
Tool Size: ER20M

ST-20, ST-38

Machine	Work Location	Live or Static	Operation	Item No.	Description	# of Tool Positions	Tool Size	Output	Other
ST-20	Turret	Live Tools	Cross Drilling / Milling	5540-000172	STA-SV20C-E16	1	ER16A	1:1	Single Ended
ST-38	Turret	Live Tools	Cross Drilling / Milling	5540-000103	STA-16ADM	2	ER16A	1:1	Single Ended
ST-38	Turret	Live Tools	Cross Drilling / Milling	5540-000173	STA-5540-000173	1	ER20A	1:1	Single Ended

Star ST-20 Machines



5540-000172
STA-SV20C-E16
Cross Drilling / Milling
ST-20
Turret
Tool Size: ER16A
Output: 1:1
Single Ended

Star ST-38 Machines



5540-000103
STA-16ADM
Cross Drilling / Milling
ST-38
Turret
Tool Size: ER16A
Output: 1:1
Single Ended



5540-000173
STA-5540-000173
Cross Drilling / Milling
ST-38
Turret
Tool Size: ER20A
Output: 1:1
Single Ended

SV-12, SV-20, SV-32, SV-38

Machine	Work Location	Live or Static	Operation	Item No.	Description	# of Tool Positions	Tool Size	Output	Other
SV-12	Sub Spindle	Live Tools	Cross Drilling / Milling	5540-000113	STA-GSC110-GSI	1	ER16	1:1	Single Ended
SV-12		Live Tools	Cross Drilling / Milling	5540-000114	STA-GSC3X-GSI	1	ER11	1:3	Single Ended High Speed 18,000 Max RPM,
SV-12	Main Spindle	Live Tools	Cross Drilling / Milling	5540-000116	STA-SCDM	1	ER20M	1:1	Single Ended
SV-12	Turret	Live Tools	Cross Drilling / Milling	5540-000172	STA-SV20C-E16	1	ER16A	1:1	Single Ended
SV-12	Turret	Static Tool	Round Shank Tool Holder	5540-000174	STA-SV3200-1P	1	32MM Round		
SV-12	Turret	Live Tools	Thread Whirling	5540-000175	STA-WH20T-MWT12	1		1:1	Single Ended, Adjustable +/- 20°
SV-12	Turret	Live Tools	End Drilling / Milling	5540-000177	STA-SV20E-E411	4	ER11M	1:1.16	Double Ended
SV-12	Turret	Static Tool	Turning	5540-000179	STA-TU1616-ADJ	1	16x16mm		Adjustable +/- 1mm
SV-12	Turret	Static Tool	Turning	5540-000180	STA-5540-000180	1	16x16mm		Adjustable +/- 1mm
SV-20	Sub Spindle	Live Tools	Cross Drilling / Milling	5540-000113	STA-GSC110-GSI	1	ER16	1:1	Single Ended
SV-20		Live Tools	Cross Drilling / Milling	5540-000114	STA-GSC3X-GSI	1	ER11	1:3	Single Ended High Speed 18,000 Max RPM,
SV-20	Turret	Live Tools	Cross Drilling / Milling	5540-000172	STA-SV20C-E16	1	ER16A	1:1	Single Ended
SV-20	Turret	Static Tool	Round Shank Tool Holder	5540-000174	STA-SV3200-1P	1	32MM Round		
SV-20	Turret	Live Tools	Thread Whirling	5540-000175	STA-WH20T-MWT12	1		1:1	Single Ended, Adjustable +/- 20°
SV-20	Turret	Live Tools	End Drilling / Milling	5540-000177	STA-SV20E-E411	4	ER11M	1:1.16	Double Ended
SV-20	Turret	Static Tool	Turning	5540-000179	STA-TU1616-ADJ	1	16x16mm		Adjustable +/- 1mm
SV-20	Turret	Static Tool	Turning	5540-000180	STA-5540-000180	1	16x16mm		Adjustable +/- 1mm
SV-20	Main Spindle	Live Tools	Cross Drilling / Milling	5540-000116	STA-SCDM	1	ER20M	1:1	Single Ended
SV-20R	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000146	STA-BWER20-8	1	ER20M		8mm Flange Thickness
SV-20R	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000147	STA-BWER20-CT	1	ER20M		Coolant Thru
SV-20R	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000148	STA-BWER20-10	1	ER20M		10mm Flange Thickness
SV-20R	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000149	STA-5540-000149	1	ER16M		8mm Flange Thickness
SV-20R	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000150	STA-BWER16-CT	1	ER16M		Coolant Thru
SV-20R	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000153	STA-BWER16-10	1	ER16M		10mm Flange Thickness
SV-20R	Sub Spindle	Live Tools	End Drilling / Milling	5540-000165	STA-STBWR20-E16	1	ER16	1:1	Single Ended
SV-20R	Sub Spindle	Live Tools	Cross Drilling / Milling	5540-000167	STA-0R151	1	ER16M	1:1	Single Ended
SV-20R	Turret	Live Tools	Cross Drilling / Milling	5540-000172	STA-SV20C-E16	1	ER16A	1:1	Single Ended
SV-20R	Turret	Live Tools	Thread Whirling	5540-000175	STA-WH20T-MWT12	1		1:1	Single Ended, Adjustable +/- 20°
SV-20R	Turret	Live Tools	End Drilling / Milling	5540-000177	STA-SV20E-E411	4	ER11M	1:1.16	Double Ended
SV-20R	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000152	STA-5540-000152	1	ER16M		Coolant Thru
SV-32	Turret	Live Tools	Cross Drilling / Milling	5540-000103	STA-16ADM	2	ER16A	1:1	Single Ended
SV-32	Sub Spindle	Live Tools	Cross Drilling / Milling	5540-000113	STA-GSC110-GSI	1	ER16	1:1	Single Ended
SV-32		Live Tools	Cross Drilling / Milling	5540-000114	STA-GSC3X-GSI	1	ER11	1:3	Single Ended High Speed 18,000 Max RPM,
SV-32	Main Spindle	Live Tools	Cross Drilling / Milling	5540-000116	STA-SCDM	1	ER20M	1:1	Single Ended
SV-32	Turret	Live Tools	Cross Drilling / Milling	5540-000173	STA-5540-000173	1	ER20A	1:1	Single Ended
SV-32	Turret	Static Tool	Round Shank Tool Holder	5540-000174	STA-SV3200-1P	1	32MM Round		
SV-32	Turret	Live Tools	Thread Whirling	5540-000176	STA-5540-000176	1		1:1	Single Ended, Adjustable +/- 20°
SV-32	Turret	Static Tool	Turning	5540-000179	STA-TU1616-ADJ	1	16x16mm		Adjustable +/- 1mm
SV-32	Turret	Static Tool	Turning	5540-000180	STA-5540-000180	1	16x16mm		Adjustable +/- 1mm
SV-32	Turret	Live Tools	End Drilling / Milling	5540-000178	STA-5540-000178	4	ER11M	1:1.16	Double Ended
SV-32JII	Sub Spindle	Live Tools	Cross Drilling / Milling	5540-000113	STA-GSC110-GSI	1	ER16	1:1	Single Ended
SV-32JII		Live Tools	Cross Drilling / Milling	5540-000114	STA-GSC3X-GSI	1	ER11	1:3	Single Ended High Speed 18,000 Max RPM,
SV-32JII	Main Spindle	Live Tools	Cross Drilling / Milling	5540-000116	STA-SCDM	1	ER20M	1:1	Single Ended
SV-32JII	Turret	Live Tools	Cross Drilling / Milling	5540-000172	STA-SV20C-E16	1	ER16A	1:1	Single Ended
SV-32JII	Turret	Static Tool	Round Shank Tool Holder	5540-000174	STA-SV3200-1P	1	32MM Round		
SV-32JII	Turret	Live Tools	Thread Whirling	5540-000175	STA-WH20T-MWT12	1		1:1	Single Ended, Adjustable +/- 20°
SV-32JII	Turret	Live Tools	End Drilling / Milling	5540-000177	STA-SV20E-E411	4	ER11M	1:1.16	Double Ended
SV-32JII	Turret	Static Tool	Turning	5540-000179	STA-TU1616-ADJ	1	16x16mm		Adjustable +/- 1mm
SV-32JII	Turret	Static Tool	Turning	5540-000180	STA-5540-000180	1	16x16mm		Adjustable +/- 1mm
SV-38R	Turret	Live Tools	Cross Drilling / Milling	5540-000103	STA-16ADM	2	ER16A	1:1	Single Ended
SV-38R	Sub Spindle	Live Tools	Cross Drilling / Milling	5540-000113	STA-GSC110-GSI	1	ER16	1:1	Single Ended
SV-38R		Live Tools	Cross Drilling / Milling	5540-000114	STA-GSC3X-GSI	1	ER11	1:3	Single Ended High Speed 18,000 Max RPM,
SV-38R		Live Tools	Cross Drilling / Milling	5540-000115	STA-A120-E16-GSI	1	ER16		Single Ended
SV-38R	Main Spindle	Live Tools	Cross Drilling / Milling	5540-000116	STA-SCDM	1	ER20M	1:1	Single Ended
SV-38R	Turret	Live Tools	Cross Drilling / Milling	5540-000173	STA-5540-000173	1	ER20A	1:1	Single Ended

Star SV-12 Machines



5540-000113
STA-GSC110-GSI
Cross Drilling / Milling
SV-12
Sub Spindle
Tool Size: ER16
Output: 1:1
Single Ended



5540-000114
STA-GSC3X-GSI
Cross Drilling / Milling
SV-12
Tool Size: ER11
Output: 1:3
Single Ended High Speed
18,000 Max RPM,



5540-000116
STA-SCDM
Cross Drilling / Milling
SV-12
Main Spindle
Tool Size: ER20M
Output: 1:1
Single Ended



5540-000172
STA-SV20C-E16
Cross Drilling / Milling
SV-12
Turret
Tool Size: ER16A
Output: 1:1
Single Ended



5540-000177
STA-SV20E-E411
End Drilling / Milling
SV-12
Turret
Tool Size: ER11M
Output: 1:1.16
Double Ended



5540-000174
STA-SV3200-1P
Round Shank Tool Holder
SV-12
Turret
Tool Size: 32MM Round



5540-000175
STA-WH20T-MWT12
Thread Whirling
SV-12
Turret



5540-000179
STA-TU1616-ADJ
Turning
SV-12
Turret
Tool Size: 16x16mm
Adjustable +/- 1mm



5540-000180
STA-5540-000180
Turning
SV-12
Turret
Tool Size: 16x16mm
Adjustable +/- 1mm

Star SV-20 Machines



5540-000113
STA-GSC110-GSI
Cross Drilling / Milling
SV-20
Sub Spindle
Tool Size: ER16
Output: 1:1
Single Ended



5540-000114
STA-GSC3X-GSI
Cross Drilling / Milling
SV-20
Tool Size: ER11
Output: 1:3
Single Ended High Speed
18,000 Max RPM,



5540-000172
STA-SV20C-E16
Cross Drilling / Milling
SV-20
Turret
Tool Size: ER16A
Output: 1:1
Single Ended



5540-000116
STA-SCDM
Cross Drilling / Milling
SV-20
Main Spindle
Tool Size: ER20M
Output: 1:1
Single Ended



5540-000177
STA-SV20E-E411
End Drilling / Milling
SV-20
Turret
Tool Size: ER11M
Output: 1:1.16
Double Ended



5540-000174
STA-SV3200-1P
Round Shank Tool Holder
SV-20
Turret
Tool Size: 32MM Round



5540-000175
STA-WH20T-MWT12
Thread Whirling
SV-20
Turret
Output: 1:1
Single Ended, Adjustable
+/- 20°



5540-000179
STA-TU1616-ADJ
Turning
SV-20
Turret
Tool Size: 16x16mm
Adjustable +/- 1mm



5540-000180
STA-5540-000180
Turning
SV-20
Turret
Tool Size: 16x16mm
Adjustable +/- 1mm

Star SV-20R Machines



5540-000167
STA-0R151
Cross Drilling / Milling
SV-20R
Sub Spindle
Tool Size: ER16M
Output: 1:1
Single Ended



5540-000172
STA-SV20C-E16
Cross Drilling / Milling
SV-20R
Turret
Tool Size: ER16A
Output: 1:1
Single Ended



5540-000165
STA-STBWR20-E16
End Drilling / Milling
SV-20R
Sub Spindle
Tool Size: ER16
Output: 1:1
Single Ended



5540-000177
STA-SV20E-E411
End Drilling / Milling
SV-20R
Turret
Tool Size: ER11M
Output: 1:1.16
Double Ended



5540-000146
STA-BWER20-8
Round Shank Tool Holder
SV-20R
Sub Spindle
Tool Size: ER20M
8mm Flange Thickness



5540-000147
STA-BWER20-CT
Round Shank Tool Holder
SV-20R
Sub Spindle
Tool Size: ER20M
Coolant Thru



5540-000148
STA-BWER20-10
Round Shank Tool Holder
SV-20R
Sub Spindle
Tool Size: ER20M



5540-000149
STA-5540-000149
Round Shank Tool Holder
SV-20R
Sub Spindle
Tool Size: ER16M



5540-000150
STA-BWER16-CT
Round Shank Tool Holder
SV-20R
Sub Spindle
Tool Size: ER16M



5540-000153
STA-BWER16-10
Round Shank Tool Holder
SV-20R
Sub Spindle
Tool Size: ER16M
10mm Flange Thickness



5540-000152
STA-5540-000152
Round Shank Tool Holder
SV-20R
Sub Spindle
Tool Size: ER16M
Coolant Thru



5540-000175
STA-WH20T-MWT12
Thread Whirling
SV-20R
Turret
Output: 1:1
Single Ended, Adjustable
+/- 20°

Star SV-32 Machines



5540-000103
STA-16ADM
Cross Drilling / Milling
SV-32
Turret
Tool Size: ER16A
Output: 1:1
Single Ended



5540-000113
STA-GSC110-GSI
Cross Drilling / Milling
SV-32
Sub Spindle
Tool Size: ER16
Output: 1:1
Single Ended



5540-000114
STA-GSC3X-GSI
Cross Drilling / Milling
SV-32
Tool Size: ER11
Output: 1:3
Single Ended High Speed
18,000 Max RPM,



5540-000116
STA-SCDM
Cross Drilling / Milling
SV-32
Main Spindle
Tool Size: ER20M
Output: 1:1
Single Ended



5540-000173
STA-5540-000173
Cross Drilling / Milling
SV-32
Turret
Tool Size: ER20A
Output: 1:1
Single Ended



5540-000178
STA-5540-000178
End Drilling / Milling
SV-32
Turret
Tool Size: ER11M
Output: 1:1.16
Double Ended



5540-000174
STA-SV3200-1P
Round Shank Tool Holder
SV-32
Turret
Tool Size: 32MM Round



5540-000176
STA-5540-000176
Thread Whirling
SV-32
Turret
Output: 1:1
Single Ended, Adjustable
+/- 20°



5540-000179
STA-TU1616-ADJ
Turning
SV-32
Turret
Tool Size: 16x16mm
Adjustable +/- 1mm



5540-000180
STA-5540-000180
Turning
SV-32
Turret
Tool Size: 16x16mm
Adjustable +/- 1mm

Star SV-32III Machines



5540-000113
STA-GSC110-GSI
Cross Drilling / Milling
SV-32JII
Sub Spindle
Tool Size: ER16
Output: 1:1
Single Ended



5540-000114
STA-GSC3X-GSI
Cross Drilling / Milling
SV-32JII
Tool Size: ER11
Output: 1:3
Single Ended High Speed
18,000 Max RPM,



5540-000116
STA-SCDM
Cross Drilling / Milling
SV-32JII
Main Spindle
Tool Size: ER20M
Output: 1:1
Single Ended



5540-000172
STA-SV20C-E16
Cross Drilling / Milling
SV-32JII
Turret
Tool Size: ER16A
Output: 1:1
Single Ended



5540-000177
STA-SV20E-E411
End Drilling / Milling
SV-32JII
Turret
Tool Size: ER11M
Output: 1:1.16
Double Ended



5540-000174
STA-SV3200-1P
Round Shank Tool Holder
SV-32JII
Turret
Tool Size: 32MM Round



5540-000175
STA-WH20T-MWT12
Thread Whirling
SV-32JII
Turret
Output: 1:1
Single Ended, Adjustable
+/- 20°



5540-000179
STA-TU1616-ADJ
Turning
SV-32JII
Turret
Tool Size: 16x16mm
Adjustable +/- 1mm



5540-000180
STA-5540-000180
Turning
SV-32JII
Turret
Tool Size: 16x16mm
Adjustable +/- 1mm



5540-000103
STA-16ADM
Cross Drilling / Milling
SV-38R
Turret
Tool Size: ER16A
Output: 1:1
Single Ended



5540-000113
STA-GSC110-GSI
Cross Drilling / Milling
SV-38R
Sub Spindle
Tool Size: ER16
Output: 1:1
Single Ended



5540-000114
STA-GSC3X-GSI
Cross Drilling / Milling
SV-38R
Tool Size: ER11
Output: 1:3
Single Ended High Speed
18,000 Max RPM,



5540-000115
STA-A120-E16-GSI
Cross Drilling / Milling
SV-38R
Tool Size: ER16
Single Ended



5540-000116
STA-SCDM
Cross Drilling / Milling
SV-38R
Main Spindle
Tool Size: ER20M
Output: 1:1
Single Ended



5540-000173
STA-5540-000173
Cross Drilling / Milling
SV-38R
Turret
Tool Size: ER20A
Output: 1:1
Single Ended

SW-12, SW-20

Machine	Work Location	Live or Static	Operation	Item No.	Description	# of Tool Positions	Tool Size	Output	Other
SW-12RII	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000146	STA-BWER20-8	1	ER20M		8mm Flange Thickness
SW-12RII	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000147	STA-BWER20-CT	1	ER20M		Coolant Thru
SW-12RII	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000148	STA-BWER20-10	1	ER20M		10mm Flange Thickness
SW-12RII	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000149	STA-5540-000149	1	ER16M		8mm Flange Thickness
SW-12RII	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000150	STA-BWER16-CT	1	ER16M		Coolant Thru
SW-12RII	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000152	STA-5540-000152	1	ER16M		Coolant Thru
SW-12RII	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000153	STA-BWER16-10	1	ER16M		10mm Flange Thickness
SW-12RII	Sub Spindle	Live Tools	Cross Drilling / Milling	5540-000155	STA-BWE11	1	ER11	1:1	Single Ended
SW-12RII	Sub Spindle	Live Tools	End Drilling / Milling	5540-000163	STA-BWE16	1	ER16	1:1	Single Ended
SW-12RII	Sub Spindle	Live Tools	End Drilling / Milling	5540-000165	STA-STBWR20-E16	1	ER16	1:1	Single Ended
SW-12RII	Sub Spindle	Live Tools	Cross Drilling / Milling	5540-000167	STA-0R151	1	ER16M	1:1	Single Ended
SW-20	Main Spindle	Static Tool	Idler Shaft	5540-000112	STA-IDLER				
SW-20	Sub Spindle	Live Tools	Cross Drilling / Milling	5540-000113	STA-GSC110-GSI	1	ER16	1:1	Single Ended
SW-20		Live Tools	Cross Drilling / Milling	5540-000114	STA-GSC3X-GSI	1	ER11	1:3	Single Ended High Speed 18,000 Max RPM
SW-20		Live Tools	Cross Drilling / Milling	5540-000115	STA-A120-E16-GSI	1	ER16		Single Ended
SW-20	Main Spindle	Live Tools	Cross Drilling / Milling	5540-000116	STA-SCDM	1	ER20M	1:1	Single Ended
SW-20	Main Spindle	Live Tools	Thread Whirling	5540-000118	STA-TWU-SR2032-20	1			Adjustable +/- 20°
SW-20	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000152	STA-5540-000152	1	ER16M		Coolant Thru
SW-20	Sub Spindle	Live Tools	End Drilling / Milling	5540-000165	STA-STBWR20-E16	1	ER16	1:1	Single Ended
SW-20	Sub Spindle	Live Tools	Cross Drilling / Milling	5540-000167	STA-0R151	1	ER16M	1:1	Single Ended

Star SW-12 Machines



5540-000155
STA-BWE11
Cross Drilling / Milling
SW-12RII
Sub Spindle
Tool Size: ER11
Output: 1:1
Single Ended



5540-000167
STA-0R151
Cross Drilling / Milling
SW-12RII
Sub Spindle
Tool Size: ER16M
Output: 1:1
Single Ended



5540-000163
STA-BWE16
End Drilling / Milling
SW-12RII
Sub Spindle
Tool Size: ER16
Output: 1:1
Single Ended



5540-000165
STA-STBWR20-E16
End Drilling / Milling
SW-12RII
Sub Spindle
Tool Size: ER16
Output: 1:1
Single Ended



5540-000146
STA-BWER20-8
Round Shank Tool Holder
SW-12RII
Sub Spindle
Tool Size: ER20M
8mm Flange Thickness



5540-000147
STA-BWER20-CT
Round Shank Tool Holder
SW-12RII
Sub Spindle
Tool Size: ER20M
Coolant Thru



5540-000148
STA-BWER20-10
Round Shank Tool Holder
SW-12RII
Sub Spindle
Tool Size: ER20M
10mm Flange Thickness



5540-000149
STA-5540-000149
Round Shank Tool Holder
SW-12RII
Sub Spindle
Tool Size: ER16M
8mm Flange Thickness



5540-000150
STA-BWER16-CT
Round Shank Tool Holder
SW-12RII
Sub Spindle
Tool Size: ER16M
Coolant Thru



5540-000152
STA-5540-000152
Round Shank Tool Holder
SW-12RII
Sub Spindle
Tool Size: ER16M
Coolant Thru



5540-000153
STA-BWER16-10
Round Shank Tool Holder
SW-12RII
Sub Spindle
Tool Size: ER16M
10mm Flange Thickness

Star SW-20 Machines



5540-000113
STA-GSC110-GSI
Cross Drilling / Milling
SW-20
Sub Spindle
Tool Size: ER16
Output: 1:1
Single Ended



5540-000114
STA-GSC3X-GSI
Cross Drilling / Milling
SW-20
Tool Size: ER11
Output: 1:3
Single Ended High Speed
18,000 Max RPM



5540-000115
STA-A120-E16-GSI
Cross Drilling / Milling
SW-20
Tool Size: ER16
Single Ended



5540-000116
STA-SCDM
Cross Drilling / Milling
SW-20
Main Spindle
Tool Size: ER20M
Output: 1:1
Single Ended



5540-000167
STA-0R151
Cross Drilling / Milling
SW-20
Sub Spindle
Tool Size: ER16M
Output: 1:1
Single Ended



5540-000165
STA-STBWR20-E16
End Drilling / Milling
SW-20
Sub Spindle
Tool Size: ER16
Output: 1:1
Single Ended



5540-000112
STA-IDLER
Idler Shaft
SW-20
Main Spindle



5540-000152
STA-5540-000152
Round Shank Tool Holder
SW-20
Sub Spindle
Tool Size: ER16M
Coolant Thru



5540-000118
STA-TWU-SR2032-20
Thread Whirling
SW-20
Main Spindle
Adjustable +/- 20°

TSUGAMI
Swiss-Type CNC Machining Tools
by GenSwiss®
Advancing Small Parts Manufacturing

TSUGAMI B0205

Machine	Work Location	Live or Static	Operation	Item No.	Description	# of Tool Positions	Tool Size	Output	Other
B0205	Main Spindle	Static Tool	Round Shank Tool Holder	5540-000208	TSU-5540-000208	4	Ø20mm		
B0205	Main Spindle	Live Tools	Cross Drilling / Milling	5540-000210	TSU-5540-000210	1	ER11A	1:2	
B0205	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000221	TSU-5540-000221	1	NR-303		
B0205	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000225	TSU-BW422500	1	Ø20mm		
B0205	Sub Spindle	Static Tool	End Drilling / Milling	5540-000232	TSU-5540-000232	1	ER16M	1:1	
B0205	Sub Spindle	Static Tool	Cross Drilling / Milling	5540-000233	TSU-5540-000233	1	ER11A	1:1	
B0205		Live Tools	Thread Whirling	5540-000237	TSU-BOTW20-B	1	Utilis Ring	1:1	Adjustable +/- 20°
B0205		Live Tools	Thread Whirling	5540-000237A1	TSU-BOTW20-B-U09.1-12 FC	1	Utilis Ring	1:1	Adjustable ±20°, Includes Utilis 9-12mm flight circle thread whirling ring
B0205		Live Tools	Thread Whirling	5540-000237A2	TSU-BOTW20-B-U09.1 - 15 FC	1	Utilis Ring	1:1	Adjustable ±20°, Includes Utilis 9-15mm flight circle thread whirling ring
B0205	Sub Spindle	Static Tool	Turning	5540-000238	TSU-5540-000238	1	DC.T11T3		Adjustable +/- 1mm
B0205	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000269	TSU-5540-000269	1	ER11A		

Tsugami B0205 Machines



TSU-5540-000208
Round Shank Tool Holder
Main Spindle
Tool Size: Ø20mm
4 Tools



TSU-5540-000210
Cross Drilling / Milling
Main Spindle
Collet Size: ER11A
Output: 1:2



TSU-5540-000221
Round Shank Tool Holder
Sub Spindle
Tool Size: NR-303



TSU-BW422500
Round Shank Tool Holder
Sub Spindle
Tool Size: Ø20mm



TSU-5540-000232
End Drilling / Milling
Sub Spindle
Collet Size: ER16M
Output: 1:1



TSU-5540-000233
Cross Drilling / Milling
Sub Spindle
Collet Size: ER11A
Output: 1:1



TSU-BOTW20-B
Thread Whirling
Sub Spindle
Ring: Utilis
Output: 1:1
Adjustable ±20°



TSU-BOTW20-B -U09.1-12 FC
Thread Whirling
Sub Spindle
Ring: Utilis
Output: 1:1
Adjustable ±20°
Ring Included



TSU-BOTW20-B -U09.1 - 15 FC
Thread Whirling
Sub Spindle
Ring: Utilis
Output: 1:1
Adjustable ±20°
Ring Included



TSU-5540-000238
Turning
Sub Spindle
Tool Size: DC T11T3
Adjustable ±1mm



TSU-5540-000269
Round Shank Tool Holder
Sub Spindle
Tool Size: ER11A

TSUGAMI B0206

Machine	Work Location	Live or Static	Operation	Item No.	Description	# of Tool Positions	Tool Size	Output	Other
B0206	Main Spindle	Static Tool	Round Shank Tool Holder	5540-000208	TSU-5540-000208	4	20mm		
B0206	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000221	TSU-5540-000221	1	NR-303		
B0206	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000225	TSU-BW422500	1	20mm		
B0206	Sub Spindle	Static Tool	End Drilling / Milling	5540-000232	TSU-5540-000232	1	ER16M	1:1	
B0206	Sub Spindle	Static Tool	Cross Drilling / Milling	5540-000233	TSU-5540-000233	1	ER11A	1:1	
B0206		Live Tools	Thread Whirling	5540-000237	TSU-BOTW20-B	1	Utilis Ring	1:1	Adjustable +/- 20°
B0206		Live Tools	Thread Whirling	5540-000237A1	TSU-BOTW20-B-U09.1-12 FC	1	Utilis Ring	1:1	Adjustable ±20°, Includes Utilis 9-12mm flight circle thread whirling ring
B0206		Live Tools	Thread Whirling	5540-000237A2	TSU-BOTW20-B-U09.1 - 15 FC	1	Utilis Ring	1:1	Adjustable ±20°, Includes Utilis 9-15mm flight circle thread whirling ring
B0206	Sub Spindle	Static Tool	Turning	5540-000238	TSU-5540-000238	1	DC.T11T3		Adjustable +/- 1mm
B0206	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000269	TSU-5540-000269	1	ER11A		

Tsugami B0206 Machines



TSU-5540-000208
Round Shank Tool Holder
Main Spindle
Tool Size: Ø20mm
4 Tools



TSU-5540-000221
Round Shank Tool Holder
Sub Spindle
Tool Size: NR-303



TSU-BW422500
Round Shank Tool Holder
Sub Spindle
Tool Size: Ø20mm



TSU-5540-000232
End Drilling / Milling
Sub Spindle
Collet Size: ER16M
Output: 1:1



TSU-5540-000233
Cross Drilling / Milling
Sub Spindle
Collet Size: ER11A
Output: 1:1



TSU-BOTW20-B
Thread Whirling
Sub Spindle
Ring: Utilis
Output: 1:1
Adjustable ±20°



TSU-BOTW20-B -U09.1-12 FC
Thread Whirling
Sub Spindle
Ring: Utilis
Output: 1:1
Adjustable ±20°
Ring Included



TSU-BOTW20-B -U09.1 - 15 FC
Thread Whirling
Sub Spindle
Ring: Utilis
Output: 1:1
Adjustable ±20°
Ring Included



TSU-5540-000238
Turning
Sub Spindle
Tool Size: DC T11T3
Adjustable ±1mm



TSU-5540-000269
Round Shank Tool Holder
Sub Spindle
Tool Size: ER11A

TSUGAMI B0265

Machine	Work Location	Live or Static	Operation	Item No.	Description	# of Tool Positions	Tool Size	Output	Other
B0265	Main Spindle	Live Tools	End Drilling / Milling	5540-000209	TSU-5540-000209	2	ER16	1:1	
B0265	Main Spindle	Live Tools	Cross Drilling / Milling	5540-000211	TSU-5540-000211	1	ER20A	1:1	
B0265	Main Spindle	Live Tools	Cross Drilling / Milling	5540-000212	TSU-5540-000212	1	ER16A	1:1	
B0265	Main Spindle	Live Tools	Cross Drilling / Milling	5540-000213	TSU-5540-000213	1	ER16A	1:1	
B0265	Main Spindle	Live Tools	End Drilling / Milling	5540-000214	TSU-5540-000214	1	ER16AM	1:1	
B0265	Main Spindle	Live Tools	End Drilling / Milling	5540-000215	TSU-5540-000215	2	ER16A	1:1	
B0265	Main Spindle	Live Tools	End Drilling / Milling	5540-000216	TSU-5540-000216	2	ER16AM	1:1	Adjustable 0-90°
B0265	Main Spindle	Live Tools	End Drilling / Milling	5540-000217	TSU-5540-000217	6	ER11A	1:1	Double Ended
B0265	Main Spindle	Live Tools	End Drilling / Milling	5540-000218	TSU-5540-000218	4	ER16AM	1:1	Double Ended
B0265	Main Spindle	Live Tools	End Drilling / Milling	5540-000219	TSU-5540-000219	6	ER11A	1:1	Adjustable 0-90°, Double Ended
B0265	Main Spindle	Live Tools	End Drilling / Milling	5540-000220	TSU-5540-000220	4	ER16AM	1:1	Adjustable 0-90°, Double Ended
B0265	Sub Spindle	Static Tool	Turning	5540-000222	TSU-5540-000222	1	12x12mm		
B0265	Sub Spindle	Static Tool	Turning	5540-000223	TSU-5540-000223	1	10x10mm		
B0265	Sub Spindle	Static Tool	Turning	5540-000224	TSU-5540-000224	1	12x12mm		
B0265	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000226	TSU-420250-CT	1	Ø25MM		Coolant Thru
B0265	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000227	TSU-5540-000227	2	Ø25MM		Coolant Thru
B0265	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000228	TSU-5540-000228	1	ER20M		Coolant Thru
B0265	Sub Spindle	Static Tool	Slitting Saw	5540-000229	TSU-5540-000229	1	Ø12.7mm	1:1	Max tool Ø50mm, Adjustable +/- 1mm
B0265	Sub Spindle	Static Tool	End Drilling / Milling	5540-000230	TSU-BW510-2X	1	ER11A	1:2	High Speed 2X
B0265	Sub Spindle	Static Tool	End Drilling / Milling	5540-000231	TSU-ASE1E16	1	ER16A	1:1	
B0265	Sub Spindle	Static Tool	Cross Drilling / Milling	5540-000234	TSU-R921E16	1	ER16M	1:1	
B0265	Main Spindle	Live Tools	Cross Drilling / Milling	5540-000235	TSU-5540-000235	2	ER16A	1:1	
B0265	Main Spindle	Live Tools	Thread Whirling	5540-000236	TSU-BOTW20	1	Utilis Ring	1:1	Adjustable +/- 20°
B0265	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000239	TSU-5540-000239	1	3MM Bore		Adjustable +/- 1mm
B0265	Main Spindle	Live Tools	End Drilling / Milling	5540-000240	TSU-5540-000240	3	ER16AM	1:1	
B0265	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000270	TSU-5540-000270	1	3MM Bore		Adjustable +/- 1mm
B0265	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000271	TSU-5540-000271	1	4MM Bore		Adjustable +/- 1mm
B0265	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000272	TSU-5540-000272	1	5MM Bore		Adjustable +/- 1mm
B0265	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000273	TSU-5540-000273	1	6MM Bore		Adjustable +/- 1mm
B0265	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000274	TSU-5540-000274	1	8MM Bore		Adjustable +/- 1mm
B0265	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000275	TSU-5540-000275	1	9MM Bore		Adjustable +/- 1mm
B0265	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000276	TSU-5540-000276	1	10MM Bore		Adjustable +/- 1mm
B0265	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000277	TSU-5540-000277	1	12MM Bore		Adjustable +/- 1mm
B0265	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000278	TSU-5540-000278	1	16MM Bore		Adjustable +/- 1mm

Tsugami B0265 Machines



TSU-5540-000209
End Drilling / Milling
Main Spindle
Collet Size: ER16
Output: 1:1
Holds 2 Tools



TSU-5540-000211
Cross Drilling / Milling
Main Spindle
Collet Size: ER20A
Output: 1:1



TSU-5540-000212
Cross Drilling / Milling
Main Spindle
Collet Size: ER16A
Output: 1:1



TSU-5540-000213
Cross Drilling / Milling
Main Spindle
Collet Size: ER16A
Output: 1:1



TSU-5540-000214
End Drilling / Milling
Main Spindle
Collet Size: ER16AM
Output: 1:1



TSU-5540-000215
End Drilling / Milling
Main Spindle
Collet Size: ER16A
Output: 1:1
Holds 2 Tools



TSU-5540-000216
End Drilling / Milling
Main Spindle
Collet Size: ER16AM
Output: 1:1
Adjustable 0-90°



TSU-5540-000217
End Drilling / Milling
Main Spindle
Collet Size: ER11A
Output: 1:1
Double Ended
Holds 6 Tools



TSU-5540-000218
End Drilling / Milling
Main Spindle
Collet Size: ER16AM
Output: 1:1
Double Ended
Holds 4 Tools



TSU-5540-000219
End Drilling / Milling
Main Spindle
Collet Size: ER11A
Output: 1:1
Adjustable 0-90º
Double Ended
Holds 6 Tools



TSU-5540-000220
End Drilling / Milling
Main Spindle
Collet Size: ER16A
Output: 1:1
Adjustable 0-90º
Double Ended
Holds 4 Tools



TSU-5540-000222
Turning
Sub Spindle
Tool Size: 12x12mm



TSU-5540-000223
Turning
Sub Spindle
Tool Size: 10x10mm



TSU-5540-000224
Turning
Sub Spindle
Tool Size: 12x12mm



TSU-420250-CT
Round Shank Tool Holder
Sub Spindle
Tool Size: 25mm
Coolant-Thru



TSU-5540-000227
Round Shank Tool Holder
Sub Spindle
Tool Size: 25mm
Holds 2 Tools
Coolant-Thru



TSU-5540-000228
Round Shank Tool Holder
Sub Spindle
Tool Size: ER20M
Coolant-Thru



TSU-5540-000229
Slitting Saw
Sub Spindle
Tool Size: Ø12.7mm
Max Tool Size Ø50mm
Adjustable ±1mm



TSU-BW510-2X
End Drilling / Milling
Sub Spindle
Tool Size: ER11
Output: 1:2
High Speed 2X



TSU-ASE1E16
End Drilling / Milling
Sub Spindle
Collet Size: ER16A
Output: 1:1



TSU-R921E16
Cross Drilling / Milling
Sub Spindle
Collet Size: ER16M
Output: 1:1



TSU-5540-000235
Cross Drilling / Milling
Main Spindle
Collet Size: ER16A
Output: 1:1
Holds 2 Tools



TSU-BOTW20
Thread Whirling
Main Spindle
Ring: Utilis
Output: 1:1
Adjustable ±20º



TSU-5540-000239
Round Shank Tool Holder
Sub Spindle
Tool Size: Ø3mm
Adjustable ±1mm



TSU-5540-000240
End Drilling / Milling
Main Spindle
Collet Size: ER16AM
Output: 1:1
Holds 3 Tools



TSU-5540-000270
Round Shank Tool Holder
Sub Spindle
Tool Size: Ø3mm
Adjustable ±1mm



TSU-5540-000271
Round Shank Tool Holder
Sub Spindle
Tool Size: Ø4mm
Adjustable ±1mm



TSU-5540-000272
Round Shank Tool Holder
Sub Spindle
Tool Size: Ø5mm
Adjustable ±1mm



TSU-5540-000273
Round Shank Tool Holder
Sub Spindle
Tool Size: Ø6mm
Adjustable ±1mm



TSU-5540-000274
Round Shank Tool Holder
Sub Spindle
Tool Size: Ø8mm
Adjustable ±1mm



TSU-5540-000275
Round Shank Tool Holder
Sub Spindle
Tool Size: Ø9mm
Adjustable ±1mm



TSU-5540-000276
Round Shank Tool Holder
Sub Spindle
Tool Size: Ø10mm
Adjustable ±1mm



TSU-5540-000277
Round Shank Tool Holder
Sub Spindle
Tool Size: Ø12mm
Adjustable ±1mm



TSU-5540-000278
Round Shank Tool Holder
Sub Spindle
Tool Size: Ø16mm
Adjustable ±1mm

TSUGAMI B0266

Machine	Work Location	Live or Static	Operation	Item No.	Description	# of Tool Positions	Tool Size	Output	Other
B0266	Main Spindle	Live Tools	End Drilling / Milling	5540-000209	TSU-5540-000209	2	ER16	1:1	
B0266	Main Spindle	Live Tools	Cross Drilling / Milling	5540-000210	TSU-5540-000210	1	ER11A	1:2	
B0266	Main Spindle	Live Tools	Cross Drilling / Milling	5540-000211	TSU-5540-000211	1	ER20A	1:1	
B0266	Main Spindle	Live Tools	Cross Drilling / Milling	5540-000212	TSU-5540-000212	1	ER16A	1:1	
B0266	Main Spindle	Live Tools	Cross Drilling / Milling	5540-000213	TSU-5540-000213	1	ER16A	1:1	
B0266	Main Spindle	Live Tools	End Drilling / Milling	5540-000214	TSU-5540-000214	1	ER16AM	1:1	
B0266	Main Spindle	Live Tools	End Drilling / Milling	5540-000215	TSU-5540-000215	2	ER16A	1:1	
B0266	Main Spindle	Live Tools	End Drilling / Milling	5540-000216	TSU-5540-000216	2	ER16AM	1:1	Adjustable 0-90°
B0266	Main Spindle	Live Tools	End Drilling / Milling	5540-000217	TSU-5540-000217	6	ER11A	1:1	Double Ended
B0266	Main Spindle	Live Tools	End Drilling / Milling	5540-000218	TSU-5540-000218	4	ER16AM	1:1	Double Ended
B0266	Main Spindle	Live Tools	End Drilling / Milling	5540-000219	TSU-5540-000219	6	ER11A	1:1	Adjustable 0-90°, Double Ended
B0266	Main Spindle	Live Tools	End Drilling / Milling	5540-000220	TSU-5540-000220	4	ER16AM	1:1	Adjustable 0-90°, Double Ended
B0266	Sub Spindle	Static Tool	Turning	5540-000222	TSU-5540-000222	1	12x12mm		
B0266	Sub Spindle	Static Tool	Turning	5540-000223	TSU-5540-000223	1	10x10mm		
B0266	Sub Spindle	Static Tool	Turning	5540-000224	TSU-5540-000224	1	12x12mm		
B0266	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000226	TSU-420250-CT	1	25MM		Coolant Thru
B0266	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000227	TSU-5540-000227	2	25MM		Coolant Thru
B0266	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000228	TSU-5540-000228	1	ER20M		Coolant Thru
B0266	Sub Spindle	Static Tool	Slitting Saw	5540-000229	TSU-5540-000229	1	Ø12.7mm	1:1	Adjustable +/- 1mm
B0266	Sub Spindle	Static Tool	End Drilling / Milling	5540-000230	TSU-BW510-2X	1	ER11A	1:2	
B0266	Sub Spindle	Static Tool	End Drilling / Milling	5540-000231	TSU-ASE1E16	1	ER16A	1:1	
B0266	Sub Spindle	Static Tool	Cross Drilling / Milling	5540-000234	TSU-R921E16	1	ER16M	1:1	
B0266	Main Spindle	Live Tools	Cross Drilling / Milling	5540-000235	TSU-5540-000235	2	ER16A	1:1	
B0266	Main Spindle	Live Tools	Thread Whirling	5540-000236	TSU-BOTW20	1	Utilis Ring	1:1	Adjustable +/- 20°
B0266	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000239	TSU-5540-000239	1	3mm Bore		Adjustable +/- 1mm
B0266	Main Spindle	Live Tools	End Drilling / Milling	5540-000240	TSU-5540-000240	3	ER16AM	1:1	
B0266	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000271	TSU-5540-000271	1	4mm Bore		Adjustable +/- 1mm
B0266	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000272	TSU-5540-000272	1	5mm Bore		Adjustable +/- 1mm
B0266	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000273	TSU-5540-000273	1	6mm Bore		Adjustable +/- 1mm
B0266	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000274	TSU-5540-000274	1	8mm Bore		Adjustable +/- 1mm
B0266	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000275	TSU-5540-000275	1	9mm Bore		Adjustable +/- 1mm
B0266	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000276	TSU-5540-000276	1	10mm Bore		Adjustable +/- 1mm
B0266	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000277	TSU-5540-000277	1	12mm Bore		Adjustable +/- 1mm
B0266	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000278	TSU-5540-000278	1	16mm Bore		Adjustable +/- 1mm

Tsugami B0266 Machines



TSU-5540-000209
End Drilling / Milling
Main Spindle
Collet Size: ER16
Output: 1:1
Holds 2 Tools



TSU-5540-000210
Cross Drilling / Milling
Main Spindle
Collet Size: ER11A
Output: 1:2



TSU-5540-000211
Cross Drilling / Milling
Main Spindle
Collet Size: ER20A
Output: 1:1



TSU-5540-000212
Cross Drilling / Milling
Main Spindle
Collet Size: ER16A
Output: 1:1



TSU-5540-000213
Cross Drilling / Milling
Main Spindle
Collet Size: ER16A
Output: 1:1



TSU-5540-000214
End Drilling / Milling
Main Spindle
Collet Size: ER16AM
Output: 1:1



TSU-5540-000215
End Drilling / Milling
Main Spindle
Collet Size: ER16A
Output: 1:1
Holds 2 Tools



TSU-5540-000216
End Drilling / Milling
Main Spindle
Collet Size: ER16AM
Output: 1:1
Adjustable 0-90°



TSU-5540-000217
End Drilling / Milling
Main Spindle
Collet Size: ER11A
Output: 1:1
Double Ended
Holds 6 Tools



TSU-5540-000218
End Drilling / Milling
Main Spindle
Collet Size: ER16AM
Output: 1:1
Double Ended
Holds 4 Tools



TSU-5540-000219
End Drilling / Milling
Main Spindle
Collet Size: ER11A
Output: 1:1
Adjustable 0-90°
Double Ended
Holds 6 Tools



TSU-5540-000220
End Drilling / Milling
Main Spindle
Collet Size: ER16A
Output: 1:1
Adjustable 0-90°
Double Ended
Holds 4 Tools



TSU-5540-000222
Turning
Sub Spindle
Tool Size: 12x12mm



TSU-5540-000223
Turning
Sub Spindle
Tool Size: 10x10mm



TSU-5540-000224
Turning
Sub Spindle
Tool Size: 12x12mm



TSU-420250-CT
Round Shank Tool Holder
Sub Spindle
Tool Size: 25mm
Coolant-Thru



TSU-5540-000227
Round Shank Tool Holder
Sub Spindle
Tool Size: 25mm
Holds 2 Tools
Coolant-Thru



TSU-5540-000228
Round Shank Tool Holder
Sub Spindle
Tool Size: ER20M
Coolant-Thru



TSU-5540-000229
Slitting Saw
Sub Spindle
Tool Size: Ø12.7mm
Max Tool Size Ø50mm
Adjustable ±1mm



TSU-BW510-2X
End Drilling / Milling
Sub Spindle
Tool Size: ER11
Output: 1:2
High Speed 2X



TSU-ASE1E16
End Drilling / Milling
Sub Spindle
Collet Size: ER16A
Output: 1:1



TSU-R921E16
Cross Drilling / Milling
Sub Spindle
Collet Size: ER16M
Output: 1:1



TSU-5540-000235
Cross Drilling / Milling
Main Spindle
Collet Size: ER16A
Output: 1:1
Holds 2 Tools



TSU-BOTW20
Thread Whirling
Main Spindle
Ring: Utilis
Output: 1:1
Adjustable ±20°



TSU-5540-000239
Round Shank Tool Holder
Sub Spindle
Tool Size: Ø3mm
Adjustable ±1mm



TSU-5540-000240
End Drilling / Milling
Main Spindle
Collet Size: ER16AM
Output: 1:1
Holds 3 Tools



TSU-5540-000271
Round Shank Tool Holder
Sub Spindle
Tool Size: Ø4mm
Adjustable ±1mm



TSU-5540-000272
Round Shank Tool Holder
Sub Spindle
Tool Size: Ø5mm
Adjustable ±1mm



TSU-5540-000273
Round Shank Tool Holder
Sub Spindle
Tool Size: Ø6mm
Adjustable ±1mm



TSU-5540-000274
Round Shank Tool Holder
Sub Spindle
Tool Size: Ø8mm
Adjustable ±1mm



TSU-5540-000275
Round Shank Tool Holder
Sub Spindle
Tool Size: Ø9mm
Adjustable ±1mm



TSU-5540-000276
Round Shank Tool Holder
Sub Spindle
Tool Size: Ø10mm
Adjustable ±1mm



TSU-5540-000277
Round Shank Tool Holder
Sub Spindle
Tool Size: Ø12mm
Adjustable ±1mm



TSU-5540-000278
Round Shank Tool Holder
Sub Spindle
Tool Size: Ø16mm
Adjustable ±1mm

TSUGAMI B0325

Machine	Work Location	Live or Static	Operation	Item No.	Description	# of Tool Positions	Tool Size	Output	Other
B0325	Main Spindle	Live Tools	End Drilling / Milling	5540-000209	TSU-5540-000209	2	ER16	1:1	
B0325	Main Spindle	Live Tools	Cross Drilling / Milling	5540-000210	TSU-5540-000210	1	ER11A	1:2	
B0325	Main Spindle	Live Tools	Cross Drilling / Milling	5540-000211	TSU-5540-000211	1	ER20A	1:1	
B0325	Main Spindle	Live Tools	Cross Drilling / Milling	5540-000212	TSU-5540-000212	1	ER16A	1:1	
B0325	Main Spindle	Live Tools	Cross Drilling / Milling	5540-000213	TSU-5540-000213	1	ER16A	1:1	
B0325	Main Spindle	Live Tools	End Drilling / Milling	5540-000214	TSU-5540-000214	1	ER16AM	1:1	
B0325	Main Spindle	Live Tools	End Drilling / Milling	5540-000215	TSU-5540-000215	2	ER16A	1:1	
B0325	Main Spindle	Live Tools	End Drilling / Milling	5540-000216	TSU-5540-000216	2	ER16AM	1:1	Adjustable 0-90°
B0325	Main Spindle	Live Tools	End Drilling / Milling	5540-000217	TSU-5540-000217	6	ER11A	1:1	Double Ended
B0325	Main Spindle	Live Tools	End Drilling / Milling	5540-000218	TSU-5540-000218	4	ER16AM	1:1	Double Ended
B0325	Main Spindle	Live Tools	End Drilling / Milling	5540-000219	TSU-5540-000219	6	ER11A	1:1	Adjustable 0-90°, Double Ended
B0325	Main Spindle	Live Tools	End Drilling / Milling	5540-000220	TSU-5540-000220	4	ER16AM	1:1	Adjustable 0-90°, Double Ended
B0325	Sub Spindle	Static Tool	Turning	5540-000222	TSU-5540-000222	1	12x12mm		
B0325	Sub Spindle	Static Tool	Turning	5540-000223	TSU-5540-000223	1	10x10mm		
B0325	Sub Spindle	Static Tool	Turning	5540-000224	TSU-5540-000224	1	12x12mm		
B0325	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000226	TSU-420250-CT	1	25mm		Coolant Thru
B0325	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000227	TSU-5540-000227	2	25mm		Coolant Thru
B0325	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000228	TSU-5540-000228	1	ER20M		Coolant Thru
B0325	Sub Spindle	Static Tool	Slitting Saw	5540-000229	TSU-5540-000229	1	Ø12.7mm	1:1	Adjustable +/- 1mm
B0325	Sub Spindle	Static Tool	End Drilling / Milling	5540-000230	TSU-BW510-2X	1	ER11A	1:2	
B0325	Sub Spindle	Static Tool	End Drilling / Milling	5540-000231	TSU-ASE1E16	1	ER16A	1:1	
B0325	Sub Spindle	Static Tool	Cross Drilling / Milling	5540-000234	TSU-R921E16	1	ER16M	1:1	
B0325	Main Spindle	Live Tools	Cross Drilling / Milling	5540-000235	TSU-5540-000235	2	ER16A	1:1	
B0325	Main Spindle	Live Tools	Thread Whirling	5540-000236	TSU-BOTW20	1	Utilis Ring	1:1	Adjustable +/- 20°
B0325	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000239	TSU-5540-000239	1	3MM Bore		Adjustable +/- 1mm
B0325	Main Spindle	Live Tools	End Drilling / Milling	5540-000240	TSU-5540-000240	3	ER16AM	1:1	
B0325	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000271	TSU-5540-000271	1	4mm Bore		Adjustable +/- 1mm
B0325	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000272	TSU-5540-000272	1	5mm Bore		Adjustable +/- 1mm
B0325	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000273	TSU-5540-000273	1	6mm Bore		Adjustable +/- 1mm
B0325	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000274	TSU-5540-000274	1	8mm Bore		Adjustable +/- 1mm
B0325	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000275	TSU-5540-000275	1	9mm Bore		Adjustable +/- 1mm
B0325	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000276	TSU-5540-000276	1	10mm Bore		Adjustable +/- 1mm
B0325	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000277	TSU-5540-000277	1	12mm Bore		Adjustable +/- 1mm
B0325	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000278	TSU-5540-000278	1	16mm Bore		Adjustable +/- 1mm

Tsugami B0325 Machines



TSU-5540-000209
End Drilling / Milling
Main Spindle
Collet Size: ER16
Output: 1:1
Holds 2 Tools



TSU-5540-000210
Cross Drilling / Milling
Main Spindle
Collet Size: ER11A
Output: 1:2



TSU-5540-000211
Cross Drilling / Milling
Main Spindle
Collet Size: ER20A
Output: 1:1



TSU-5540-000212
Cross Drilling / Milling
Main Spindle
Collet Size: ER16A
Output: 1:1



TSU-5540-000213
Cross Drilling / Milling
Main Spindle
Collet Size: ER16A
Output: 1:1



TSU-5540-000214
End Drilling / Milling
Main Spindle
Collet Size: ER16AM
Output: 1:1



TSU-5540-000215
End Drilling / Milling
Main Spindle
Collet Size: ER16A
Output: 1:1
Holds 2 Tools



TSU-5540-000216
End Drilling / Milling
Main Spindle
Collet Size: ER16AM
Output: 1:1
Adjustable 0-90°



TSU-5540-000217
End Drilling / Milling
Main Spindle
Collet Size: ER11A
Output: 1:1
Double Ended
Holds 6 Tools



TSU-5540-000218
End Drilling / Milling
Main Spindle
Collet Size: ER16AM
Output: 1:1
Double Ended
Holds 4 Tools



TSU-5540-000219
End Drilling / Milling
Main Spindle
Collet Size: ER11A
Output: 1:1
Adjustable 0-90°
Double Ended
Holds 6 Tools



TSU-5540-000220
End Drilling / Milling
Main Spindle
Collet Size: ER16A
Output: 1:1
Adjustable 0-90°
Double Ended
Holds 4 Tools



TSU-5540-000222
Turning
Sub Spindle
Tool Size: 12x12mm



TSU-5540-000223
Turning
Sub Spindle
Tool Size: 10x10mm



TSU-5540-000224
Turning
Sub Spindle
Tool Size: 12x12mm



TSU-420250-CT
Round Shank Tool Holder
Sub Spindle
Tool Size: 25mm
Coolant-Thru



TSU-5540-000227
Round Shank Tool Holder
Sub Spindle
Tool Size: 25mm
Holds 2 Tools
Coolant-Thru



TSU-5540-000228
Round Shank Tool Holder
Sub Spindle
Tool Size: ER20M
Coolant-Thru



TSU-5540-000229
Slitting Saw
Sub Spindle
Tool Size: Ø12.7mm
Max Tool Size Ø50mm
Adjustable ±1mm



TSU-BW510-2X
End Drilling / Milling
Sub Spindle
Tool Size: ER11
Output: 1:2
High Speed 2X



TSU-ASE1E16
End Drilling / Milling
Sub Spindle
Collet Size: ER16A
Output: 1:1



TSU-R921E16
Cross Drilling / Milling
Sub Spindle
Collet Size: ER16M
Output: 1:1



TSU-5540-000235
Cross Drilling / Milling
Main Spindle
Collet Size: ER16A
Output: 1:1
Holds 2 Tools



TSU-BOTW20
Thread Whirling
Main Spindle
Ring: Utilis
Output: 1:1
Adjustable ±20°



TSU-5540-000239
Round Shank Tool Holder
Sub Spindle
Tool Size: Ø3mm
Adjustable ±1mm



TSU-5540-000240
End Drilling / Milling
Main Spindle
Collet Size: ER16AM
Output: 1:1
Holds 3 Tools



TSU-5540-000271
Round Shank Tool Holder
Sub Spindle
Tool Size: Ø4mm
Adjustable ±1mm



TSU-5540-000272
Round Shank Tool Holder
Sub Spindle
Tool Size: Ø5mm
Adjustable ±1mm



TSU-5540-000273
Round Shank Tool Holder
Sub Spindle
Tool Size: Ø6mm
Adjustable ±1mm



TSU-5540-000274
Round Shank Tool Holder
Sub Spindle
Tool Size: Ø8mm
Adjustable ±1mm



TSU-5540-000275
Round Shank Tool Holder
Sub Spindle
Tool Size: Ø9mm
Adjustable ±1mm



TSU-5540-000276
Round Shank Tool Holder
Sub Spindle
Tool Size: Ø10mm
Adjustable ±1mm



TSU-5540-000277
Round Shank Tool Holder
Sub Spindle
Tool Size: Ø12mm
Adjustable ±1mm



TSU-5540-000278
Round Shank Tool Holder
Sub Spindle
Tool Size: Ø16mm
Adjustable ±1mm

TSUGAMI B0326

Machine	Work Location	Live or Static	Operation	Item No.	Description	# of Tool Positions	Tool Size	Output	Other
B0326	Main Spindle	Live Tools	End Drilling / Milling	5540-000209	TSU-5540-000209	2	ER16	1:1	
B0326	Main Spindle	Live Tools	Cross Drilling / Milling	5540-000210	TSU-5540-000210	1	ER11A	1:2	
B0326	Main Spindle	Live Tools	Cross Drilling / Milling	5540-000211	TSU-5540-000211	1	ER20A	1:1	
B0326	Main Spindle	Live Tools	Cross Drilling / Milling	5540-000212	TSU-5540-000212	1	ER16A	1:1	
B0326	Main Spindle	Live Tools	Cross Drilling / Milling	5540-000213	TSU-5540-000213	1	ER16A	1:1	
B0326	Main Spindle	Live Tools	End Drilling / Milling	5540-000214	TSU-5540-000214	1	ER16AM	1:1	
B0326	Main Spindle	Live Tools	End Drilling / Milling	5540-000215	TSU-5540-000215	2	ER16A	1:1	
B0326	Main Spindle	Live Tools	End Drilling / Milling	5540-000216	TSU-5540-000216	2	ER16AM	1:1	Adjustable 0-90°
B0326	Main Spindle	Live Tools	End Drilling / Milling	5540-000217	TSU-5540-000217	6	ER11A	1:1	Double Ended
B0326	Main Spindle	Live Tools	End Drilling / Milling	5540-000218	TSU-5540-000218	4	ER16AM	1:1	Double Ended
B0326	Main Spindle	Live Tools	End Drilling / Milling	5540-000219	TSU-5540-000219	6	ER11A	1:1	Adjustable 0-90°, Double Ended
B0326	Main Spindle	Live Tools	End Drilling / Milling	5540-000220	TSU-5540-000220	4	ER16AM	1:1	Adjustable 0-90°, Double Ended
B0326	Sub Spindle	Static Tool	Turning	5540-000222	TSU-5540-000222	1	12x12mm		
B0326	Sub Spindle	Static Tool	Turning	5540-000223	TSU-5540-000223	1	10x10mm		
B0326	Sub Spindle	Static Tool	Turning	5540-000224	TSU-5540-000224	1	12x12mm		
B0326	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000226	TSU-420250-CT	1	25mm		Coolant Thru
B0326	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000227	TSU-5540-000227	1	25mm		Coolant Thru
B0326	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000228	TSU-5540-000228	1	ER20M		Coolant Thru
B0326	Sub Spindle	Static Tool	Slitting Saw	5540-000229	TSU-5540-000229	1	Ø12.7mm	1:1	Adjustable +/- 1mm
B0326	Sub Spindle	Static Tool	End Drilling / Milling	5540-000230	TSU-BW510-2X	1	ER11A	1:2	
B0326	Sub Spindle	Static Tool	End Drilling / Milling	5540-000231	TSU-ASE1E16	1	ER16A	1:1	
B0326	Sub Spindle	Static Tool	Cross Drilling / Milling	5540-000234	TSU-R921E16	1	ER16M	1:1	
B0326	Main Spindle	Live Tools	Cross Drilling / Milling	5540-000235	TSU-5540-000235	2	ER16A	1:1	
B0326	Main Spindle	Live Tools	Thread Whirling	5540-000236	TSU-BOTW20	1	Utilis Ring	1:1	Adjustable +/- 20°
B0326	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000239	TSU-5540-000239	1	3mm Bore		Adjustable +/- 1mm
B0326	Main Spindle	Live Tools	End Drilling / Milling	5540-000240	TSU-5540-000240	3	ER16AM	1:1	
B0326	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000271	TSU-5540-000271	1	4mm Bore		Adjustable +/- 1mm
B0326	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000272	TSU-5540-000272	1	5mm Bore		Adjustable +/- 1mm
B0326	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000273	TSU-5540-000273	1	6mm Bore		Adjustable +/- 1mm
B0326	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000274	TSU-5540-000274	1	8mmBore		Adjustable +/- 1mm
B0326	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000275	TSU-5540-000275	1	9mm Bore		Adjustable +/- 1mm
B0326	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000276	TSU-5540-000276	1	10mm Bore		Adjustable +/- 1mm
B0326	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000277	TSU-5540-000277	1	12mmBore		Adjustable +/- 1mm
B0326	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000278	TSU-5540-000278	1	16mm Bore		Adjustable +/- 1mm

Tsugami B0326 Machines



TSU-5540-000209
End Drilling / Milling
Main Spindle
Collet Size: ER16
Output: 1:1
Holds 2 Tools



TSU-5540-000210
Cross Drilling / Milling
Main Spindle
Collet Size: ER11A
Output: 1:2



TSU-5540-000211
Cross Drilling / Milling
Main Spindle
Collet Size: ER20A
Output: 1:1



TSU-5540-000212
Cross Drilling / Milling
Main Spindle
Collet Size: ER16A
Output: 1:1



TSU-5540-000213
Cross Drilling / Milling
Main Spindle
Collet Size: ER16A
Output: 1:1



TSU-5540-000214
End Drilling / Milling
Main Spindle
Collet Size: ER16AM
Output: 1:1



TSU-5540-000215
End Drilling / Milling
Main Spindle
Collet Size: ER16A
Output: 1:1
Holds 2 Tools



TSU-5540-000216
End Drilling / Milling
Main Spindle
Collet Size: ER16AM
Output: 1:1
Adjustable 0-90°



TSU-5540-000217
End Drilling / Milling
Main Spindle
Collet Size: ER11A
Output: 1:1
Double Ended
Holds 6 Tools



TSU-5540-000218
End Drilling / Milling
Main Spindle
Collet Size: ER16AM
Output: 1:1
Double Ended
Holds 4 Tools



TSU-5540-000219
End Drilling / Milling
Main Spindle
Collet Size: ER11A
Output: 1:1
Adjustable 0-90°
Double Ended
Holds 6 Tools



TSU-5540-000220
End Drilling / Milling
Main Spindle
Collet Size: ER16A
Output: 1:1
Adjustable 0-90°
Double Ended
Holds 4 Tools



TSU-5540-000222
Turning
Sub Spindle
Tool Size: 12x12mm



TSU-5540-000223
Turning
Sub Spindle
Tool Size: 10x10mm



TSU-5540-000224
Turning
Sub Spindle
Tool Size: 12x12mm



TSU-420250-CT
Round Shank Tool Holder
Sub Spindle
Tool Size: 25mm
Coolant-Thru



TSU-5540-000227
Round Shank Tool Holder
Sub Spindle
Tool Size: 25mm
Holds 2 Tools
Coolant-Thru



TSU-5540-000228
Round Shank Tool Holder
Sub Spindle
Tool Size: ER20M
Coolant-Thru



TSU-5540-000229
Slitting Saw
Sub Spindle
Tool Size: Ø12.7mm
Max Tool Size Ø50mm
Adjustable ±1mm



TSU-BW510-2X
End Drilling / Milling
Sub Spindle
Tool Size: ER11
Output: 1:2
High Speed 2X



TSU-ASE1E16
End Drilling / Milling
Sub Spindle
Collet Size: ER16A
Output: 1:1



TSU-R921E16
Cross Drilling / Milling
Sub Spindle
Collet Size: ER16M
Output: 1:1



TSU-5540-000235
Cross Drilling / Milling
Main Spindle
Collet Size: ER16A
Output: 1:1
Holds 2 Tools



TSU-BOTW20
Thread Whirling
Main Spindle
Ring: Utilis
Output: 1:1
Adjustable ±20°



TSU-5540-000239
Round Shank Tool Holder
Sub Spindle
Tool Size: Ø3mm
Adjustable ±1mm



TSU-5540-000240
End Drilling / Milling
Main Spindle
Collet Size: ER16AM
Output: 1:1
Holds 3 Tools



TSU-5540-000271
Round Shank Tool Holder
Sub Spindle
Tool Size: Ø4mm
Adjustable ±1mm



TSU-5540-000272
Round Shank Tool Holder
Sub Spindle
Tool Size: Ø5mm
Adjustable ±1mm



TSU-5540-000273
Round Shank Tool Holder
Sub Spindle
Tool Size: Ø6mm
Adjustable ±1mm



TSU-5540-000274
Round Shank Tool Holder
Sub Spindle
Tool Size: Ø8mm
Adjustable ±1mm



TSU-5540-000275
Round Shank Tool Holder
Sub Spindle
Tool Size: Ø9mm
Adjustable ±1mm



TSU-5540-000276
Round Shank Tool Holder
Sub Spindle
Tool Size: Ø10mm
Adjustable ±1mm



TSU-5540-000277
Round Shank Tool Holder
Sub Spindle
Tool Size: Ø12mm
Adjustable ±1mm



TSU-5540-000278
Round Shank Tool Holder
Sub Spindle
Tool Size: Ø16mm
Adjustable ±1mm

TSUGAMI B0385

Machine	Work Location	Live or Static	Operation	Item No.	Description	# of Tool Positions	Tool Size	Output	Other
B0385	Main Spindle	Live Tools	End Drilling / Milling	5540-000209	TSU-5540-000209	2	ER16	1:1	
B0385	Main Spindle	Live Tools	Cross Drilling / Milling	5540-000210	TSU-5540-000210	1	ER11A	1:2	
B0385	Main Spindle	Live Tools	Cross Drilling / Milling	5540-000211	TSU-5540-000211	1	ER20A	1:1	
B0385	Main Spindle	Live Tools	Cross Drilling / Milling	5540-000212	TSU-5540-000212	1	ER16A	1:1	
B0385	Main Spindle	Live Tools	Cross Drilling / Milling	5540-000213	TSU-5540-000213	1	ER16A	1:1	
B0385	Main Spindle	Live Tools	End Drilling / Milling	5540-000214	TSU-5540-000214	1	ER16AM	1:1	
B0385	Main Spindle	Live Tools	End Drilling / Milling	5540-000215	TSU-5540-000215	2	ER16A	1:1	
B0385	Main Spindle	Live Tools	End Drilling / Milling	5540-000216	TSU-5540-000216	2	ER16AM	1:1	Adjustable 0-90°
B0385	Main Spindle	Live Tools	End Drilling / Milling	5540-000217	TSU-5540-000217	6	ER11A	1:1	Double Ended
B0385	Main Spindle	Live Tools	End Drilling / Milling	5540-000218	TSU-5540-000218	4	ER16AM	1:1	Double Ended
B0385	Main Spindle	Live Tools	End Drilling / Milling	5540-000219	TSU-5540-000219	6	ER11A	1:1	Adjustable 0-90°, Double Ended
B0385	Main Spindle	Live Tools	End Drilling / Milling	5540-000220	TSU-5540-000220	4	ER16AM	1:1	Adjustable 0-90°, Double Ended
B0385	Sub Spindle	Static Tool	Turning	5540-000222	TSU-5540-000222	1	12x12mm		
B0385	Sub Spindle	Static Tool	Turning	5540-000223	TSU-5540-000223	1	10x10mm		
B0385	Sub Spindle	Static Tool	Turning	5540-000224	TSU-5540-000224	1	12x12mm		
B0385	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000226	TSU-420250-CT	1	25mm		Coolant Thru
B0385	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000227	TSU-5540-000227	2	25mm		Coolant Thru
B0385	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000228	TSU-5540-000228	1	ER20M		Coolant Thru
B0385	Sub Spindle	Static Tool	Slitting Saw	5540-000229	TSU-5540-000229	1	Ø12.7mm	1:1	Adjustable +/- 1mm
B0385	Sub Spindle	Static Tool	End Drilling / Milling	5540-000230	TSU-BW510-2X	1	ER11A	1:2	
B0385	Sub Spindle	Static Tool	End Drilling / Milling	5540-000231	TSU-ASE1E16	1	ER16A	1:1	
B0385	Sub Spindle	Static Tool	Cross Drilling / Milling	5540-000234	TSU-R921E16	1	ER16M	1:1	
B0385	Main Spindle	Live Tools	Cross Drilling / Milling	5540-000235	TSU-5540-000235	2	ER16A	1:1	
B0385	Main Spindle	Live Tools	Thread Whirling	5540-000236	TSU-BOTW20	1	Utilis Ring	1:1	Adjustable +/- 20°
B0385	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000239	TSU-5540-000239	1	3mm Bore		Adjustable +/- 1mm
B0385	Main Spindle	Live Tools	End Drilling / Milling	5540-000240	TSU-5540-000240	3	ER16AM	1:1	
B0385	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000271	TSU-5540-000271	1	4mm Bore		Adjustable +/- 1mm
B0385	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000272	TSU-5540-000272	1	5mm Bore		Adjustable +/- 1mm
B0385	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000273	TSU-5540-000273	1	6mm Bore		Adjustable +/- 1mm
B0385	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000274	TSU-5540-000274	1	8mm Bore		Adjustable +/- 1mm
B0385	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000275	TSU-5540-000275	1	9mm Bore		Adjustable +/- 1mm
B0385	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000276	TSU-5540-000276	1	10mm Bore		Adjustable +/- 1mm
B0385	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000277	TSU-5540-000277	1	12mm Bore		Adjustable +/- 1mm
B0385	Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000278	TSU-5540-000278	1	16mm Bore		Adjustable +/- 1mm

Tsugami B0385 Machines



TSU-5540-000209
End Drilling / Milling
Main Spindle
Collet Size: ER16
Output: 1:1
Holds 2 Tools



TSU-5540-000210
Cross Drilling / Milling
Main Spindle
Collet Size: ER11A
Output: 1:2



TSU-5540-000211
Cross Drilling / Milling
Main Spindle
Collet Size: ER20A
Output: 1:1



TSU-5540-000212
Cross Drilling / Milling
Main Spindle
Collet Size: ER16A
Output: 1:1



TSU-5540-000213
Cross Drilling / Milling
Main Spindle
Collet Size: ER16A
Output: 1:1



TSU-5540-000214
End Drilling / Milling
Main Spindle
Collet Size: ER16AM
Output: 1:1



TSU-5540-000215
End Drilling / Milling
Main Spindle
Collet Size: ER16A
Output: 1:1
Holds 2 Tools



TSU-5540-000216
End Drilling / Milling
Main Spindle
Collet Size: ER16AM
Output: 1:1
Adjustable 0-90°



TSU-5540-000217
End Drilling / Milling
Main Spindle
Collet Size: ER11A
Output: 1:1
Double Ended
Holds 6 Tools



TSU-5540-000218
End Drilling / Milling
Main Spindle
Collet Size: ER16AM
Output: 1:1
Double Ended
Holds 4 Tools



TSU-5540-000219
End Drilling / Milling
Main Spindle
Collet Size: ER11A
Output: 1:1
Adjustable 0-90º
Double Ended
Holds 6 Tools



TSU-5540-000220
End Drilling / Milling
Main Spindle
Collet Size: ER16A
Output: 1:1
Adjustable 0-90º
Double Ended
Holds 4 Tools



TSU-5540-000222
Turning
Sub Spindle
Tool Size: 12x12mm



TSU-5540-000223
Turning
Sub Spindle
Tool Size: 10x10mm



TSU-5540-000224
Turning
Sub Spindle
Tool Size: 12x12mm



TSU-420250-CT
Round Shank Tool Holder
Sub Spindle
Tool Size: 25mm
Coolant-Thru



TSU-5540-000227
Round Shank Tool Holder
Sub Spindle
Tool Size: 25mm
Holds 2 Tools
Coolant-Thru



TSU-5540-000228
Round Shank Tool Holder
Sub Spindle
Tool Size: ER20M
Coolant-Thru



TSU-5540-000229
Slitting Saw
Sub Spindle
Tool Size: Ø12.7mm
Max Tool Size Ø50mm
Adjustable ±1mm



TSU-BW510-2X
End Drilling / Milling
Sub Spindle
Tool Size: ER11
Output: 1:2
High Speed 2X



TSU-ASE1E16
End Drilling / Milling
Sub Spindle
Collet Size: ER16A
Output: 1:1



TSU-R921E16
Cross Drilling / Milling
Sub Spindle
Collet Size: ER16M
Output: 1:1



TSU-5540-000235
Cross Drilling / Milling
Main Spindle
Collet Size: ER16A
Output: 1:1
Holds 2 Tools



TSU-BOTW20
Thread Whirling
Main Spindle
Ring: Utilis
Output: 1:1
Adjustable ±20º



TSU-5540-000239
Round Shank Tool Holder
Sub Spindle
Tool Size: Ø3mm
Adjustable ±1mm



TSU-5540-000240
End Drilling / Milling
Main Spindle
Collet Size: ER16AM
Output: 1:1
Holds 3 Tools



TSU-5540-000271
Round Shank Tool Holder
Sub Spindle
Tool Size: Ø4mm
Adjustable ±1mm



TSU-5540-000272
Round Shank Tool Holder
Sub Spindle
Tool Size: Ø5mm
Adjustable ±1mm



TSU-5540-000273
Round Shank Tool Holder
Sub Spindle
Tool Size: Ø6mm
Adjustable ±1mm



TSU-5540-000274
Round Shank Tool Holder
Sub Spindle
Tool Size: Ø8mm
Adjustable ±1mm



TSU-5540-000275
Round Shank Tool Holder
Sub Spindle
Tool Size: Ø9mm
Adjustable ±1mm



TSU-5540-000276
Round Shank Tool Holder
Sub Spindle
Tool Size: Ø10mm
Adjustable ±1mm



TSU-5540-000277
Round Shank Tool Holder
Sub Spindle
Tool Size: Ø12mm
Adjustable ±1mm



TSU-5540-000278
Round Shank Tool Holder
Sub Spindle
Tool Size: Ø16mm
Adjustable ±1mm

TSUGAMI S205 & S206

Work Location	Live or Static	Operation	Item No.	Description	# of Tool Positions	Tool Size	Output	Other
Main Spindle	Live Tools	Cross Drilling / Milling	5540-000251	TSU-5540-000251	1	ER16M	1:1	
Main Spindle	Live Tools	Thread Whirling	5540-000252	TSU-TWU-S205/6-20	1	Utilis Ring	1:1	Adjustable +/- 20°
Main Spindle	Live Tools	End Drilling / Milling	5540-000253	TSU-S205-S206	3	ER11A	1:1	
Main Spindle	Live Tools	End Drilling / Milling	5540-000254	TSU-5540-000254	6	ER16A, ER11A	1:1	Double Ended
Main Spindle	Live Tools	End Drilling / Milling	5540-000255	TSU-5540-000255	3	ER16A	1:1	
Main Spindle	Live Tools	End Drilling / Milling	5540-000256	TSU-5540-000256	3	ER16A	1:1	Adjustable 0-90°
Main Spindle	Live Tools	End Drilling / Milling	5540-000257	TSU-5540-000257	4	ER16M, ER11A	1:1	Double Ended
Main Spindle	Live Tools	End Drilling / Milling	5540-000258	TSU-5540-000258	4	ER16M, ER11A	1:1	Adjustable 0-90°, Double Ended
Main Spindle	Live Tools	End Drilling / Milling	5540-000259	TSU-5540-000259	6	ER16A, ER11A	1:1	Adjustable 0-90°, Double Ended
Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000260	TSU-5540-000260	1	20mm		Coolant Thru
Sub Spindle	Static Tool	Turning	5540-000261	TSU-5540-000261	1	10x10mm		
Sub Spindle	Static Tool	Turning	5540-000262	TSU-5540-000262	1	10x10mm		
Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000263	TSU-5540-000263	1	16mm		
Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000264	TSU-5540-000264	1	ER20M		Coolant Thru
Sub Spindle	Static Tool	Round Shank Tool Holder	5540-000265	TSU-S20BWE16-CT-GSI	1	ER16M		
Sub Spindle	Live Tools	End Drilling / Milling	5540-000266	TSU-BWS20-E16	1	ER16M	1:1	
Sub Spindle	Live Tools	Cross Drilling / Milling	5540-000267	TSU-BWC-S2056-E16	1	ER16M	1:1	
Sub Spindle	Static Tool	Turning	5540-000268	TSU-5540-000268	1	12x12mm		

Tsugami S205 & S206 Machines



TSU-5540-000251
Cross Drilling / Milling
Main Spindle
Collet Size: ER16M
Output: 1:1



TSU-5540-000252
Thread Whirling
Main Spindle
Ring: Utilis
Output: 1:1
Adjustable ±20°



TSU-5540-000253
End Drilling / Milling
Main Spindle
Collet Size: ER11A
Output: 1:1
Holds 3 Tools



TSU-5540-000254
End Drilling / Milling
Main Spindle
Collet Size: ER16A, ER11A
Output: 1:1
Double-Ended
Holds 6 Tools



TSU-5540-000255
End Drilling / Milling
Main Spindle
Collet Size: ER16A
Output: 1:1
Holds 3 Tools



TSU-5540-000256
End Drilling / Milling
Main Spindle
Collet Size: ER16A
Output: 1:1
Adjustable 0-90°
Holds 3 Tools



TSU-5540-000257
End Drilling / Milling
Main Spindle
Collet Size: ER16M, ER11A
Output: 1:1
Holds 4 Tools
Double-Ended



TSU-5540-000258
End Drilling / Milling
Main Spindle
Collet Size: ER16M, ER11A
Output: 1:1
Holds 4 Tools
Double-Ended
Adjustable 0-90°



TSU-5540-000259
End Drilling / Milling
Main Spindle
Collet Size: ER16A, ER11A
Output: 1:1
Holds 6 Tools
Double-Ended
Adjustable 0-90°



TSU-5540-000260
Round Shank Tool Holder
Sub Spindle
Tool Size: Ø20mm
Coolant-Thru



TSU-5540-000261
Turning
Sub Spindle
Tool Size: 10x10mm



TSU-5540-000262
Turning
Sub Spindle
Tool Size: 10x10mm



TSU-5540-000263
Round Shank Tool Holder
Sub Spindle
Tool Size: Ø16mm



TSU-5540-000264
Round Shank Tool Holder
Sub Spindle
Collet Size: ER20M
Coolant-Thru



TSU-S20BWE16-CT-GSI
Round Shank Tool Holder
Sub Spindle
Collet Size: ER16M



TSU-BWS20-E16
End Drilling / Milling
Sub Spindle
Collet Size: ER16M
Output: 1:1



TSU-BWC-S2056-E16
Cross Drilling / Milling
Sub Spindle
Collet Size: ER16M
Output: 1:1



TSU-5540-000268
Turning
Sub Spindle
Tool Size: 12x12mm

INDEX

Tool Type - Designation

BackTools
Accessories & Spare Parts: MBV..... pg. 328; MSP..... pg. 328; YE4..... pg. 328
Holder: MBA..... pg. 327; MBG..... pg. 314-319; MBK..... pg. 327; MBR..... pg. 326; MBS..... pg. 319-327; MBZ..... pg. 327

Bore Micro
Accessories & Spare Parts: FIT..... pg. 39; MRH..... pg. 39; MSP..... pg. 39
Holder: AKR..... pg. 39; SDA..... pg. 38
Tools: SDF..... pg. 25; SDG..... pg. 21; SDH..... pg. 27; SDI..... pg. 23; SDK..... pg. 28; SDM..... pg. 29; SDO..... pg. 30; SDQ..... pg. 31; SDR..... pg. 32; SDS..... pg. 33; SDT..... pg. 34; SDU..... pg. 34; SDV..... pg. 35; SXF..... pg. 26; SXG..... pg. 22; SXI..... pg. 24; SXJ..... pg. 36; SXP..... pg. 37

Broaching, Rotary
Guide: ..... pg. 6-7
Holder: RBH..... pg. 8-10
Tools: RBT..... pg. 12-19

Broaching, Static Punch
Holder: SBH..... pg. 11

Clamp/Wedge
Accessories & Spare Parts: MLU..... pg. 309; MSP..... pg. 310-312
Clamp/Wedge: MLU..... pg. 310

Coolant Kit
Kit: ..... pg. 394

Collet Sleeves
Holder: CS..... pg. 105-108

Tool Type - Designation

Collets
Accessories & Spare Parts: CD..... pg. 121; CN..... pg. 121; CQS..... pg. 122; CSB..... pg. 122; CW..... pg. 122; MRH..... pg. 122
Tool Holder: CC..... pg. 117, 119; CK..... pg. 118, 119; CM..... pg. 118; ET1..... pg. 120
Head Stock, Sub-Spindle: MC..... pg. 405; ..... pg. 406-407
Barfeed: MCB..... pg. 409

Cutting Oil
Oil: LCO..... pg. 390-391

Drills, Micro
Holder: CC..... pg. 48; CS..... pg. 48
Spare Parts: Nut..... pg. 48; Wrench..... pg. 48
Tools: GD..... pg. 50-76; TD..... pg. 78-91

Ejector Pins: EJK..... pg. 397-399

Endmills, Micro
Tools: TE..... pg. 92-96

HSK & PSC Holders
Holder: HSK..... pg. 372-374, pg. 378-383; PSC..... pg. 375-377 pg. 384-386

EZR Swiss Clamp
Holder: EZR..... pg. 114

Gen Bore Mini
Holder: GBM..... pg. 104

GenCut Spot Drills
Holder: SDH..... pg. 43
Inserts: SDI..... pg. 43

GenGrip
Holder: CTS..... pg. 362; HYC..... pg. 363-365; HYCS..... pg. 363-364; GRI..... pg. 366-368; GRIS..... pg. 369

INDEX

Tool Type - Designation		
GenQuick		
Holder	CQS	pg. 110-112
Guide Bushing	MB	pg. 408
Gun Drilling		pg. 351
Knurling		
Holder	KHB	pg. 344,346-347
	KHE	pg. 343
	KHS	pg. 342
Tools	KDL	pg. 345, 347
	KDR	pg. 345, 347
	KDS	pg. 345, 347
Live Tooling		
CITIZEN	CIT	pg. 412-455
		pg. 474-493
STAR	STA	pg. 466-471
		pg. 494-527
TORNOS	TOR	pg. 456-460
TSUGAMI	TSU	pg. 461-465
		pg. 528-543
Magnetic Finishing	FR	pg. 401
MiJet		pg. 400
Reaming		
Holder	RFH	pg. 44
Tools	TR-8600.	pg. 45-47
Saws & Arbors		
Holder	SAC	pg. 354
	SAF	pg. 355
	SAP	pg. 356
	SAPE	pg. 356
	SAS	pg. 355
Tools	SSM	pg. 357
Thread Milling		
Tools	WHA	pg. 98
	WHB	pg. 99
	WHC	pg. 100-101
	WHD	pg. 102-103
	WHL	pg. 99
	WHS	pg. 98

Tool Type - Designation		
Thread Rolling		pg. 350
Thread Whirling		
Rings	MWT	pg. 331-336
Inserts	MWI	pg. 337-341
Ti-Loc		
CTE Spare Parts		pg. 115
SAT Spare Parts		pg. 353
Holder	CTE	pg. 116
	RTE	pg. 116
	SAT	pg. 353
Turning		
Holder	1600	pg. 187-193
	1600-S	pg. 302
	3000	pg. 154-157
	3000-S	pg. 303
	SC	pg. 211-212
	SD	pg. 223-240
	SV	pg. 255-264
		pg. 270-280
	SV-S	pg. 303-304
Tools	1602	pg. 162-170
	1603	pg. 170-172
	1604	pg. 172-174
	1605	pg. 174-176
	1606	pg. 176-182
	1607	pg. 183
	1610	pg. 184-185
	1611	pg. 186-187
	1612	pg. 186
	3002	pg. 127-139
	3003	pg. 140
	3004	pg. 141-144
	3005	pg. 145-147
	3006	pg. 148-153
	3007	pg. 146
	3012	pg. 153
	CC	pg. 199-210
	DC	pg. 213-228
	DN	pg. 203
	VC	pg. 241-254
	VP	pg. 269
Vice Blocks	IMC	pg. 403

Drill Size Chart

FRACT #SIZE	METRIC (mm)	DECIMAL INCHES
80	0.3429	0.0135
79	0.368	0.0145
(1/64)	0.3969	0.0156
78	0.4064	0.016
77	0.4572	0.018
	0.5	0.0197
76	0.508	0.02
75	0.5334	0.021
74	0.5715	0.0225
73	0.6096	0.024
72	0.635	0.025
71	0.6604	0.026
70	0.7712	0.028
69	0.7417	0.0292
	0.75	0.0295
68	0.7874	0.031
(1/32)	0.7938	0.0312
67	0.8128	0.032
66	0.8382	0.033
65	0.889	0.035
64	0.9144	0.036
63	0.9398	0.037
62	0.9652	0.038
61	0.9906	0.039
	1	0.0394
60	1.016	0.04
59	1.0414	0.041
58	1.0668	0.042
57	1.0922	0.043
56	1.1811	0.0465
(3/64)	1.1906	0.0469
	1.25	0.0492
55	1.3208	0.052
54	1.397	0.055
	1.5	0.0591
53	1.5113	0.0595
(1/16)	1.5875	0.0625
52	1.6129	0.0635
51	1.7018	0.067
	1.75	0.0689
50	1.778	0.07
49	1.8542	0.073
48	1.9304	0.076
(5/64)	1.9844	0.0781
47	1.9939	0.0785
	2	0.0787
46	2.0574	0.081
45	2.0828	0.082
44	2.144	0.086
	2.25	0.0886
43	2.2606	0.089
42	2.3749	0.0935
(3/32)	2.3813	0.0938
41	2.4384	0.096
40	2.4892	0.098
	2.5	0.0984
39	2.5273	0.0995
38	2.5781	0.1015
37	2.6416	0.104
36	2.7051	0.1065

LETTER FRACT #SIZE	METRIC (mm)	DECIMAL INCHES
	2.75	0.1083
(7/64)	2.7781	0.1094
35	2.794	0.11
34	2.8194	0.111
33	2.8702	0.113
32	2.9464	0.116
	3	0.1181
31	3.048	0.12
(1/8)	3.175	0.125
	3.25	0.128
30	3.2639	0.1285
29	3.4544	0.136
	3.5	0.1378
28	3.5687	0.1405
(9/64)	3.5719	0.1406
27	3.6576	0.144
26	3.7973	0.147
	3.75	0.1476
25	3.7973	0.1495
24	3.8608	0.152
23	3.9116	0.154
(5/32)	3.9688	0.1562
22	3.9878	0.157
	4	0.1575
21	4.0386	0.159
20	4.0894	0.161
19	4.2164	0.166
	4.25	0.1673
18	4.3053	0.1695
(11/64)	4.3656	0.1719
17	4.3942	0.173
16	4.4958	0.177
	4.5	0.1772
15	4.572	0.18
14	4.6228	0.182
13	4.699	0.185
	4.75	0.187
(3/16)	4.7625	0.1875
12	4.8006	0.189
11	4.8514	0.191
10	4.9149	0.1935
9	4.9874	0.196
	5	0.1969
8	4.0546	0.199
7	5.1054	0.201
(13/64)	5.1594	0.2031
6	5.1816	0.204
5	5.2197	0.2055
	5.25	0.2067
4	5.3086	0.209
3	5.4102	0.213
	5.5	0.2165
(7/32)	5.5563	0.2188
2	5.6134	0.221
	5.75	0.2264
1	5.7912	0.228
A	5.9436	0.234
(15/64)	5.9531	0.2344
	6	0.2362
B	6.0452	0.238

LETTER/ FRACT SIZE	METRIC (mm)	DECI-MAL INCHES
C	6.1468	0.242
D	6.2484	0.246
	6.25	0.2461
E (1/4)	6.35	0.25
	6.5	0.2559
F	6.5278	0.257
G	6.6294	0.261
(17/64)	6.7469	0.2656
	6.75	0.2657
H	6.7564	0.266
I	6.9088	0.272
	7	0.2756
J	7.0358	0.277
K	7.1374	0.281
(9/32)	7.1438	0.2812
	7.25	0.2854
L	7.366	0.29
M	7.493	0.295
	7.5	0.2953
(19/64)	7.5406	0.2969
N	7.6708	0.302
	7.75	0.3051
(5/16)	7.9375	0.3125
	8	0.315
O	8.0264	0.316
P	8.2042	0.323
	8.25	0.3248
(21/64)	8.3344	0.3281
Q	8.4328	0.332
	8.5	0.3346
R	8.6106	0.339
(11/32)	8.7316	0.3438
	8.75	0.3445
S	8.8392	0.348
	9	0.3543
T	9.0932	0.358
(23/64)	9.1281	0.3594
	9.25	0.3642
U	9.3472	0.368
	9.5	0.374
(3/8)	9.525	0.375
V	9.5758	0.377
	9.75	0.3839
W	9.8044	0.386
(25/64)	9.9219	0.3906
	10	0.3937
X	10.0838	0.397
Y	10.2616	0.404
(13/32)	10.3188	0.4063
Z	10.4902	0.413
	10.5	0.4134
(27/64)	10.7156	0.4219
	11	0.4331
(7/16)	11.1125	0.4375
	11.5	0.4528
(29/64)	11.5094	0.4531
(15/32)	11.9063	0.4688
	12	0.4724
(31/64)	12.3031	0.4844
	12.5	0.4921

FRACT SIZE	METRIC (mm)	DECIMAL INCHES
(1/2)	12.7	0.5
	13	0.5118
(33/64)	13.0969	0.5156
(17/32)	13.4938	0.5312
	13.5	0.5315
(35/64)	13.8906	0.5469
	14	0.5512
(9/16)	14.2875	0.5625
	14.5	0.5709
(37/64)	14.6844	0.5781
	15	0.5906
(19/32)	15.0813	0.5938
(39/64)	15.4781	0.6094
	15.5	0.6102
(5/8)	15.875	0.625
	16	0.6299
(41/64)	16.2719	0.6406
	16.5	0.6496
(21/32)	16.6687	0.6562
	17	0.6693
(43/64)	17.0656	0.6719
(11/16)	17.4625	0.6875
	17.5	0.689
(45/64)	17.8594	0.7031
	18	0.7087
(23/32)	18.2563	0.7188
	18.5	0.7283
(47/64)	18.6531	0.7344
	19	0.748
(3/4)	19.05	0.75
(49/64)	19.4469	0.7656
	19.5	0.7677
(25/32)	19.8438	0.7813
	20	0.7874
51/64	20.2406	0.7969
	20.5	0.8071
(13/16)	20.6375	0.8125
	21	0.8268
(53/64)	21.0344	0.8281
(27/32)	21.4313	0.8438
	21.5	0.8465
(55/64)	21.8281	0.8594
	22	0.8661
(7/8)	22.225	0.875
	22.5	0.8858
(57/64)	22.6219	0.8906
	23	0.9055
(29/32)	23.0188	0.9062
(21/23)	23.1913	0.913
(59/64)	23.4156	0.9219
	23.5	0.9252
(15/16)	23.8125	0.9375
	24	0.9449
(61/64)	24.2094	0.9531
	24.5	0.9646
(31/32)	24.6063	0.9688
	25	0.9843
(63/64)	25.0031	0.9844
1	25.4	1

We're Also On the Web @

www.genswiss.com

Terms & Conditions of Sale

Prices All prices are in U.S. dollars. Prices are valid for 30 days after quotation, then subject to change. Sales & Use Tax due is the consumer responsibility and payable as State regulations require.

Credit Credit approval may take several weeks after returning the completed Credit Application and signed Terms & Conditions Agreement. Changes to Genevieve Swiss Industries, Inc. ("GSI") standard Terms and Conditions made by the applicant are grounds for credit denial. GSI reserves the right to change or deny credit at any time based upon late payment or changes to your DNB rating.

Orders Upon receipt of your purchase order, GSI will provide a sales order confirmation. The customer accepts responsibility to notify GSI of any error or changes that are required.

Cancellation Order cancellation must be provided to GSI in writing. Cancelled orders are subject to a minimum $25.00 process fee and a production upcharge depending upon product completion.

Delivery Product availability is subject to prior order regardless of stock condition at the time of quotation. GSI policy is to partial ship the order if any item is out of stock unless otherwise instructed. The customer is responsible for all shipping charges. The customer accepts responsibility to notify GSI in writing of orders that must ship complete.

Quantity For special orders, the customer agrees to a delivered quantity +/-10% at the per piece cost.

Blanket Order At the end of the agreed term, the customer agrees to accept the open balance of the blanket order. Any deviation to this agreement must be in writing by GSI. If GSI agrees to a contract adjustment and where quantity discounts were applied, a change in quantity will affect the price per piece of the complete order. The customer accepts a back charge on any previously shipped quantity.

Payment Invoices are payable within GSI established terms. Interest will be charge on overdue accounts at 1.5% per month, 18% per annum. Returned checks will incur a $50 charge. Credit Card payments are due when the item ships. Credit card payments made after 30 days of invoice or later are subject to a 2.75% fee or 1.5% per month at the option of GSI.

Shipping All freight and packing cost will be paid by the customer and shown separately on the invoice. Shipments will be insured at sale value and included in the shipping cost. A maximum 20% packing fee may be added at the discretion of GSI. Shipments are FOB Westfield Massachusetts.

Warranty Products are covered by the original manufacturer warranty where applicable. Live Tool Holders are guaranteed by the manufacturer for a period of 12 months or 2000 hours whichever comes first to be free of material defect or poor workmanship. A copy of the manufacturer's full guaranty is available upon request. GSI warrants that its products are free of material defect or poor workmanship ("Defect") for a period of 12 months from delivery. In the event GSI receives written notice of an alleged defect within the warranty period, GSI has a reasonable opportunity to inspect the relevant product and GSI determines that there is a Defect, GSI will repair or replace the product at GSI's option. EXCEPT FOR THE WARRANTY SET FORTH IN THIS SECTION, GSI MAKES NO OTHER WARRANTIES, WHETHER BY STATUTE OR EXPRESS OR IMPLIED, INCLUDING ANY WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, OR THAT THE DESIGN OF THE FINISHED PRODUCT WILL MEET CUSTOMER REQUIREMENTS. ALL OTHER WARRANTIES AS TO THE QUALITY, CONDITION, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE ARE HEREBY EXPRESSLY DISCLAIMED. THE REMEDIES SET FORTH IN THIS SECTION SHALL CONSTITUTE YOUR SOLE AND EXCLUSIVE REMEDIES, AND GSI'S SOLE AND EXCLUSIVE LIABILITY, IN CONNECTION WITH ANY WARRANTY CLAIM ARISING HEREUNDER.

Limitation of Liability EXCEPT FOR ACTS OF GROSS NEGLIGENCE OR WILLFUL MISCONDUCT, TO THE MAXIMUM EXTENT PERMITTED BY LAW, NEITHER GSI, NOR ITS RESPECTIVE OFFICERS, DIRECTORS, EMPLOYEES, AND AGENTS SHALL BE LIABLE TO CUSTOMER FOR ANY INCIDENTAL, CONSEQUENTIAL, INDIRECT, SPECIAL, RELIANCE OR PUNITIVE DAMAGES OR LOST PROFITS OR OPPORTUNITIES, IRRESPECTIVE OF ANY NOTICE OR ACT CONSTITUTING NOTICE OF THE POSSIBILITY OF ANY SUCH CLAIM. THE AGGREGATE CUMULATIVE LIABILITY THAT GSI SHALL HAVE FOR ANY AND ALL CLAIMS ARISING IN CONNECTION WITH THIS PURCHASE, WHETHER BASED ON CONTRACT, TORT, STRICT OR PRODUCTS LIABILITY, WARRANTY, INFRINGEMENT OR OTHERWISE, SHALL NOT EXCEED ALL PAYMENTS MADE BY CUSTOMER AND RECEIVED BY GSI UNDER CUSTOMER'S ORDER.

Returns We will replace or accept for return items that are not what was ordered or are found to be defective. Claims must be submitted within 30 days and will not be accepted without an approved GSI Return Authorization Form. Items must be returned in new condition and properly packaged. Returned items that are damaged, used or are missing parts may be refused for return or subject to repair charges and restocking fee. Items returned without cause will incur a $25.00 process fee and or up to 20% restocking charge. No credit will be issued for items returned after 90 days. Special orders cannot be returned. Any credit due will be issued as a merchandise credit and applied towards future purchases.

Collection In the event of non-payment within the terms, the customer will be responsible for all costs of collection including, but not limited to, attorneys' fees incurred by GSI in connection with any delinquent account.

Disputes This Agreement and dispute arising from or related to this Agreement, the sale of goods or any other transactions between the parties shall be governed exclusively by Massachusetts law. Any court action by either party shall be brought exclusively in the appropriate state or federal court in Hampden County, Massachusetts. The customer hereby agrees to submit to the jurisdiction of such court.

I understand the terms and conditions set forth by Genevieve Swiss Industries, Inc. and agree to the conditions in whole as they are stated above in exchange for the goods and service rendered from Genevieve Swiss Industries, Inc. No amendment or modification of these terms and conditions is effective unless agreed to in writing by an officer of Genevieve Swiss Industries, Inc.

GenSwiss®

Making The Machinist's Job Easier

DESIGNED & MANUFACTURED TO THE HIGHEST STANDARD

www.genswiss.com



P: (413) 562-4800
F: (413) 562-4802
sales@genswiss.com
6 Old Stage Road, Westfield, MA, 01085 USA